



Built on the same rugged design as the incremental model, the HS35 Absolute Encoder is available with various output options including Gray Code and Natural Binary. Designed with a cast aluminum housing, a sealed connector and shaft seals, it carries an IP65 environmental rating. With the optional insulating inserts, it can be mounted on smaller diameter shafts. It is designed for either a through shaft mounting or blind shaft mounting with a closed cover to maintain its environmental rating.

The HS35 Absolute Encoder is available with the following certification:

EN 55011 and EN 61000-6-2

Electrical Specifications

Options: Parallel: NB or GC 12-14 Bits (see Table 1)
 Serial (S3): 12-16 Bits (see Table 3)
 Analog: (A1-A5) 12-16 Bits (see Table 2)

Counts Per Shaft Turn: 4096–65536 depending on options
Count Transition Accuracy: $\pm 1/2$ bit maximum (Consult factory over 13 Bits)
Supply Voltage: 5–28 VDC ; 13-28 VDC for Analog
Current Requirements: 120 mA typical
Output Formats: **Parallel:** Gray Code, Natural Binary, Serial and Analog
Voltage/Output: (see note 2)
 28V/V: Line Driver, 5–28 VDC in, $V_{out} = V_{in}$
 28V/5: Line Driver, 5–28 VDC in, $V_{out} = 5$ VDC
 28V/OC: Open Collector, 5–28 VDC in, OC_{out}
 SSI: 5–28 VDC in/ $5V_{out}$ (consult factory for more information)
 Analog: A1-A5

Protection Level: Reverse, overvoltage and output short circuit protection
Frequency Response: 500kHz or 6000 RPM (Parallel)

Output Termination Pinouts: see tables
 For S3 options, reference Spec Addendum 02087-005
 For A1-A5 options, reference Spec Addendum 02088-002

Mechanical & Environmental Specs


Shaft Bore: many diameters from .375 to 1.000 inch are available, including metric. (Consult factory for details)
Allowable Misalignment: 0.005" T.I.R. on mating shaft 0.75" from shaft end
Bore Runout: 0.001 T.I.R. maximum
Starting Torque at 25°C: Through shaft version (SS) = 7 in-oz (max);
 Blind shaft version (BS) = 4 in-oz max
Bearings: 52100 SAE High carbon steel
Shaft Material: 416 Stainless Steel
Bearing Housing: Die cast aluminum with protective finish
Cover: Die cast aluminum with protective finish
Bearing Life: 7.5×10^9 revs (50,000 hours @ 2500 RPM)
Maximum RPM: 6,000 mechanical (see frequency response, above)
Moment of Inertia: 0.019 oz-in-sec²
Weight: 18oz typical
Temperature: Operating, 0° to 70°C; Extended temperature ratings are available in the following ranges: -40 to 70°C, -40 to 85°C. Extended temperature ranges can affect other performance factors.

NOTES & TABLES: All notes and tables referred to in the text can be found on pages 2 & 3.

HS35 Absolute Encoder Ordering Options

FOR ASSISTANCE CALL 800-350-2727

Use this diagram, working from left to right to construct your model number (example: HS35F-100-R1-SS-12GC-28VV-CCW-SM14/19). All notes and tables referred to can be found on the back of this page.

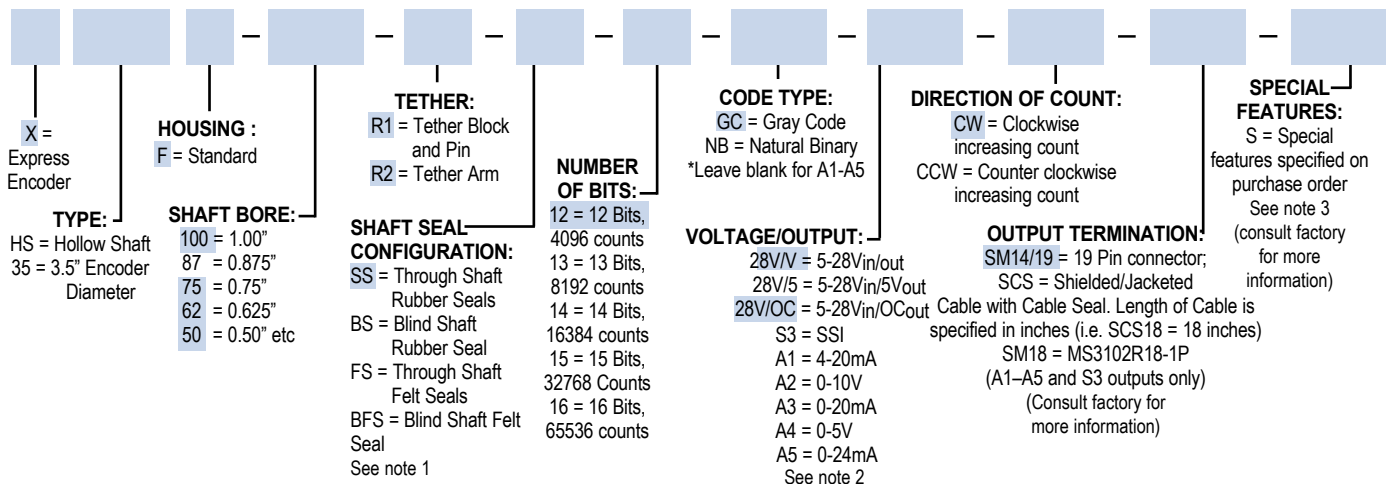

(consult factory for more information)

EXPRESS ENCODERS: ITEMS HIGHLIGHTED WITH ARE STANDARD EXPRESS ENCODERS AND SHIP IN ONE TO THREE DAYS.

BEI and Express Encoder are registered trademarks of BEI Sensors and Systems Company.

Table 1: Parallel Output Code and Terminations

PARALLEL Gray or Natural code			TERMINATION	
14 BIT	13 BIT	12 BIT STD.	M14/19 CONN	CABLE COLOR
B13 (MSB)	B12 (MSB)	B11 (MSB)	A	W/BLK
B12	B11	B10	B	W/BRN
B11	B10	B9	C	W/RED
B10	B9	B8	D	W/ORN
B9	B8	B7	E	W/YEL
B8	B7	B6	F	W/GRN
B7	B6	B5	G	W/BLU
B6	B5	B4	H	W/VIO
B5	B4	B3	J	W/GRY
B4	B3	B2	K	WHT
B3	B2	B1	L	GRY/BLK
B2	B1	B0 (LSB)	M	GRY/BRN std
B1	B0 (LSB) OR NC		N	GRY/RED*
OV std. (BO_LSB 14 BIT or Enable, Dir C, latch)			P	GRY/ORN*
Dir Control std. (optional: latch or Enable)			R	ORN*
Case GND			S	GRN
OV RETURN			T	BLK
LATCH std. (optional: DC or Enable)			U	YEL*
+V SUPPLY			V	RED
SHIELD DRAIN			-	BARE
*Optional				

Table 2: Analog Termination and Options

Analog	M18	M14/19	CABLE COLOR
A1,2,3,4 & A5	M18	M14/19	CABLE COLOR
A+ OUT	A	A	YEL
A Return	H	B	W/YEL
Dir Control	C	U	ORN
Reset*	B	C	BLU
OV Return	F	T	BLK
+V Supply	D	V	RED
CASE GND	G	S	GRN
*Optional			

Table 3: SSI Termination

SSI	Termination		
	M18	M14/19	CABLE
DATA+	A	A	YEL
DATA-	H	B	W/YEL
CLK+	B	C	BLU
CLK-	I	D	W/BLU
Dir Control	C	R	ORN
ENABLE*	J	P	W/ORN
OV RETURN	F	T	BLK
+V SUPPLY	D	V	RED
CASE GND	G	S	GRN
SHIELD DRAIN	-	-	BARE
*Optional			

Ordering SSI : HOW TO SPECIFY SSI OUTPUT IN THE ENCODER MODEL NUMBER:
 Example: HS35-100-R2-SS-12-NB-S3-CW-SM18

Direction of Count: Standard is CW increasing when viewed from the shaft end. Pin R is normally HI (or N/C) and is pulled up internally to +V. To reverse the count direction, Pin R must be pulled LO (COMMON).

Latch control: Encoder outputs are active and provide continuous parallel position information when Pin U is HI (or N/C). Pin U is pulled up internally to +V. When Pin U is LO (COMMON) the encoder outputs are latched at the logic state that is present when the latch is applied and will stay latched until Pin U is no longer LO (COMMON).

M18 Connector is a MS3102R18-1P, 10-pin connector on the encoder body and mates to an MS3106F18-1S connector or can be used with a standard cable/connector assembly, BEI P/N 924-31186-18XX (Where XX = 10, 20 30 or 50 for a 10, 20, 30, or 50 foot length). This is the preferred connector for SSI output.

M14/19 Connector is a MS3112E14-19P, 19-pin connector on the encoder body and mates to an MS3116J14-19S or equivalent.

Figures

Figure 1
Gray Code

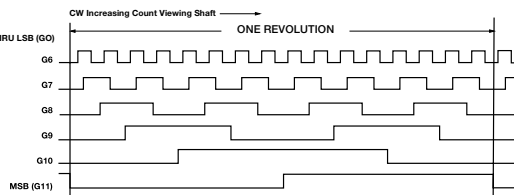


Figure 2
Natural Binary

