

1. Features


- Designed for 2.4GHz applications: BT / BLE, Wi-Fi[®] (802.11a/b/g/n), ZigBee[®].
- Low profile design
- High efficiency
- Lightweight
- Intended for SMD mounting
- Supplied in tape and reel

2. Description

Fusca is intended for use with all 2.4 GHz applications. The antenna uses a ground plane in order to radiate efficiently, but this ground plane must not extend underneath the antenna itself. Ideal for small wearables.


3. Applications

- Wearables
- Medical devices
- Sensors

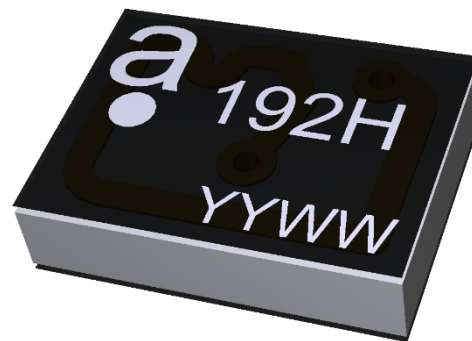

4. Part Number

Fusca: A10192H

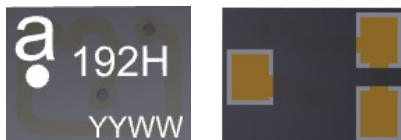

5. General Data

| | |
|------------------------------|-----------------------------------|
| Product name | Fusca |
| Part Number | A10192H |
| Frequency | 2.4 – 2.5GHz |
| Polarization | Linear |
| Operating temperature | -40°C to140°C |
| Environmental condition test | ISO 16750-4 5.1.1.1/5.1.2.1/5.3.2 |
| Impedance with matching | 50 Ω |
| Weight | <0.03g |
| Antenna type | SMD |
| Dimensions | 4 x 3 x 1.1 (mm) |


6. RF Characteristics

| | 2.4 – 2.5 GHz |
|-----------------------|---------------|
| Peak gain | 0.8dBi |
| Average gain (Linear) | -1.9dBi |
| Average efficiency | 65% |
| Maximum return loss | <-10dB |
| Maximum VSWR | 2:1 |


All data measured on Antenna's evaluation PCB
Part No. A10192H-EVB-1

7. RF Performance

7.1 Return Loss

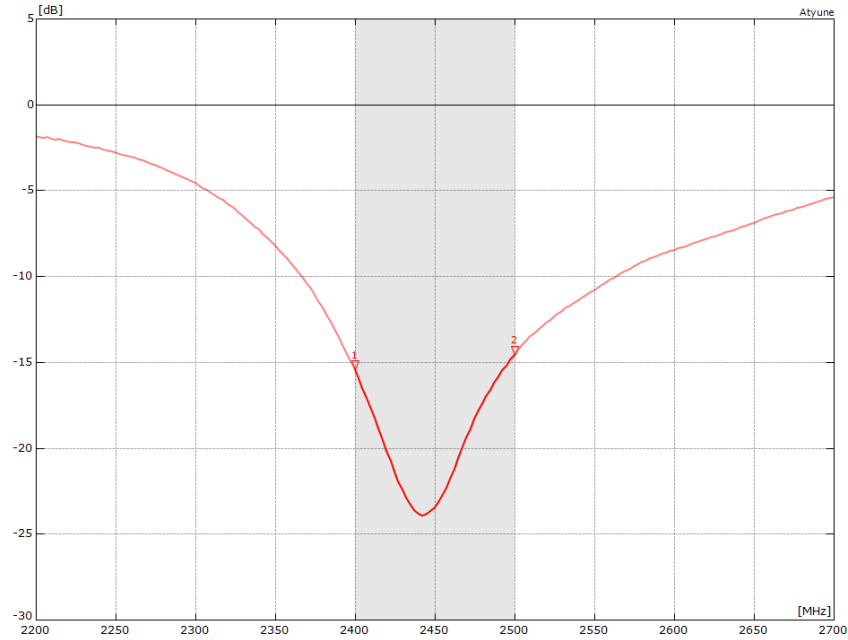


7.2 VSWR

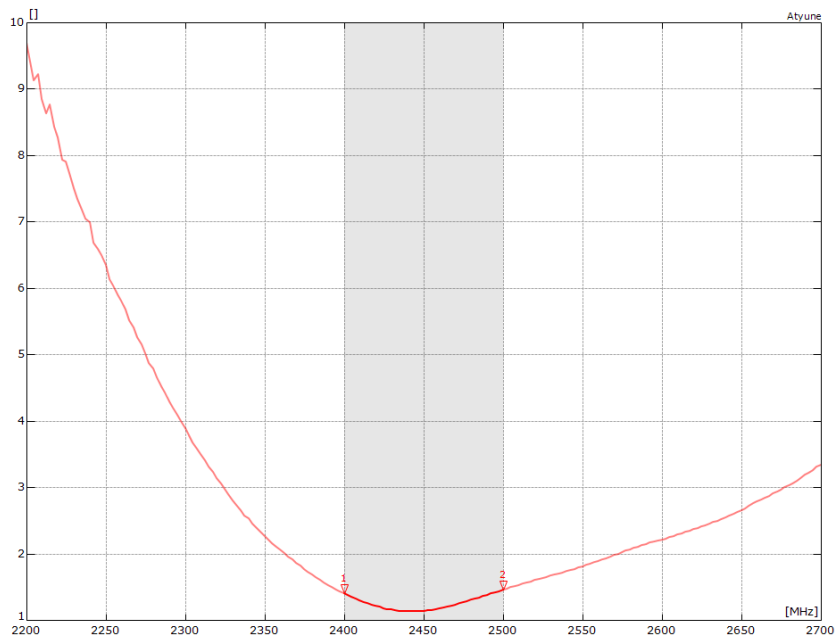


7.3 Antenna pattern

7.3.1 2400 MHz – 2500 MHz

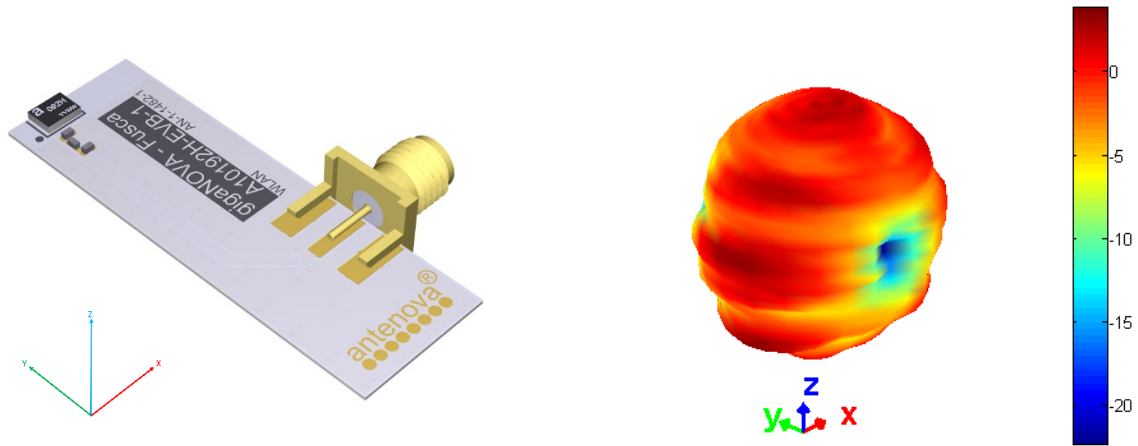


3D pattern at 2450 MHz

Drag to rotate pattern and PCB by using Adobe Reader
(Click to Activate)

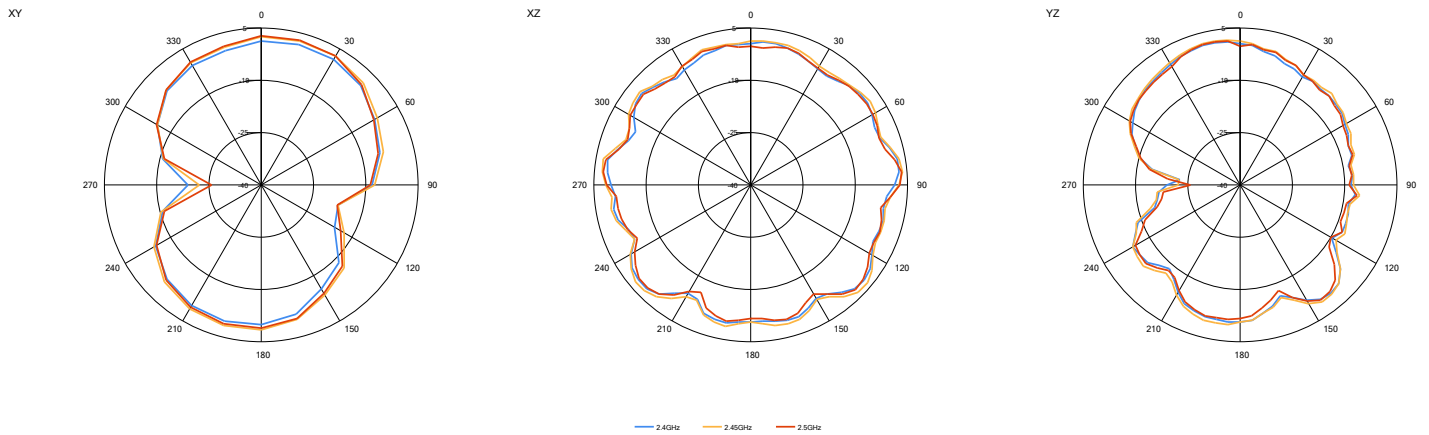

8. Antenna Dimensions


Fusca: A10192H

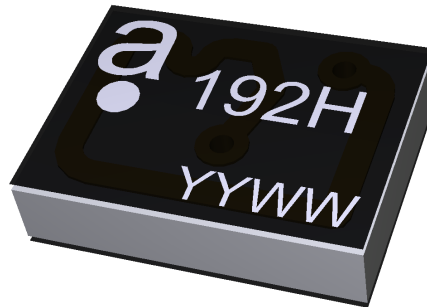

Top side



Bottom Side

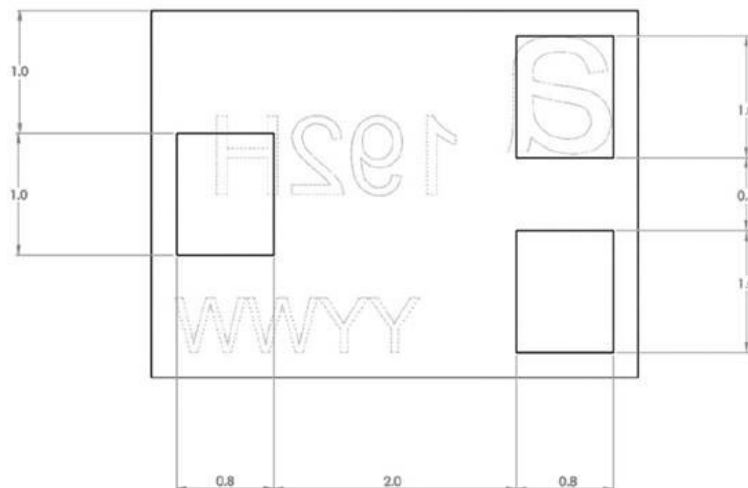

3 solder pads (1.0 x 0.8 mm)


All Dimensions in (mm)

Antennas for Wireless Applications

9. Schematic symbol and Pin definition


The circuit symbol for the antenna is shown below. The antenna has 5 pins with only two as functional. All other pins are for mechanical strength.

| Pin | Description |
|-----|-------------------------------|
| 1,2 | Feed |
| 3 | Not used (Mechanical only) |

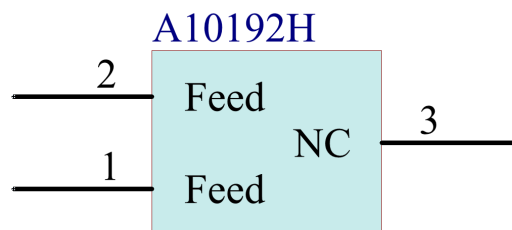

10. Antenna footprint

The recommended host PCB footprint is below.

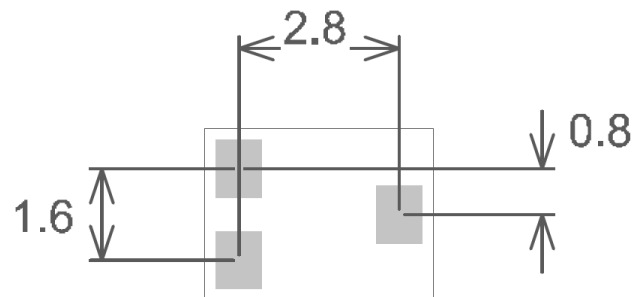

ALL PADS = 1.0 X 0.8 (MM)
ALL DIMENSIONS IN MM

11. Electrical Interface

11.1 Transmission Line


All transmission lines should be designed to have a characteristic impedance of 50Ω.

- The length of the transmission lines should be kept to a minimum
- Any other parts of the RF system like transceivers, power amplifiers, etc, should also be designed to have an impedance of 50 Ω

Once the material for the PCB has been chosen (PCB thickness and dielectric constant), a coplanar transmission line can easily be designed using any of the commercial software packages for transmission line design. For the chosen PCB thickness, copper thickness and substrate dielectric constant, the program will calculate the appropriate transmission line width and gaps on either side of the track, so the characteristic impedance of the co-planar transmission is 50 Ω.

11.2 Matching Circuit


The antenna requires a matching circuit that must be optimized for each product. The matching circuit will require up to 3 components and the following circuit should be designed into the host PCB. Not all components may be required but should be included as a precaution. The matching network must be placed close to the antenna feed to ensure it is more effective in tuning the antenna.

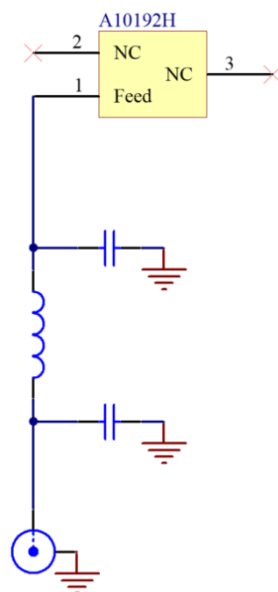

12. Antenna Integration Guide

12.1 Antenna Placement

Antenova strongly recommends placing the antenna at the edge of the board. Maximum antenna performance is achieved by placing the antenna towards one of the corners of the PCB and with the feed point of the antenna as close to same corner of the PCB as possible.

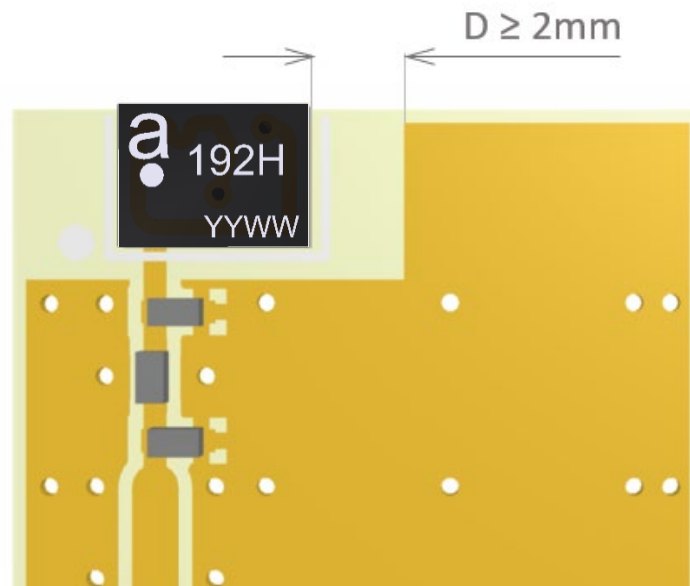


Additional ground and components near the antenna should be at a distance of at least 2 mm. Where possible the antenna should be clear of ground from both sides, although the antenna can work well with a minimum clearance of $D \geq 2$ mm as shown in the drawing above.

13. Reference Board


The reference board has been designed for the purpose of evaluating A10192H and includes an SMA female connector.

A10192H Evaluation Board

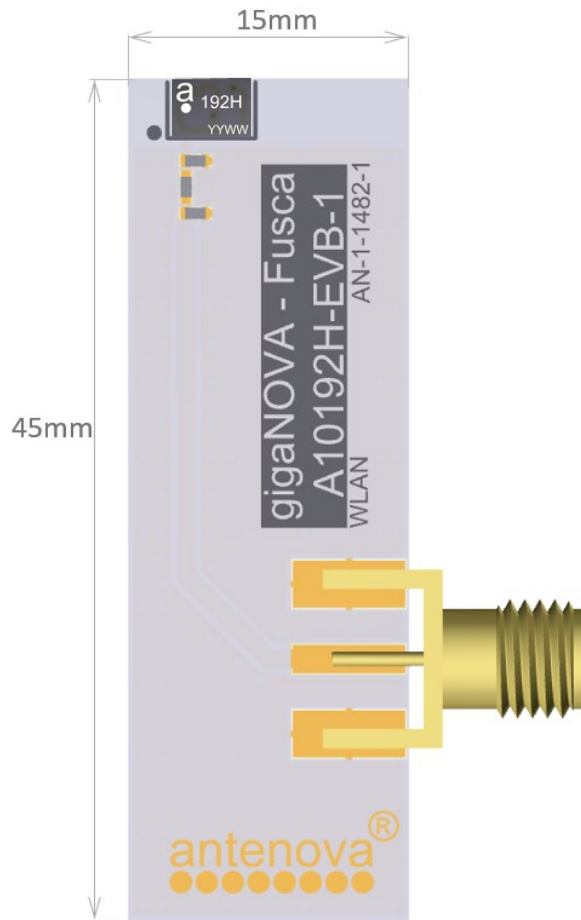

To order a reference board please see www.antenna.com

14. Reference Board Matching Circuit

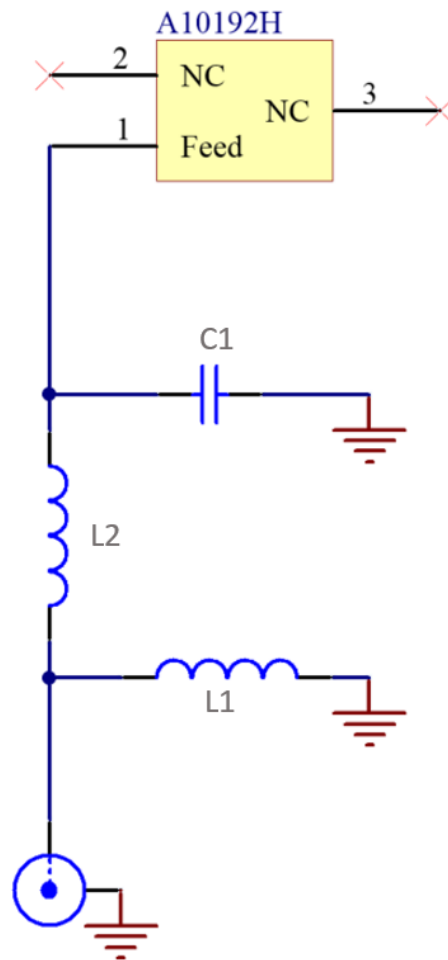


| Designator | Type | Value | Description |
|------------|-----------|------------|-----------------------|
| L1, L2 | Inductor | 2.2nH | Murata LQG15HN series |
| C1 | Capacitor | Not fitted | Not fitted |


15. Comparison S11

The A10192H is a direct replacement for the A10192 original parts. The chart shown below is a comparison between the two antennas on the same evaluation PCB.

15.1 Return Loss

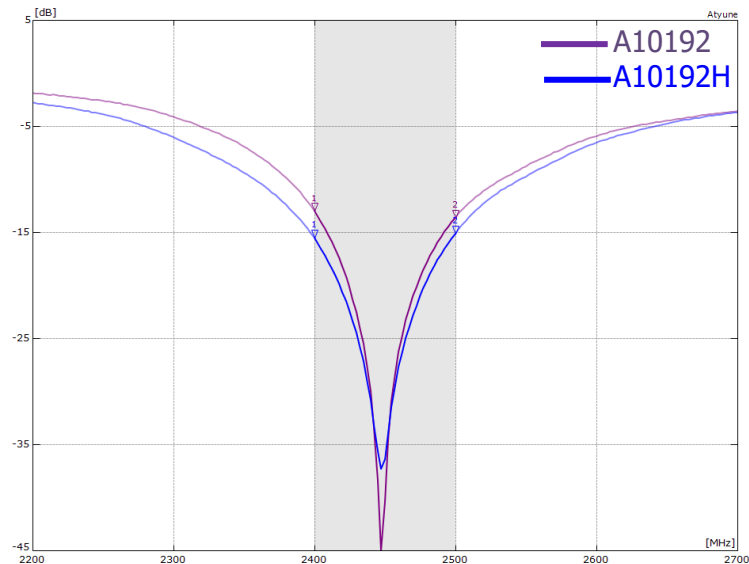


15.2 VSWR

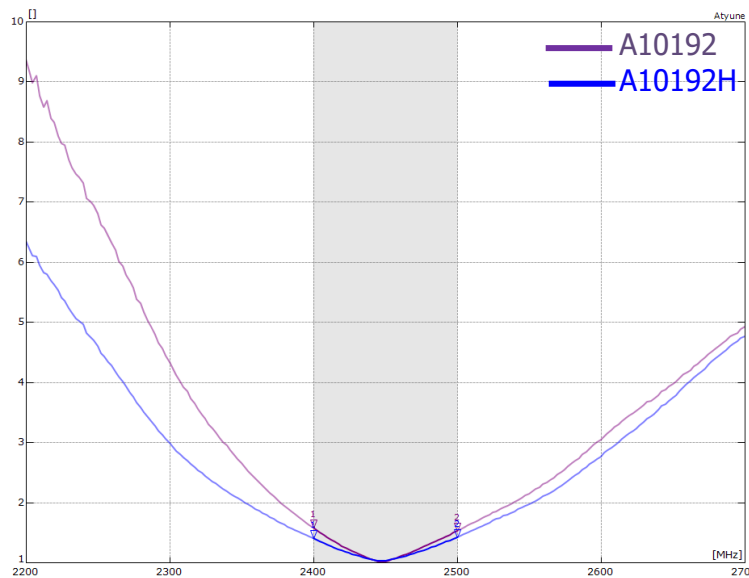

15.3 Pattern Comparison

The A10192H is a direct replacement for the A10192 original part. The below is a comparison of each on the same evaluation PCB shown in a polar format.

— A10192H
— A10192

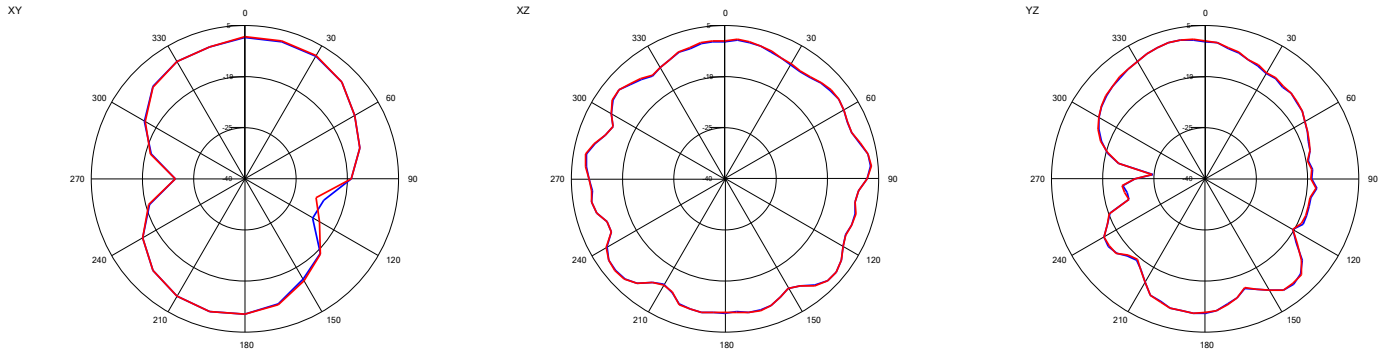

16. Soldering

This antenna is suitable for lead free soldering. The reflow profile should be adjusted to suit the device, oven, and solder paste, while observing the following conditions:

- The maximum temperature should not exceed 240 °C
- However, for lead free soldering, a maximum temperature of 255 °C for no more than 20 seconds is permitted.
- The antenna should not be exposed to temperatures exceeding 120 °C more than 3 times during the soldering process.

17. Hazardous Material Regulation Conformance

The antenna has been tested to conform to RoHS requirements. A certificate of conformance is available from Antenova M2M's website.

18. Packaging


18.1 Optimal Storage Conditions

| | |
|---------------|---|
| Temperature | -10°C to 40°C |
| Humidity | Less than 75% RH |
| Shelf life | 24 Months |
| Storage place | Away from corrosive gas and direct sunlight |
| Packaging | Reels should be stored in unopened sealed manufacturer's plastic packaging. |


Note: Storage of open reels of antennas is not recommended due to possible oxidization of pads on antennas. If short term storage is necessary, then it is highly recommended that the bag containing the antenna reel is re-sealed and stored in like storage conditions as in above table.

18.2 Tape Characteristics

Fusca [Part Number: A10192H]

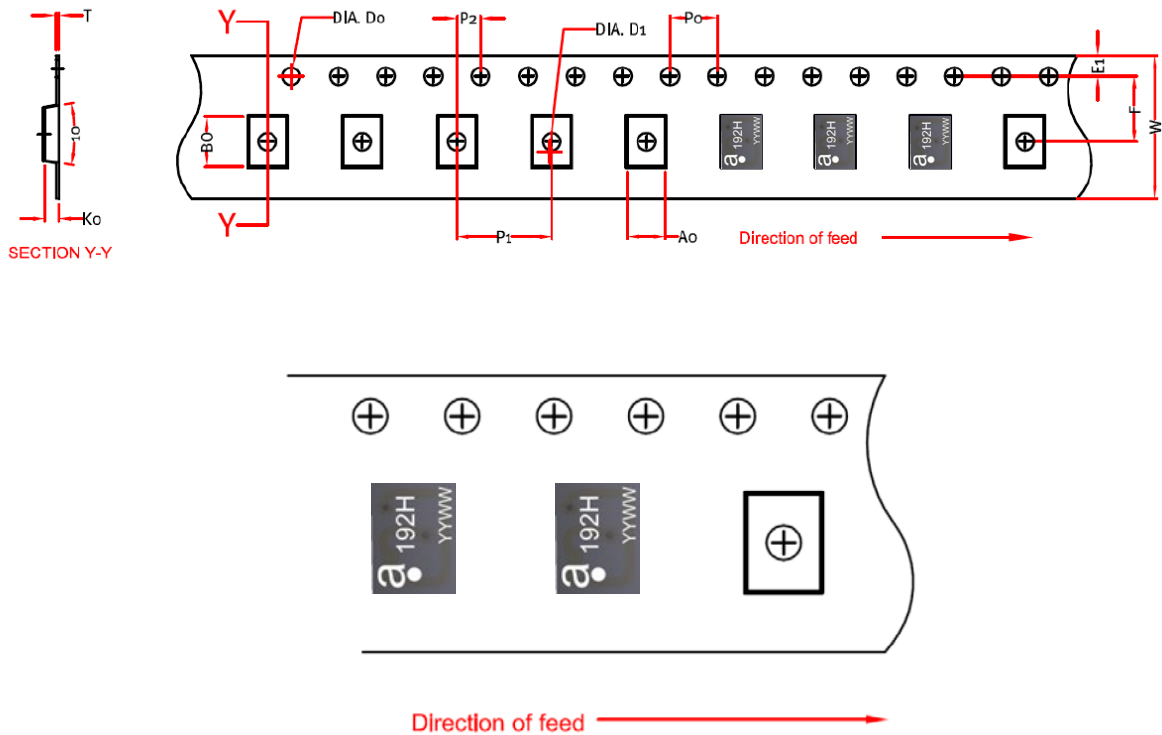


18.3 Reel Dimensions

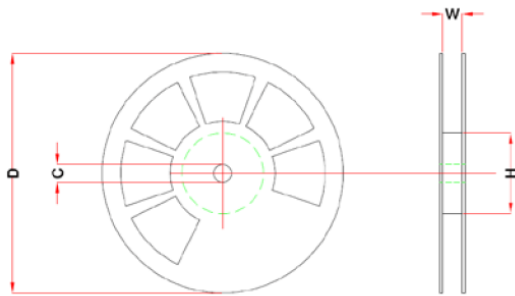

| Width | Reel Diameter | Hub Diameter | Shaft Diameter |
|-------|---------------|--------------|----------------|
| 14 mm | 178 mm | 60 mm | 13.2 mm |

18.4 Box Dimensions

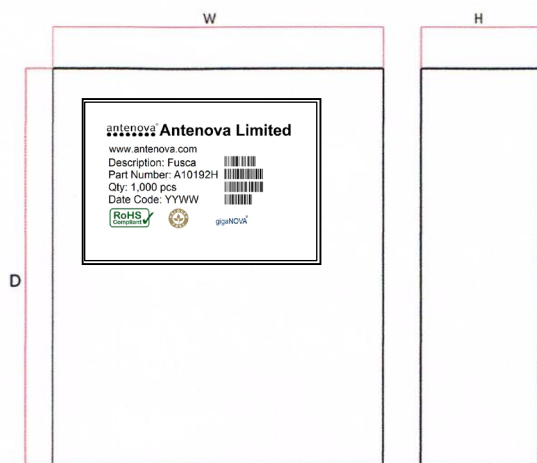

| Width W | Breadth B | Thickness H |
|---------|-----------|-------------|
| 195 mm | 195 mm | 37 mm |

18.5 Bag Properties

Reels are supplied in protective plastic packaging.

18.6 Reel Label Information

antenova® **Antenova Limited**

www.antenova.com

Description: Fusca

Part Number: A10192H

Qty: 1,000 pcs

Date Code: YYWW

