

**02SSL20L  
THRU  
02SSL40L**

**SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER**

**VOLTAGE RANGE 20 to 40 Volts CURRENT 0.2 Ampere**

**FEATURES**

- \* Low power loss, high efficiency
- \* Low leakage
- \* Low forward voltage
- \* High current capability
- \* High speed switching
- \* High surge capability
- \* High reliability

**MECHANICAL DATA**

- \* Epoxy: Device has UL flammability classification 94V-O
- \* Mounting position: Any
- \* Weight: 0.016 gram

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**




Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.



**SOD-123FL**

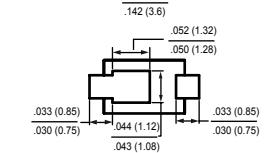

Dimensions in inches and (millimeters)

**MAXIMUM RATINGS (@ TA=25 °C unless otherwise noted)**

RATINGS	SYMBOL	02SSL20L	02SSL30L	02SSL40L	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	40	40	Volts
Maximum Average Forward Rectified Current .375" (9.5mm) lead length at T <sub>A</sub> =110°C	I <sub>O</sub>		0.2		Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>		60		Amps
Typical Junction Capacitance (Note 1)	C <sub>J</sub>		110		pF
Typical Thermal Resistance (Note 3)	R <sub>θJA</sub>		110		°C/W
	R <sub>θJL</sub>		30		
Operating Temperature Range	T <sub>J</sub>		150		°C
Storage Temperature Range	T <sub>STG</sub>		-55 to + 150		°C

**ELECTRICAL CHARACTERISTICS (@ TA=25 °C unless otherwise noted)**

CHARACTERISTICS	SYMBOL	02SSL20L	02SSL30L	02SSL40L	UNITS
Maximum Instantaneous Forward Voltage at 0.2A DC	V <sub>F</sub>		.28		Volts
Maximum Average Reverse Current at Rated DC Blocking Voltage	I <sub>R</sub> @ T <sub>A</sub> = 25°C @ T <sub>A</sub> = 100°C		1.0		mAmps
			10		mAmps


NOTES : 1. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

2. "Fully ROHS compliant", "100% Sn plating (Pb-free)".


3. Thermal resistance: Mounted on PCB.

2006-11


## RATING AND CHARACTERISTICS CURVES ( 02SSL20L THRU 02SSL40L )

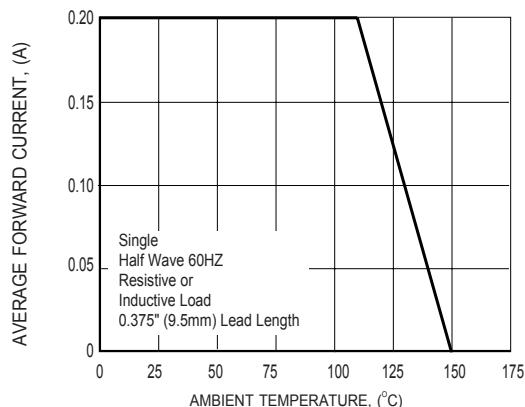


**FIG.1 TYPICAL FORWARD CURRENT DERATING CURVE**

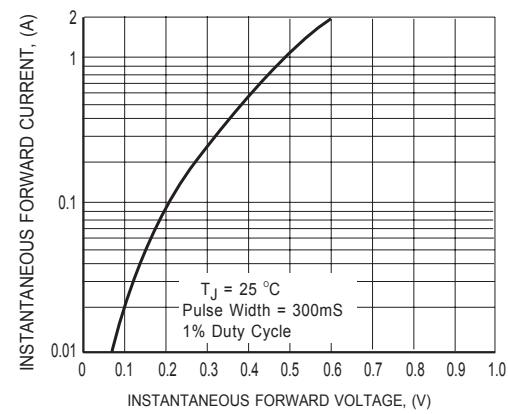


**FIG.2 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

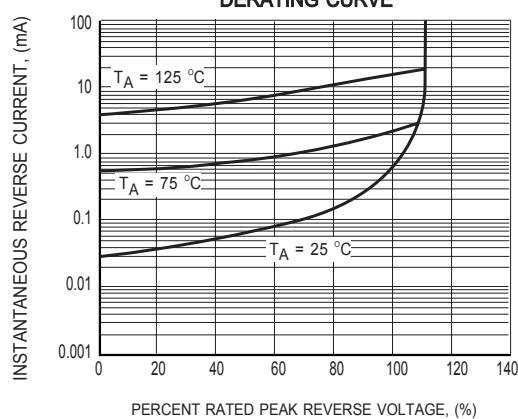

**FIG.3 TYPICAL REVERSE CHARACTERISTICS**

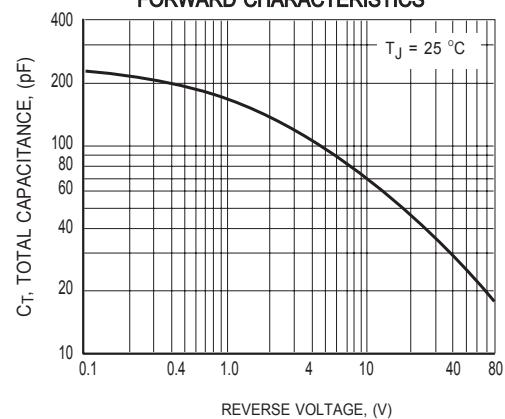


**FIG.4 TYPICAL JUNCTION CAPACITANCE**

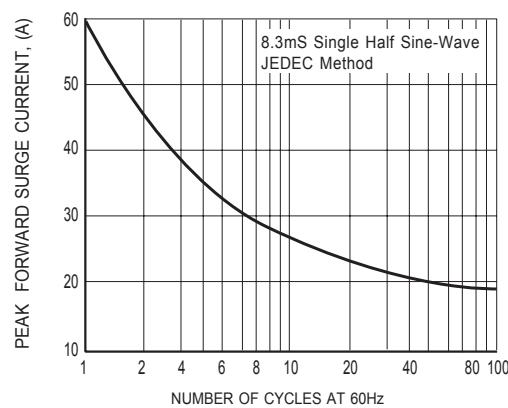

**FIG.5 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT**

## Mounting Pad Layout

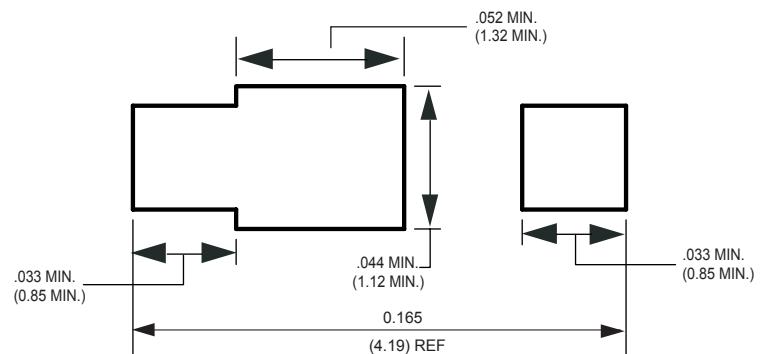

Dimensions in inches and (millimeters)