

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### General Description

DA9130 is a power management IC (PMIC) suitable for supplying CPUs, GPUs, DDR memory rails in single in-line pin package (SIPP) modules, mobile, portable and consumer applications.

DA9130 operates as a single-channel dual-phase buck converter, each phase requiring a small external 0.22  $\mu$ H inductor. It is capable of delivering up to 10 A output current at a 0.3 V to 1.9 V output voltage range. The 2.8 V to 5.5 V input voltage range is suitable for a wide variety of low-voltage systems.

With remote sensing, the DA9130 guarantees the highest accuracy and supports multiple PCB routing scenarios without loss of performance.

The pass devices are fully integrated, so no external FETs or Schottky diodes are needed.

A programmable soft start-up can be enabled, which limits the inrush current from the input node and secures a slope-controlled rail activation.

The dynamic voltage control (DVC) supports adaptive adjustment of the supply voltage dependent on the processor load, via either a direct register write using the communication interface (I<sup>2</sup>C-compatible) or with a programmable input pin.

A configurable GPI allows multiple I<sup>2</sup>C address selection for multiple instances of DA9130 in the same application.

DA9130 has integrated over-temperature and over-current protection for increased system reliability, without the need for external sensing components.

### Key Features

- 2.8 V to 5.5 V input voltage
- 0.3 V to 1.9 V output voltage
- Up to 10 A output current
- 4 MHz nominal switching frequency
- Dual-phase operation
- 220 nH inductor per phase
- 20  $\mu$ F output capacitor
- $\pm 1$  % output voltage accuracy (static)
- $\pm 5$  % load transient (dynamic)
- Programmable GPIOs
- Programmable soft startup
- I<sup>2</sup>C-compatible interface (FM+)
- Voltage, current, and temperature supervision
- 24-pin FCQFN package, wettable flanks (nom. 3.3 mm x 4.8 mm)
- 218 mm<sup>2</sup> total solution area
- -40 °C to +105 °C ambient temperature range
- AEC-Q100 Grade 2 qualified version also available for Automotive applications (DA9130-A)

### Benefits

- High Efficiency buck converters deliver outstanding thermal performance
- Fully integrated switching FET's means no external FETs or Schottky diodes are required
- Remote sensing guarantees the highest accuracy and supports multiple PCB routing scenarios without loss of performance.
- Fully programmable soft-start limits the inrush current from the input to give a slope-controlled output voltage.
- Dynamic voltage control (DVC) enables adaptive adjustment of the device output voltage depending on the load. This increases efficiency when the downstream circuitry enters low power or idle mode, resulting in power savings.
- Configurable GPIOs support a range of features including I<sup>2</sup>C, DVC and Power-Good indicator.

# DA9130

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

- Optimized BoM cost and footprint: Each output requires a very small inductor and capacitor delivering parts and cost savings
- Cycle by cycle current limiting for superior over-current protection

### Applications

- Switches and routers
- Smart metering
- Industrial automation
- Wireless
- Consumer products
- SoC/FPGA high performance processing system requiring efficient, high current, power delivery
- SIPP modules (SoC, DRAM)

### System Diagrams

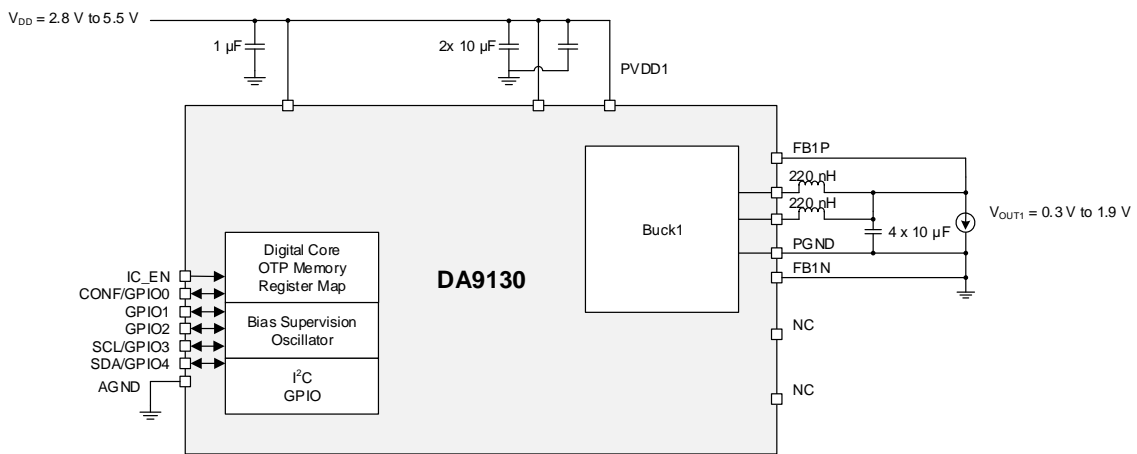


Figure 1: Simplified Schematic Diagram

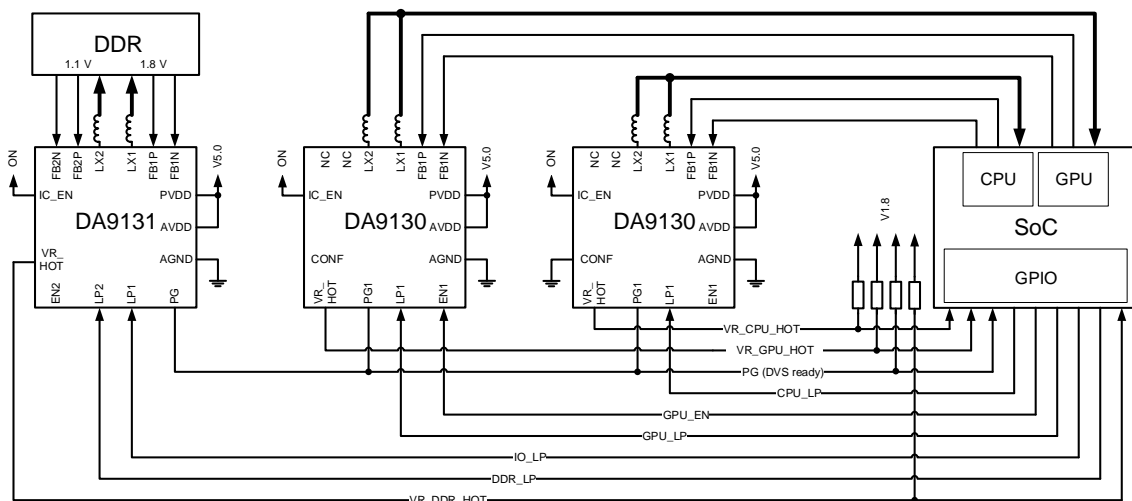


Figure 2: Typical Application Diagram (Port Control)

High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

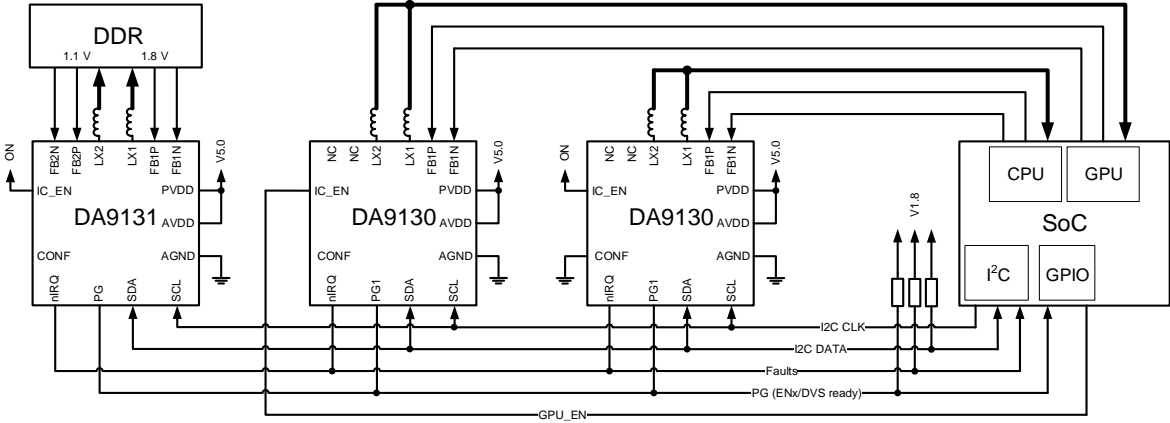


Figure 3: Typical Application Diagram (I<sup>2</sup>C Control)

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### Contents

|  |           |
|--|-----------|
| <b>General Description</b> .....                     | <b>1</b>  |
| <b>Key Features</b> .....                            | <b>1</b>  |
| <b>Benefits</b> .....                                | <b>1</b>  |
| <b>Applications</b> .....                            | <b>2</b>  |
| <b>System Diagrams</b> .....                         | <b>2</b>  |
| <b>Contents</b> .....                                | <b>4</b>  |
| <b>Table of Figures</b> .....                        | <b>5</b>  |
| <b>Table of Tables</b> .....                         | <b>5</b>  |
| <b>1 Terms and Definitions</b> .....                 | <b>7</b>  |
| <b>2 Pinout</b> .....                                | <b>8</b>  |
| <b>3 Characteristics</b> .....                       | <b>9</b>  |
| 3.1 Absolute Maximum Ratings .....                   | 9         |
| 3.2 Recommended Operating Conditions.....            | 9         |
| 3.3 Thermal Characteristics .....                    | 10        |
| 3.3.1 Thermal Ratings .....                          | 10        |
| 3.3.2 Power Dissipation .....                        | 10        |
| 3.3.3 ESD Characteristics.....                       | 11        |
| 3.4 Buck Characteristics .....                       | 11        |
| 3.5 Performance and Supervision Characteristics..... | 13        |
| 3.6 Digital IO Characteristics.....                  | 14        |
| 3.7 Timing Characteristics.....                      | 14        |
| 3.8 Typical Performance .....                        | 16        |
| <b>4 Functional Description</b> .....                | <b>17</b> |
| 4.1 DC-DC Buck Converter.....                        | 17        |
| 4.1.1 Switching Frequency .....                      | 17        |
| 4.1.2 Operation Modes and Phase Selection .....      | 17        |
| 4.1.3 Output Voltage Selection .....                 | 17        |
| 4.1.4 Soft Start-Up and Shutdown.....                | 18        |
| 4.1.5 Current Limit .....                            | 18        |
| 4.1.6 Thermal Protection .....                       | 18        |
| 4.2 Internal Circuits .....                          | 19        |
| 4.2.1 IC_EN/Chip Enable/Disable.....                 | 19        |
| 4.2.2 nIRQ/Interrupt .....                           | 19        |
| 4.2.3 GPIO.....                                      | 22        |
| 4.3 Operating Modes.....                             | 23        |
| 4.3.1 ON.....  | 23        |
| 4.3.2 OFF.....                                       | 24        |
| 4.4 I <sup>2</sup> C Communication .....             | 24        |
| 4.4.1 I <sup>2</sup> C Protocol.....                 | 24        |
| <b>5 Register Definitions</b> .....                  | <b>26</b> |
| 5.1 Register Map.....                                | 26        |
| 5.1.1 System.....                                    | 28        |
| 5.1.2 Buck1 .....                                    | 35        |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

|          |                                      |           |
|----------|--------------------------------------|-----------|
| 5.1.3    | Serialization .....                  | 39        |
| <b>6</b> | <b>Package Information .....</b>     | <b>40</b> |
| 6.1      | Package Outlines .....               | 40        |
| 6.2      | Package Marking .....                | 41        |
| 6.3      | Moisture Sensitivity Level.....      | 41        |
| 6.4      | Soldering Information .....          | 41        |
| <b>7</b> | <b>Ordering Information .....</b>    | <b>42</b> |
| <b>8</b> | <b>Application Information .....</b> | <b>42</b> |
| 8.1      | Capacitor Selection .....            | 42        |
| 8.2      | Inductor Selection .....             | 43        |

## Table of Figures

|            |   |    |
|------------|---|----|
| Figure 1:  | Simplified Schematic Diagram .....                          | 2  |
| Figure 2:  | Typical Application Diagram (Port Control) .....            | 2  |
| Figure 3:  | Typical Application Diagram (I <sup>2</sup> C Control)..... | 3  |
| Figure 4:  | DA9130 Pinout Diagram (Bottom View).....                    | 8  |
| Figure 5:  | Power Derating Curve .....                                  | 10 |
| Figure 6:  | DA9130 Efficiency, PWM Mode with no Phase Shedding .....    | 16 |
| Figure 7:  | DA9130 Efficiency, Auto Mode with Phase Shedding .....      | 16 |
| Figure 8:  | Buck Output Voltage Control Concept .....                   | 18 |
| Figure 9:  | Thermal Protection Operation .....                          | 19 |
| Figure 10: | Interrupt Operation Example .....                           | 21 |
| Figure 11: | I <sup>2</sup> C START and STOP Condition Timing.....       | 24 |
| Figure 12: | I <sup>2</sup> C Byte Write (SDA Line) .....                | 25 |
| Figure 13: | I <sup>2</sup> C Byte Read (SDA Line) Examples .....        | 25 |
| Figure 14: | Package Outline Drawing.....                                | 40 |

## Table of Tables

|           |  |    |
|-----------|--|----|
| Table 1:  | Pin Description .....  | 8  |
| Table 2:  | Pin Type Definition .....  | 9  |
| Table 3:  | Absolute Maximum Ratings.....                                    | 9  |
| Table 4:  | Recommended Operating Conditions .....                           | 9  |
| Table 5:  | Package Ratings .....  | 10 |
| Table 6:  | Power Dissipation.....   | 10 |
| Table 7:  | ESD Characteristics .....  | 11 |
| Table 8:  | Buck Electrical Characteristics .....                            | 11 |
| Table 9:  | Electrical Characteristics .....                                 | 13 |
| Table 10: | Digital I/O Electrical Characteristics .....                     | 14 |
| Table 11: | I <sup>2</sup> C Electrical Characteristics .....                | 14 |
| Table 12: | Thermal Protection Control Registers .....                       | 18 |
| Table 13: | Interrupt List.....  | 19 |
| Table 14: | Interrupt Registers Except for Power Good Status .....           | 21 |
| Table 15: | Interrupt Registers for Power Good and Temp Warning Status ..... | 21 |
| Table 16: | GPIO Pin Assignment .....  | 22 |
| Table 17: | GPIO Function Configuration .....                                | 22 |
| Table 18: | GPIO0-Configurable Registers when CONF_EN = 1 .....              | 23 |
| Table 19: | Register Map .....   | 26 |
| Table 20: | SYS_STATUS_0 (0x0001) .....                                      | 28 |
| Table 21: | SYS_STATUS_1 (0x0002) .....                                      | 28 |
| Table 22: | SYS_STATUS_2 (0x0003).....                                       | 28 |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

|  |    |
|--|----|
| Table 23: SYS_EVENT_0 (0x0004) .....                         | 28 |
| Table 24: SYS_EVENT_1 (0x0005) .....                         | 28 |
| Table 25: SYS_EVENT_2 (0x0006) .....                         | 29 |
| Table 26: SYS_MASK_0 (0x0007) .....                          | 29 |
| Table 27: SYS_MASK_1 (0x0008) .....                          | 29 |
| Table 28: SYS_MASK_2 (0x0009) .....                          | 29 |
| Table 29: SYS_MASK_3 (0x000A) .....                          | 29 |
| Table 30: SYS_CONFIG_2 (0x000D) .....                        | 30 |
| Table 31: SYS_CONFIG_3 (0x000E) .....                        | 30 |
| Table 32: SYS_GPIO0_0 (0x0010) .....                         | 31 |
| Table 33: SYS_GPIO0_1 (0x0011) .....                         | 31 |
| Table 34: SYS_GPIO1_0 (0x0012) .....                         | 32 |
| Table 35: SYS_GPIO1_1 (0x0013) .....                         | 33 |
| Table 36: SYS_GPIO2_0 (0x0014) .....                         | 34 |
| Table 37: SYS_GPIO2_1 (0x0015) .....                         | 34 |
| Table 38: BUCK_BUCK1_0 (0x0020) .....                        | 35 |
| Table 39: BUCK_BUCK1_1 (0x0021) .....                        | 36 |
| Table 40: BUCK_BUCK1_2 (0x0022) .....                        | 37 |
| Table 41: BUCK_BUCK1_3 (0x0023) .....                        | 37 |
| Table 42: BUCK_BUCK1_4 (0x0024) .....                        | 38 |
| Table 43: BUCK_BUCK1_5 (0x0025) .....                        | 38 |
| Table 44: BUCK_BUCK1_6 (0x0026) .....                        | 39 |
| Table 45: OTP_DEVICE_ID (0x0048) .....                       | 39 |
| Table 46: OTP_VARIANT_ID (0x0049) .....                      | 39 |
| Table 47: OTP_CUSTOMER_ID (0x004A) .....                     | 39 |
| Table 48: OTP_CONFIG_ID (0x004B) .....                       | 39 |
| Table 49: MSL Classification .....                           | 41 |
| Table 50: Ordering Information .....                         | 42 |
| Table 51: Recommended Consumer Grade Capacitor Types .....   | 42 |
| Table 52: Recommended Automotive Grade Capacitor Types ..... | 42 |
| Table 53: Recommended Inductor Types .....                   | 43 |

---

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### 1 Terms and Definitions

|       |  |
|-------|--|
| ATE   | Automated test equipment                           |
| CPU   | Central processing unit                            |
| DDR   | Dual data rate                                     |
| DVC   | Dynamic voltage control                            |
| FET   | Field effect transistor                            |
| FM+   | Fast mode plus                                     |
| GBD   | Guaranteed by design                               |
| GBQ   | Guaranteed by qualification                        |
| GBSPC | Guaranteed by statistical process characterization |
| GPI   | General purpose input                              |
| GPIO  | General purpose input/output                       |
| GPU   | Graphics processing unit                           |
| IC    | Integrated circuit                                 |
| HW    | Hardware   |
| OTP   | One time programmable                              |
| PCB   | Printed circuit board                              |
| PRS   | Product requirements specification                 |
| SCL   | Serial clock                                       |
| SDA   | Serial data  |
| SIPP  | Single in-line pin package                         |
| SW    | Software   |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### 2 Pinout

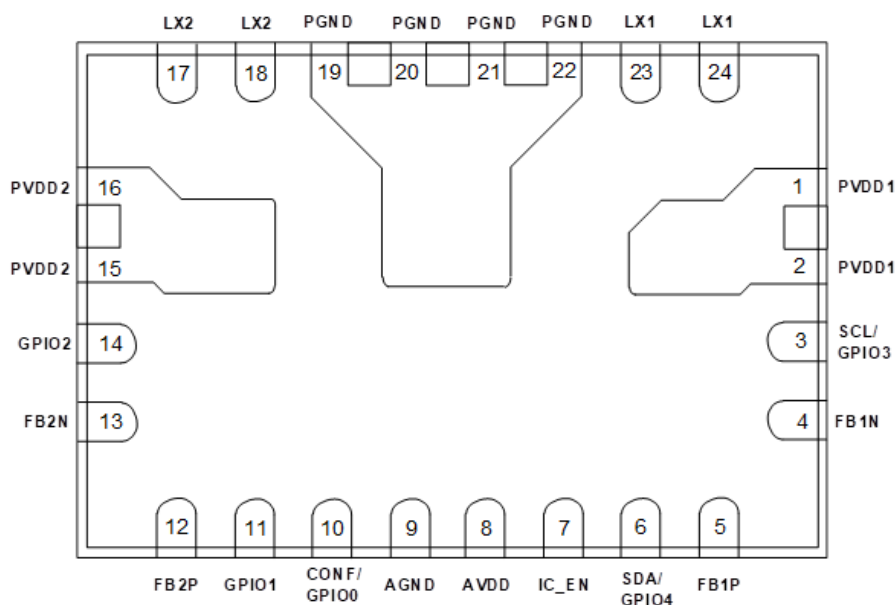


Figure 4: DA9130 Pinout Diagram (Bottom View)

Table 1: Pin Description

| Pin #          | Pin Name   | Type (Table 2) | Drive per pin (mA) | Description                |
|----------------|------------|----------------|--------------------|----------------------------|
| 1, 2           | PVDD1      | PS             | 5000               | Supply for Ch1             |
| 3              | SCL/GPIO3  | DIO            | 15                 | SCL                        |
| 4              | FB1N       | AI             | 10                 | Negative feedback for Ch 1 |
| 5              | FB1P       | AI             | 10                 | Positive feedback for Ch 1 |
| 6              | SDA/GPIO4  | DIO            | 15                 | SDA                        |
| 7              | IC_EN      | DI             | 10                 | IC enable.                 |
| 8              | AVDD       | PS             | 10                 | Analog supply              |
| 9              | AGND       | PS             | 10                 | Analog ground              |
| 10             | CONF/GPIO0 | DIO            | 10                 | GPIO                       |
| 11             | GPIO1      | DIO            | 10                 | GPIO                       |
| 12             | FB2P       | AI             | 10                 | Positive feedback for Ch 2 |
| 13             | FB2N       | AI             | 10                 | Negative feedback for Ch 2 |
| 14             | GPIO2      | DIO            | 10                 | GPIO                       |
| 15, 16         | PVDD2      | PS             | 5000               | Supply for Ch2             |
| 17, 18         | LX2        | AO             | 5000               | Buck output of Ch 2        |
| 19, 20, 21, 22 | PGND       | PS             | 5000               | Power ground               |
| 23, 24         | LX1        | AO             | 5000               | Buck output of Ch 1        |



## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

**Table 2: Pin Type Definition**

| Pin Type | Description          | Pin Type | Description   |
|----------|----------------------|----------|---------------|
| DI       | Digital input        | AI       | Analog input  |
| DIO      | Digital input/output | AO       | Analog output |
| PS       | Power supply         |          |               |

### 3 Characteristics

#### 3.1 Absolute Maximum Ratings

Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, so functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification are not implied. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.

**Table 3: Absolute Maximum Ratings**

| Parameter        | Description           | Conditions | Min  | Max | Unit |
|------------------|-----------------------|------------|------|-----|------|
| T <sub>STG</sub> | Storage temperature   |            | -65  | 150 | °C   |
| T <sub>J</sub>   | Junction temperature  |            | -40  | 150 | °C   |
| V <sub>SYS</sub> | System supply voltage |            | -0.3 | 6.0 | V    |
| V <sub>PIN</sub> | Voltage on pins       |            | -0.3 | 6.0 | V    |

#### 3.2 Recommended Operating Conditions

**Table 4: Recommended Operating Conditions**

| Parameter        | Description (Error! Reference source not found.) | Conditions (Note 1) | Min  | Typ | Max                    | Unit |
|------------------|--|---------------------|------|-----|------------------------|------|
| V <sub>SYS</sub> | System supply voltage                            |                     | 2.8  |     | 5.5                    | V    |
| V <sub>PIN</sub> | Voltage on pins                                  |                     | -0.3 |     | V <sub>SYS</sub> + 0.3 | V    |
| T <sub>J</sub>   | Junction temperature                             |                     | -40  |     | 125                    | °C   |
| T <sub>A</sub>   | Ambient temperature                              |                     | -40  |     | 105                    | °C   |

**Note 1** Within the specified limits, a lifetime of 10 years is guaranteed. If operating outside of these recommended conditions, please consult with Renesas.

**Note 2** V<sub>SYS</sub>, V<sub>IN</sub>, V<sub>PVDD</sub> and V<sub>AVDD</sub> should be connected together. The pin names are different for routing purposes.

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### 3.3 Thermal Characteristics

#### 3.3.1 Thermal Ratings

**Table 5: Package Ratings**


| Parameter     | Description                          | Conditions  | Min | Typ   | Max | Unit |
|---------------|--------------------------------------|-------------|-----|-------|-----|------|
| $\theta_{JA}$ | Package thermal resistance           | Note 1      |     | 21.21 |     | °C/W |
| $\theta_{JB}$ | Thermal resistance junction to board | Note 1      |     | 12.37 |     | °C/W |
| $\theta_{JC}$ | Thermal resistance junction to case  | Without PCB |     | 32    |     | °C/W |

**Note 1** Obtained from package thermal simulations, JEDEC 2S2P four layer board (76.2 mm x 114 mm x 1.6 mm), 70  $\mu\text{m}$  (2 oz) copper thickness power planes, 35  $\mu\text{m}$  (1 oz) copper thickness signal layer traces, natural convection (still air), see Section 6.1.

#### 3.3.2 Power Dissipation

**Table 6: Power Dissipation**

| Parameter      | Description       | Conditions                     | Min  | Typ  | Max | Unit |
|----------------|-------------------|--------------------------------|------|------|-----|------|
| $P_{D\_Twarn}$ | Power dissipation | @105 °C ambient, $T_{J\_WARN}$ |      | 0.94 |     | W    |
| $P_{D\_Tcrit}$ | Power dissipation | @105 °C ambient, $T_{CRIT}$    | 1.41 | 1.65 |     | W    |
| $P_{D\_70}$    | Power dissipation | @70°C ambient                  |      | 2.43 |     | W    |

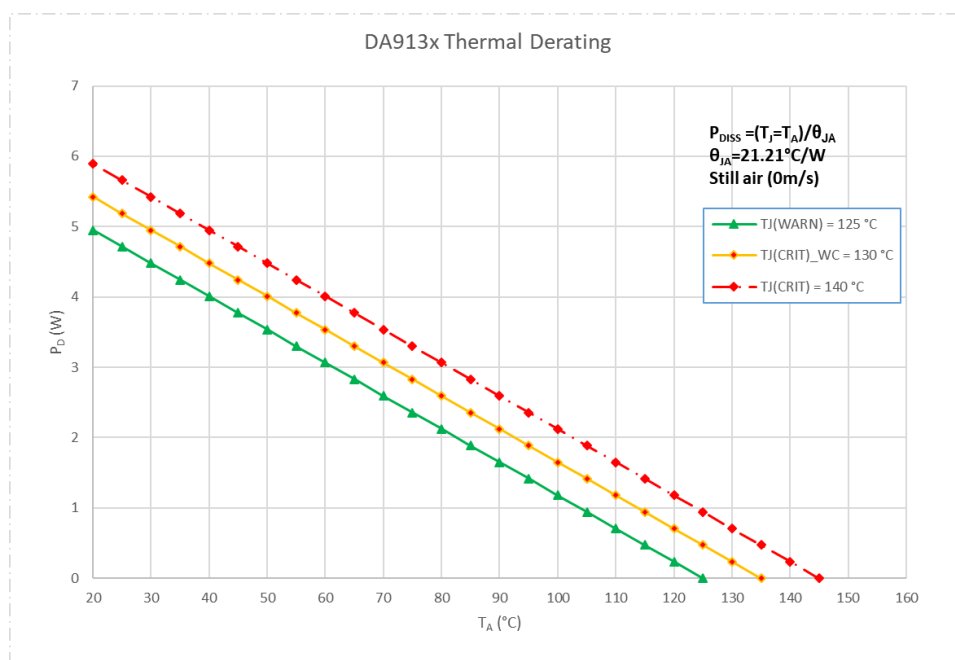

**Figure 5: Power Derating Curve**

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### 3.3.3 ESD Characteristics

**Table 7: ESD Characteristics**

| Parameter            | Description                            | Conditions                 | Value | Unit |
|----------------------|--|----------------------------|-------|------|
| V <sub>ESD_HBM</sub> | ESD protection, human body model (HBM) |                            | 2     | kV   |
| V <sub>ESD_CDM</sub> | Maximum ESD protection                 | Charged device model (CDM) | 500   | V    |

### 3.4 Buck Characteristics

Unless otherwise noted, the following is valid for T<sub>J</sub> = -40 °C to +125 °C, V<sub>SYS</sub> = 2.8 V to 5.5 V.

**Table 8: Buck Electrical Characteristics**

| Parameter                             | Description   | Conditions   | Min   | Typ | Max   | Unit |
|---------------------------------------|---|--|-------|-----|-------|------|
| <b>External Electrical Conditions</b> |   |  |       |     |       |      |
| V <sub>IN</sub>                       | Input voltage   | V <sub>IN</sub> = V <sub>SYS</sub>   | 2.8   |     | 5.5   | V    |
| C <sub>OUT</sub>                      | Output capacitance, per phase, including voltage and temperature coefficient              |  | -40 % | 20  | +30 % | μF   |
| ESR <sub>COUT</sub>                   | Output capacitor series resistance, per phase   | f > 100 kHz  |       | 1   |       | mΩ   |
| L                                     | Inductor value, per phase, including current and temperature dependence                   |  | -50 % | 220 | +20 % | nH   |
| DCR <sub>L</sub>                      | Inductor DC resistance  |  |       | 8   | 13    | mΩ   |
| <b>Electrical Performance</b>         |   |  |       |     |       |      |
| V <sub>OUT</sub>                      | Output voltage, configurable in 10 mV steps   | I <sub>OUT</sub> = 0 mA to I <sub>MAX</sub> at 25 °C ambient<br>2.8 V < V <sub>OUT</sub> + 1 V < V <sub>IN</sub> ≤ 5.5 V | 0.3   |     | 1.9   | V    |
| I <sub>LIM</sub>                      | Current limit, configurable per phase<br><a href="#">Note 1</a><br><a href="#">Note 2</a> | CHx_ILIM = 1010  | -20 % | 8   | +20 % | A    |
| I <sub>MAX</sub>                      | Output current<br><a href="#">Note 3</a>  | V <sub>IN</sub> ≥ V <sub>OUT</sub> + 1 V<br>5 A per phase  | 10    |     |       | A    |
| V <sub>OUT_ACC</sub>                  | Output voltage accuracy, including static line and load regulation                        | V <sub>OUT</sub> ≥ 1 V   | -1    |     | 1     | %    |
| V <sub>OUT_ACC</sub>                  | Output voltage accuracy, including static line and load regulation                        | V <sub>OUT</sub> < 1 V   | -10   |     | 10    | mV   |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

| Parameter                   | Description   | Conditions  | Min  | Typ  | Max | Unit |
|-----------------------------|---|---|------|------|-----|------|
| V <sub>THR_PG_HYS</sub>     | Power-good voltage threshold hysteresis                                       | V <sub>OUT</sub> = V <sub>THR_PG_DWN</sub>  | 60   | 80   | 100 | mV   |
| V <sub>THR_PG_DWN</sub>     | Power-good voltage threshold for falling                                      | V <sub>OUT</sub> = V <sub>BUCK</sub>  | -160 | -130 | -80 | mV   |
| V <sub>THR_HV</sub>         | High V <sub>OUT</sub> voltage threshold                                       | V <sub>OUT</sub> = V <sub>BUCK</sub>  | 100  | 150  | 200 | mV   |
| V <sub>OUT_TR_LINE</sub>    | Line transient response   | V <sub>IN</sub> = 3 V to 3.6 V<br>I <sub>OUT</sub> = 0.5 * I <sub>MAX</sub><br>dt = 10 μs                                   |      | 15   |     | mV   |
| f <sub>SW</sub>             | Switching frequency   |   |      | 4    |     | MHz  |
| t <sub>ON_MIN</sub>         | Minimum turn-on pulse<br>0 % duty is also supported                           |   | 5    | 7    | 11  | ns   |
| t <sub>BUCK_EN</sub>        | Turn-on time  | CHx_EN = high   |      |      | 20  | μs   |
| R <sub>PD</sub>             | Output pull-down resistance for each phase at the LX node, see BUCK<x>_PD_DIS | V <sub>IN</sub> = 3.7 V<br>V <sub>OUT</sub> = 0.5 V   | 145  | 150  | 161 | Ω    |
| R <sub>ON_P MOS</sub>       | On resistance of switching PMOS, per phase                                    | V <sub>IN</sub> = 3.7 V   | 17   | 25   | 37  | mΩ   |
| R <sub>ON_N MOS</sub>       | On resistance of switching NMOS, per phase                                    | V <sub>IN</sub> = 3.7 V   | 6    | 10   | 16  | mΩ   |
| <b>PWM Mode</b>             |   |   |      |      |     |      |
| I <sub>THR_1PH_TO_2PH</sub> | Current threshold for automatic phase shedding 1-phase to 2-phase             |   |      | 2.25 |     | A    |
| I <sub>THR_2PH_TO_1PH</sub> | Current threshold for automatic phase shedding 2-phase to 1-phase             |   |      | 1.7  |     | A    |
| I <sub>Q_PWM_2PH</sub>      | Quiescent current, per phase  | V <sub>IN</sub> = 3.7 V<br>No load  |      | 16   |     | mA   |
| η <sub>PWM</sub>            | Efficiency, phase shedding  | V <sub>IN</sub> = 3.6 V<br>V <sub>OUT</sub> = 1 V<br>I <sub>OUT</sub> = 5 % (I <sub>MAX</sub> ) to 80 % (I <sub>MAX</sub> ) |      | 85   |     | %    |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

| Parameter              | Description                                     | Conditions   | Min | Typ | Max | Unit          |
|------------------------|---|--|-----|-----|-----|---------------|
| <b>AUTO Mode</b>       |   |  |     |     |     |               |
| $V_{OUT\_TR\_LD\_2PH}$ | Load transient response, phase shedding enabled | $V_{OUT} = 1\text{ V}$<br>$I_{OUT} = 2.5\text{ to }7.5\text{ A at }25\text{ }^{\circ}\text{C}$ ambient<br>$di/dt = 5\text{ A}/\mu\text{s}$ | -25 |     | 45  | mV            |
| <b>PFM Mode</b>        |   |  |     |     |     |               |
| $I_{Q\_PFM\_2PH}$      | Quiescent current in PFM                        | $V_{IN} = 3.7\text{ V}$<br>No load<br>No switching   |     | 164 |     | $\mu\text{A}$ |
| $\eta_{PFM}$           | Efficiency                                      | $V_{IN} = 3.6\text{ V}$<br>$V_{OUT} = 1\text{ V}$<br>$I_{OUT} = 10\text{ mA}$  |     | 83  |     | %             |

**Note 1**  $t_{ON} > 40\text{ ns}$

**Note 2** The value is configured by OTP and should not be modified while the buck is active.

**Note 3** For short durations to meet peak current requirements,  $I_{OUT}$  can be operated at up to 10 % higher than the specified maximum operating condition. The part should not be operated in this mode for extended periods and is not guaranteed for continuous operation.

### 3.5 Performance and Supervision Characteristics

**Table 9: Electrical Characteristics**

| Parameter                     | Description                            | Conditions   | Min | Typ | Max  | Unit               |
|-------------------------------|--|--|-----|-----|------|--------------------|
| <b>Electrical Performance</b> |  |  |     |     |      |                    |
| $V_{THR\_POR}$                | Power-on-reset threshold               | Threshold for AVDD falling   |     | 2.1 | 2.25 | V                  |
| $V_{THR\_POR\_HYS}$           | Power-on-reset hysteresis              |  |     | 200 |      | mV                 |
| $T_{WARN}$                    | Thermal warning temperature threshold  |  | 115 | 125 | 135  | $^{\circ}\text{C}$ |
| $T_{CRIT}$                    | Thermal shutdown temperature threshold |  | 130 | 140 | 150  | $^{\circ}\text{C}$ |
| $I_{IN\_OFF}$                 | Supply current                         | OFF state<br>$T_A = 27\text{ }^{\circ}\text{C}$<br>$IC\_EN = 0$            |     | 0.1 | 1    | $\mu\text{A}$      |
| $I_{IN\_ON}$                  | Supply current                         | ON state<br>$T_A = 27\text{ }^{\circ}\text{C}$<br>$IC\_EN = 1$<br>Buck off | 5   | 10  | 20   | $\mu\text{A}$      |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### 3.6 Digital IO Characteristics

**Table 10: Digital I/O Electrical Characteristics**

| Parameter                     | Description                          | Conditions                                | Min          | Typ  | Max          | Unit |
|-------------------------------|--------------------------------------|---|--------------|------|--------------|------|
| <b>Electrical Performance</b> |                                      |   |              |      |              |      |
| V <sub>IH_EN</sub>            | Input high voltage, IC enable        |   | 1.2          |      | AVDD         | V    |
| V <sub>IL_EN</sub>            | Input low voltage, IC enable         |   |              |      | 0.4          | V    |
| t <sub>IC_EN</sub>            | IC enable time                       |   |              |      | 1000         | μs   |
| V <sub>IH_GPIO_SCL_SDA</sub>  | Input high voltage<br>GPIO, SCL, SDA |   | 1.2          |      | AVDD         | V    |
| V <sub>IL_GPIO_SCL_SDA</sub>  | Input low voltage<br>GPIO, SCL, SDA  |   |              |      | 0.4          | V    |
| V <sub>OH_GPIO</sub>          | Output high voltage<br>GPIO          | Push-pull mode<br>I <sub>OUT</sub> = 1 mA | 0.8*AV<br>DD |      | AVDD         | V    |
| V <sub>OL_GPIO</sub>          | Output low voltage<br>GPIO           | Push-pull mode<br>I <sub>OUT</sub> = 1 mA |              |      | 0.2*AV<br>DD | V    |
| V <sub>OL_SDA</sub>           | Output low voltage<br>SDA            | I <sub>OUT</sub> = 3 mA                   |              | 0.24 |              | V    |
| R <sub>PD</sub>               | GPIO pull-down resistor              | V <sub>sys</sub> = 3.7 V<br>Note 1        | 9            | 15   | 24           | kΩ   |
| R <sub>PU</sub>               | GPIO pull-up resistor                | V <sub>sys</sub> = 3.7 V<br>Note 1        | 28           | 45   | 70           | kΩ   |

**Note 1** Resistance may have greater variation, depending on voltage and temperature.

### 3.7 Timing Characteristics

**Table 11: I2C Electrical Characteristics**

| Parameter                     | Description                                      | Conditions            | Min          | Typ | Max  | Unit |
|-------------------------------|--|-----------------------|--------------|-----|------|------|
| <b>Electrical Performance</b> |  |                       |              |     |      |      |
| t <sub>BUS</sub>              | Bus free time between a STOP and START condition |                       | 0.5          |     |      | μs   |
| C <sub>BUS</sub>              | Bus line capacitive load                         |                       |              |     | 150  | pF   |
| f <sub>SCL</sub>              | SCL clock frequency                              |                       | 20<br>Note 1 |     | 1000 | kHz  |
| t <sub>LO_SCL</sub>           | SCL low time                                     |                       | 0.5          |     |      | μs   |
| t <sub>HI_SCL</sub>           | SCL high time                                    |                       | 0.26         |     |      | μs   |
| t <sub>RISE</sub>             | SCL and SDA rise time                            | Requirement for input |              |     | 1000 | ns   |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

| Parameter                | Description                 | Conditions            | Min  | Typ | Max  | Unit |
|--------------------------|-----------------------------|-----------------------|------|-----|------|------|
| t <sub>FALL</sub>        | SCL and SDA fall time       | Requirement for input |      |     | 300  | ns   |
| t <sub>SETUP_START</sub> | Start condition setup time  |                       | 0.26 |     |      | μs   |
| t <sub>HOLD_START</sub>  | Start condition hold time   |                       | 0.26 |     |      | μs   |
| t <sub>SETUP_STOP</sub>  | Stop condition setup time   |                       | 0.26 |     |      | μs   |
| t <sub>DATA</sub>        | Data valid time             |                       |      |     | 0.45 | μs   |
| t <sub>DATA_ACK</sub>    | Data valid acknowledge time |                       |      |     | 0.45 | μs   |
| t <sub>SETUP_DATA</sub>  | Data setup time             |                       | 50   |     |      | ns   |
| t <sub>HOLD_DATA</sub>   | Data hold time              |                       | 0    |     |      | ns   |

**Note 1** Minimum clock frequency is limited to 20 kHz if I2C\_TIMEOUT is enabled

High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

3.8 Typical Performance

The static efficiency measurements depicted in Figure 6 and Figure 7 were performed at room temperature on a DA913X-30-A evaluation board.

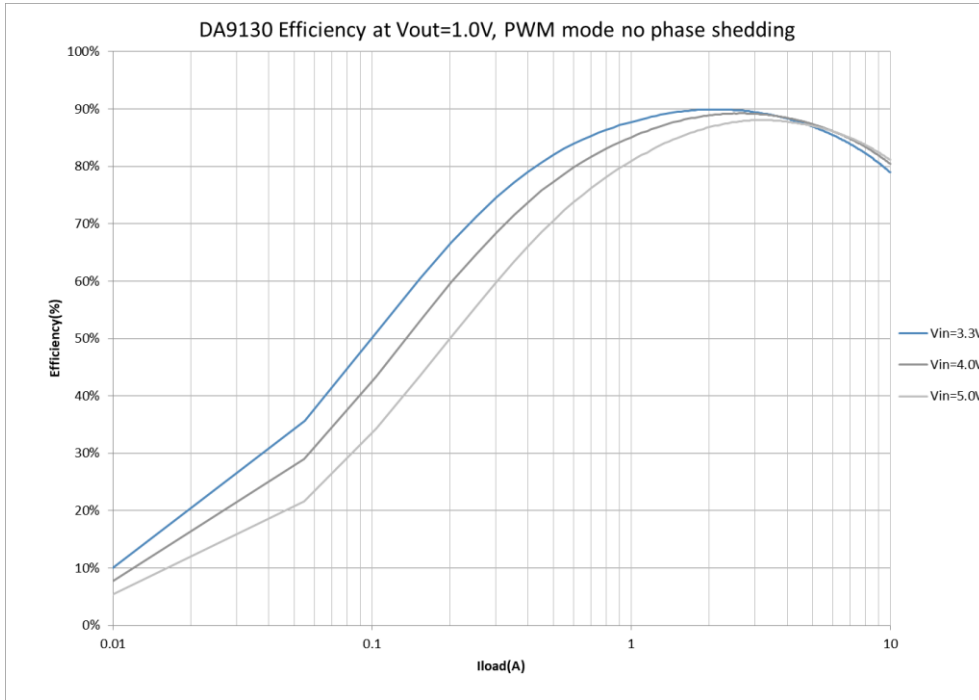


Figure 6: DA9130 Efficiency, PWM Mode with no Phase Shedding

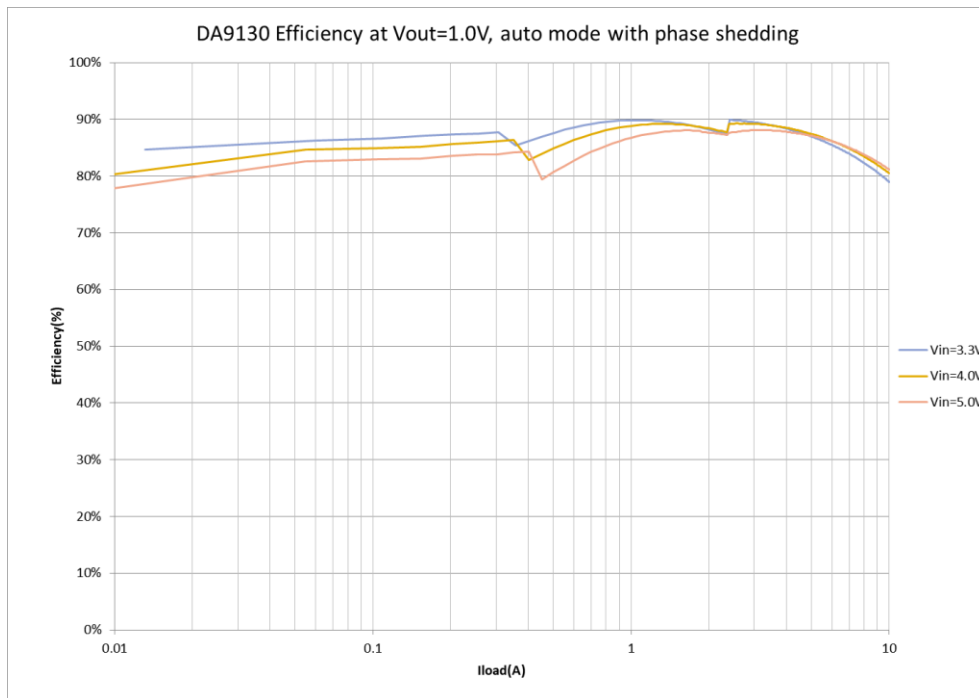


Figure 7: DA9130 Efficiency, Auto Mode with Phase Shedding



## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### 4 Functional Description

#### 4.1 DC-DC Buck Converter

DA9130 operates as a single-channel dual-phase buck converter capable of delivering up to 10 A output current at a 0.3 V to 1.9 V output voltage range.

The buck converter has two voltage registers. One defines the normal output voltage, while the other offers an alternative retention voltage. In this way, different application power modes can easily be supported. The voltage selection can be operated either via GPI or via control interface to guarantee the maximum flexibility according to the specific host processor status in the application.

When a buck is enabled, its output voltage is monitored and a power good signal indicates that the buck output voltage has reached a level higher than the  $V_{THR\_PG\_HYS}$  threshold. The power good status is lost when the voltage drops below  $V_{THR\_PG\_DWN}$  or increases above  $V_{THR\_HV}$ . The status of the power good indicator can be read back via I<sup>2</sup>C from the PG1 status bit. It can be also individually assigned to any of the GPIOs by setting the GPIO mode registers to PG1 output.

The buck converter is capable of supporting DVC transitions that occur when:

- the active and selected A- or B-voltage is updated to a new target value
- the voltage selection is changed from the A- to B-voltage (or B- to A-voltage) using CH1\_VSEL

The DVC controller operates in pulse width modulation (PWM) mode with synchronous rectification.

The slew rate of the DVC transition is programmed at 10 mV per 8  $\mu$ s, 4  $\mu$ s, 2  $\mu$ s, 1  $\mu$ s, or 0.5  $\mu$ s in register bits CH1\_SR\_DVC.

A pull-down resistor (typically 150  $\Omega$ ) for each phase is always activated unless it is disabled by setting register bits CH1\_PD\_DIS to 1.

##### 4.1.1 Switching Frequency

The buck switching frequency, nominally 4 MHz, can be tuned using register bit OSC\_TUNE. The internal 8 MHz oscillator frequency is tuned in  $\pm 160$  kHz steps. This impacts the buck converter frequency in steps of 80 kHz and helps to mitigate possible disturbances to other high frequency systems in the application.

##### 4.1.2 Operation Modes and Phase Selection

The buck converters can operate in PWM and PFM modes. The operating mode is selected using register bits CH1\_<A or B>\_MODE.

Phase shedding automatically changes between 1- and 2-phase operation at a typical current of 2.0 A.

If the automatic operation mode is selected on CH1\_<A or B>\_MODE, the buck converter automatically changes between synchronous PWM mode and PFM depending on the load current. This improves the efficiency across the whole range of output load currents.

##### 4.1.3 Output Voltage Selection

The switching converter can be configured using the I<sup>2</sup>C interface.

Two output voltages can be pre-configured in registers CH1\_<A or B>\_VOUT. The output voltage can be selected by either toggling register bit CH1\_VSEL or by re-programming the selected voltage control register. Both changes will result in ramped voltage transitions. After being enabled, the buck converter will, by default, use the register settings in CH1\_A\_VOUT unless the output voltage selection is configured via the GPI port.

Registers CH1\_VMAX limit the output voltage that can be set for each of the respective buck converters.

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

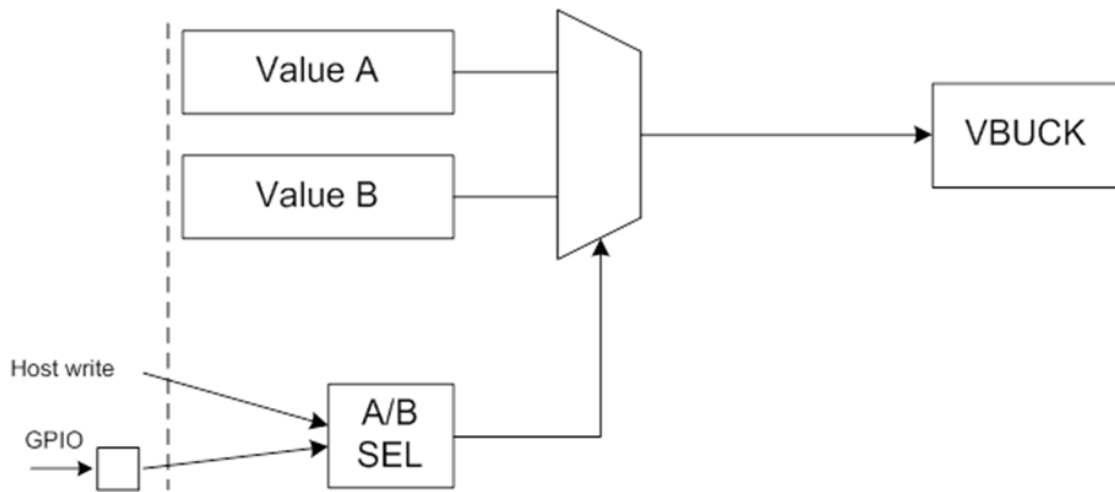


Figure 8: Buck Output Voltage Control Concept

### 4.1.4 Soft Start-Up and Shutdown

To limit in-rush current from VSYS, the buck converter can perform a soft-start after being enabled. The start-up behavior is a compromise between acceptable inrush current from the battery and turn-on time. Ramp times can be configured in register CH1\_SR\_STARTUP. Rates higher than 20 mV/μs may produce overshoot during the start-up phase, so it should be considered carefully.

A ramped power down can be selected in register bits CH1\_SR\_SHDN. When no ramp is selected (immediate power down), the output node will be discharged only by the pull-down resistor, if enabled in register CH1\_PD\_DIS.

### 4.1.5 Current Limit

The integrated current limit protects the power stages and external coil from excessive current. The buck current limit should be configured to at least 40 % higher than the required maximum output current.

When the current limit is reached, the buck converter generates an event and an interrupt to the host processor unless the interrupt has been masked using register M\_OC1 in SYS\_MASK\_1. Register bit OC\_DVC\_MASK is used to mask over-current events during DVC transitions.

### 4.1.6 Thermal Protection

DA9130 is protected from internal overheating by thermal shutdown.

There are two kinds of flags concerning thermal protection, thermal warning and thermal critical. The warning flag is asserted when  $T_J > T_{WARN}$  and the critical flag is asserted when  $T_J > T_{CRIT}$ . When the critical flag is asserted, Buck1 is shut down immediately.

Table 12: Thermal Protection Control Registers

| Category  | Register name | Description   |
|-----------|---------------|---|
| Status    | TEMP_WARN     | Asserted as long as the thermal warning threshold is reached  |
|           | TEMP_CRIT     | Asserted as long as the thermal shutdown threshold is reached |
| IRQ event | E_TEMP_WARN   | TEMP_WARN caused event  |
|           | E_TEMP_CRIT   | TEMP_CRIT caused event  |
| IRQ mask  | M_TEMP_WARN   | TEMP_WARN event IRQ mask                                      |
|           | M_TEMP_CRIT   | TEMP_CRIT event IRQ mask                                      |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

| Category | Register name | Description               |
|----------|---------------|---------------------------|
|          | M_VR_HOT      | TEMP_WARN status IRQ mask |

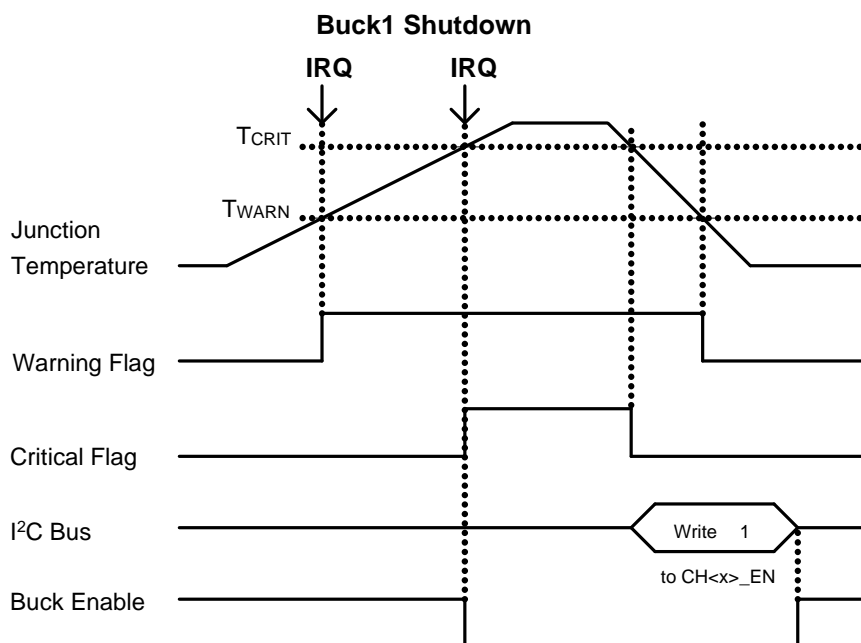


Figure 9: Thermal Protection Operation

## 4.2 Internal Circuits

### 4.2.1 IC\_EN/Chip Enable/Disable

IC\_EN is chip enable/disable control input. When IC\_EN = 0, all blocks except for low I<sub>Q</sub> POR are powered-down and buck output is pulled-down.

### 4.2.2 nIRQ/Interrupt

The interrupt triggers events. Trigger conditions and control registers for each interrupt event are listed in Table 13.

Some of these events are categorized as fault events and affect device operation (for example, buck disable), see Section 4.1.6.

Table 13: Interrupt List

| Name                     | Polarity (Note 1) | Trigger                                       | IRQ Status Register | IRQ Mask Register | Deglitch Period |
|--------------------------|-------------------|---|---------------------|-------------------|-----------------|
| Thermal warning (event)  | N                 | T <sub>J</sub> rising above T <sub>WARN</sub> | E_TEMP_WARN         | M_TEMP_WARN       | 0 s             |
| Thermal critical (event) | N                 | T <sub>J</sub> rising above T <sub>CRIT</sub> | E_TEMP_CRIT         | M_TEMP_CRIT       | 0 s             |
| System Good (event)      | P                 | Buck1 PG event                                | E_SG                | M_SG              | 0s              |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

| Name                               | Polarity (Note 1) | Trigger  | IRQ Status Register | IRQ Mask Register   | Deglitch Period                           |
|------------------------------------|-------------------|--|---------------------|---------------------|---|
| Buck1 power-good (event)           | P                 | Buck1 $V_{OUT}$ is in power-good voltage range (not under- or over-voltage)            | E_PG1               | M_PG1               | 0 s                                       |
| Buck1 over-voltage (event)         | N                 | Buck1 $V_{OUT}$ rising above over-voltage threshold (target voltage + 150 mV)          | E_OV1               | M_OV1               | Rise:8 $\mu$ s<br>Fall:8 $\mu$ s          |
| Buck1 under-voltage (event)        | N                 | Buck1 $V_{OUT}$ falling below under-voltage threshold (target voltage - $V_{TH\_PG}$ ) | E_UV1               | M_UV1               | 0 s                                       |
| Buck1 over-current (event)         | N                 | Buck1 current rising above over-current threshold                                      | E_OC1               | M_OC1               | 0 s                                       |
| Buck1 power-good (status) (Note 2) | P                 | Buck1 $V_{OUT}$ is in power-good voltage range (not under- or over-voltage)            | PG1                 | M_PG1_STAT (Note 3) | 0 s                                       |
| System good (status) (Note 2)      | P                 | Buck1 PG is active   | SG                  | S_PG_STAT (Note 3)  | 0 s                                       |
| Thermal warning (status) (Note 2)  | N                 | $T_J$ rising above $T_{WARN}$  | TEMP_WARN           | M_VR_HOT (Note 3)   | 0 s                                       |
| GPIO0 change (event)               | N                 | Detect GPIO0 change for active trigger selected GPIO0_TRIG register                    | E_GPIO0             | M_GPIO0             | 100 $\mu$ s/<br>1 ms/<br>10 ms/<br>100 ms |
| GPIO1 change (event)               | N                 | Detect GPIO1 change for active trigger selected GPIO1_TRIG register                    | E_GPIO1             | M_GPIO1             |   |
| GPIO2 change (event)               | N                 | Detect GPIO2 change for active trigger selected GPIO2_TRIG register                    | E_GPIO2             | M_GPIO2             |   |

**Note 1** Polarity at the source of the flag: P = active-high, N = active-low.  
General rule is: normal system state is high, and abnormal system state is low (for example, PG = high means power-good, TEMP\_CRIT = low when TEMP critical state).

**Note 2** Interrupt outputs the status as is. I<sup>2</sup>C write is not required for interrupt clear.

**Note 3** OTP load value defined by CONF pin setting if CONF\_EN = 1.


## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

**Table 14: Interrupt Registers Except for Power Good Status**

| Register | Description   |
|----------|---|
| E_<name> | Read-only interrupt event register<br>0: No interrupt<br>1: Interrupt occurred<br><b>Cleared after being written to I<sup>2</sup>C. Set until IRQ is removed.</b> |
| M_<name> | Interrupt mask register<br>0: Not masked<br>1: Masked. No IRQ signal sent. Event register (E_<name>) is updated.  |

**Table 15: Interrupt Registers for Power Good and Temp Warning Status**

| Register     | Description  |
|--------------|--|
| PG<x>        | Buck<x> power good status. Asserted as long as the buck<x> output voltage is in range (under-voltage threshold < buck output voltage < over-voltage threshold)<br>0: Not power good<br>1: Power good |
| M_PG<x>_STAT | Power good status interrupt mask register<br>0: Not masked<br>1: Masked. No IRQ signal sent. Power good status register (PG<x>) is updated   |
| TEMP_WARN    | Asserted as long as the thermal warning threshold ( $T_{WARN}$ ) is reached<br>0: Junction temperature is below $T_{WARN}$<br>1: Junction temperature is above $T_{WARN}$                            |
| M_VR_HOT     | Temperature warning status (TEMP_WARN) interrupt mask register<br>0: Not masked<br>1: Masked. No IRQ signal sent. Temperature warning status register (TEMP_WARN) is updated                         |
| SG           | System good. Asserted as long as the buck1 PG signal is high<br>0: Not system good<br>1: System good   |

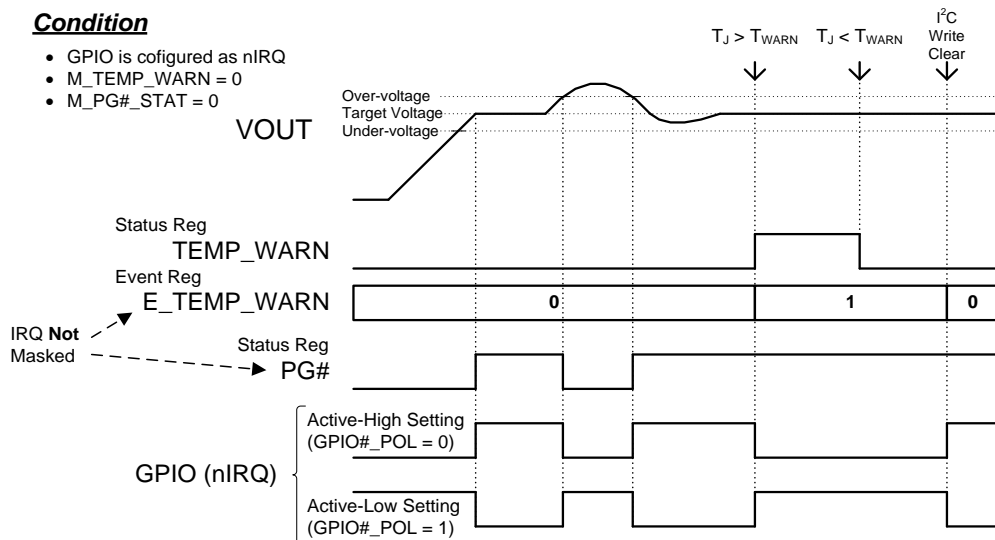

**Figure 10: Interrupt Operation Example**

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### 4.2.3 GPIO

#### 4.2.3.1 GPIO Pin Assignment

The DA9130 provides up to five GPIO pins, three if the I<sup>2</sup>C is enabled, see [Table 16](#). These registers are OTP programmable. When CONF\_EN = 1 GPIO0 can be used for chip configuration.

Any register settings for GPIO3 and GPIO4 are ignored and GPIO3 and GPIO4 function as SCL and SDA respectively if I2C\_EN = 1.

**Table 16: GPIO Pin Assignment**

| OTP Option |         | GPIO Pin       |       |       |               |               | Available GPIOs |
|------------|---------|----------------|-------|-------|---------------|---------------|-----------------|
| I2C_EN     | CONF_EN | CONF/<br>GPIO0 | GPIO1 | GPIO2 | SCL/<br>GPIO3 | SDA/<br>GPIO4 |                 |
| 1'b0       | 1'b0    | GPIO0          | GPIO1 | GPIO2 | GPIO3         | GPIO4         | 5               |
|            | 1'b1    | CONF           | GPIO1 | GPIO2 | GPIO3         | GPIO4         | 4               |
| 1'b1       | 1'b0    | GPIO0          | GPIO1 | GPIO2 | SCL           | SDA           | 3               |
|            | 1'b1    | CONF           | GPIO1 | GPIO2 | SCL           | SDA           | 2               |

#### 4.2.3.2 GPIO Function

The GPIOs pins are configurable as the following functions in register GPIO<x>\_MODE (x = 0 to 4):

- Buck1 enable input (EN1)
- Buck1 DVC control input (DVC1)
- Buck1 OTP setting reload input (RELOAD)
- Buck1 power good output (PG1)
- System good output (SG)
- Interrupt output (nIRQ)

**Table 17: GPIO Function Configuration**

| GPIO<x>_MODE[3:0] | Function     | IO Condition |
|-------------------|--------------|--------------|
| 4'h0              | GPIO disable | HiZ          |
| 4'h1              | EN1          | In           |
| 4'h2              | Reserved     | In           |
| 4'h3              | Reserved     | In           |
| 4'h4              | DVC1         | In           |
| 4'h5              | Reserved     | In           |
| 4'h6              | Reserved     | In           |
| 4'h7              | RELOAD       | In           |
| 4'h8              | PG1          | Out          |
| 4'h9              | Reserved     | Out          |
| 4'hA              | Reserved     | Out          |
| 4'hB              | SG           | Out          |
| 4'hC              | nIRQ         | Out          |
| 4'hD              | Reserved     | HiZ          |
| 4'hE              | Low level    | Out          |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

| GPIO<x>_MODE[3:0] | Function   | IO Condition |
|-------------------|------------|--------------|
| 4'hF              | High level | Out          |

### 4.2.3.3 Chip Configuration Select (CONF)

GPIO0 functions as chip configuration select (CONF) input when CONF\_EN = 1.

Three different chip configurations can be selected according to the CONF pin level, whether it is HIGH, LOW, or Hi-Z. Table 18 lists the device configurations that can be modified if CONF\_EN = 1.

**Table 18: GPIO0-Configurable Registers when CONF\_EN = 1**

| Register Name      | Description                                |
|--------------------|--|
| IF_SLAVE_ADDR[6:0] | I <sup>2</sup> C slave address             |
| CH1_A_MODE[1:0]    | CH1_A Operation mode select                |
| CH1_B_MODE[1:0]    | CH1_B Operation mode select                |
| CH1_VSEL           | CH1 output voltage and operation selection |
| CH1_EN             | CH1 enable                                 |
| CH1_A_VOUT[7:0]    | CH1 output voltage setting A               |
| CH1_B_VOUT[7:0]    | CH1 output voltage setting B               |
| M_PG1_STAT         | IRQ mask setting for CH1 power good status |
| M_VR_HOT           | IRQ mask setting for temp warning status   |
| GPIO1_MODE[3:0]    | GPIO1 mode setting                         |
| GPIO2_MODE[3:0]    | GPIO2 mode setting                         |
| GPIO1_OBUF         | GPIO1 output buffer select                 |
| GPIO2_OBUF         | GPIO2 output buffer select                 |
| GPIO1_TRIG[1:0]    | GPIO1 input trigger select                 |
| GPIO1_POL          | GPIO1 polarity select                      |
| GPIO1_PUPD         | GPIO1 pull-up/pull-down enable             |
| GPIO1_DEB[1:0]     | GPIO1 input debounce time setting          |
| GPIO1_DEB_RISE     | GPIO1 input debounce rising edge enable    |
| GPIO1_DEB_FALL     | GPIO1 input debounce falling edge enable   |
| GPIO2_TRIG[1:0]    | GPIO2 input trigger select                 |
| GPIO2_POL          | GPIO2 polarity select                      |
| GPIO2_PUPD         | GPIO2 pull-up/pull-down enable             |
| GPIO2_DEB[1:0]     | GPIO2 input debounce time setting          |
| GPIO2_DEB_RISE     | GPIO2 input debounce rising edge enable    |
| GPIO2_DEB_FALL     | GPIO2 input debounce falling edge enable   |

## 4.3 Operating Modes

### 4.3.1 ON

DA9130 is ON when the IC\_EN port is higher than  $V_{IH\_EN}$  and the supply voltage is higher than  $V_{THR\_POR}$ . Once enabled, the host processor can start communicating with DA9130 using the control interface, after the  $t_{IC\_EN}$  delay.

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### 4.3.2 OFF

DA9130 is OFF when the IC\_EN port is lower than  $V_{IL\_EN}$ . In OFF, the bucks are always disabled and LX nodes are pulled down by (typically 150  $\Omega$ ) internal pull-down resistors.

## 4.4 I<sup>2</sup>C Communication

All features of DA9130 can be controlled with the I<sup>2</sup>C interface which is enabled or disabled in register I2C\_EN.

| I2C_EN | Description  |
|--------|--|
| 0      | I <sup>2</sup> C disable: SCL/GPIO3 and SDA/GPIO4 pins can be used as GPIO   |
| 1      | I <sup>2</sup> C enable: SCL/GPIO3 and SDA/GPIO4 pins are used as I <sup>2</sup> C clock input and I <sup>2</sup> C data input/output. |

GPIO3 functions as the I<sup>2</sup>C clock and GPIO4 carries all the power manager bidirectional I<sup>2</sup>C data. The I<sup>2</sup>C interface is open-drain supporting multiple devices on a single line. The bus lines have to be pulled high by external pull-up resistors (2 k $\Omega$  to 20 k $\Omega$ ). The standard frequency of the I<sup>2</sup>C bus is 1 MHz in fast-mode plus (FM+), 400 kHz in fast-mode, or 100 kHz in standard mode.

### 4.4.1 I<sup>2</sup>C Protocol

All data is transmitted across the I<sup>2</sup>C bus in eight-bit groups. To send a bit, the SDA line is driven towards the intended state while the SCL is low (a low SDA indicates a zero bit). Once the SDA has settled, the SCL line is brought high and then low. This pulse on SCL clocks the SDA bit into the receiver's shift register.

A two-byte serial protocol is used containing one byte for address and one byte data. Data and address transfer are transmitted MSB first for both read and write operations. All transmissions begin with the START condition from the master while the bus is in idle state (the bus is free). It is initiated by a high to low transition on the SDA line while the SCL is in the high state (a STOP condition is indicated by a low to high transition on the SDA line while the SCL is in the high state).




Figure 11: I<sup>2</sup>C START and STOP Condition Timing

The I<sup>2</sup>C bus is monitored for a valid slave address whenever the interface is enabled. It responds immediately when it receives its own slave address. The acknowledge is done by pulling the SDA line low during the following clock cycle (white blocks marked with A in [Figure 12](#) and [Figure 13](#)).

The protocol for a register write from master to slave consists of a START condition, a slave address with read/write bit, and the eight-bit register address followed by eight bits of data, terminated by a STOP condition. DA9130 responds to all bytes with acknowledge (A), see [Figure 12](#).




## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

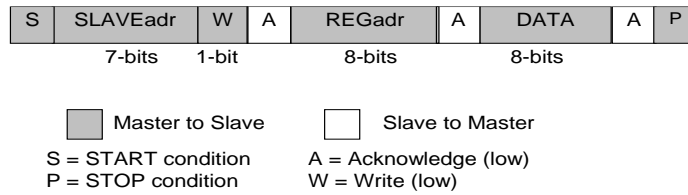

**Figure 12: I<sup>2</sup>C Byte Write (SDA Line)**

When the host reads data from a register it first has to write to DA9130 with the target register address and then read from DA9130 with a repeated START, or alternatively a second START, condition. After receiving the data, the host sends no acknowledge (A\*) and terminates the transmission with a STOP condition, see [Figure 13](#).

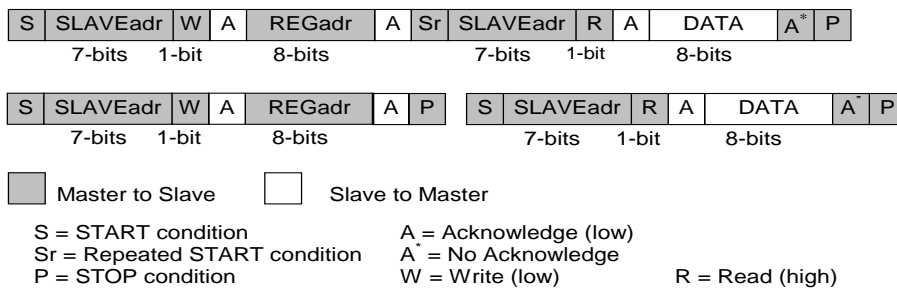

**Figure 13: I<sup>2</sup>C Byte Read (SDA Line) Examples**

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### 5 Register Definitions

#### 5.1 Register Map

Table 19: Register Map

| Addr                 | Register                     | 7              | 6                | 5              | 4               | 3                | 2          | 1               | 0           |  |
|----------------------|------------------------------|----------------|------------------|----------------|-----------------|------------------|------------|-----------------|-------------|--|
| <b>System Module</b> |                              |                |                  |                |                 |                  |            |                 |             |  |
| <b>System</b>        |                              |                |                  |                |                 |                  |            |                 |             |  |
| 0x0001               | <a href="#">SYS_STATUS_0</a> | Reserved       | Reserved         | Reserved       | Reserved        | Reserved         | SG         | TEMP_CRIT       | TEMP_WARN   |  |
| 0x0002               | <a href="#">SYS_STATUS_1</a> | Reserved       | Reserved         | Reserved       | Reserved        | PG1              | OV1        | UV1             | OC1         |  |
| 0x0003               | <a href="#">SYS_STATUS_2</a> | Reserved       | Reserved         | Reserved       | Reserved        | Reserved         | GPIO2      | GPIO1           | GPIO0       |  |
| 0x0004               | <a href="#">SYS_EVENT_0</a>  | Reserved       | Reserved         | Reserved       | Reserved        | Reserved         | E_SG       | E_TEMP_CRIT     | E_TEMP_WARN |  |
| 0x0005               | <a href="#">SYS_EVENT_1</a>  | Reserved       | Reserved         | Reserved       | Reserved        | E_PG1            | E_OV1      | E_UV1           | E_OC1       |  |
| 0x0006               | <a href="#">SYS_EVENT_2</a>  | Reserved       | Reserved         | Reserved       | Reserved        | Reserved         | E_GPIO2    | E_GPIO1         | E_GPIO0     |  |
| 0x0007               | <a href="#">SYS_MASK_0</a>   | Reserved       | Reserved         | Reserved       | Reserved        | Reserved         | Reserved   | M_TEMP_CRIT     | M_TEMP_WARN |  |
| 0x0008               | <a href="#">SYS_MASK_1</a>   | Reserved       | Reserved         | Reserved       | Reserved        | M_PG1            | M_OV1      | M_UV1           | M_OC1       |  |
| 0x0009               | <a href="#">SYS_MASK_2</a>   | Reserved       | Reserved         | Reserved       | Reserved        | Reserved         | M_GPIO2    | M_GPIO1         | M_GPIO0     |  |
| 0x000A               | <a href="#">SYS_MASK_3</a>   | Reserved       | Reserved         | Reserved       | Reserved        | M_VR_HOT         | Reserved   | Reserved        | M_PG1_STAT  |  |
| 0x000B               | <a href="#">SYS_CONFIG_0</a> | Reserved       |                  |                |                 | Reserved         |            |                 |             |  |
| 0x000C               | <a href="#">SYS_CONFIG_1</a> | Reserved       |                  |                |                 | Reserved         |            |                 |             |  |
| 0x000D               | <a href="#">SYS_CONFIG_2</a> | Reserved       | OC_LATCHOFF<1:0> |                | OC_DVC_MASK     | PG_DVC_MASK<1:0> |            | Reserved        | Reserved    |  |
| 0x000E               | <a href="#">SYS_CONFIG_3</a> | Reserved       | OSC_TUNE<2:0>    |                |                 | Reserved         | Reserved   | I2C_TIMEOUT     | Reserved    |  |
| 0x0010               | <a href="#">SYS_GPIO0_0</a>  | Reserved       | Reserved         | Reserved       | GPIO0_MODE<3:0> |                  |            |                 | GPIO0_OBUF  |  |
| 0x0011               | <a href="#">SYS_GPIO0_1</a>  | GPIO0_DEB_FALL | GPIO0_DEB_RISE   | GPIO0_DEB<1:0> |                 | GPIO0_PUPD       | GPIO0_PO L | GPIO0_TRIG<1:0> |             |  |
| 0x0012               | <a href="#">SYS_GPIO1_0</a>  | Reserved       | Reserved         | Reserved       | GPIO1_MODE<3:0> |                  |            |                 | GPIO1_OBUF  |  |
| 0x0013               | <a href="#">SYS_GPIO1_1</a>  | GPIO1_DEB_FALL | GPIO1_DEB_RISE   | GPIO1_DEB<1:0> |                 | GPIO1_PUPD       | GPIO1_PO L | GPIO1_TRIG<1:0> |             |  |
| 0x0014               | <a href="#">SYS_GPIO2_0</a>  | Reserved       | Reserved         | Reserved       | GPIO2_MODE<3:0> |                  |            |                 | GPIO2_OBUF  |  |
| 0x0015               | <a href="#">SYS_GPIO2_1</a>  | GPIO2_DEB_FALL | GPIO2_DEB_RISE   | GPIO2_DEB<1:0> |                 | GPIO2_PUPD       | GPIO2_PO L | GPIO2_TRIG<1:0> |             |  |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

| Addr                 | Register        | 7               | 6                   | 5        | 4            | 3                   | 2        | 1               | 0          |
|----------------------|-----------------|-----------------|---------------------|----------|--------------|---------------------|----------|-----------------|------------|
| <b>Buck Control</b>  |                 |                 |                     |          |              |                     |          |                 |            |
| <b>Buck1</b>         |                 |                 |                     |          |              |                     |          |                 |            |
| 0x0020               | BUCK_BUCK1_0    | Reserved        | CH1_SR_DVC_DWN<2:0> |          |              | CH1_SR_DVC_UP<2:0>  |          |                 | CH1_EN     |
| 0x0021               | BUCK_BUCK1_1    | Reserved        | CH1_SR_SHDN<2:0>    |          |              | CH1_SR_STARTUP<2:0> |          |                 | CH1_PD_DIS |
| 0x0022               | BUCK_BUCK1_2    | Reserved        | Reserved            | Reserved | Reserved     | CH1_ILIM<3:0>       |          |                 |            |
| 0x0023               | BUCK_BUCK1_3    | CH1_VMAX<7:0>   |                     |          |              |                     |          |                 |            |
| 0x0024               | BUCK_BUCK1_4    | Reserved        | Reserved            | Reserved | CH1_VSE<br>L | CH1_B_MODE<1:0>     |          | CH1_A_MODE<1:0> |            |
| 0x0025               | BUCK_BUCK1_5    | CH1_A_VOUT<7:0> |                     |          |              |                     |          |                 |            |
| 0x0026               | BUCK_BUCK1_6    | CH1_B_VOUT<7:0> |                     |          |              |                     |          |                 |            |
| 0x0027               | BUCK_BUCK1_7    | Reserved        | Reserved            | Reserved | Reserved     | Reserved            | Reserved | Reserved        | Reserved   |
| <b>Serialization</b> |                 |                 |                     |          |              |                     |          |                 |            |
| 0x0048               | OTP_DEVICE_ID   | DEV_ID<7:0>     |                     |          |              |                     |          |                 |            |
| 0x0049               | OTP_VARIANT_ID  | MRC<3:0>        |                     |          |              | VRC<3:0>            |          |                 |            |
| 0x004A               | OTP_CUSTOMER_ID | CUST_ID<7:0>    |                     |          |              |                     |          |                 |            |
| 0x004B               | OTP_CONFIG_ID   | CONFIG_REV<7:0> |                     |          |              |                     |          |                 |            |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### 5.1.1 System

**Table 20: SYS\_STATUS\_0 (0x0001)**

| Bit | Type | Symbol    | Description  |
|-----|------|-----------|--|
| [2] | R    | SG        | Asserted whilst PG1 is asserted                            |
| [1] | R    | TEMP_CRIT | Asserted whilst the thermal shutdown threshold is exceeded |
| [0] | R    | TEMP_WARN | Asserted whilst the thermal warning threshold is exceeded  |

**Table 21: SYS\_STATUS\_1 (0x0002)**

| Bit | Type | Symbol | Description                                      |
|-----|------|--------|--|
| [3] | R    | PG1    | Asserted whilst Buck1 output voltage is in range |
| [2] | R    | OV1    | Asserted whilst Buck1 output is over-voltage     |
| [1] | R    | UV1    | Asserted whilst Buck1 output is under-voltage    |
| [0] | R    | OC1    | Asserted whilst Buck1 output is over-current     |

**Table 22: SYS\_STATUS\_2 (0x0003)**

| Bit | Type | Symbol | Description  |
|-----|------|--------|--------------|
| [2] | R    | GPIO2  | GPIO2 status |
| [1] | R    | GPIO1  | GPIO1 status |
| [0] | R    | GPIO0  | GPIO0 status |

**Table 23: SYS\_EVENT\_0 (0x0004)**

| Bit | Type | Symbol      | Description   |
|-----|------|-------------|---|
| [2] | R    | E_SG        | SG event. Similar to PG1. Write 1 to clear this bit after the event source has been released. |
| [1] | R    | E_TEMP_CRIT | TEMP_CRIT event. Write 1 to clear this bit after the event source has been released.          |
| [0] | R    | E_TEMP_WARN | TEMP_WARN event. Write 1 to clear this bit after the event source has been released.          |

**Table 24: SYS\_EVENT\_1 (0x0005)**

| Bit | Type | Symbol | Description   |
|-----|------|--------|---|
| [3] | RW   | E_PG1  | PG1 caused event. Write 1 to clear this bit after the event source has been released. |
| [2] | RW   | E_OV1  | OV1 caused event. Write 1 to clear this bit after the event source has been released. |
| [1] | RW   | E_UV1  | UV1 caused event. Write 1 to clear this bit after the event source has been released. |
| [0] | RW   | E_OC1  | OC1 caused event. Write 1 to clear this bit after the event source has been released. |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

**Table 25: SYS\_EVENT\_2 (0x0006)**

| Bit | Type | Symbol  | Description  |
|-----|------|---------|--|
| [2] | RW   | E_GPIO2 | GPIO2 event. Write 1 to clear this bit after the event source has been released. |
| [1] | RW   | E_GPIO1 | GPIO1 event. Write 1 to clear this bit after the event source has been released. |
| [0] | RW   | E_GPIO0 | GPIO0 event. Write 1 to clear this bit after the event source has been released. |

**Table 26: SYS\_MASK\_0 (0x0007)**

| Bit | Type | Symbol      | Description        |
|-----|------|-------------|--------------------|
| [2] | RW   | M_SG        | SG IRQ mask        |
| [1] | RW   | M_TEMP_CRIT | TEMP_CRIT IRQ mask |
| [0] | RW   | M_TEMP_WARN | TEMP_WARN IRQ mask |

**Table 27: SYS\_MASK\_1 (0x0008)**

| Bit | Type | Symbol | Description        |
|-----|------|--------|--------------------|
| [3] | RW   | M_PG1  | PG1 event IRQ mask |
| [2] | RW   | M_OV1  | OV1 event IRQ mask |
| [1] | RW   | M_UV1  | UV1 event IRQ mask |
| [0] | RW   | M_OC1  | OC1 event IRQ mask |

**Table 28: SYS\_MASK\_2 (0x0009)**

| Bit | Type | Symbol  | Description    |
|-----|------|---------|----------------|
| [2] | RW   | M_GPIO2 | GPIO2 IRQ mask |
| [1] | RW   | M_GPIO1 | GPIO1 IRQ mask |
| [0] | RW   | M_GPIO0 | GPIO0 IRQ mask |

**Table 29: SYS\_MASK\_3 (0x000A)**

| Bit | Type | Symbol     | Description   |
|-----|------|------------|---|
| [3] | RW   | M_VR_HOT   | Temp warning status IRQ mask. Initial value is determined by CONF pin setting at the start-up if CONF_EN = 1, see Section 4.2.3.3 |
| [0] | RW   | M_PG1_STAT | PG1 status IRQ mask. Initial value is determined by CONF pin setting at the start-up if CONF_EN = 1, see Section 4.2.3.3          |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

**Table 30: SYS\_CONFIG\_2 (0x000D)**

| Bit   | Type                                    | Symbol      | Description  |       |             |     |                   |     |   |     |                                    |     |                                    |
|-------|---|-------------|--|-------|-------------|-----|-------------------|-----|---|-----|------------------------------------|-----|------------------------------------|
| [6:5] | RW                                      | OC_LATCHOFF | <p>Over-current latch-off setting. BUCK shut-down after OCP for 8 <math>\mu</math>s/1 ms/3 ms unless disable setting. IRQ is generated unless IRQ is masked.</p> <table> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>Latch off disable</td> </tr> <tr> <td>0x1</td> <td>Latch off after 8 <math>\mu</math>s of OCP signal</td> </tr> <tr> <td>0x2</td> <td>Latch off after 1 ms of OCP signal</td> </tr> <tr> <td>0x3</td> <td>Latch off after 3 ms of OCP signal</td> </tr> </tbody> </table> | Value | Description | 0x0 | Latch off disable | 0x1 | Latch off after 8 $\mu$ s of OCP signal | 0x2 | Latch off after 1 ms of OCP signal | 0x3 | Latch off after 3 ms of OCP signal |
| Value | Description                             |             |  |       |             |     |                   |     |   |     |                                    |     |                                    |
| 0x0   | Latch off disable                       |             |  |       |             |     |                   |     |   |     |                                    |     |                                    |
| 0x1   | Latch off after 8 $\mu$ s of OCP signal |             |  |       |             |     |                   |     |   |     |                                    |     |                                    |
| 0x2   | Latch off after 1 ms of OCP signal      |             |  |       |             |     |                   |     |   |     |                                    |     |                                    |
| 0x3   | Latch off after 3 ms of OCP signal      |             |  |       |             |     |                   |     |   |     |                                    |     |                                    |
| [4]   | RW                                      | OC_DVC_MASK | Over-current event (IRQ and latch-off feature) mask during DVC ramp-up and ramp-down   |       |             |     |                   |     |   |     |                                    |     |                                    |
| [3:2] | RW                                      | PG_DVC_MASK | <p>Power-good mask during DVC</p> <table> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>No mask</td> </tr> <tr> <td>0x1</td> <td>Mask as not power good during DVC</td> </tr> <tr> <td>0x2</td> <td>Mask as power good during DVC</td> </tr> <tr> <td>0x3</td> <td>Reserved</td> </tr> </tbody> </table>   | Value | Description | 0x0 | No mask           | 0x1 | Mask as not power good during DVC       | 0x2 | Mask as power good during DVC      | 0x3 | Reserved                           |
| Value | Description                             |             |  |       |             |     |                   |     |   |     |                                    |     |                                    |
| 0x0   | No mask                                 |             |  |       |             |     |                   |     |   |     |                                    |     |                                    |
| 0x1   | Mask as not power good during DVC       |             |  |       |             |     |                   |     |   |     |                                    |     |                                    |
| 0x2   | Mask as power good during DVC           |             |  |       |             |     |                   |     |   |     |                                    |     |                                    |
| 0x3   | Reserved                                |             |  |       |             |     |                   |     |   |     |                                    |     |                                    |

**Table 31: SYS\_CONFIG\_3 (0x000E)**

| Bit   | Type        | Symbol      | Description  |       |             |     |   |     |   |     |   |     |   |     |    |     |    |     |    |     |    |
|-------|-------------|-------------|--|-------|-------------|-----|---|-----|---|-----|---|-----|---|-----|----|-----|----|-----|----|-----|----|
| [6:4] | RW          | OSC_TUNE    | <p>Tune oscillator frequency, tuned frequency = Current + OSC_TUNE * 160 kHz</p> <table> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x3</td> <td>3</td> </tr> <tr> <td>0x2</td> <td>2</td> </tr> <tr> <td>0x1</td> <td>1</td> </tr> <tr> <td>0x0</td> <td>0</td> </tr> <tr> <td>0x7</td> <td>-1</td> </tr> <tr> <td>0x6</td> <td>-2</td> </tr> <tr> <td>0x5</td> <td>-3</td> </tr> <tr> <td>0x4</td> <td>-4</td> </tr> </tbody> </table> | Value | Description | 0x3 | 3 | 0x2 | 2 | 0x1 | 1 | 0x0 | 0 | 0x7 | -1 | 0x6 | -2 | 0x5 | -3 | 0x4 | -4 |
| Value | Description |             |  |       |             |     |   |     |   |     |   |     |   |     |    |     |    |     |    |     |    |
| 0x3   | 3           |             |  |       |             |     |   |     |   |     |   |     |   |     |    |     |    |     |    |     |    |
| 0x2   | 2           |             |  |       |             |     |   |     |   |     |   |     |   |     |    |     |    |     |    |     |    |
| 0x1   | 1           |             |  |       |             |     |   |     |   |     |   |     |   |     |    |     |    |     |    |     |    |
| 0x0   | 0           |             |  |       |             |     |   |     |   |     |   |     |   |     |    |     |    |     |    |     |    |
| 0x7   | -1          |             |  |       |             |     |   |     |   |     |   |     |   |     |    |     |    |     |    |     |    |
| 0x6   | -2          |             |  |       |             |     |   |     |   |     |   |     |   |     |    |     |    |     |    |     |    |
| 0x5   | -3          |             |  |       |             |     |   |     |   |     |   |     |   |     |    |     |    |     |    |     |    |
| 0x4   | -4          |             |  |       |             |     |   |     |   |     |   |     |   |     |    |     |    |     |    |     |    |
| [1]   | RW          | I2C_TIMEOUT | Enable automatic reset of 2-wire interface (if SDA stays low for >50 ms).  |       |             |     |   |     |   |     |   |     |   |     |    |     |    |     |    |     |    |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

**Table 32: SYS\_GPIO0\_0 (0x0010)**

| Bit   | Type | Symbol     | Description   |
|-------|------|------------|---|
| [4:1] | RW   | GPIO0_MODE | GPIO function mode select<br><b>Value      Description</b><br>0x0      GPIO disable<br>0x1      EN1 input<br>0x2      Reserved<br>0x3      Reserved<br>0x4      DVC1 input<br>0x5      Reserved<br>0x6      Reserved<br>0x7      RELOAD input<br>0x8      PG1 output<br>0x9      Reserved<br>0xA      Reserved<br>0xB      Reserved<br>0xC      nIRQ output<br>0xD      Reserved<br>0xE      Low output<br>0xF      High output |
| [0]   | RW   | GPIO0_OBUF | GPIO output buffer select<br><b>Value      Description</b><br>0x0      open-drain output<br>0x1      push-pull output   |

**Table 33: SYS\_GPIO0\_1 (0x0011)**

| Bit   | Type | Symbol         | Description  |
|-------|------|----------------|--|
| [7]   | RW   | GPIO0_DEB_FALL | GPI debounce falling edge  |
| [6]   | RW   | GPIO0_DEB_RISE | GPI debounce rising edge   |
| [5:4] | RW   | GPIO0_DEB      | GPI debounce time<br><b>Value      Description</b><br>0x0      100 $\mu$ s debounce<br>0x1      1 ms debounce<br>0x2      10 ms debounce<br>0x3      100 ms debounce |
| [3]   | RW   | GPIO0_PUPD     | GPIO pull-up/pull-down enable<br><b>Value      Description</b><br>0x0      GPI: pull-down disabled, GPO: pull-up to AVDD disabled                                    |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

|       |    |            |   |  |
|-------|----|------------|---|--|
|       |    |            | 0x1   | GPI: pull-down enabled, GPO: pull-up to AVDD enabled |
| [2]   | RW | GPIO0_POL  | GPIO polarity<br><b>Value</b> <b>Description</b><br>0x0            GPIO is active-high<br>0x1            GPIO is active-low   |  |
| [1:0] | RW | GPIO0_TRIG | GPI trigger type<br><b>Value</b> <b>Description</b><br>0x0            Dual-edge triggered<br>0x1            Pos-edge triggered<br>0x2            Neg-edge triggered<br>0x3            Reserved (No trigger) |  |

**Table 34: SYS\_GPIO1\_0 (0x0012)**

| Bit   | Type | Symbol     | Description   |
|-------|------|------------|---|
| [4:1] | RW   | GPIO1_MODE | GPIO function mode select. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1<br><b>Value</b> <b>Description</b><br>0x0            GPIO disable<br>0x1            EN1 input<br>0x2            Reserved<br>0x3            Reserved<br>0x4            DVC1 input<br>0x5            Reserved<br>0x6            Reserved<br>0x7            RELOAD input<br>0x8            PG1 output<br>0x9            Reserved<br>0xA            Reserved<br>0xB            Reserved<br>0xC            nIRQ output<br>0xD            Reserved<br>0xE            Low output<br>0xF            High output |
| [0]   | RW   | GPIO1_OBUF | GPIO output buffer select. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1<br><b>Value</b> <b>Description</b><br>0x0            open-drain output<br>0x1            push-pull output   |



## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

**Table 35: SYS\_GPIO1\_1 (0x0013)**

| Bit   | Type   | Symbol         | Description  |       |             |     |  |     |  |     |                    |     |                       |
|-------|--|----------------|--|-------|-------------|-----|--|-----|--|-----|--------------------|-----|-----------------------|
| [7]   | RW   | GPIO1_DEB_FALL | GPI debounce falling edge. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1  |       |             |     |  |     |  |     |                    |     |                       |
| [6]   | RW   | GPIO1_DEB_RISE | GPI debounce rising edge. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1   |       |             |     |  |     |  |     |                    |     |                       |
| [5:4] | RW   | GPIO1_DEB      | <p>GPI debounce time. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>100 <math>\mu</math>s debounce</td> </tr> <tr> <td>0x1</td> <td>1 ms debounce</td> </tr> <tr> <td>0x2</td> <td>10 ms debounce</td> </tr> <tr> <td>0x3</td> <td>100 ms debounce</td> </tr> </tbody> </table>    | Value | Description | 0x0 | 100 $\mu$ s debounce                                   | 0x1 | 1 ms debounce  | 0x2 | 10 ms debounce     | 0x3 | 100 ms debounce       |
| Value | Description  |                |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x0   | 100 $\mu$ s debounce                                   |                |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x1   | 1 ms debounce  |                |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x2   | 10 ms debounce   |                |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x3   | 100 ms debounce  |                |  |       |             |     |  |     |  |     |                    |     |                       |
| [3]   | RW   | GPIO1_PUPD     | <p>GPIO pull-up/pull-down enable. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>GPI: pull-down disabled, GPO: pull-up to AVDD disabled</td> </tr> <tr> <td>0x1</td> <td>GPI: pull-down enabled, GPO: pull-up to AVDD enabled</td> </tr> </tbody> </table>                          | Value | Description | 0x0 | GPI: pull-down disabled, GPO: pull-up to AVDD disabled | 0x1 | GPI: pull-down enabled, GPO: pull-up to AVDD enabled |     |                    |     |                       |
| Value | Description  |                |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x0   | GPI: pull-down disabled, GPO: pull-up to AVDD disabled |                |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x1   | GPI: pull-down enabled, GPO: pull-up to AVDD enabled   |                |  |       |             |     |  |     |  |     |                    |     |                       |
| [2]   | RW   | GPIO1_POL      | <p>GPIO polarity. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>GPIO is active-high</td> </tr> <tr> <td>0x1</td> <td>GPIO is active-low</td> </tr> </tbody> </table>   | Value | Description | 0x0 | GPIO is active-high                                    | 0x1 | GPIO is active-low                                   |     |                    |     |                       |
| Value | Description  |                |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x0   | GPIO is active-high                                    |                |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x1   | GPIO is active-low                                     |                |  |       |             |     |  |     |  |     |                    |     |                       |
| [1:0] | RW   | GPIO1_TRIG     | <p>GPI trigger type. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>Dual-edge triggered</td> </tr> <tr> <td>0x1</td> <td>Pos-edge triggered</td> </tr> <tr> <td>0x2</td> <td>Neg-edge triggered</td> </tr> <tr> <td>0x3</td> <td>Reserved (No trigger)</td> </tr> </tbody> </table> | Value | Description | 0x0 | Dual-edge triggered                                    | 0x1 | Pos-edge triggered                                   | 0x2 | Neg-edge triggered | 0x3 | Reserved (No trigger) |
| Value | Description  |                |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x0   | Dual-edge triggered                                    |                |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x1   | Pos-edge triggered                                     |                |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x2   | Neg-edge triggered                                     |                |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x3   | Reserved (No trigger)                                  |                |  |       |             |     |  |     |  |     |                    |     |                       |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

**Table 36: SYS\_GPIO2\_0 (0x0014)**

| Bit   | Type              | Symbol     | Description  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
|-------|-------------------|------------|--|-------|-------------|-----|-------------------|-----|------------------|-----|----------|-----|----------|-----|------------|-----|----------|-----|----------|-----|--------------|-----|------------|-----|----------|-----|----------|-----|----------|-----|-------------|-----|----------|-----|------------|-----|-------------|
| [4:1] | RW                | GPIO2_MODE | <p>GPIO function mode select. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr><td>0x0</td><td>GPIO disable</td></tr> <tr><td>0x1</td><td>EN1 input</td></tr> <tr><td>0x2</td><td>Reserved</td></tr> <tr><td>0x3</td><td>Reserved</td></tr> <tr><td>0x4</td><td>DVC1 input</td></tr> <tr><td>0x5</td><td>Reserved</td></tr> <tr><td>0x6</td><td>Reserved</td></tr> <tr><td>0x7</td><td>RELOAD input</td></tr> <tr><td>0x8</td><td>PG1 output</td></tr> <tr><td>0x9</td><td>Reserved</td></tr> <tr><td>0xA</td><td>Reserved</td></tr> <tr><td>0xB</td><td>Reserved</td></tr> <tr><td>0xC</td><td>nIRQ output</td></tr> <tr><td>0xD</td><td>Reserved</td></tr> <tr><td>0xE</td><td>Low output</td></tr> <tr><td>0xF</td><td>High output</td></tr> </tbody> </table> | Value | Description | 0x0 | GPIO disable      | 0x1 | EN1 input        | 0x2 | Reserved | 0x3 | Reserved | 0x4 | DVC1 input | 0x5 | Reserved | 0x6 | Reserved | 0x7 | RELOAD input | 0x8 | PG1 output | 0x9 | Reserved | 0xA | Reserved | 0xB | Reserved | 0xC | nIRQ output | 0xD | Reserved | 0xE | Low output | 0xF | High output |
| Value | Description       |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0x0   | GPIO disable      |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0x1   | EN1 input         |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0x2   | Reserved          |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0x3   | Reserved          |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0x4   | DVC1 input        |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0x5   | Reserved          |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0x6   | Reserved          |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0x7   | RELOAD input      |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0x8   | PG1 output        |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0x9   | Reserved          |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0xA   | Reserved          |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0xB   | Reserved          |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0xC   | nIRQ output       |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0xD   | Reserved          |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0xE   | Low output        |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0xF   | High output       |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| [0]   | RW                | GPIO2_OBUF | <p>GPIO output buffer select. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr><td>0x0</td><td>open-drain output</td></tr> <tr><td>0x1</td><td>push-pull output</td></tr> </tbody> </table>   | Value | Description | 0x0 | open-drain output | 0x1 | push-pull output |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| Value | Description       |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0x0   | open-drain output |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |
| 0x1   | push-pull output  |            |  |       |             |     |                   |     |                  |     |          |     |          |     |            |     |          |     |          |     |              |     |            |     |          |     |          |     |          |     |             |     |          |     |            |     |             |

**Table 37: SYS\_GPIO2\_1 (0x0015)**

| Bit   | Type                 | Symbol         | Description   |       |             |     |                      |     |               |     |                |     |                 |
|-------|----------------------|----------------|---|-------|-------------|-----|----------------------|-----|---------------|-----|----------------|-----|-----------------|
| [7]   | RW                   | GPIO2_DEB_FALL | GPI debounce falling edge. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1   |       |             |     |                      |     |               |     |                |     |                 |
| [6]   | RW                   | GPIO2_DEB_RISE | GPI debounce rising edge. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1  |       |             |     |                      |     |               |     |                |     |                 |
| [5:4] | RW                   | GPIO2_DEB      | <p>GPI debounce time. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr><td>0x0</td><td>100 <math>\mu</math>s debounce</td></tr> <tr><td>0x1</td><td>1 ms debounce</td></tr> <tr><td>0x2</td><td>10 ms debounce</td></tr> <tr><td>0x3</td><td>100 ms debounce</td></tr> </tbody> </table> | Value | Description | 0x0 | 100 $\mu$ s debounce | 0x1 | 1 ms debounce | 0x2 | 10 ms debounce | 0x3 | 100 ms debounce |
| Value | Description          |                |   |       |             |     |                      |     |               |     |                |     |                 |
| 0x0   | 100 $\mu$ s debounce |                |   |       |             |     |                      |     |               |     |                |     |                 |
| 0x1   | 1 ms debounce        |                |   |       |             |     |                      |     |               |     |                |     |                 |
| 0x2   | 10 ms debounce       |                |   |       |             |     |                      |     |               |     |                |     |                 |
| 0x3   | 100 ms debounce      |                |   |       |             |     |                      |     |               |     |                |     |                 |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

| [3]   | RW   | GPIO2_PUPD | <p>GPIO pull-up/pull-down enable. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>GPI: pull-down disabled, GPO: pull-up to AVDD disabled</td> </tr> <tr> <td>0x1</td> <td>GPI: pull-down enabled, GPO: pull-up to AVDD enabled</td> </tr> </tbody> </table>                          | Value | Description | 0x0 | GPI: pull-down disabled, GPO: pull-up to AVDD disabled | 0x1 | GPI: pull-down enabled, GPO: pull-up to AVDD enabled |     |                    |     |                       |
|-------|--|------------|--|-------|-------------|-----|--|-----|--|-----|--------------------|-----|-----------------------|
| Value | Description  |            |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x0   | GPI: pull-down disabled, GPO: pull-up to AVDD disabled |            |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x1   | GPI: pull-down enabled, GPO: pull-up to AVDD enabled   |            |  |       |             |     |  |     |  |     |                    |     |                       |
| [2]   | RW   | GPIO2_POL  | <p>GPIO polarity. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>GPIO is active-high</td> </tr> <tr> <td>0x1</td> <td>GPIO is active-low</td> </tr> </tbody> </table>   | Value | Description | 0x0 | GPIO is active-high                                    | 0x1 | GPIO is active-low                                   |     |                    |     |                       |
| Value | Description  |            |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x0   | GPIO is active-high                                    |            |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x1   | GPIO is active-low                                     |            |  |       |             |     |  |     |  |     |                    |     |                       |
| [1:0] | RW   | GPIO2_TRIG | <p>GPI trigger type. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>Dual-edge triggered</td> </tr> <tr> <td>0x1</td> <td>Pos-edge triggered</td> </tr> <tr> <td>0x2</td> <td>Neg-edge triggered</td> </tr> <tr> <td>0x3</td> <td>Reserved (No trigger)</td> </tr> </tbody> </table> | Value | Description | 0x0 | Dual-edge triggered                                    | 0x1 | Pos-edge triggered                                   | 0x2 | Neg-edge triggered | 0x3 | Reserved (No trigger) |
| Value | Description  |            |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x0   | Dual-edge triggered                                    |            |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x1   | Pos-edge triggered                                     |            |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x2   | Neg-edge triggered                                     |            |  |       |             |     |  |     |  |     |                    |     |                       |
| 0x3   | Reserved (No trigger)                                  |            |  |       |             |     |  |     |  |     |                    |     |                       |

### 5.1.2 Buck1

**Table 38: BUCK\_BUCK1\_0 (0x0020)**

| Bit   | Type            | Symbol         | Description  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
|-------|-----------------|----------------|--|-------|-------------|-----|-----------------|-----|-----------------|-----|-----------------|-----|----------------|-----|----------------|-----|----------|-----|----------|-----|----------|
| [6:4] | RW              | CH1_SR_DVC_DWN | <p>Voltage slew-rate for DVC ramp-down</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>10 mV/8 <math>\mu</math>s</td> </tr> <tr> <td>0x1</td> <td>10 mV/4 <math>\mu</math>s</td> </tr> <tr> <td>0x2</td> <td>10 mV/2 <math>\mu</math>s</td> </tr> <tr> <td>0x3</td> <td>10 mV/<math>\mu</math>s</td> </tr> <tr> <td>0x4</td> <td>20 mV/<math>\mu</math>s</td> </tr> <tr> <td>0x5</td> <td>Reserved</td> </tr> <tr> <td>0x6</td> <td>Reserved</td> </tr> <tr> <td>0x7</td> <td>Reserved</td> </tr> </tbody> </table> | Value | Description | 0x0 | 10 mV/8 $\mu$ s | 0x1 | 10 mV/4 $\mu$ s | 0x2 | 10 mV/2 $\mu$ s | 0x3 | 10 mV/ $\mu$ s | 0x4 | 20 mV/ $\mu$ s | 0x5 | Reserved | 0x6 | Reserved | 0x7 | Reserved |
| Value | Description     |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| 0x0   | 10 mV/8 $\mu$ s |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| 0x1   | 10 mV/4 $\mu$ s |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| 0x2   | 10 mV/2 $\mu$ s |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| 0x3   | 10 mV/ $\mu$ s  |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| 0x4   | 20 mV/ $\mu$ s  |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| 0x5   | Reserved        |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| 0x6   | Reserved        |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| 0x7   | Reserved        |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| [3:1] | RW              | CH1_SR_DVC_UP  | <p>Voltage slew-rate for DVC ramp-up</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>10 mV/8 <math>\mu</math>s</td> </tr> <tr> <td>0x1</td> <td>10 mV/4 <math>\mu</math>s</td> </tr> <tr> <td>0x2</td> <td>10 mV/2 <math>\mu</math>s</td> </tr> <tr> <td>0x3</td> <td>10 mV/<math>\mu</math>s</td> </tr> <tr> <td>0x4</td> <td>20 mV/<math>\mu</math>s</td> </tr> </tbody> </table>   | Value | Description | 0x0 | 10 mV/8 $\mu$ s | 0x1 | 10 mV/4 $\mu$ s | 0x2 | 10 mV/2 $\mu$ s | 0x3 | 10 mV/ $\mu$ s | 0x4 | 20 mV/ $\mu$ s |     |          |     |          |     |          |
| Value | Description     |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| 0x0   | 10 mV/8 $\mu$ s |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| 0x1   | 10 mV/4 $\mu$ s |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| 0x2   | 10 mV/2 $\mu$ s |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| 0x3   | 10 mV/ $\mu$ s  |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |
| 0x4   | 20 mV/ $\mu$ s  |                |  |       |             |     |                 |     |                 |     |                 |     |                |     |                |     |          |     |          |     |          |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

|     |    |        |  |          |
|-----|----|--------|--|----------|
|     |    |        | 0x5  | 40 mV/μs |
|     |    |        | 0x6  | Reserved |
|     |    |        | 0x7  | Reserved |
| [0] | RW | CH1_EN | Channel enable. Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1 |          |

**Table 39: BUCK\_BUCK1\_1 (0x0021)**

| Bit   | Type | Symbol         | Description   |                      |
|-------|------|----------------|---|----------------------|
| [6:4] | RW   | CH1_SR_SHDN    | Voltage slew-rate during shut-down                      |                      |
|       |      |                | <b>Value</b>  | <b>Description</b>   |
|       |      |                | 0x0   | 10 mV/8 μs           |
|       |      |                | 0x1   | 10 mV/4 μs           |
|       |      |                | 0x2   | 10 mV/2 μs           |
|       |      |                | 0x3   | 10 mV/μs             |
|       |      |                | 0x4   | 20 mV/μs             |
|       |      |                | 0x5   | Reserved             |
|       |      |                | 0x6   | Reserved             |
|       |      |                | 0x7   | Immediate power-down |
| [3:1] | RW   | CH1_SR_STARTUP | Voltage slew-rate during startup                        |                      |
|       |      |                | <b>Value</b>  | <b>Description</b>   |
|       |      |                | 0x0   | 10 mV/8 μs           |
|       |      |                | 0x1   | 10 mV/4 μs           |
|       |      |                | 0x2   | 10 mV/2 μs           |
|       |      |                | 0x3   | 10 mV/μs             |
|       |      |                | 0x4   | 20 mV/μs             |
|       |      |                | 0x5   | 40 mV/μs             |
|       |      |                | 0x6   | Reserved             |
|       |      |                | 0x7   | Reserved             |
| [0]   | RW   | CH1_PD_DIS     | Pull-down while buck is disabled. 0: enable, 1: disable |                      |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

**Table 40: BUCK\_BUCK1\_2 (0x0022)**

| Bit   | Type        | Symbol   | Description   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
|-------|-------------|----------|---|-------|-------------|-----|----------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----|---------|
| [3:0] | RW          | CH1_ILIM | <p>Select OCP threshold per phase (A). The value is configured by OTP and should not be modified while the buck is active.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>Reserved</td> </tr> <tr> <td>0x1</td> <td>3.5</td> </tr> <tr> <td>0x2</td> <td>4.0</td> </tr> <tr> <td>0x3</td> <td>4.5</td> </tr> <tr> <td>0x4</td> <td>5.0</td> </tr> <tr> <td>0x5</td> <td>5.5</td> </tr> <tr> <td>0x6</td> <td>6.0</td> </tr> <tr> <td>0x7</td> <td>6.5</td> </tr> <tr> <td>0x8</td> <td>7.0</td> </tr> <tr> <td>0x9</td> <td>7.5</td> </tr> <tr> <td>0xA</td> <td>8.0</td> </tr> <tr> <td>0xB</td> <td>8.5</td> </tr> <tr> <td>0xC</td> <td>9.0</td> </tr> <tr> <td>0xD</td> <td>9.5</td> </tr> <tr> <td>0xE</td> <td>10.0</td> </tr> <tr> <td>0xF</td> <td>Disable</td> </tr> </tbody> </table> | Value | Description | 0x0 | Reserved | 0x1 | 3.5 | 0x2 | 4.0 | 0x3 | 4.5 | 0x4 | 5.0 | 0x5 | 5.5 | 0x6 | 6.0 | 0x7 | 6.5 | 0x8 | 7.0 | 0x9 | 7.5 | 0xA | 8.0 | 0xB | 8.5 | 0xC | 9.0 | 0xD | 9.5 | 0xE | 10.0 | 0xF | Disable |
| Value | Description |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0x0   | Reserved    |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0x1   | 3.5         |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0x2   | 4.0         |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0x3   | 4.5         |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0x4   | 5.0         |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0x5   | 5.5         |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0x6   | 6.0         |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0x7   | 6.5         |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0x8   | 7.0         |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0x9   | 7.5         |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0xA   | 8.0         |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0xB   | 8.5         |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0xC   | 9.0         |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0xD   | 9.5         |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0xE   | 10.0        |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |
| 0xF   | Disable     |          |   |       |             |     |          |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |      |     |         |

**Table 41: BUCK\_BUCK1\_3 (0x0023)**

| Bit                   | Type        | Symbol   | Description  |       |             |      |     |      |      |      |      |                       |  |      |      |       |  |      |      |      |     |
|-----------------------|-------------|----------|--|-------|-------------|------|-----|------|------|------|------|-----------------------|--|------|------|-------|--|------|------|------|-----|
| [7:0]                 | RW          | CH1_VMAX | <p>VOOUT max setting (V):<br/>From 0.30 V (0x1E) to 1.90 V (0xBE) in 10 mV steps.<br/>This is a read-only register.</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x1E</td> <td>0.3</td> </tr> <tr> <td>0x1F</td> <td>0.31</td> </tr> <tr> <td>0x20</td> <td>0.32</td> </tr> <tr> <td colspan="2">Continuing through...</td> </tr> <tr> <td>0x99</td> <td>1.53</td> </tr> <tr> <td colspan="2">To...</td> </tr> <tr> <td>0xBD</td> <td>1.89</td> </tr> <tr> <td>0xBE</td> <td>1.9</td> </tr> </tbody> </table> | Value | Description | 0x1E | 0.3 | 0x1F | 0.31 | 0x20 | 0.32 | Continuing through... |  | 0x99 | 1.53 | To... |  | 0xBD | 1.89 | 0xBE | 1.9 |
| Value                 | Description |          |  |       |             |      |     |      |      |      |      |                       |  |      |      |       |  |      |      |      |     |
| 0x1E                  | 0.3         |          |  |       |             |      |     |      |      |      |      |                       |  |      |      |       |  |      |      |      |     |
| 0x1F                  | 0.31        |          |  |       |             |      |     |      |      |      |      |                       |  |      |      |       |  |      |      |      |     |
| 0x20                  | 0.32        |          |  |       |             |      |     |      |      |      |      |                       |  |      |      |       |  |      |      |      |     |
| Continuing through... |             |          |  |       |             |      |     |      |      |      |      |                       |  |      |      |       |  |      |      |      |     |
| 0x99                  | 1.53        |          |  |       |             |      |     |      |      |      |      |                       |  |      |      |       |  |      |      |      |     |
| To...                 |             |          |  |       |             |      |     |      |      |      |      |                       |  |      |      |       |  |      |      |      |     |
| 0xBD                  | 1.89        |          |  |       |             |      |     |      |      |      |      |                       |  |      |      |       |  |      |      |      |     |
| 0xBE                  | 1.9         |          |  |       |             |      |     |      |      |      |      |                       |  |      |      |       |  |      |      |      |     |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

**Table 42: BUCK\_BUCK1\_4 (0x0024)**

| Bit   | Type                                      | Symbol     | Description  |       |             |     |                     |     |                                  |     |   |     |           |
|-------|---|------------|--|-------|-------------|-----|---------------------|-----|----------------------------------|-----|---|-----|-----------|
| [4]   | RW  | CH1_VSEL   | Output voltage and operation selection: 0: A, 1: B.<br>Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1  |       |             |     |                     |     |                                  |     |   |     |           |
| [3:2] | RW  | CH1_B_MODE | Operation mode selection.<br>Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1<br><br><table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>Force PFM operation</td> </tr> <tr> <td>0x1</td> <td>Force PWM operation (full phase)</td> </tr> <tr> <td>0x2</td> <td>Force PWM operation (with phase shedding)</td> </tr> <tr> <td>0x3</td> <td>Auto mode</td> </tr> </tbody> </table> | Value | Description | 0x0 | Force PFM operation | 0x1 | Force PWM operation (full phase) | 0x2 | Force PWM operation (with phase shedding) | 0x3 | Auto mode |
| Value | Description                               |            |  |       |             |     |                     |     |                                  |     |   |     |           |
| 0x0   | Force PFM operation                       |            |  |       |             |     |                     |     |                                  |     |   |     |           |
| 0x1   | Force PWM operation (full phase)          |            |  |       |             |     |                     |     |                                  |     |   |     |           |
| 0x2   | Force PWM operation (with phase shedding) |            |  |       |             |     |                     |     |                                  |     |   |     |           |
| 0x3   | Auto mode                                 |            |  |       |             |     |                     |     |                                  |     |   |     |           |
| [1:0] | RW  | CH1_A_MODE | Operation mode selection.<br>Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1<br><br><table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x0</td> <td>Force PFM operation</td> </tr> <tr> <td>0x1</td> <td>Force PWM operation (full phase)</td> </tr> <tr> <td>0x2</td> <td>Force PWM operation (with phase shedding)</td> </tr> <tr> <td>0x3</td> <td>Auto mode</td> </tr> </tbody> </table> | Value | Description | 0x0 | Force PFM operation | 0x1 | Force PWM operation (full phase) | 0x2 | Force PWM operation (with phase shedding) | 0x3 | Auto mode |
| Value | Description                               |            |  |       |             |     |                     |     |                                  |     |   |     |           |
| 0x0   | Force PFM operation                       |            |  |       |             |     |                     |     |                                  |     |   |     |           |
| 0x1   | Force PWM operation (full phase)          |            |  |       |             |     |                     |     |                                  |     |   |     |           |
| 0x2   | Force PWM operation (with phase shedding) |            |  |       |             |     |                     |     |                                  |     |   |     |           |
| 0x3   | Auto mode                                 |            |  |       |             |     |                     |     |                                  |     |   |     |           |

**Table 43: BUCK\_BUCK1\_5 (0x0025)**

| Bit                   | Type        | Symbol     | Description   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
|-----------------------|-------------|------------|---|-------|-------------|------|-----|------|------|------|------|-----------------------|--|------|---|-------|--|------|------|------|------|------|-----|
| [7:0]                 | RW          | CH1_A_VOUT | Output voltage setting A: Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1<br>From 0.30 V (0x1E) to 1.90 V (0xBE) in steps of 10 mV (default 1.0 V)<br>Write-protected when value is written below 0.30 V or above 1.90 V<br><br><table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x1E</td> <td>0.3</td> </tr> <tr> <td>0x1F</td> <td>0.31</td> </tr> <tr> <td>0x20</td> <td>0.32</td> </tr> <tr> <td colspan="2">Continuing through...</td> </tr> <tr> <td>0x64</td> <td>1</td> </tr> <tr> <td colspan="2">To...</td> </tr> <tr> <td>0xBC</td> <td>1.88</td> </tr> <tr> <td>0xBD</td> <td>1.89</td> </tr> <tr> <td>0xBE</td> <td>1.9</td> </tr> </tbody> </table> | Value | Description | 0x1E | 0.3 | 0x1F | 0.31 | 0x20 | 0.32 | Continuing through... |  | 0x64 | 1 | To... |  | 0xBC | 1.88 | 0xBD | 1.89 | 0xBE | 1.9 |
| Value                 | Description |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0x1E                  | 0.3         |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0x1F                  | 0.31        |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0x20                  | 0.32        |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| Continuing through... |             |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0x64                  | 1           |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| To...                 |             |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0xBC                  | 1.88        |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0xBD                  | 1.89        |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0xBE                  | 1.9         |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

**Table 44: BUCK\_BUCK1\_6 (0x0026)**

| Bit                   | Type        | Symbol     | Description   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
|-----------------------|-------------|------------|---|-------|-------------|------|-----|------|------|------|------|-----------------------|--|------|---|-------|--|------|------|------|------|------|-----|
| [7:0]                 | RW          | CH1_B_VOUT | <p>Output voltage setting B: Initial value is determined by CONF pin setting at the start-up in CONF_EN = 1<br/>From 0.30 V (0x1E) to 1.90 V (0xBE) in steps of 10 mV (default 1.0 V)<br/>Write-protected when value is written below 0.30 V or above 1.90 V</p> <table border="1"> <thead> <tr> <th>Value</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>0x1E</td> <td>0.3</td> </tr> <tr> <td>0x1F</td> <td>0.31</td> </tr> <tr> <td>0x20</td> <td>0.32</td> </tr> <tr> <td colspan="2">Continuing through...</td> </tr> <tr> <td>0x64</td> <td>1</td> </tr> <tr> <td colspan="2">To...</td> </tr> <tr> <td>0xBC</td> <td>1.88</td> </tr> <tr> <td>0xBD</td> <td>1.89</td> </tr> <tr> <td>0xBE</td> <td>1.9</td> </tr> </tbody> </table> | Value | Description | 0x1E | 0.3 | 0x1F | 0.31 | 0x20 | 0.32 | Continuing through... |  | 0x64 | 1 | To... |  | 0xBC | 1.88 | 0xBD | 1.89 | 0xBE | 1.9 |
| Value                 | Description |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0x1E                  | 0.3         |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0x1F                  | 0.31        |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0x20                  | 0.32        |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| Continuing through... |             |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0x64                  | 1           |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| To...                 |             |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0xBC                  | 1.88        |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0xBD                  | 1.89        |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |
| 0xBE                  | 1.9         |            |   |       |             |      |     |      |      |      |      |                       |  |      |   |       |  |      |      |      |      |      |     |

### 5.1.3 Serialization

**Table 45: OTP\_DEVICE\_ID (0x0048)**

| Bit   | Type | Symbol | Description |
|-------|------|--------|-------------|
| [7:0] | R    | DEV_ID | Device ID   |

**Table 46: OTP\_VARIANT\_ID (0x0049)**

| Bit   | Type | Symbol | Description        |
|-------|------|--------|--------------------|
| [7:4] | R    | MRC    | Mask Revision Code |
| [3:0] | R    | VRC    | Chip Variant Code  |

**Table 47: OTP\_CUSTOMER\_ID (0x004A)**

| Bit   | Type | Symbol  | Description |
|-------|------|---------|-------------|
| [7:0] | R    | CUST_ID | Customer ID |

**Table 48: OTP\_CONFIG\_ID (0x004B)**

| Bit   | Type | Symbol     | Description |
|-------|------|------------|-------------|
| [7:0] | R    | CONFIG_REV | OTP Variant |

High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

6 Package Information

6.1 Package Outlines

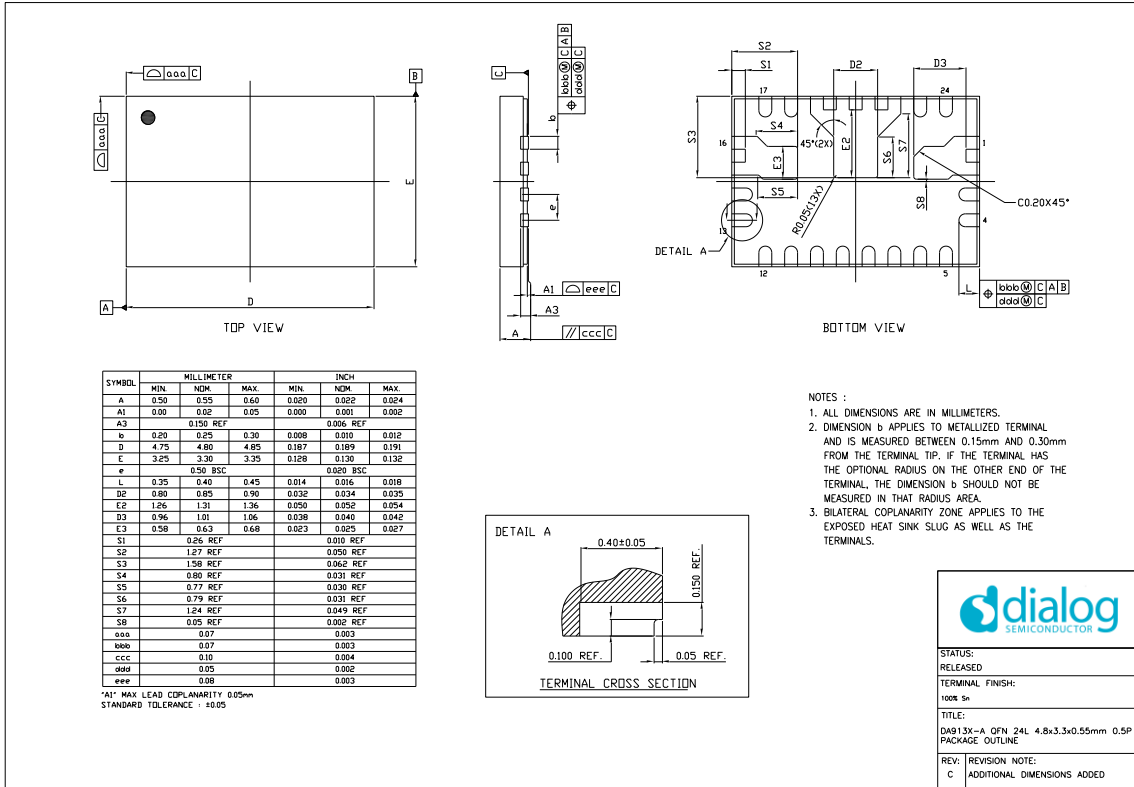


Figure 14: Package Outline Drawing



## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### 6.2 Package Marking

| Package Marking   |                    |                      |
|---|--------------------|----------------------|
| A1 Corner >   | Marking Content    | Format               |
| 1st   | •                  | Pin 1 ID             |
| 2nd   | <b>D A 9 1 3 0</b> | Orientation/Part No. |
| 3rd   | <b>x x A T y y</b> | OTP/Option/Year      |
| 4th   | <b>W W z z z z</b> | Date Code            |
| Date Code Format: yy = Year, ww = Week, zzzz = Traceability                       |                    |                      |
| xx identifies the OTP Variant   |                    |                      |
| A or AT optionally indicate the Automotive and Automotive high temp test options. |                    |                      |

### 6.3 Moisture Sensitivity Level

The moisture sensitivity level (MSL) is an indicator for the maximum allowable time period (floor lifetime) in which a moisture sensitive plastic device, once removed from the dry bag, can be exposed to an environment with a specified maximum temperature and a maximum relative humidity before the solder reflow process. The MSL classification is defined in [Table 49](#).

For detailed information on MSL levels refer to the IPC/JEDEC standard J-STD-020, which can be downloaded from <http://www.jedec.org>.

The FCQFN package is qualified for MSL 3.

**Table 49: MSL Classification**

| MSL Level | Floor Lifetime | Conditions      |
|-----------|----------------|-----------------|
| MSL 4     | 72 hours       | 30 °C / 60 % RH |
| MSL 3     | 168 hours      | 30 °C / 60 % RH |
| MSL 2A    | 4 weeks        | 30 °C / 60 % RH |
| MSL 2     | 1 year         | 30 °C / 60 % RH |
| MSL 1     | Unlimited      | 30 °C / 60 % RH |

### 6.4 Soldering Information

Refer to the IPC/JEDEC standard J-STD-020 for relevant soldering information. This document can be downloaded from <http://www.jedec.org>.

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### 7 Ordering Information

The ordering number consists of the part number followed by a suffix indicating the packing method. For details and availability, please consult your Renesas [local sales representative](#).

**Table 50: Ordering Information**

| Part Number  | Package                             | Package Description | MOQ                  |
|--------------|-------------------------------------|---------------------|----------------------|
| DA9130-xxRT2 | 24 FCQFN wettable flanks, 3.3 x 4.8 | T&R, 4800 pcs       | 3 Reels - 14400      |
| DA9130-xxRT1 | 24 FCQFN wettable flanks            | Tray, 490 pcs       | 30 Trays - 14700 pcs |

### 8 Application Information

The following recommended components are examples selected from requirements of a typical application.

#### 8.1 Capacitor Selection

Ceramic capacitors are used as bypass capacitors at all VDD and output rails. When selecting a capacitor, especially for types with high capacitance at smallest physical dimension, the DC bias characteristic has to be taken into account.

**Table 51: Recommended Consumer Grade Capacitor Types**

| Application        | Value (μF) | Size | Temp. Char. | Tol. (%) | V-Rate (V) | Type                     |
|--------------------|------------|------|-------------|----------|------------|--------------------------|
| VOUT output bypass | 10         | 0402 | X5R         | 20       | 6.3        | Murata GRM155R60J106ME15 |
| PVDDx bypass       | 10         | 0603 | X5R         | 20       | 25         | Murata GRM188R61E106MA73 |
| AVDD bypass        | 1          | 0402 | X5R         | 10       | 10         | Murata GRM155R61A105KE15 |

**Table 52: Recommended Automotive Grade Capacitor Types**

| Application        | Value (μF) | Size | Temp. Char. | Tol. (%) | V-Rate (V) | Type                      |
|--------------------|------------|------|-------------|----------|------------|---------------------------|
| VOUT output bypass | 10         | 0805 | X7R ±15%    | ±10      | 6.3        | TDK CGA4J1X7R0J106K125AC  |
| PVDDx bypass       | 10         | 3216 | X7R ±15%    | ±10      | 16         | Murata GCM31CR71C106KA64L |
| AVDD bypass        | 1          | 0805 | X7R ±15%    | ±10      | 50         | Murata GCM21BR71H105KA03L |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### 8.2 Inductor Selection

Inductors should be selected based on the following parameters:

- Rated maximum current  
Usually a coil provides two current limits:  $I_{SAT}$  specifies the maximum current at which the inductance drops by 30 % of the nominal value, and  $I_{MAX}$  is defined by the maximum power dissipation and is applied to the effective current.
- DC resistance  
Critical for the converter efficiency and should therefore be minimized.

**Table 53: Recommended Inductor Types**

| Value ( $\mu\text{H}$ ) | Size (mm)       | $I_{MAX}$ (DC) (A) | $I_{SAT}$ (A) | Tol. (%) | DC Resistance ( $\text{m}\Omega$ ) | Type                     |
|-------------------------|-----------------|--------------------|---------------|----------|------------------------------------|--------------------------|
| 0.22                    | 2.5 x 2.0 x 1.2 | 6.7                | 8             | 20       | 8                                  | TDK TFM252012ALMAR22MTAA |

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### Status Definitions

| Revision | Datasheet Status | Product Status | Definition   |
|----------|------------------|----------------|--|
| 1.<n>    | Target           | Development    | This datasheet contains the design specifications for product development. Specifications may be changed in any manner without notice.   |
| 2.<n>    | Preliminary      | Qualification  | This datasheet contains the specifications and preliminary characterization data for products in pre-production. Specifications may be changed at any time without notice in order to improve the design.  |
| 3.<n>    | Final            | Production     | This datasheet contains the final specifications for products in volume production. The specifications may be changed at any time in order to improve the design, manufacturing and supply. Major specification changes are communicated via Customer Product Notifications. Datasheet changes are communicated via <a href="http://www.dialog-semiconductor.com">www.dialog-semiconductor.com</a> . |
| 4.<n>    | Obsolete         | Archived       | This datasheet contains the specifications for discontinued products. The information is provided for reference only.  |

### RoHS Compliance

Dialog Semiconductor's suppliers certify that its products are in compliance with the requirements of Directive 2011/65/EU of the European Parliament on the restriction of the use of certain hazardous substances in electrical and electronic equipment. RoHS certificates from our suppliers are available on request.

## High-Performance, 10 A, Dual-Phase DC-DC Converter for Mobile and Portable Applications

### Important Notice and Disclaimer

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

© 2022 Renesas Electronics Corporation. All rights reserved.

(Rev.1.0 Mar 2020)

## Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu

Koto-ku, Tokyo 135-0061, Japan

[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:

<https://www.renesas.com/contact/>

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.