

### DESCRIPTION

The EV2316-D-00A is used for demonstrating the performance of MP2316, a fully-integrated, high efficiency, synchronous step-down switch mode converter with the feathered 40uA quiescent current. MP2316 provides up to 3A continuous output current over a wide input supply range with constant-on-time control for fast loop response.

High power efficiency over a wide load range is achieved by scaling down the switching frequency at light load to reduce the switching related loss by constant on time control. Short circuit and thermal shutdown provides reliable, fault-tolerant operation.

MP2316 is available in 2mmx3mm 14-pin QFN package.

### ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Units
Input Voltage	$V_{IN}$	4– 19	V
Output Voltage	$V_{OUT}$	1.2	V
Output Current	$I_{OUT}$	3	A

### FEATURES

- Wide 4V to 19V Operating Input Range
- Up to 3A Output Current
- 40 $\mu$ A Quiescent Current
- 90m $\Omega$  /30m $\Omega$  High Side/ Low Side  $R_{DS(ON)}$  for Internal Power MOSFETs
- PWM/PFM Mode Selectable
- Programmable Switching Frequency
- Power Good Indicator
- Cycle-by-Cycle Over Current Protection
- Short Circuit Protection with Hiccup Mode
- Thermal Shutdown
- Stable with Low ESR Ceramic Output Capacitors
- Programmable Soft-Start Time
- Available in QFN14 (2mmx3mm)Package

### APPLICATIONS


- Tablet PCs
- Solid State Drives
- Gaming
- Battery-operated Applications

All MPS parts are lead-free and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance. "MPS" and "The Future of Analog IC Technology", are Registered Trademarks of Monolithic Power Systems, Inc.


## EV2316-D-00A EVALUATION BOARD



Board Number	MPS IC Number
EV2316-D-00A	MP2316GD

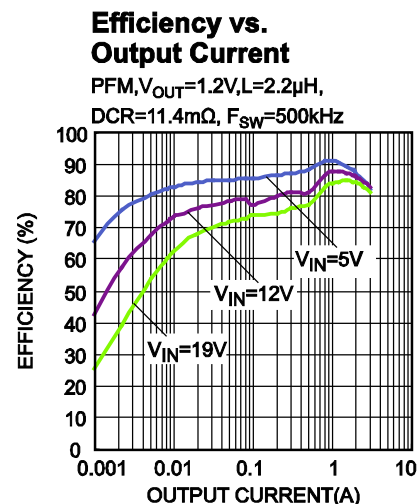

## EVALUATION BOARD SCHEMATIC

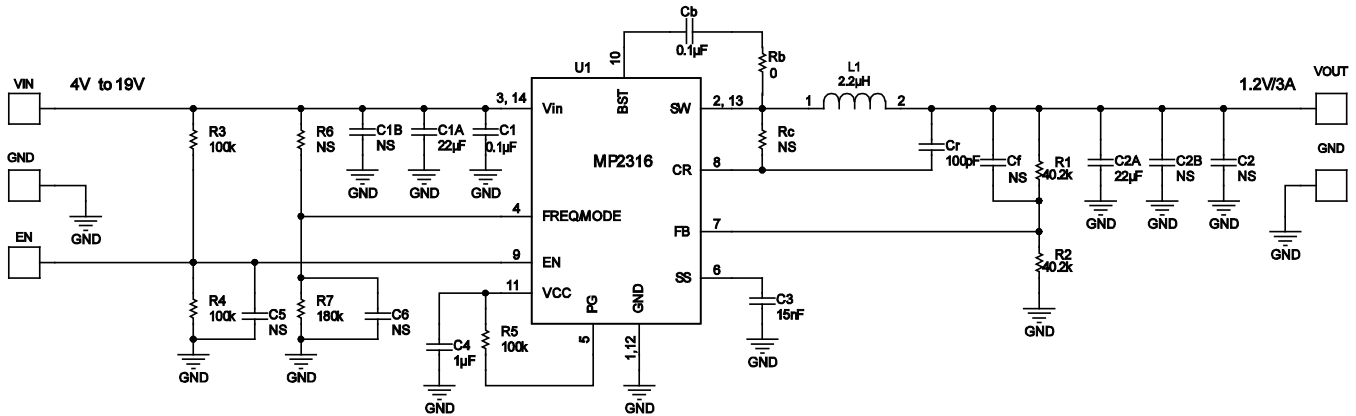










Note: Use R6 and not use R7 to set part work at force PWM Mode, Use R7 and not use R6 to set part work at Auto PFM/PWM Mode.

## EV2316-D-00A BILL OF MATERIALS

Qty	RefDes	Value	Description	Package	Manufacturer	Manufacturer P/N
2	R1,R2	40.2k	Film Res, 1%	0603	ROYAL	RL0603FR-0740K2L
3	R3, R4,R5	100k	Film Res, 1%	0603	ROYAL	RL0603FR-07100KL
0	R6,Rc	NS				
1	R7	180k	Film Res, 1%	0603	ROYAL	RL0603FR-07180KL
1	Rb	0Ω	Film Res, 1%	0603	Yageo	RC0603FR-070RL
1	C1	0.1µF	Ceramic Cap,25V,X7R	0603	Murata	GRM188R71E104KA01D
0	C2, C5, C6,Cf, C1B, C2B	NS				
1	Cb	0.1µF	Ceramic Cap, 16V, X7R	0603	Murata	GRM188R71C104KA01D
1	C3	15nF	Ceramic Cap, 50V, X7R	0603	TDK	C1608X7R1H153K
1	C4	1µF	Ceramic Cap,16V, X7R	0603	Murata	GRM188R71C105KA12D
1	Cr	100pF	Ceramic Cap, 50V, C0G	0603	Murata	GRM1885C1H101JA01D
1	C1A	22µF	Ceramic Cap,25V,X7R	1206	Murata	GRM31ER71E226KE15L
1	C2A	22µF	Ceramic Cap,10V,X7R	1206	Murata	GRM31CR71A226KE15L
1	L1	2.2µH	Inductor, DCR=11.4mΩ, Isat=13A	SMD	Würth	744311220
1	U1	MP2316GD	Synchronous Step-down Converter	QFN14(2m mX3mm)	MPS	MP2316GD

## EVB TEST RESULTS

Performance waveforms are tested on the evaluation board.  
 $V_{IN}=12V$ ,  $V_{OUT}=1.2V$ ,  $L=2.2\mu H$ ,  $T_A=25^\circ C$ , unless otherwise noted.

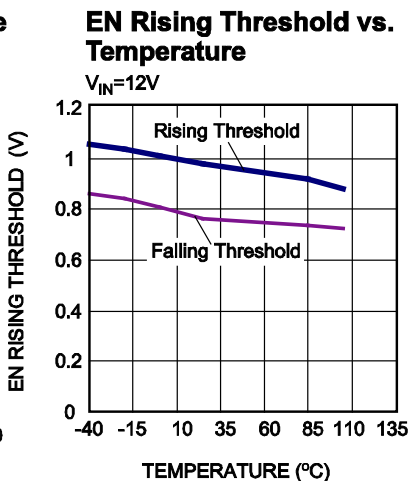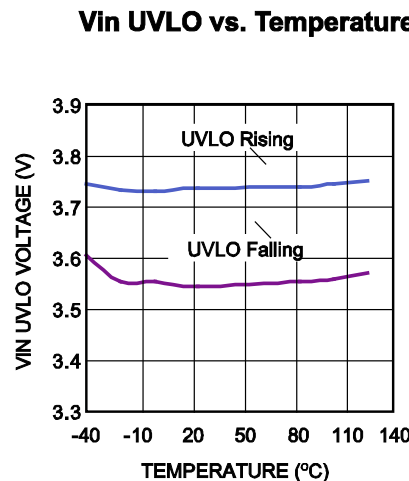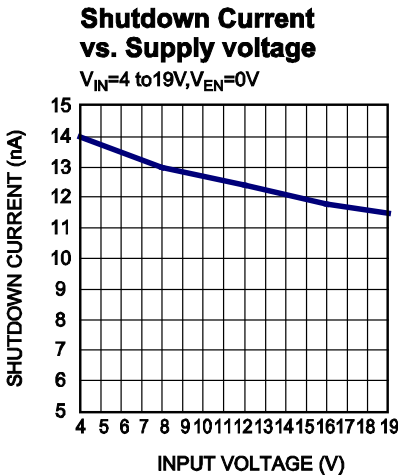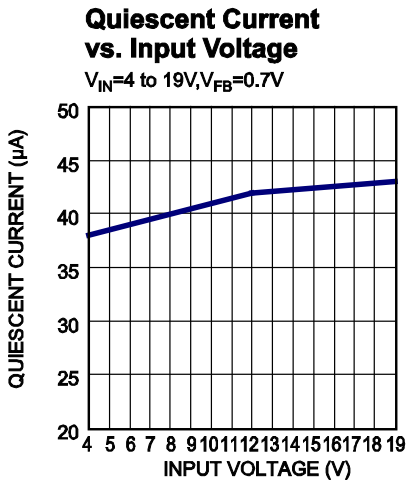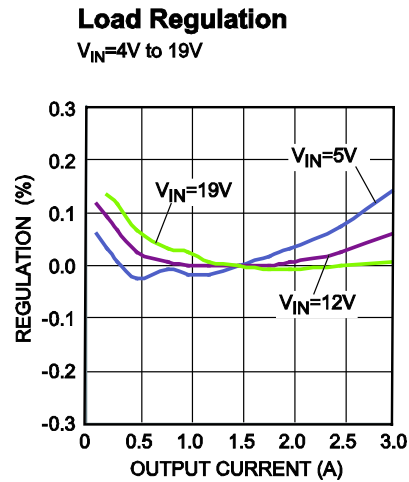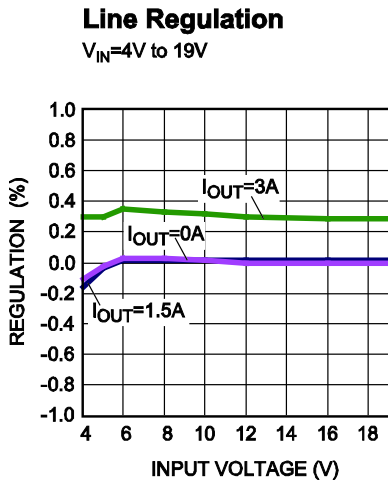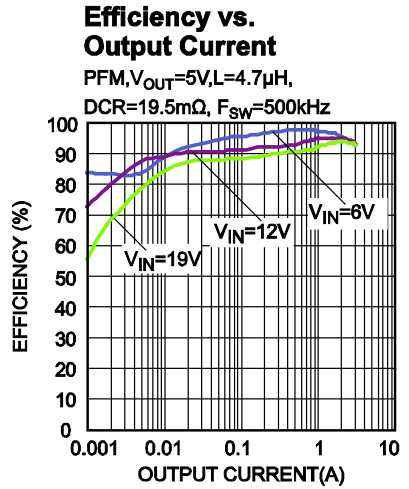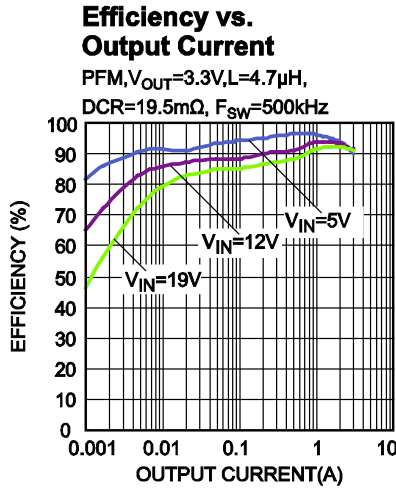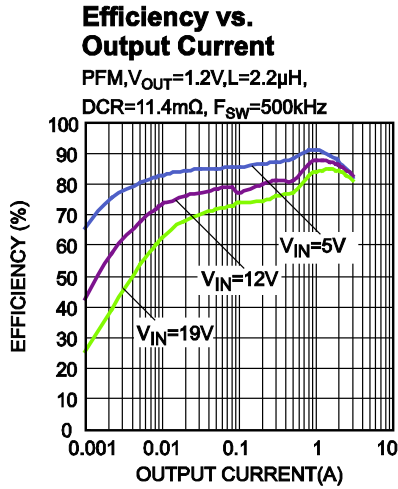


## EVB TEST RESULTS *(continued)*


Performance waveforms are tested on the evaluation board.

$V_{IN}=12V$ ,  $V_{OUT}=1.2V$ ,  $L=2.2\mu H$ ,  $T_A=25^\circ C$ , unless otherwise noted.

**Max Frequency vs. Input Voltage**

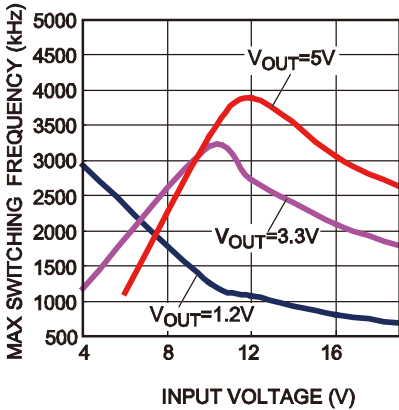


**Peak Current Limit vs. Duty Cycle**

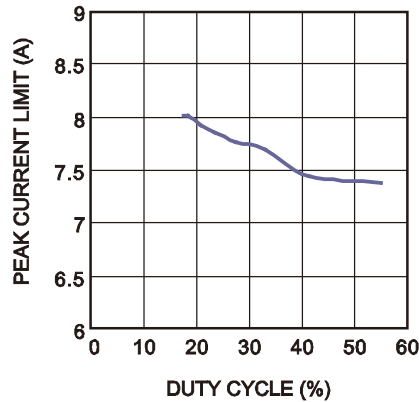


**Case Temperature Rise vs.  $I_{OUT}$**

$V_{OUT}=1.2V$ ,  $I_{OUT}=1A$  to  $3A$ , 4 Layers PCB, Size: 6.35cm X 6.35cm

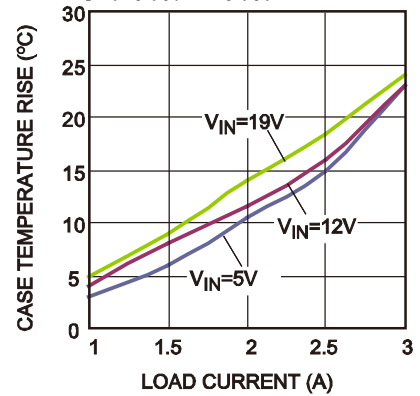

**Case Temperature Rise vs.  $I_{OUT}$**


$V_{OUT}=5V$ ,  $I_{OUT}=1A$  to  $3A$ , 4 Layers PCB, Size: 6.35cm X 6.35cm

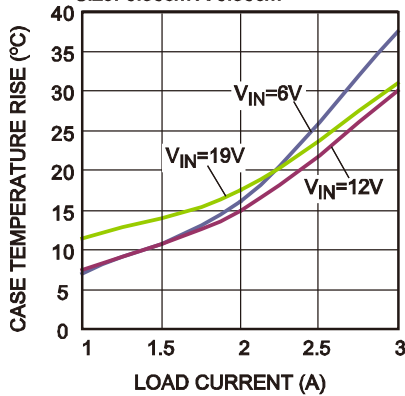


**EVB TEST RESULTS (continued)**

Performance waveforms are tested on the evaluation board.  
 $V_{IN}=12V$ ,  $V_{OUT}=1.2V$ ,  $L=2.2\mu H$ ,  $T_A=25^\circ C$ , unless otherwise noted.


**Input/Output Ripple**  
 PFM,  $I_{OUT}=0A$

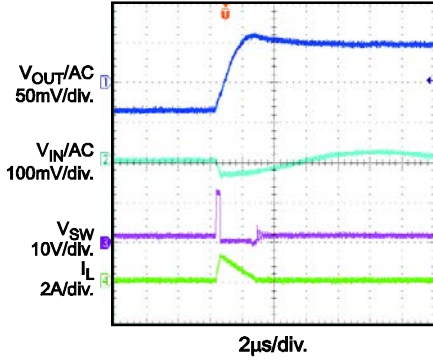


**Input/Output Ripple**  
 $I_{OUT}=3A$

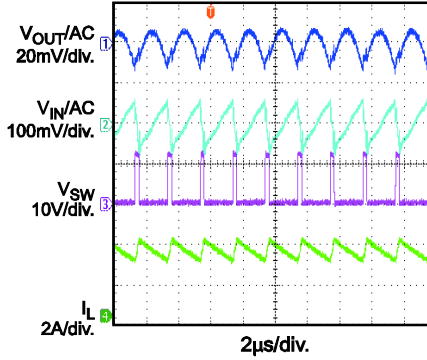


**Input/Output Ripple**  
 Force PWM,  $I_{OUT}=0A$

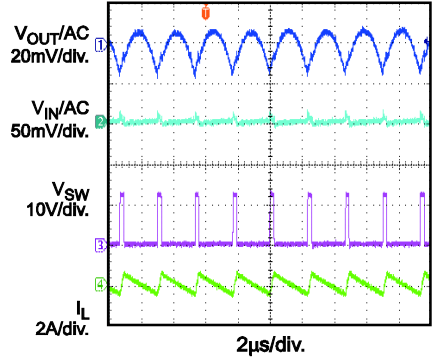


**Startup through VIN**  
 PFM,  $I_{OUT}=0A$

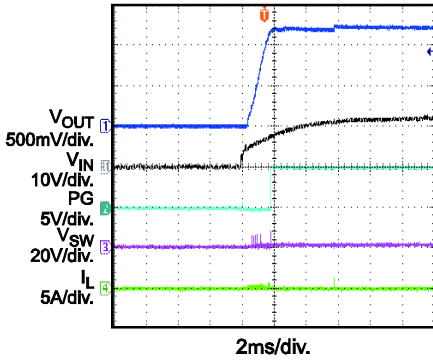


**Startup through VIN**  
 $I_{OUT}=3A$

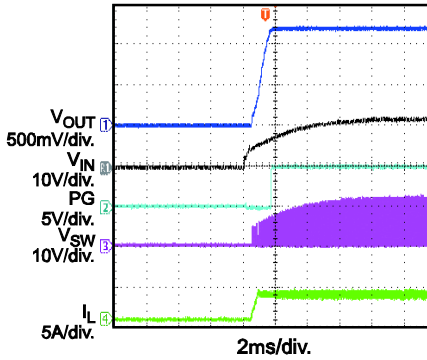


**Startup through VIN**  
 Force PWM,  $I_{OUT}=0A$

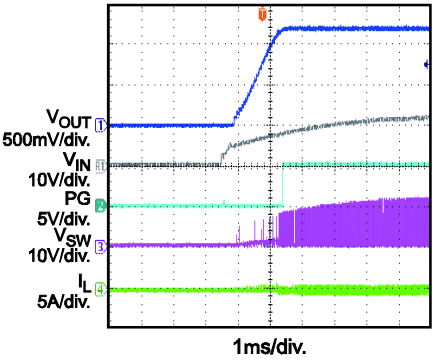


**Shutdown through VIN**  
 PFM,  $I_{OUT}=0A$

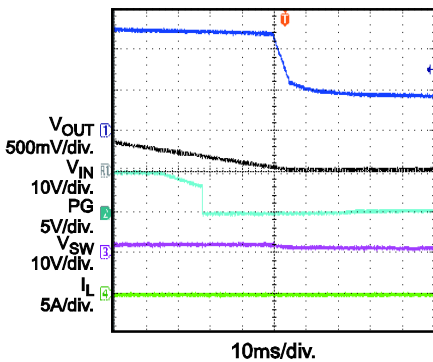

**Shutdown through VIN**  
 $I_{OUT}=3A$

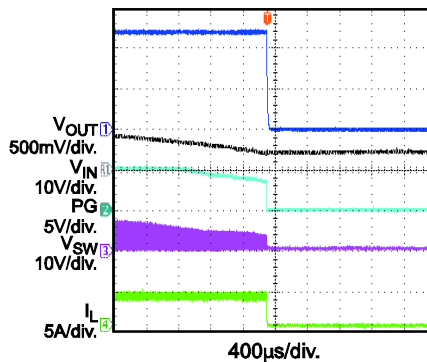


**Shutdown through VIN**  
 Force PWM,  $I_{OUT}=0A$

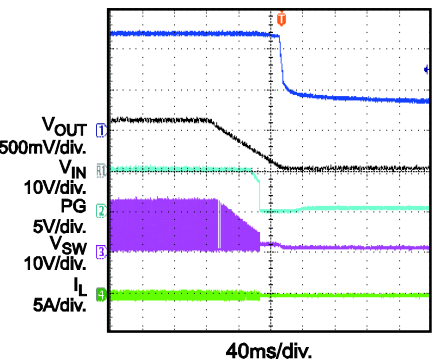


**EVB TEST RESULTS (continued)**

Performance waveforms are tested on the evaluation board.  
 $V_{IN}=12V$ ,  $V_{OUT}=1.2V$ ,  $L=2.2\mu H$ ,  $T_A=25^\circ C$ , unless otherwise noted.


**Startup through EN**  
 PFM,  $I_{OUT}=0A$

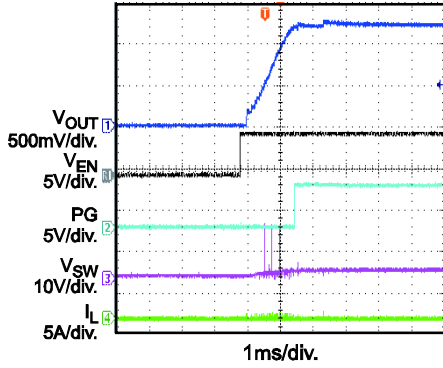


**Startup through EN**  
 $I_{OUT} = 3A$

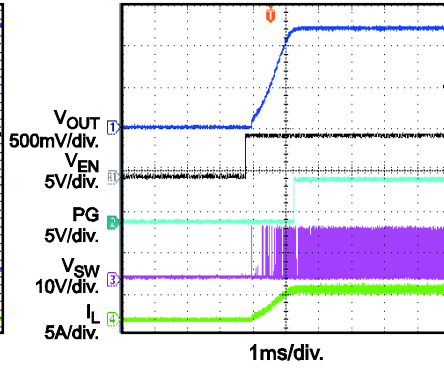


**Startup through EN**  
 Force PWM,  $I_{OUT}=0A$

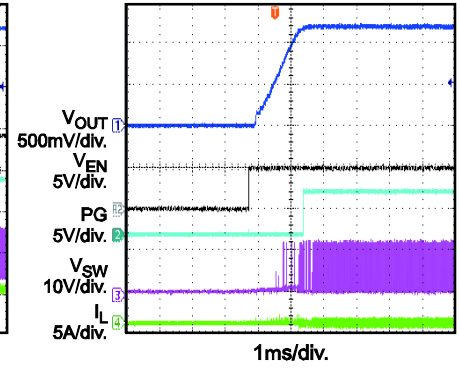


**Shutdown through EN**  
 PFM,  $I_{OUT}=0A$

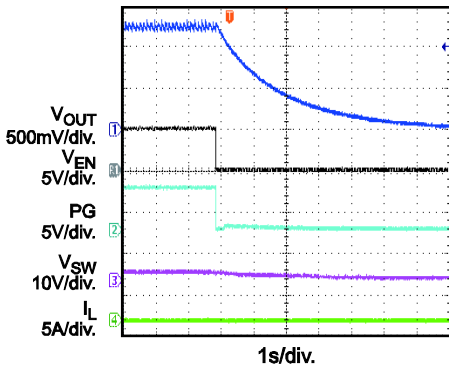


**Shutdown through EN**  
 $I_{OUT} = 3A$

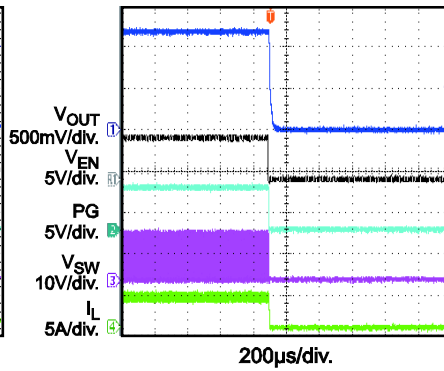


**Shutdown through EN**  
 Force PWM,  $I_{OUT}=0A$

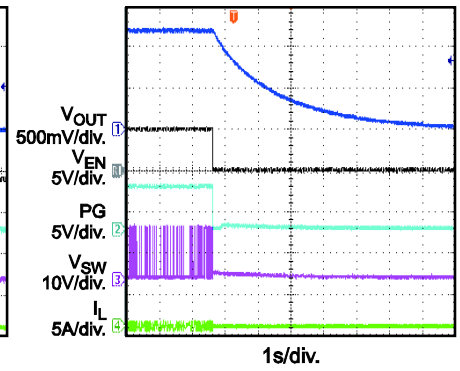


**Short Circuit Entry**  
 $I_{OUT}=3A$

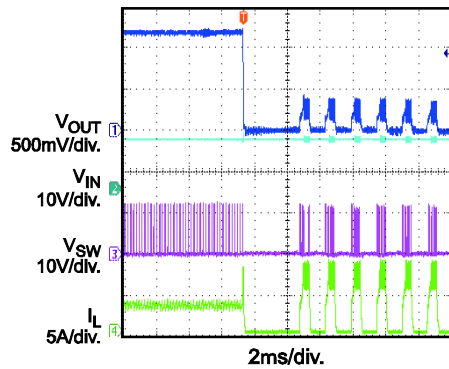

**Short Circuit Recovery**  
 $I_{OUT} = 3A$

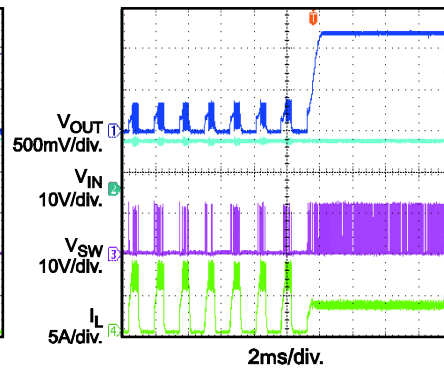


**Short Circuit Steady**  
 $I_{OUT} = 3A$

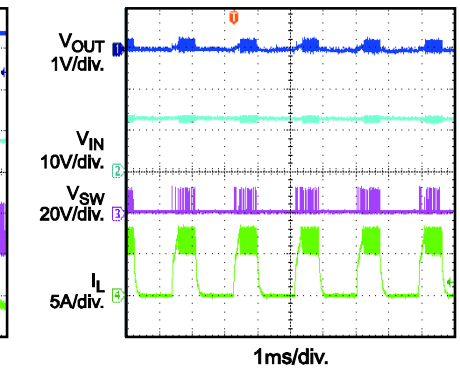

**EVB TEST RESULTS** *(continued)*

Performance waveforms are tested on the evaluation board.

$V_{IN}=12V$ ,  $V_{OUT}=1.2V$ ,  $L=2.2\mu H$ ,  $T_A=25^\circ C$ , unless otherwise noted.

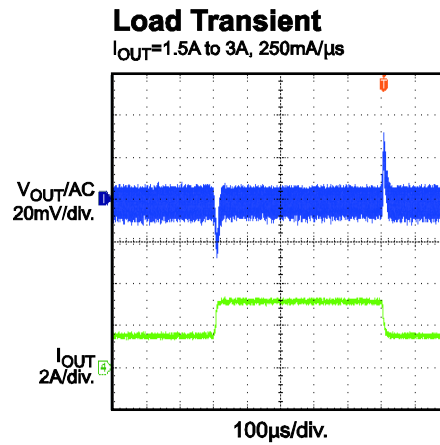

### PRINTED CIRCUIT BOARD LAYOUT

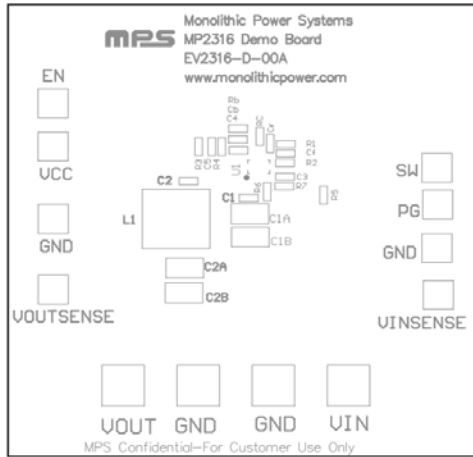


Figure 1—Top Silk Layer

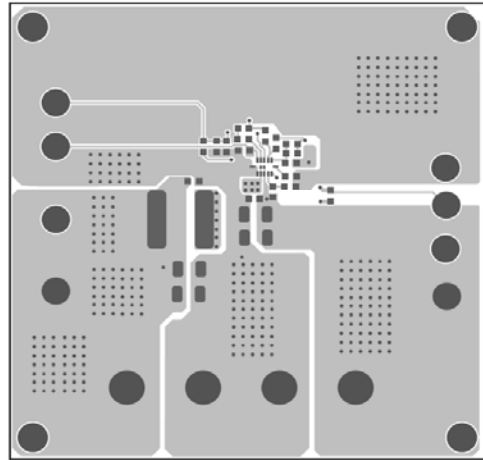


Figure 2—Top Layer

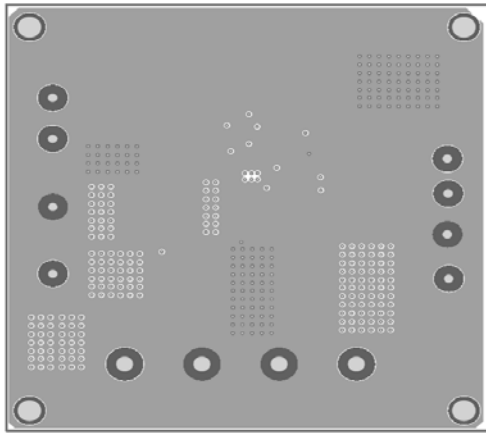


Figure 3— Inner 1 Layer

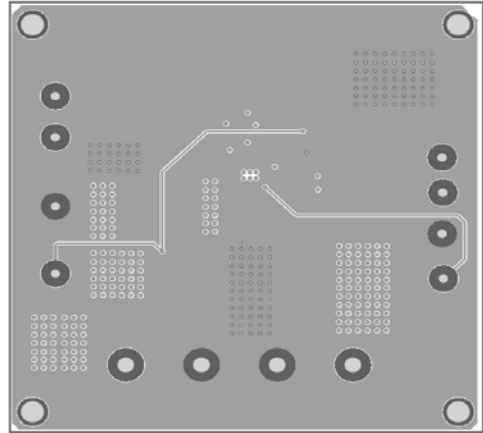


Figure 4— Inner 2 Layer

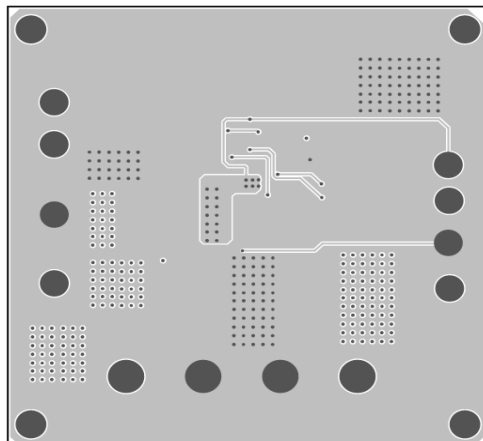


Figure 5— Bottom Layer