



EV8862-Q-00A

2.8 - 22V V_{IN} , 2A I_{OUT} , 4-Switch, Integrated Buck-Boost Converter with I²C Interface

DESCRIPTION

The EV8862-Q-00A is an evaluation board for MP8862, which is a synchronous, 4-switch, integrated buck-boost converter capable of regulating the output voltage from a 2.8V to 22V wide input voltage range with high efficiency. The integrated output voltage scaling and adjustable output current limit functions meet the USB power delivery (PD) requirement.

The MP8862 uses constant-on-time (COT) control in buck mode and constant-off-time control in boost mode, providing fast load transient response and smooth buck-boost mode transient. The MP8862 provides auto PFM/PWM or forced PWM switching modes, programmable output constant current (CC) current limit, which supports flexible design for different applications.

Full protection features include over-current protection (OCP), over-voltage protection (OVP), under-voltage protection (UVP), programmable soft start, and thermal shutdown.

The MP8862 is available in a 16-pin QFN (3mmx3mm) package.

ELECTRICAL SPECIFICATION

| Parameter | Symbol | Value | Units |
|-------------------------|-----------|-------|-------|
| Operating Input Voltage | V_{IN} | 12 | V |
| Switching Frequency | F_s | 500 | kHz |
| Output Voltage | V_{OUT} | 5 | V |
| Output Current | I_{OUT} | 2 | A |

FEATURES

- Wide 2.8V to 22V Operating Input Voltage Range
- 1V ⁽¹⁾ to 20.47V Output Voltage Range (5V Default) with 10mV Resolution through I²C
- 2A Output Current or 4A Input Current
- Four Low $R_{DS(ON)}$ Internal Buck Power MOSFETs
- Adjustable Accurate CC Output Current Limit with Internal Sensing MOSFET via I²C
- 500kHz Switching Frequency
- Output Over-Voltage Protection (OVP) Hiccup
- Output Short-Circuit Protection (SCP) with Hiccup
- Over-Temperature Warning and Shutdown
- I²C Interface with ALT Pin
- Four Programmable I²C Addresses
- One-Time Programmable (OTP) Non-Volatile Memory
- I²C Programmable Line Drop Compensation, PFM/PWM Mode, Soft Start, OCP, etc.
- EN Shutdown Discharge Programmable
- Available in a QFN-16 (3mmx3mm) Package

APPLICATIONS


- USB PD Sourcing Ports
- Buck-Boost Bus Supplies

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance. "MPS" and "The Future of Analog IC Technology" are registered trademarks of Monolithic Power Systems, Inc.


NOTE:

- 1) For $V_{OUT} < 3V$ applications, the switching frequency decreases.

EV8862-Q-00A EVALUATION BOARD




| | |
|---|----------------------|
| (L x W) 6.35cm x 6.35cm (Four Layer PCB) | |
| Board Number | MPS IC Number |
| EV8862-Q-00A | MP8862GQ-0000 |

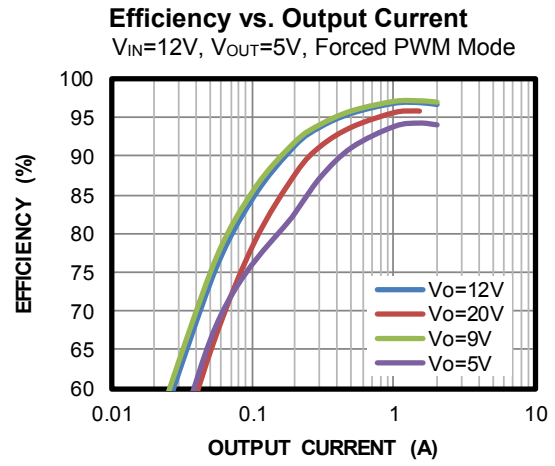

OTP E-FUSE SELECTION TABLE BY DEFAULT (MP8862GQ-0000)

| OTP Items | Default Value |
|-------------------------------|-----------------------------|
| Output voltage | 5V |
| IOUT_LIMIT | 3A (For 21.5kΩ OC resistor) |
| Switching frequency | 500kHz |
| Mode | Forced PWM mode |
| Soft start time | 900μs |
| Line drop compensation | No line drop compensation |
| Output voltage discharge mode | Enabled |
| OCP_OVP protection mode | Hiccup |
| OTP configure code (ID1) | 0x00 |

EVALUATION BOARD SCHEMATIC

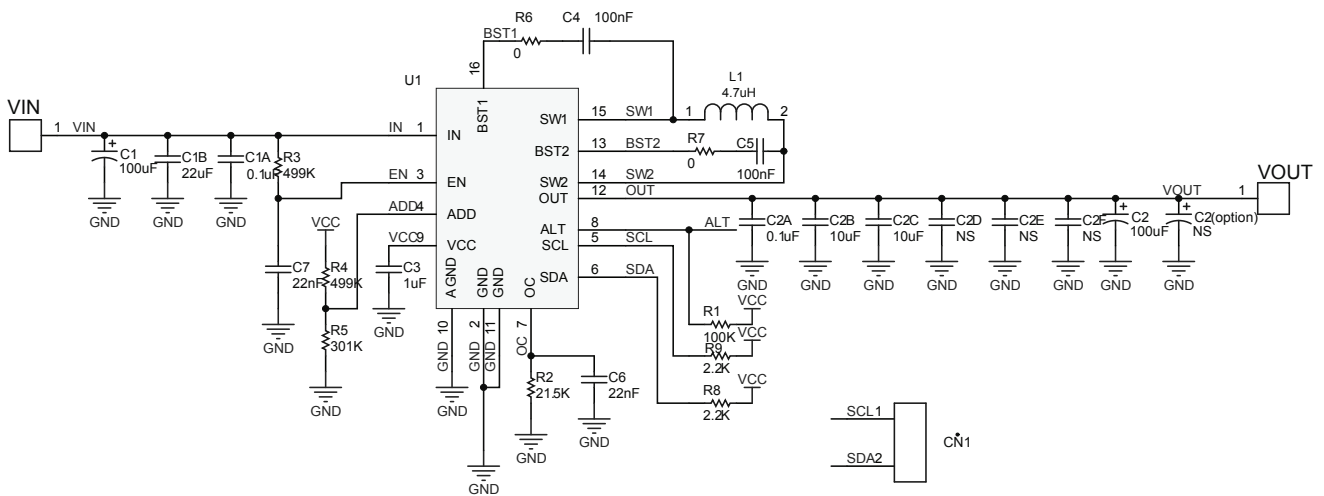

EV8862-Q-00A BILL OF MATERIALS

| RefDes | Value | Description | Package | Manufacturer | Manufacturer P/N |
|---|-------------------|---|---------------------|--------------|--------------------|
| C1 | 100μF | Electrolytic cap, 35V | SMD | CHEMICON | EMZJ350ADA101MF80G |
| C1B | 22μF | Ceramic Cap.,25V,X5R | 0805 | TDK | C2012X5R1E226M |
| C2B,C2C | 10μF | Ceramic Cap.,25V,X5R | 0805 | Murata | GRM21BR61E106MA73L |
| C2 | 100μF | Electrolytic cap, 35V | SMD | CHEMICON | EMZJ350ARA101MHA0G |
| C3 | 1μF | Ceramic Cap.,16V,X5R | 0603 | WE | 885012106017 |
| C1A, C2A, C4,C5 | 100nF | Ceramic Cap.,50V,X7R | 0402 | SAMSUNG | CL05B104KB5NNNC |
| C6, C7 | 22nF | Ceramic Capacitor, 50V, X5R | 0603 | Murata | GRM188R71H223KA01D |
| L1 | 4.7μH | Inductor, RDC=19.5mOhm, Isat=7A | SMD | WE | 744311470 |
| R1 | 100k | Film Res,1%,0603 | 0603 | YAGEO | RC0603FR-07100KL |
| R2 | 21.5k | Film Res,1%,0603 | 0603 | YAGEO | RC0603FR-0721K5L |
| R3,R4 | 499k | Film Res,1%,0603 | 0603 | YAGEO | RC0603FR-07499KL |
| R5 | 301k | Film Res,1%,0603 | 0603 | YAGEO | RC0603FR-07301KL |
| R6,R7 | 0 | Film Res,1%,0402 | 0402 | YAGEO | RC0402FR-070RL |
| R8,R9 | 2.2k | Film Res,1%,0603 | 0603 | YAGEO | RC0603FR-072K2L |
| CN1 | test pin | 1x2pin, 2.54mm | DIP | WE | 61300211121 |
| 3*GNDSENSE, ALT, ADD,EN, VOUTSENSE, VINSENSE | test pin | 1pin, 2.54mm | DIP | WE | 61300111121 |
| VIN, VOUT, GND | 2mm copper pin | φ2.0 copper pin | DIP | N/A | φ2.0 copper pin |
| U1 | MP8862 | 4-Switch Integrated Buck-Boost Converter | QFN-16 (3mm×3mm) | MPS | MP8862 |


TYPICAL PERFORMANCE CHARACTERISTICS

Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$, $V_{OUT} = 5V$, $T_A = 25^\circ C$, unless otherwise noted.


ENPWR Bit Enable through I²C Command

Load = 0A

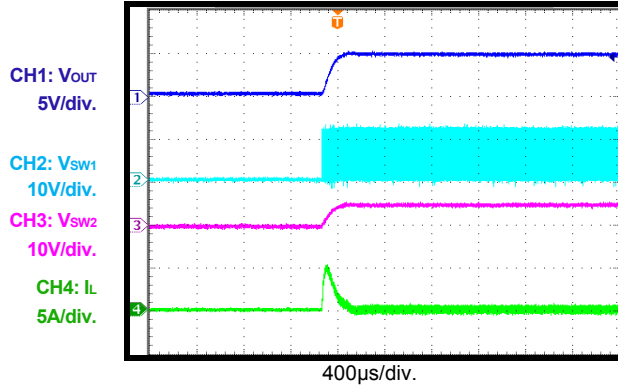


ENPWR Bit Enable through I²C Command

Load = 2A

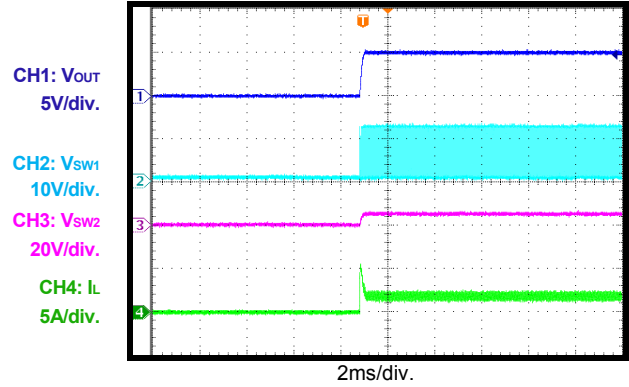


ENPWR Bit Disable through I²C Command

Load = 0A

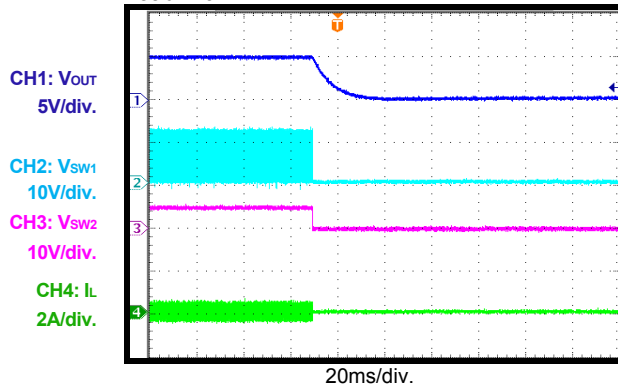


ENPWR Bit Disable through I²C Command

Load = 2A

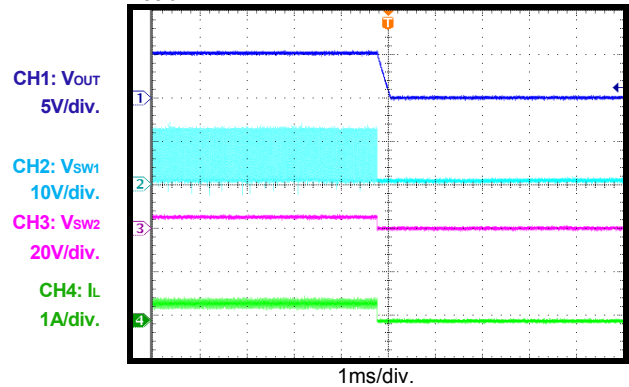


V_{IN} Power Off

Load = 0A

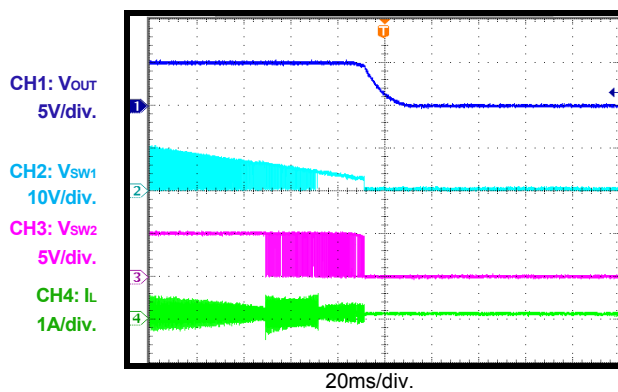

V_{IN} Power Off

Load = 2A

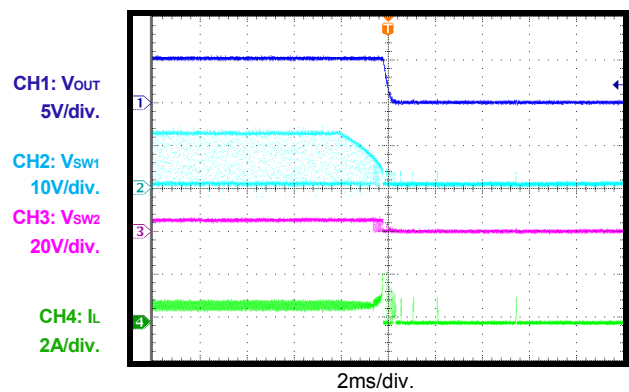


TYPICAL PERFORMANCE CHARACTERISTICS (continued)


Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$, $V_{OUT} = 5V$, $T_A = 25^\circ C$, unless otherwise noted.


V_{IN} Start-Up
Load = 10mA

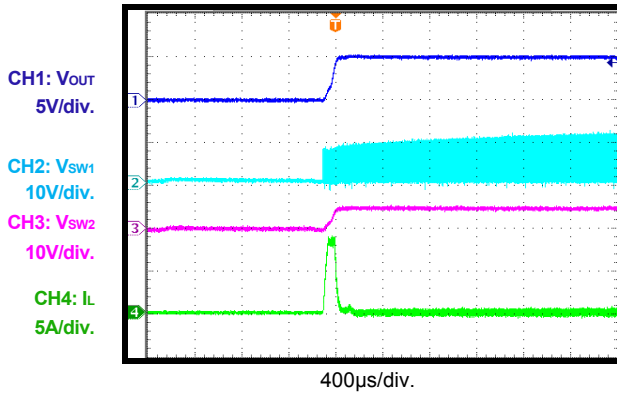


V_{IN} Start-Up
Load = 2A

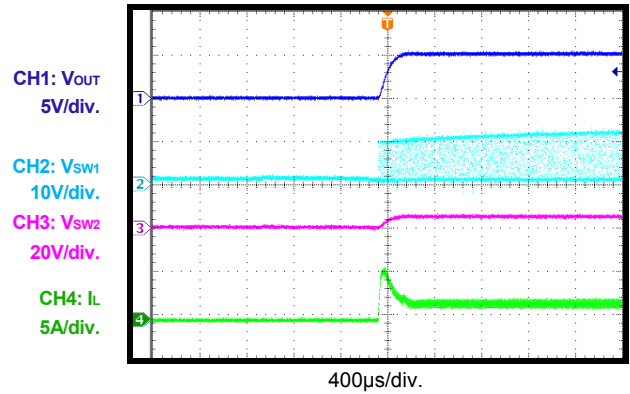


EN Pin Enable
Load = 0A

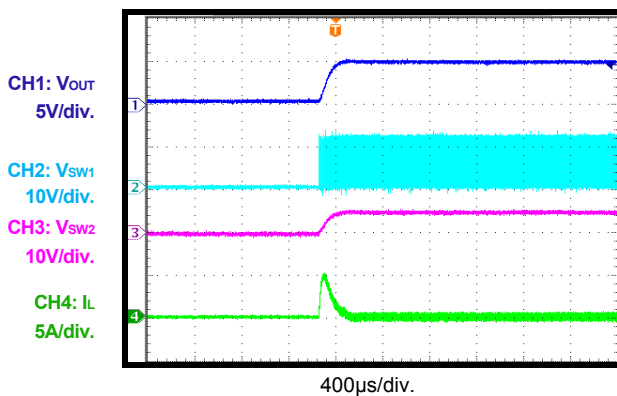


EN Pin Enable
Load = 2A

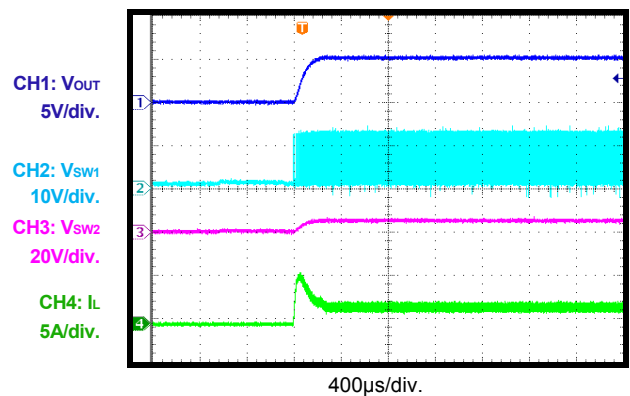

EN Pin Disable
Load = 0A

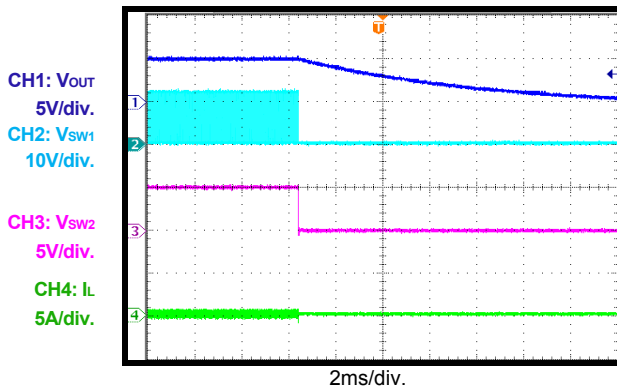

EN Pin Disable
Load = 2A

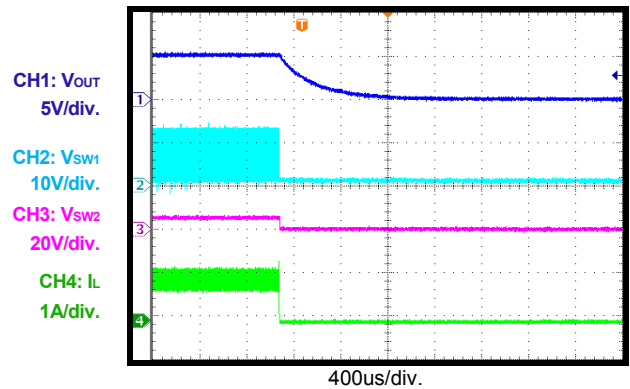


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$, $V_{OUT} = 5V$, $T_A = 25^\circ C$, unless otherwise noted.

Steady State


$V_{OUT} = 5V$, Load = 0A

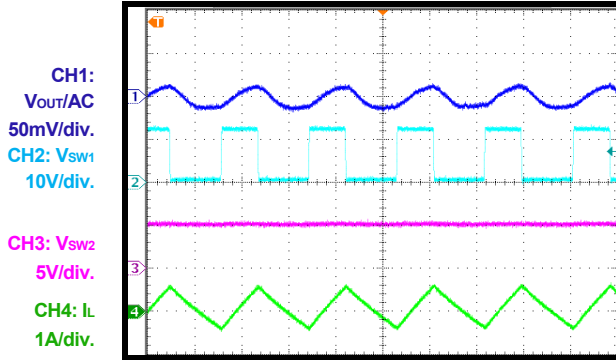

1µs/div.

Steady State


$V_{OUT} = 5V$, Load = 2A

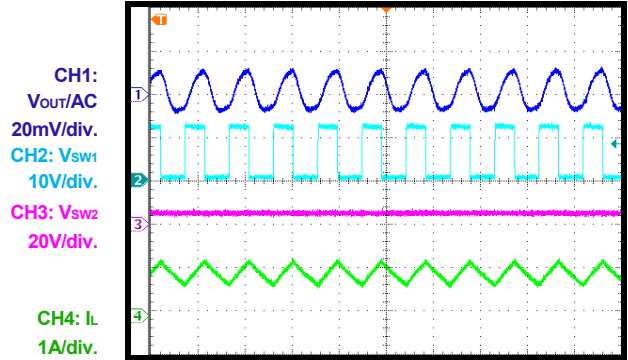

2µs/div.

Load Transient


$V_{IN} = 12V$, $V_{OUT} = 5V$, No Line Drop Compensation, 0A - 1A, 150mA/µs

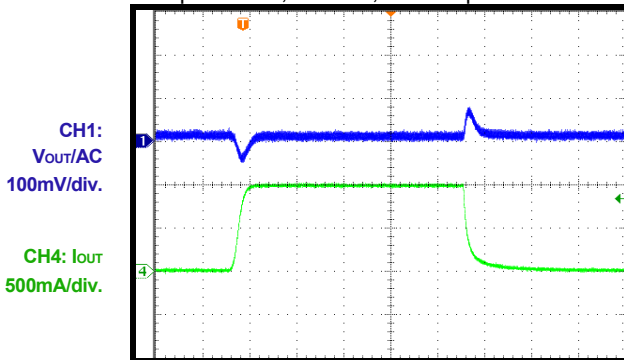

400µs/div.

Load Transient


$V_{IN} = 12V$, $V_{OUT} = 5V$, No Line Drop Compensation, 0A - 2A, 150mA/µs

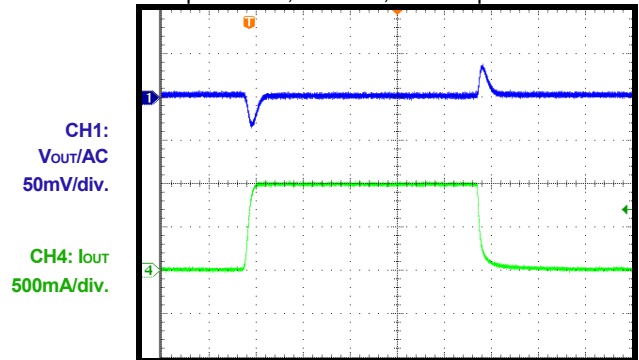

400µs/div.

Load Transient


$V_{IN} = 12V$, $V_{OUT} = 5V$, No Line Drop Compensation, 1A - 2A, 150mA/µs

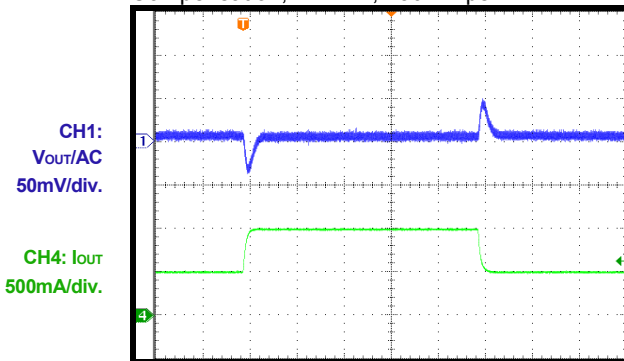

400µs/div.

OCP Entry

$V_{IN} = 12V$, $V_{OUT} = 5V$, Hiccup Mode






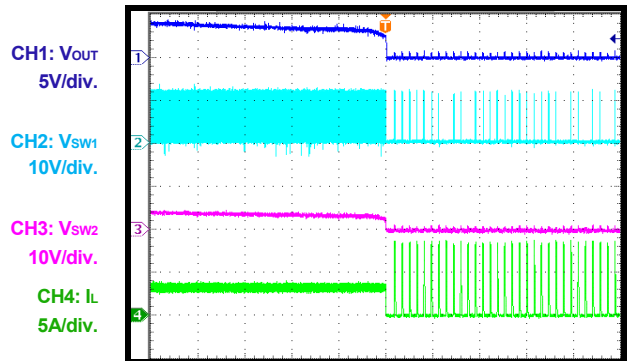


10ms/div.

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Performance waveforms are tested on the evaluation board.

 $V_{IN} = 12V$, $V_{OUT} = 5V$, $T_A = 25^\circ C$, unless otherwise noted.

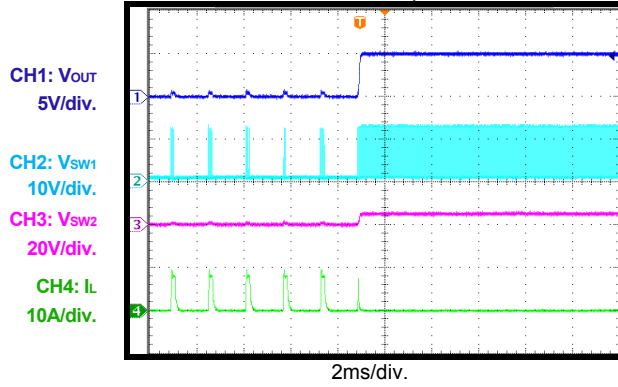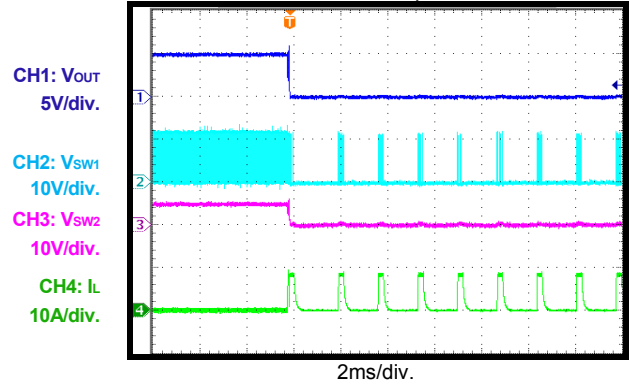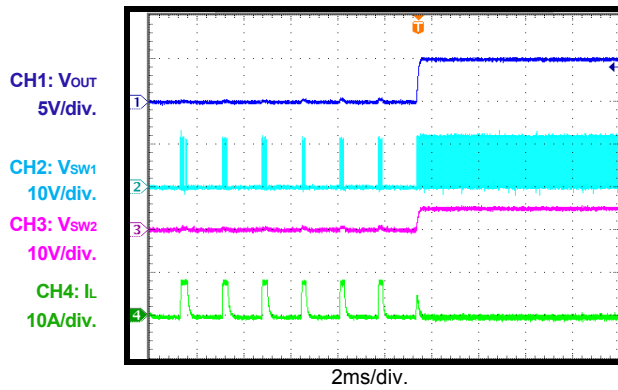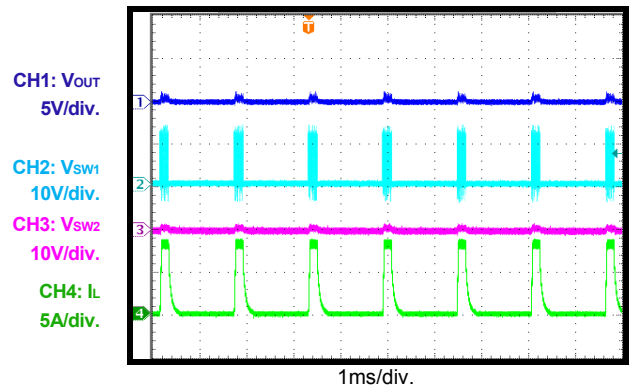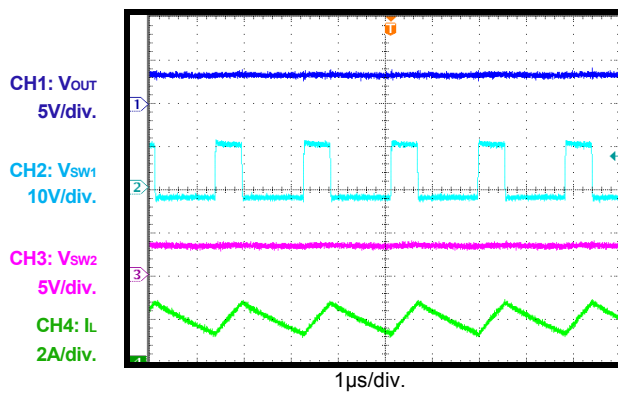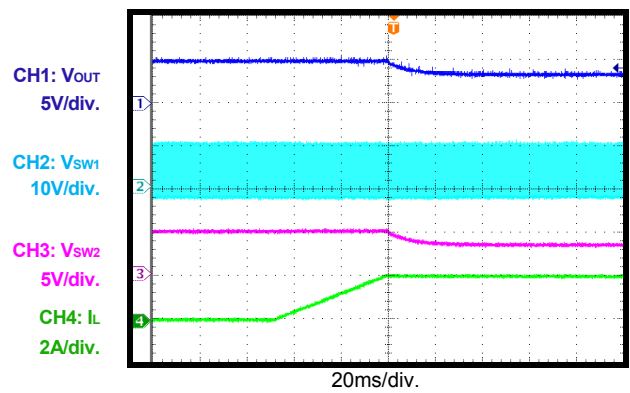OCP Recovery
 $V_{IN} = 12V$, $V_{OUT} = 5V$, Hiccup Mode

SCP Entry
 $V_{IN} = 12V$, $V_{OUT} = 5V$, Hiccup Mode

SCP Recovery
 $V_{IN} = 12V$, $V_{OUT} = 5V$, Hiccup Mode

SCP Steady
 $V_{IN} = 12V$, $V_{OUT} = 5V$, Hiccup Mode

CC Steady

CC Entry


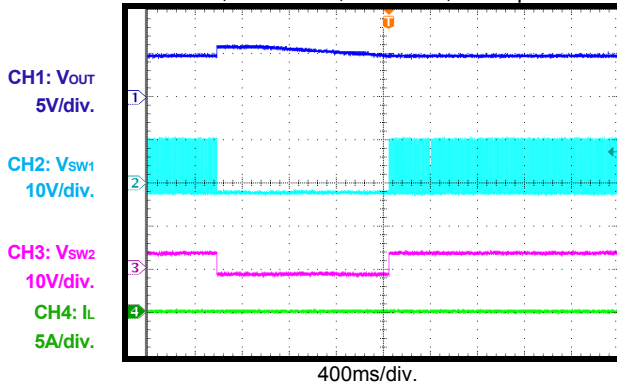
TYPICAL PERFORMANCE CHARACTERISTICS *(continued)*

Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$, $V_{OUT} = 5V$, $T_A = 25^\circ C$, unless otherwise noted.

OVP

$V_{IN} = 12V$, $V_{OUT} = 5V$, $I_{OUT} = 0A$, Hiccup Mode



PRINTED CIRCUIT BOARD LAYOUT

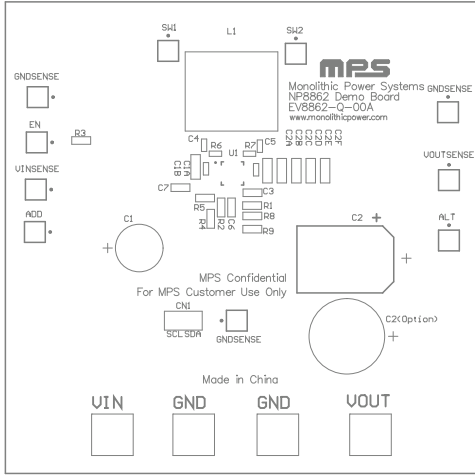


Figure 1—Top Silk Layer

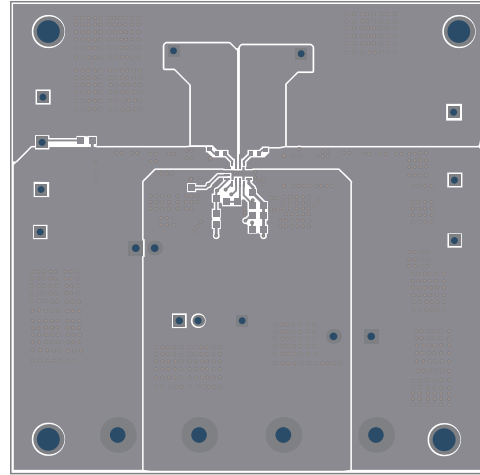


Figure 2—Top Layer

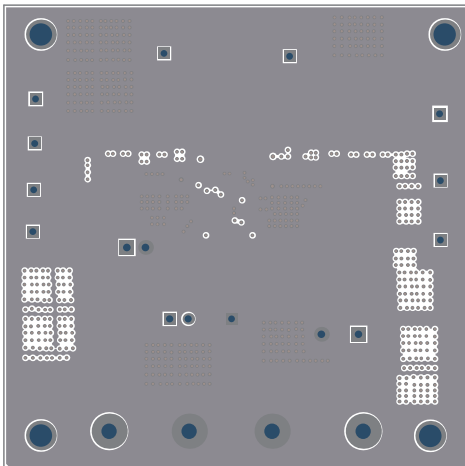


Figure 3—Mid 1 Layer

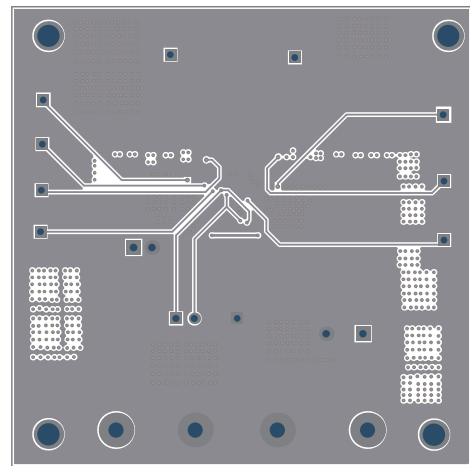


Figure 4—Mid 2 Layer

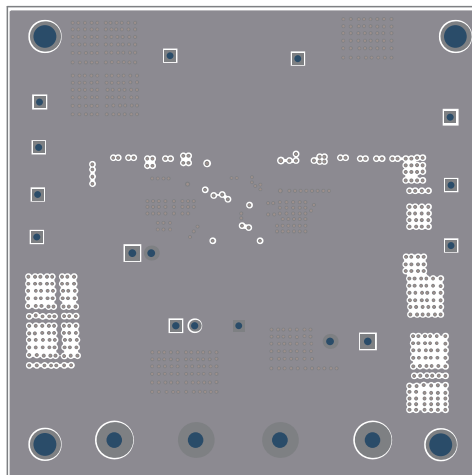


Figure 5—Bottom Layer