




**MAKING BETTER NETWORKS™**



***PRODUCT  
SELECTION  
GUIDE***

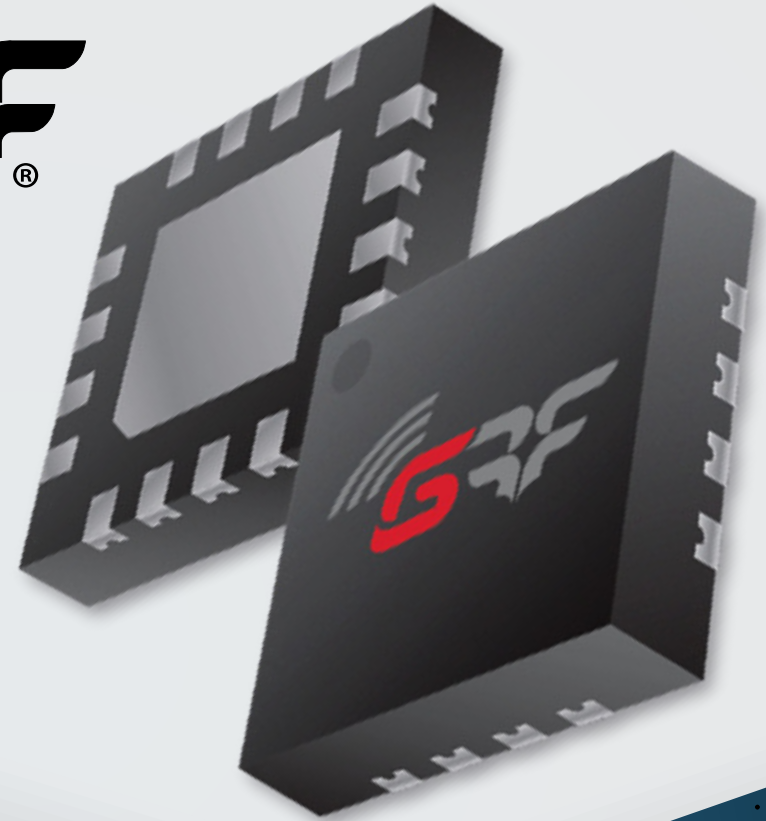


## ***WE ARE PERFORMANCE***

***The best wireless networks always start with the ultimate in RF component performance.***

This fundamental belief drives everything we do at GRF – from innovative IC definition & design to unparalleled applications & production support.

Our passion for creating the very best RFICs has led directly to our success as one of the fastest growing semiconductor firms in the industry, and one of the top 500 companies as recognized by Inc. magazine.

With an installed base of well over 100M units, Guerrilla RF ICs deliver proven, ultra-reliable performance for an ever-growing variety of mission-critical applications.


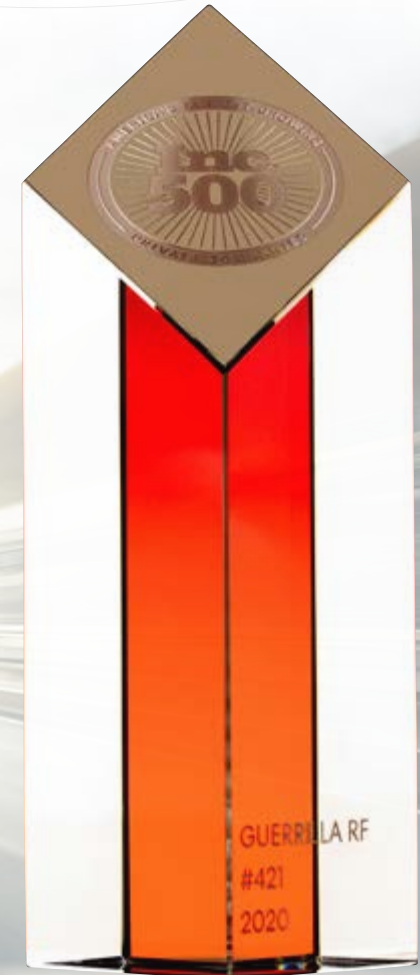


## WHO WE SERVE


### *Providing the Critical Building Blocks for Performance-Driven Markets*

Our cores form the backbone of today's state-of-the-art RF and microwave communication systems.

Each RFIC is tailored to meet the demanding requirements of wireless infrastructure-grade applications found in 5G, Automotive Connectivity, Cellular Boosters & DAS, Military Radios and Wireless Audio.

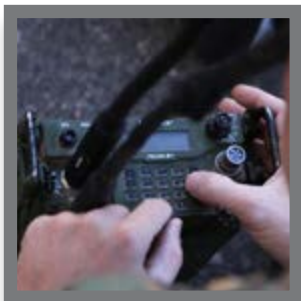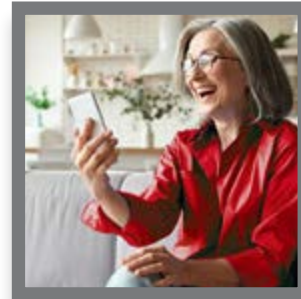



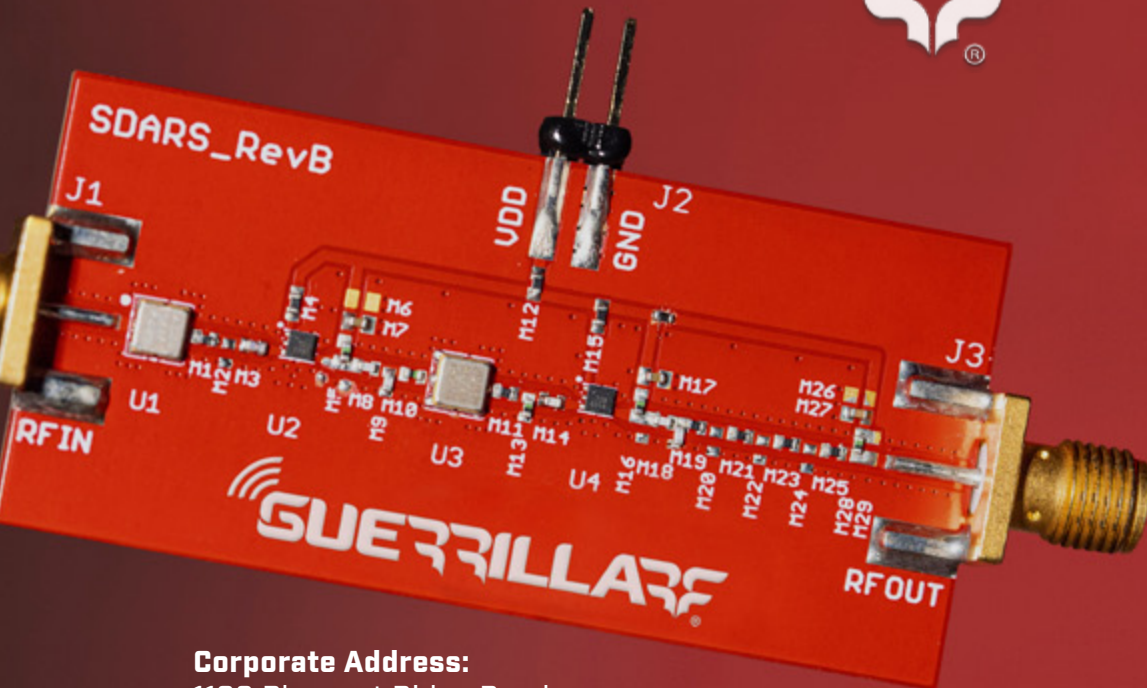

**Corporate Address:**

1196 Pleasant Ridge Road  
Greensboro, NC 27409

[www.guerrilla-rf.com](http://www.guerrilla-rf.com)

**Phone: [336] 510-7840**

**Emails:**

[sales@guerrilla-rf.com](mailto:sales@guerrilla-rf.com)  
[applications@guerrilla-rf.com](mailto:applications@guerrilla-rf.com)  
[careers@guerrilla-rf.com](mailto:careers@guerrilla-rf.com)  
[environmental@guerrilla-rf.com](mailto:environmental@guerrilla-rf.com)

**TABLE OF CONTENTS**

**Products**

**Amplifiers**

**LNA Portfolio**

- LNA Overview / Performance Classifications ..... 5
- Ultra LNAs ..... 6
- Ultra LNAs with Bypass ..... 6
- Broadband LNAs ..... 7
- Broadband LNAs with Bypass ..... 9
- Low Current LNAs ..... 10
- Low Current LNAs with Bypass ..... 10
- Power LNAs ..... 11

**Medium and High-Power Amplifier Portfolio**

- Gain Block, Driver, & PA Overview ..... 12
- High Linearity Gain Blocks ..... 13
- High Linearity Gain Blocks with Bypass ..... 14
- High Frequency Gain Blocks ..... 15
- Linear Drivers ..... 16
- Linear Drivers with Bypass ..... 16
- Linear PAs ..... 17
- Guerrilla Bloc™ Linear PA Modules ..... 17
- Saturated PAs ..... 18

- RF Switches ..... 19
- RF Power Detectors ..... 19
- Mixers ..... 19

**Market Applications**

- Automotive Solutions ..... 20
  - AEC-Q100 Automotive Qualified Devices ..... 21
  - Block Diagram Overview ..... 22
  - GPS/GNSS Front Ends ..... 23
  - SDARS Front Ends ..... 24
  - Cellular Compensators ..... 26
  - V2X Compensators ..... 28

- 5G Cellular Infrastructure Solutions ..... 31
  - 5G Millimeter Wave ..... 32
  - 5G TDD mMIMO ..... 34
  - 5G FDD mMIMO ..... 36

- 4G Wireless Infrastructure Solutions ..... 39
  - 4G TDD Macrocell ..... 40
  - 4G FDD Macrocell ..... 42

- Small Cell Solutions ..... 45
  - Small Cells [with DPD] ..... 46
  - Picocells/Femtocells ..... 48

- Cellular Repeater/Booster/DAS Solutions ..... 51

- GRF Regional Sales Representatives ..... 54







# 2021 PRODUCTS




# GRF LNAs

Guerrilla RF has one of the most extensive offerings of high performance LNAs in the industry. Each of the 60+ components in our library have been optimized to accentuate critical parameters like ultra low noise figure, frequency coverage, current consumption and linearity/compression performance.

Use the categories below as a guide to discovering the ideal component for your specific application.

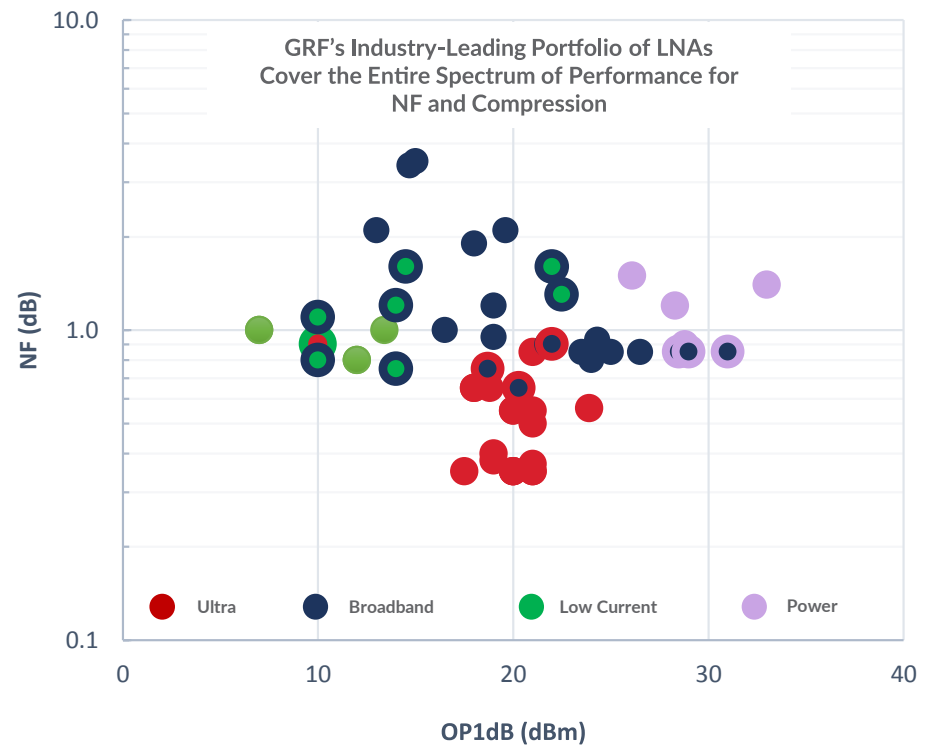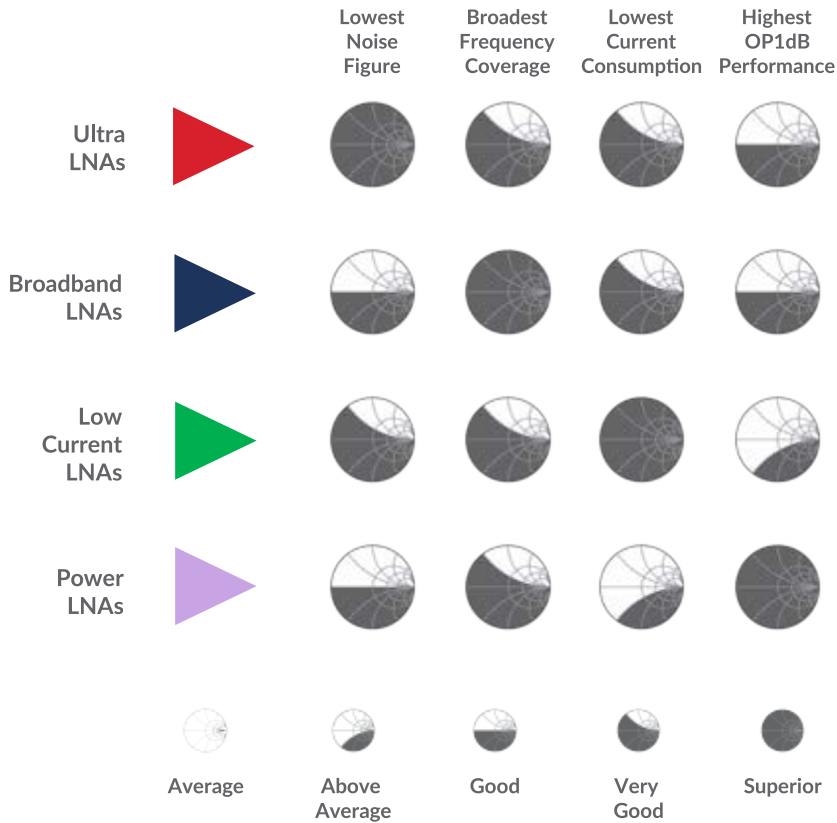

Ultra LNAs

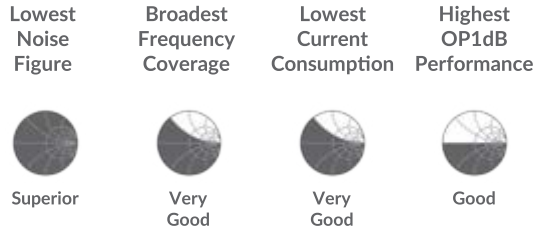

## Ultra LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100		2.0 DFN-8
GRF2080	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	Digital Shutdown	2.0 DFN-8
GRF2133	0.4-2.7	28.5	0.65	20.3	30	1.8-5.0	30-160	High Gain	1.5 DFN-6
GRF2071	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100		2.0 DFN-8
GRF2071W	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	AEC-Q100 Automotive Qualified	2.0 DFN-8
GRF2081	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	Digital Shutdown	2.0 DFN-8
GRF2078*	0.7-2.7	18.8	0.56	23.9	40.7	5	150	Dual Channel	3.0 QFN-16
GRF2051	0.7-3.8	19	0.37	21	36	2.7-5.0	20-100		2.0 QFN-12
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100		2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	Digital Shutdown	2.0 DFN-8
GRF2052	1.7-4.5	19.2	0.5	21	38	2.7-5.0	20-100		2.0 QFN-12
GRF2105	0.4-5.0	20.7	0.77	22.5	36	2.7-5.0	20-90	Flat Gain, Broadband	1.5 DFN-6
GRF2171	2.5-5.0	29.5	0.75	18.7	41.5	5	75	High Gain	1.5 DFN-6
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100		2.0 DFN-8
GRF2093	1.0-6.0	21	0.38	19	36	2.7-5.0	30-100		1.5 DFN-6
GRF2093W	1.0-6.0	21	0.37	19	36	2.7-5.0	30-100	AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	Digital Shutdown	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100		2.0 DFN-8
GRF2073W	3.0-6.0	20.5	0.4	19.8	35	2.7-5.0	20-100	AEC-Q100 Automotive Qualified	2.0 DFN-8

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.  
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## Ultra LNAs with Bypass

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
GRF2077*	0.7-3.8	17	0.9	22	40	3.0-5.0	70	Failsafe Bypass Mode	2.0 DFN-8
GRF2076*	0.6-6.0	19.5	0.85	21	37.5	2.7-5.0	20-100		1.5 DFN-6


\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.





## Broadband LNAs

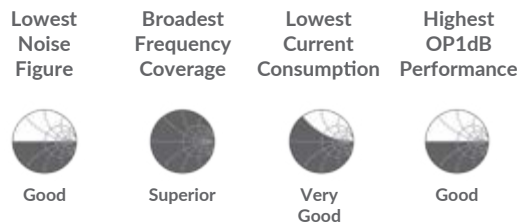

## Broadband LNAs

Part Number	Frequency Range (GHz)	Reference Design Tunes <sup>1</sup> (MHz) [Standard Datasheet Tune in BOLD]			Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
<b>GRF2114</b>	0.1-2.7	20-50	100-400	450-520 <b>700-960</b>	17.9	0.93	24.3	40.2	1.8-5.0	30-150	High Linearity	2.0 DFN-8
<b>GRF2133</b>	0.4-2.7	400-500 <b>700-2700</b>	800-2700 900-1200	1200-1600 1600-2100	28.5	0.65	20.3	30	1.8-5.0	30-160	High Gain	1.5 DFN-6
<b>GRF2100</b>	0.1-3.8	80-120 400-650 408-410 700-960	1150-1200 1150-1615 1540-1640 1700-2200	<b>2300-2700</b> 3400-3800 4300-5300	16.5	0.8	10	19	1.8-5.0	6-30		1.5 DFN-6
<b>GRF2108*</b>	0.1-3.8		<b>400-2700</b>		17	0.9	17.5	19	1.8-5.0	4-20	High Gain, Low Noise, Low Cost	1.5 DFN-6
<b>GRF5020</b>	0.1-3.8	30-2500 80-1000 350-750 470-870 500-3000 700-2700 800-1000	900-1300 1000-3300 1200-2000 1300-2700 <b>1700-2700</b> 1800-3800 2000-4000	2300-3500 2600-3400 3000-5000 3600-4400 4300-5300 5000-6000	17.3	0.8	24.5	37.2	4.5-10.0	50-200	High Linearity	3.0 QFN-16
<b>GRF4002</b>	0.1-3.8	15-50 20-40 70-110	100-1000 434-868 <b>700-3600</b>	1100-1700 1200-1400 2320-2345	15	0.85	23.5	36.5	1.8-5.0	20-80	High Linearity, Ultra-Broadband	1.5 DFN-6
<b>GRF4002W</b>	0.1-3.8		<b>700-3600</b>		15	0.85	23.5	36.5	1.8-5.0	20-80	High Linearity, Ultra-Broadband, AEC-Q100 Automotive Qualified	1.5 DFN-6
<b>GRF4003</b>	0.1-3.8	10-500 30-450	<b>700-3600</b>	868-915	13	0.85	25	41	1.8-5.0	30-120	High Linearity, Ultra-Broadband	1.5 DFN-6
<b>GRF4004</b>	0.1-3.8	20-60 400-900	600-1000	<b>1700-2700</b>	12.7	0.85	26.5	43	1.8-5.0	30-150	High Linearity	1.5 DFN-6
<b>GRF5040</b>	0.1-3.8	25-35 30-2500	900-1300 1200-1400	1500-1600 <b>1700-2700</b>	15	0.85	29.8	46.3	4.5-10.0	100-250	High Linearity	3.0 QFN-16
<b>GRF2373</b>	0.1-3.8	90-110 240-260 500-3000	800-1000 <b>1700-2200</b>	1900-2700 3600-4000	18.5	1.2	12.5	25	2.7-5.0	10-25		1.5 DFN-6
<b>GRF2130*</b>	0.7-3.8		<b>1700-2200</b>		32	1.2	14	17	1.8-5.0	15-50		1.5 DFN-6
<b>GRF4012*</b>	0.4-4.2		<b>2320-2345</b>		17.8	0.9	21	32	1.8-5.0	20-80	High Gain, Low Noise	1.5 DFN-6
<b>GRF4012W*</b>	0.4-4.2		<b>2320-2345</b>		17.8	0.9	21	32	1.8-5.0	20-80	High Gain, Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6


Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at [guerrilla-rf.com](http://guerrilla-rf.com).

\* Product is in Pre-Production. Contact [sales@guerrilla-rf.com](mailto:sales@guerrilla-rf.com) for minimum order quantity.  
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Note 1: New custom tunes are being added everyday. Be sure to look under the 'Custom Tunes' tab on the product's web page to view the latest set of matching options.

Note 2: Assumes a broadband choke. See datasheet for details.

## Broadband LNAs

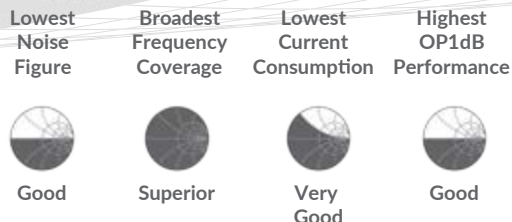

## Broadband LNAs (continued)

Part Number	Frequency Range (GHz)	Reference Design Tunes <sup>1</sup> (MHz) [Standard Datasheet Tune in BOLD]			Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
<b>GRF2105</b>	0.4-5.0	150-3500 450-1250 <b>700-2700</b>	800-3000 1000-2000 3000-5000	3300-4200 3400-3800 4400-5000	20.7	0.77	22.5	36	2.7-5.0	20-90	High Linearity; Ultra-Broadband	1.5 DFN-6
<b>GRF2171</b>	2.5-5.0	1170-1300 1525-1610 2000-2500	2100-2500 2900-3000 <b>3400-3800</b>	3300-4200 3800-4250	29.5	0.75	18.7	41.5	5	75		1.5 DFN-6
<b>GRF5010</b>	0.05-6.0	10-200 70-150 100-400	700-960 700-2700 900-1300	<b>1700-3800</b> 3400-3800 4250-4350	17	0.82	24.5	38.5	4.5-9.0	50-150	High Linearity; Ultra-Broadband	3.0 QFN-16
<b>GRF4014</b>	0.1-6.0	10-50 100-115 140-650 150-400	400-1000 902-928 950-1250 1240-1525	<b>1700-3800</b> 2400-2800 2700-3600 5800-6000	16.5	0.8	24	39	3.0-8.0	30-130	High Linearity; Ultra-Broadband	1.5 DFN-6
<b>GRF4014W</b>	0.1-6.0		<b>1700-3800</b>		17	0.8	24	39	3.0-8.0	30-130	High Linearity; Ultra-Broadband, AEC-Q100 Automotive Qualified	1.5 DFN-6
<b>GRF4001</b>	0.1-6.0		<b>0.1-6000</b>		15.5	1	16.5	30.5	1.8-5.0	5-50	Ultra-Broadband	1.5 DFN-6
<b>GRF2505</b>	4.0-6.0		<b>4000-5925</b>		12.5	1.2	19	30	1.8-5.0	20-60	Ultra-Broadband	1.5 DFN-6
<b>GRF2013</b>	0.05-8.0	50-100 50-2200 70-6000 100-500 100-1000 400-1000	700-900 <b>700-3900</b> 800-860 1200-1500 1700-2000 2000-6000	2500-2700 3000-6000 3400-3800 5855-5925 6000-7000 7750-8250	18.5	1.3	22.5	38.5	2.7-8.0	15-100	High Linearity; Ultra-Broadband	1.5 DFN-6
<b>GRF2013W</b>	0.05-8.0		<b>700-3900</b>		18.5	1.3	22.5	38.5	2.7-8.0	15-100	High Linearity; Ultra-Broadband, AEC-Q100 Automotive Qualified	1.5 DFN-6
<b>GRF3014*</b>	0.001-9.0		<b>0.1-9000</b>		10	6	12.4	26	5	35-45	Ultra-Broadband	1.5 DFN-6
<b>GRF3016*</b>	0.001-10.0		<b>0.1-10000</b>		13.5	5.2	17	26.5	5	65-80	Ultra-Broadband	1.5 DFN-6
<b>GRF2004</b>	0.1-10.0	<b>0.1-10000</b> <sup>2</sup> 50-300 50-10000	950-1700 2000-6000	7000-8000 9000-10000	16.5	1.9	18	31	1.8-5.0	60-120	Ultra-Broadband	1.5 DFN-6
<b>GRF2003</b>	0.1-10.0	400-6000	1000-5000	<b>1000-10000</b>	12	3.5	15	29	2.7-5.0	40-80	Ultra-Broadband	1.5 DFN-6
<b>GRF3044</b>	0.01-11.0	<b>0.1-11000</b> <sup>2</sup>	5000-6000	9000-11000	16.9	2.1	19.6	31.5	> 5.0	60-120	Ultra-Broadband	1.5 DFN-6
<b>GRF3012*</b>	0.001-12.0		<b>0.1-12000</b> <sup>2</sup>		11	5.6	5	18	5	17-22	Ultra-Broadband	1.5 DFN-6
<b>GRF2710</b>	8.0-13.0		<b>8000-12000</b>		13.9	2.1	13	21	3.0-8.0	20-40	Ultra-Broadband	1.5 DFN-6
<b>GRF3042</b>	0.01-15.0		<b>0.1-15000</b> <sup>2</sup>		14.5	3.4	14.7	26	> 5.0	35-60	Ultra-Broadband	1.5 DFN-6
<b>GRF3010*</b>	0.001-15.0		<b>0.1-15000</b> <sup>2</sup>		14.3	5	5	17.5	5	17-22	Ultra-Broadband	1.5 DFN-6

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at [guerrilla-rf.com](http://guerrilla-rf.com).

\* Product is in Pre-Production. Contact [sales@guerrilla-rf.com](mailto:sales@guerrilla-rf.com) for minimum order quantity.


W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Note 1: New custom tunes are being added everyday. Be sure to look under the 'Custom Tunes' tab on the product's web page to view the latest set of matching options.

Note 2: Assumes a broadband choke. See datasheet for details.



Broadband LNAs

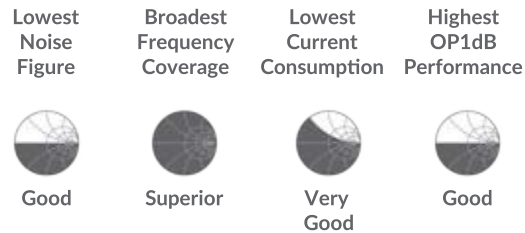

## Broadband LNAs with Bypass

Part Number	Frequency Range (GHz)	Reference Design Tunes <sup>1</sup> (MHz) [Standard Datasheet Tune in BOLD]			Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
<b>GRF4042</b>	0.4-2.7	415-460 700-960	<b>700-2700</b> 1710-2170	1600-2100 2500-2700	16	0.9	22	36	1.8-5.0	20-180	High Linearity; Ultra-Broadband	2.0 QFN-12
<b>GRF2140</b>	0.1-3.8	85-115	493-547 <b>1700-2200</b>	2000-3000	16.2	1.1	10	23.5	2.7-5.0	6-30		1.5 DFN-6
<b>GRF2374</b>	0.1-3.8	380-480	400-960 <b>1700-2200</b>	820-920	16.5	1.2	10	22	2.7-5.0	10-25	Ultra-Broadband	1.5 DFN-6
<b>GRF2077*</b>	0.7-3.8		<b>1700-2700</b>		17	0.9	22	40	3.0-5.0	70	High Linearity	2.0 DFN-8
<b>GRF2243</b>	0.4-5.0	400-500 900-1000	1700-2100 <b>2300-2700</b>	3400-3800 4400-5000	19.7	0.75	14	23	2.7-5.0	8-25		1.5 DFN-6
<b>GRF2243W*</b>	0.4-5.0		<b>2300-2700</b>		19.7	0.75	14	23	2.7-5.0	8-25	High Gain, Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6
<b>GRF2043</b>	0.05-6.0		<b>400-2700</b>		18.4	1.6	22	37	2.7-5.0	20-100	High Linearity	1.5 DFN-6
<b>GRF4142</b>	0.1-6.0	30-90 100-150 150-2700 415-460	<b>700-2700</b> 1700-2200 1920-2170 2400-2600	3600-3800 4400-4900 5000-6000	15.3	0.9	19.3	33	1.8-5.0	15-80	Ultra-Broadband	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.


Note 1: New custom tunes are being added everyday. Be sure to look under the 'Custom Tunes' tab on the product's web page to view the latest set of matching options

Note 2: Assumes a broadband choke. See datasheet for details.

 Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.



Low Current LNAs

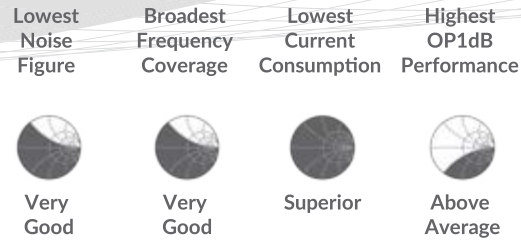

## Low Current LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
GRF2100	0.1-3.8	16.5	0.8	10	19	1.8-5.0	6-30	Low Cost	1.5 DFN-6
GRF2373	0.1-3.8	18.5	1.2	12.5	25	2.7-5.0	10-25	Low Cost	1.5 DFN-6
GRF2108*	0.1-3.8	17	0.9	17.5	19	1.8-5.0	4-20	High Gain, Low Noise, Low Cost	1.5 DFN-6
GRF2201	0.4-3.8	20.5	0.8	12	26	2.7-5.0	10-30	High Gain	1.5 DFN-6
GRF2130*	0.7-3.8	32	1.2	14	17	1.8-5.0	15-50	Ultra-High Gain	1.5 DFN-6
GRF2106	0.1-4.2	20.5	0.8	12	26	2.7-5.0	8-30	High Gain	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	15-100	Flat Gain	1.5 DFN-6
GRF2012W	0.05-6.0	14.8	2.7	23	40	2.7-8.0	15-100	Flat Gain, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2501	4.9-6.0	16	1	7	19	2.7-5.0	12-28		1.5 DFN-6
GRF2501W	4.9-6.0	16	1	7	19	2.7-5.0	12-28	AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	Flat Gain	1.5 DFN-6
GRF2013W	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	Flat Gain, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2101	4.0-10.0	18	0.9	10	22	2.7-5.0	12-28	Low Cost	1.5 DFN-6
GRF2101W*	4.0-10.0	18	0.9	10	22	2.7-5.0	12-28	Low Cost, AEC-Q100 Automotive Qualified	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.  
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## Low Current LNAs with Bypass


Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
GRF2140	0.1-3.8	16.2	1.1	10	23.5	2.7-5.0	6-30		1.5 DFN-6
GRF2374	0.1-3.8	16.5	1.2	10	22	2.7-5.0	10-25		1.5 DFN-6
GRF2243	0.4-5.0	19.7	0.75	14	23	2.7-5.0	8-25	High Gain	1.5 DFN-6
GRF2243W*	0.4-5.0	19.7	0.75	14	23	2.7-5.0	8-25	High Gain, Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2043	0.05-6.0	18.4	1.6	22	37	2.7-5.0	20-100	High Gain; High Linearity	1.5 DFN-6
GRF2042	0.05-6.0	15	2.3	22	39	2.7-5.0	20-100	Flat Gain; High Linearity	1.5 DFN-6
GRF2541	4.9-6.0	16.4	1	7	19	2.7-5.0	12-28		1.5 DFN-6
GRF2543	4.9-6.0	14.4	1	13.4	25.5	2.7-5.0	15		1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.  
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.



Power LNAs

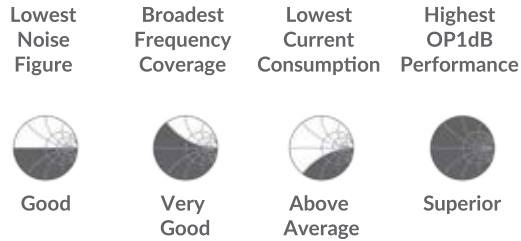

## Power LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
<b>GRF5109</b>	0.4-1.5	17.9	1.2	28.3	45	2.7-5.0	50-200		3.0 QFN-16
<b>GRF5115</b>	0.1-2.7	14.8	1.4	33	45	2.7-5.0	100-300	Highest Linearity	3.0 QFN-16
<b>GRF5110</b>	1.5-2.7	15	0.9	28.8	45	2.7-5.0	50-200	Lowest Noise	3.0 QFN-16
<b>GRF5020</b>	0.1-3.8	17.3	0.8	24.5	37.2	4.5-10.0	50-200	Lowest Noise	3.0 QFN-16
<b>GRF5040</b>	0.1-3.8	15	0.85	29.8	46.3	4.5-10.0	100-250	Lowest Noise	3.0 QFN-16
<b>GRF5010</b>	0.05-6.0	17	0.82	24.5	38.5	4.5-9.0	50-150	Lowest Noise, Broad Frequency Range	3.0 QFN-16
<b>GRF5511</b>	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	High Gain, Broad Frequency Range	3.0 QFN-16

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at [guerrilla-rf.com](http://guerrilla-rf.com).

# GRF Gain Blocks, Drivers, & PAs


Guerrilla RF has over 35 medium and high-power amplifier cores which have been optimized for linearity over a variety of RF and microwave frequency ranges.

Use the categories below as a guide to discovering the ideal component for your specific application.




		Highest OP1dB Performance	Lowest Noise Figure	Broadest Frequency Coverage	Highest Frequency Reach
Gain Blocks					
High Frequency Gain Blocks					
Linear Drivers					
Linear PAs					
Saturated PAs					
	Average	Above Average	Good	Very Good	Superior

GRF's Industry-Leading Portfolio of Medium & High Power Amplifier Cores cover the entire spectrum of performance for NF and Compression

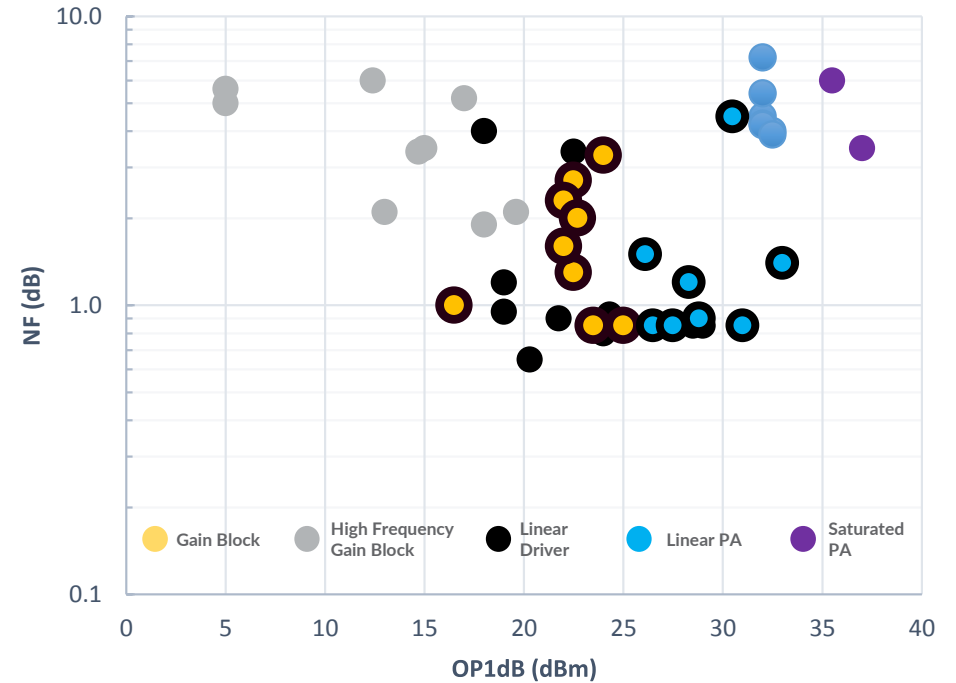



## Gain Blocks

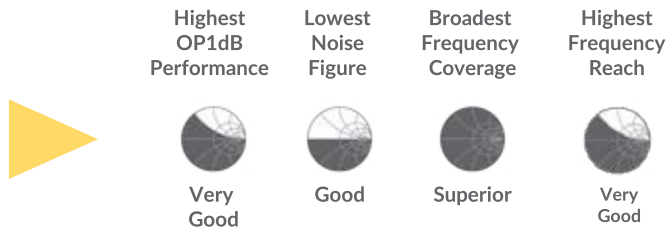

## High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Reference Design Tunes <sup>1</sup> (MHz) [Standard Datasheet Tune in BOLD]		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
<b>GRF2011</b>	0.05-3.8	20-70 40-60	174-240 450-520	<b>700-3800</b>	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
<b>GRF2014</b>	0.05-3.8	100-1800	<b>500-3000</b>	1500-2400	15.9	3.3	24	43.5	2.7-8.0	50-180	Flat Gain 1.5 DFN-6
<b>GRF4002</b>	0.1-3.8	15-50 20-40 70-110	100-1000 100-3600 430-870 <b>700-3600</b>	1100-1700 1200-1400 2320-2345	15	0.85	23.5	36.5	1.8-5.0	20-80	Low Noise 1.5 DFN-6
<b>GRF4002W</b>	0.1-3.8		<b>700-3600</b>		15	0.85	23.5	36.5	1.8-5.0	20-80	Low Noise, AEC-Q100 Automotive Qualified 1.5 DFN-6
<b>GRF4003</b>	0.1-3.8	10-500 30-450	100-3800 <b>700-3600</b>	868-915	13	0.85	25	41	1.8-5.0	30-120	Low Noise 1.5 DFN-6
<b>GRF4012*</b>	0.4-4.2		<b>2320-2345</b>		17.8	0.9	21	32	1.8-5.0	20-80	High Gain, Low Noise 1.5 DFN-6
<b>GRF4012W*</b>	0.4-4.2		<b>2320-2345</b>		17.8	0.9	21	32	1.8-5.0	20-80	High Gain, Low Noise, AEC-Q100 Automotive Qualified 1.5 DFN-6
<b>GRF2010</b>	0.05-5		<b>400-4000</b>		10.5	3.1	20.5	32.5	2.7-8.0	15-100	Broadband, Low Noise 1.5 DFN-6
<b>GRF2012</b>	0.05-6.0	50-6000 700-900	700-1200 <b>400-3800</b>	1700-2000 2500-2700	15	2.7	22.5	40	2.7-8.0	30-120	Flat Gain 1.5 DFN-6
<b>GRF2012W</b>	0.05-6.0		<b>400-3800</b>		14.8	2.7	23	40	2.7-8.0	15-100	Flat Gain, AEC-Q100 Automotive Qualified 1.5 DFN-6
<b>GRF4001</b>	0.1-6.0	<b>100-5500</b>	3300-3800		15.5	1	16.5	30.5	1.8-5.0	5-50	Low Noise 1.5 DFN-6
<b>GRF2013</b>	0.05-8.0	50-100 50-2200 70-6000 100-500 100-1000 400-1000	700-900 <b>700-3800</b> 800-860 800-860 1200-1500 1700-2000 2000-6000	2500-2700 3000-6000 3400-3800 5855-5925 6000-7000 7750-8250	18.5	1.3	22.5	38.5	2.7-8.0	15-100	Low Noise, Flat Gain 1.5 DFN-6
<b>GRF2013W</b>	0.05-8.0		<b>700-3800</b>		18.5	1.3	22.5	38.5	2.7-8.0	15-100	Low Noise, Flat Gain, AEC-Q100 Automotive Qualified 1.5 DFN-6


\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

Note 1: New custom tunes are being added everyday. Be sure to look under the 'Custom Tunes' tab on the product's web page to view the latest set of matching options.

 Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.

Gain  
Blocks

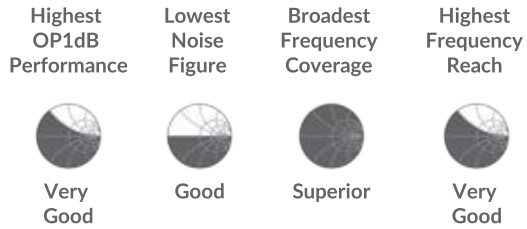


## High Linearity Gain Blocks with Bypass

Part Number	Frequency Range (GHz)	Reference Design Tunes <sup>1</sup> (MHz) [Standard Datasheet Tune in BOLD]		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
<b>GRF2043</b>	0.05-6.0	<b>400-2700</b>	700-5000	18.4	1.6	22	37	2.7-5.0	20-100	Low Noise	1.5 DFN-6
<b>GRF2042</b>	0.05-6.0	<b>600-2700</b>	3500-4500 5000-6000	15	2.3	22	39	2.7-5.0	20-100	Flat Gain	1.5 DFN-6

Note 1: New custom tunes are being added everyday. Be sure to look under the 'Custom Tunes' tab on the product's web page to view the latest set of matching options.

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at [guerrilla-rf.com](http://guerrilla-rf.com).

High  
Frequency  
Gain Blocks

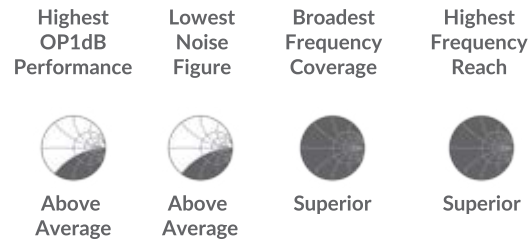

## High Frequency Gain Blocks

Part Number	Frequency Range (GHz)	Reference Design Tunes <sup>1</sup> (MHz) [Standard Datasheet Tune in BOLD]			Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
<b>GRF3014*</b>	0.001-9.0	<b>1-9000</b> <sup>2</sup>			10	6	12.4	26	5	35-45	Ultra-Flat Gain, Near-DC Frequency Operation	1.5 DFN-6
<b>GRF3016*</b>	0.001-10.0	<b>1-10000</b> <sup>2</sup>			13.5	5.2	17	26.5	5	65-80	Flat Gain, Near-DC Frequency Operation	1.5 DFN-6
<b>GRF2004</b>	0.1-10.0	50-300 50-10000	<b>100-10000</b> 950-1700 2000-6000	7000-8000 9000-10000	16.5	1.9	18	31	1.8-5.0	60-120	Low Noise	1.5 DFN-6
<b>GRF2003</b>	0.1-10.0	400-6000	<b>1000-5000</b> <b>1000-10000</b>		12	3.5	15	29	2.7-5.0	40-80		1.5 DFN-6
<b>GRF3044</b>	0.01-11.0	100-10000	<b>100-12000</b> 5000-6000	9000-11000	16.9	2.1	19.6	31.5	> 5.0	60-120	Low Noise	1.5 DFN-6
<b>GRF3012*</b>	0.001-12.0	<b>1-12000</b> <sup>2</sup>			11	5.6	5	18	5	17-22	Flat Gain, Near DC Frequency Operation	1.5 DFN-6
<b>GRF2710</b>	8.0-12.0	<b>8000-12000</b>			13.9	2.1	13	21	3.0-8.0	20-40	Low Noise	1.5 DFN-6
<b>GRF3010*</b>	0.001-15.0	<b>1-15000</b> <sup>2</sup>			14.3	5	5	17.5	5	17-22	Low Current	1.5 DFN-6
<b>GRF3042</b>	0.01-15.0	<b>100-15000</b>			14.5	3.4	14.7	26	> 5.0	35-60		1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.


Note 1: New custom tunes are being added everyday. Be sure to look under the 'Custom Tunes' tab on the product's web page to view the latest set of matching options.

Note 2: Assumes a broadband choke. See datasheet for details.



Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.

## Linear Drivers

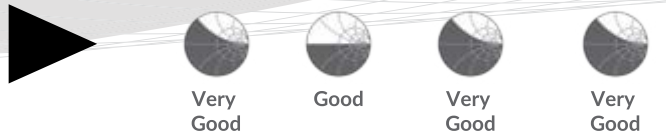

## Linear Drivers

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
GRF5109	0.4-1.5	17.9	1.2	28.3	45	2.7-5.0	50-200	High Linearity, Low Noise	3.0 QFN-16
GRF5115	0.1-2.7	14.8	1.4	33	45	2.7-5.0	100-300	Ultra-High Linearity	3.0 QFN-16
GRF2114	0.1-2.7	17.9	0.93	24.3	40.2	1.8-5.0	30-150	Low Noise	2.0 DFN-8
GRF2133	0.4-2.7	28.5	0.65	20.3	30	1.8-5.0	30-160	Ultra-High Gain, Ultra-low Noise	1.5 DFN-6
GRF5110	1.5-2.7	15	0.9	28.8	45	2.7-5.0	50-200	High Linearity, Low Noise	3.0 QFN-16
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100		1.5 DFN-6
GRF2014	0.05-3.8	15.9	3.3	24	43.5	2.7-8.0	50-180	Flat Gain	1.5 DFN-6
GRF4005	0.1-3.8	13	0.85	27.5	43	1.8-5.0	50-200	High Linearity, Low Noise	1.5 DFN-6
GRF4004	0.1-3.8	12.7	0.85	26.5	43	1.8-5.0	30-150	High Linearity, Low Noise	1.5 DFN-6
GRF4003	0.1-3.8	13	0.85	25	41	1.8-5.0	30-120	High Linearity, Low Noise	1.5 DFN-6
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	Low Noise	1.5 DFN-6
GRF4002W	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF5040	0.1-3.8	15	0.85	29.8	46.3	4.5-10.0	100-250	High Linearity, Low Noise	3.0 QFN-16
GRF5020	0.1-3.8	17.3	0.8	24.5	37.2	4.5-10.0	50-200	High Linearity, Low Noise	3.0 QFN-16
GRF4100*	0.1-3.8	16.5	3.4	22.5	31.5	2.7-5.0	20-40	High Gain, Internally Matched	1.5 DFN-6
GRF4200*	0.1-3.8	21.5	4	18	35.5	2.7-5.0	5-40	High Gain, Internally Matched	1.5 DFN-6
GRF4205*	0.4-3.8	20	4.5	30.5	51	3.0-9.0	500	High Reverse Isolation	3.0 QFN-16
GRF4012*	0.4-4.2	17.8	0.9	21	32	1.8-5.0	20-80	High Gain, Low Noise	1.5 DFN-6
GRF4012W*	0.4-4.2	17.8	0.9	21	32	1.8-5.0	20-80	High Gain, Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF2010	0.05-5.0	10.5	3.1	20.5	32.5	2.7-8.0	15-100	Broadband, Low Noise, Internally Matched	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	Flat Gain, Broad Frequency Range	1.5 DFN-6
GRF2012W	0.05-6.0	14.8	2.7	23	40	2.7-8.0	15-100	Flat Gain, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF5010	0.05-6.0	17	0.82	24.5	38.5	4.5-9.0	50-150	Low Noise	3.0 QFN-16
GRF4001	0.1-6.0	15.5	1	16.5	30.5	1.8-5.0	5-50	Low Noise	1.5 DFN-6
GRF4014	0.1-6.0	16.5	0.8	24	39	3.0-8.0	30-130	Low Noise	1.5 DFN-6
GRF4014W	0.1-6.0	17	0.8	24	39	3.0-8.0	30-130	Low Noise, AEC-Q100 Automotive Qualified	1.5 DFN-6
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	High Linearity	3.0 QFN-16
GRF2505	4.0-6.0	12.5	1.2	19	30	1.8-5.0	20-60		1.5 DFN-6
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	Flat Gain, Broad Frequency Range	1.5 DFN-6
GRF2013W	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	Flat Gain, Broad Frequency Range, AEC-Q100 Automotive Qualified	1.5 DFN-6


\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.  
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## Linear Drivers with Bypass

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
GRF4042	0.4-2.7	16	0.9	22	36	1.8-5.0	20-180	Low Noise	2.0 QFN-12
GRF2042	0.05-6.0	15	2.3	22	39	2.7-5.0	20-100	Flat Gain, Broad Frequency Range	1.5 DFN-6
GRF2043	0.05-6.0	18.4	1.6	22	37	2.7-5.0	20-100	Broad Frequency Range	1.5 DFN-6
GRF4142	0.1-6.0	15.3	0.9	19.3	33	1.8-5.0	15-80	Low Noise, Single Logic Control	1.5 DFN-6

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.

Linear PAs

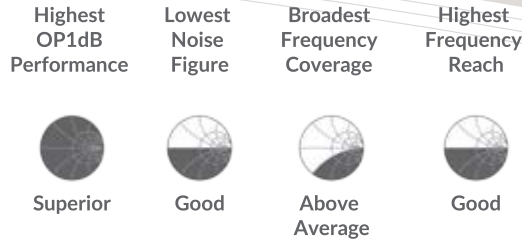

## Linear Power Amplifiers

Part Number	Frequency Range (GHz)	Rated P <sub>OUT</sub> <sup>1</sup> (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Features	Package (mm)
GRF5506	0.66-0.72	24 <sup>1</sup>	28.4	4.5	33.3	46.8	5	290 <sup>3</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5507	0.7-0.8	24 <sup>1</sup>	30.5	4.5	33.4	47.3	5	305 <sup>3</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5508	0.8-0.9	24 <sup>1</sup>	29.7	4.5	33.1	45.4	5	302 <sup>3</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5510	0.88-0.96	24 <sup>1</sup>	29.2	4.5	33.8	46.1	5	352 <sup>3</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5109	0.4-1.5		17.9	1.2	28.3	45	2.7-5.0	50-200	Low Noise, Flexible Bias	3.0 QFN-16
GRF5517	1.7-1.8	22.5 <sup>1</sup>	27.5	5.4	32	48	5	305 <sup>3</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5518	1.8-1.91	23 <sup>1</sup>	27	4.2	32	45	5	310 <sup>3</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5519	1.92-2.0	23 <sup>1</sup>	26.5	4.1	32	45	5	310 <sup>3</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5521*	2.11-2.17	23 <sup>1</sup>	31	3.1	33	45	5	250 <sup>3</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.0 QFN-16
GRF5115	0.1-2.7		14.8	1.4	33	45	2.7-5.0	100-300	Low Noise, Flexible Bias	3.0 QFN-16
GRF5110	1.5-2.7		15	0.9	28.8	45	2.7-5.0	50-200	Low Noise, Flexible Bias	3.0 QFN-16
GRF4004	0.1-3.8		12.7	0.85	26.5	43	1.8-5.0	30-150	Low Noise, Flexible Bias	1.5 DFN-6
GRF4005	0.1-3.8		13	0.85	27.5	43	1.8-5.0	50-200	Low Noise, Flexible Bias	1.5 DFN-6
GRF5040	0.1-3.8		15	0.85	29.8	46.3	4.5-10.0	100-250	Low Noise, Flexible Bias	3.0 QFN-16
GRF4205*	0.4-3.8		20	4.5	30.5	51	3.0-9.0	500	High Gain, High Linearity, High Reverse Isolation, Flexible Bias	3.0 QFN-16
GRF5511	0.7-6.0		20.1	1.5	26.1	39.6	4.5-9.0	50-200	High Gain, Low Noise, Flexible Bias	3.0 QFN-16
GRF5558*	5.77-6.0	25.5 <sup>2</sup>	27	4.5	32	45	5	590 <sup>3</sup>	High Gain, High Linearity, Ideal for Automotive V2X	3.0 QFN-16

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Rated P<sub>OUT</sub> Yields Better Than -45dBc ACLR (LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR).

Note 2: Rated P<sub>OUT</sub> for DSRC/802.11p operation.

Note 3: I<sub>DD</sub> with RF power applied.

## Guerrilla Bloc™ Linear Power Amplifier Modules

Part Number	Frequency Range (GHz)	Rated P <sub>OUT</sub> <sup>1</sup> (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> (mA)	Features	Package (mm)
GRF5406*	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 <sup>2</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5407*	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 <sup>2</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5408*	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 <sup>2</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5410*	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 <sup>2</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5417*	1.7-1.8	22.5	27.5	5.4	32	48	5	305 <sup>2</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5418*	1.8-1.91	23	27	4.2	32	45	5	310 <sup>2</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5419*	1.92-2.0	23	26.5	4.1	32	45	5	310 <sup>2</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM
GRF5421*	2.11-2.17	23	31	3.1	33	45	5	250 <sup>2</sup>	High Gain, High Efficiency, Exceptionally Rugged	3.5 LFM

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.



Note 1: Rated P<sub>OUT</sub> Yields Better Than -45dBc ACLR (LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR).

Note 2: I<sub>DD</sub> with RF power applied.

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.



Saturated PAs

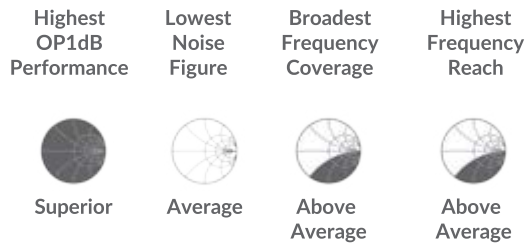

## ▶ Saturated Power Amplifiers

Part Number	Frequency Range (GHz)	Rated P <sub>OUT</sub> (dBm)	Gain (dB)	OP1dB (dBm)	P <sub>SAT</sub> (dBm)	PAE (%)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> (mA)	Features	Package (mm)
<b>GRF5504</b>	0.4-0.5	35	41	34	35.5	64	3.5-5	120 <sup>1</sup>	High Efficiency, High Power	3.0 QFN-16
<b>GRF5509</b>	0.7-1.0	36	33.4	35.5	36.4	55	3.5-5	125 <sup>1</sup>	High Efficiency, High Power	3.0 QFN-16

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Quiescent current.



Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.

## RF Switches

Part Number	Switch Type	Frequency Range (GHz)	Rated Power (W)	Path	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	Special Features	Package (mm)
<b>GRF6001*</b>	SPDT	0.1 - 10.0	1W	RFC to RF1: RFC to RF2:	-1 -1	26 26	50 50	3.0-5.0	High Frequency Operation	1.5 DFN-6
<b>GRF6011</b>	SPDT	0.1 - 6.0	1W	RFC to RF1: RFC to RF2:	-0.43 -0.33	32 30.5	49.5 51	3.0-5.0	Failsafe Mode (Upon Loss of Power, RFC to RF1 Defaults to Open, RFC to RF2 Defaults to Close)	1.5 DFN-6
<b>GRF6011W*</b>	SPDT	0.1 - 6.0	1W	RFC to RF1: RFC to RF2:	-0.43 -0.33	32 30.5	49.5 51	3.0-5.0	Failsafe Mode (Upon Loss of Power, RFC to RF1 Defaults to Open, RFC to RF2 Defaults to Close), AEC-Q100 Automotive Qualified	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.  
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## RF Power Detectors

Part Number	Detector Type	Frequency Range (GHz)	RF Input Power Range (dBm)	Output Voltage Range (V)	Slope (mV/dB)	Intercept (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> (mA)	Special Features	Package (mm)
<b>GRF1201</b>	Logarithmic Average Power Detector	0.1-6.0	-20 to +20	1.1-4.3	80	-33.2	2.7-5.0	7	Broadband, Low Current	1.5 DFN-6
<b>GRF1201W</b>	Logarithmic Average Power Detector	0.1-6.0	-20 to +20	1.1-4.3	80	-33.2	2.7-5.0	7	Broadband, Low Current, AEC-Q100 Automotive Qualified	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## Mixers

Part Number	Description	RF/IF (GHz)	LO (GHz)	Conv Gain (dB)	IP1dB (dBm)	IIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
<b>GRF7001</b>	Linear TX/RX Mixer with Integrated LO Buffer	0.1-4.0	0.1-4.0	-6	>17.0	25	3.0-5.0	10-30	Ideal for both TX and RX Applications	1.5 DFN-6
<b>GRF7034*</b>	Linear RX Mixer with Integrated LO Buffer and IF Amplifier	0.1-4.0	0.1-4.0	11.8	0	11	3	26	Ideal for RX Applications, IF Amplifier Integration	2.0 QFN-12
<b>GRF7042*</b>	Double-Balanced TX/RX Mixer with Integrated LO Buffer	0.1-5.0	0.1-4	-7.5	> 13	23.5	3.0-5.0	18.3	Ideal for both TX and RX Applications, Increased Linearity, Better Spurious Suppression, Low LO Drive Levels	2.0 QFN-12

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

 Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.

# ***AUTOMOTIVE SOLUTIONS***





# AEC-Q100 Automotive Qualified Devices

## ► Amplifiers

Part Number	Device Type	Frequency		Reference Conditions	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Features	Package (mm)
		Range (GHz)	Datasheet Tune (MHz)									
<b>GRF2071W</b>	Ultra-LNA	0.7-2.7	1700-2700	5V/60mA/2332.5MHz	19	0.35	21	38	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
<b>GRF2073W</b>	Ultra-LNA	3.0-6.0	2320-2345	5V/70mA/2332.5MHz	20.5	0.4	19.8	35	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
<b>GRF2093W</b>	Ultra-LNA	1.0-6.0	2300-2700	5V/70mA/2332.5MHz	21	0.37	19	36	2.7-5.0	30-100	Ultra-low Noise; High Gain	1.5 DFN-6
<b>GRF2501W</b>	Ultra-LNA	4.9-9.0	5100-5925	3.3V/15mA/5.5GHz	16	1	7	19	2.7-5.0	12-28	Broadband; Low Current	1.5 DFN-6
<b>GRF4002W</b>	Ultra-LNA / Linear Driver	0.1-3.8	700-3800	5V/70mA/2.5GHz	15	0.85	23.5	36.5	1.8-5.0	20-80	High Linearity; Low Noise	1.5 DFN-6
<b>GRF4012W*</b>	Broadband LNA / Linear Driver	0.4-4.2	2320-2345	5V/50mA/2332.5MHz	17.8	0.9	21	32	1.8-5.0	20-80	High Gain; Low Noise	1.5 DFN-6
<b>GRF4014W</b>	Broadband LNA / Linear Driver	0.1-6.0	1700-3800	5V/60mA/2332.5MHz	17	0.8	24	39	3.0-8.0	30-130	High Linearity; Low Noise; Broadband	1.5 DFN-6
<b>GRF2101W*</b>	Low Current LNA	4.0-10.0	5100-5925	3.3V/18mA/5.5GHz	18	0.9	10	22	2.7-5.0	12-28	Low Noise; Broadband	1.5 DFN-6
<b>GRF2243W*</b>	LNA with Bypass	0.4-5.0	2300-2700	3.3V/15mA/2.5GHz	19.7	0.75	14	23	2.7-5.0	8-25	High Gain; Low Noise; Bypass	1.5 DFN-6
<b>GRF2012W</b>	Broadband Gain Block	0.05-6.0	400-3800	5V/90mA/900MHz	14.8	2.7	23	40	2.7-8.0	15-100	Flat Gain; High Linearity	1.5 DFN-6
<b>GRF2013W</b>	Broadband Gain Block	0.05-8.0	700-3800	5V/90mA/1.9GHz	18.5	1.3	22.5	38.5	2.7-8.0	15-100	Flat Gain; High Linearity	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## RF Switches

Part Number	Switch Type	Frequency Range (GHz)	Rated Power (W)	Path	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	Special Features	Package (mm)
<b>GRF6011W*</b>	SPDT	0.1 - 6.0	1W	RFC to RF1: RFC to RF2:	-0.43 -0.33	32 30.5	49.5 51	3.0-5.0	Failsafe Mode (Upon Loss of Power, RFC to RF1 Defaults to Open, RFC to RF2 Defaults to Close), AEC-Q100 Automotive Qualified	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## RF Power Detectors


Part Number	Detector Type	Frequency Range (GHz)	RF Input Power Range (dBm)	Output Voltage Range (V)	Slope (mV/dB)	Intercept (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> (mA)	Special Features	Package (mm)
<b>GRF1201W</b>	Logarithmic Average Power Detector	0.1-6.0	-20 to +20	1.1-4.3	80	-33.2	2.7-5.0	7	Broadband, Low Current	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

 Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.




# Automotive Solutions Overview

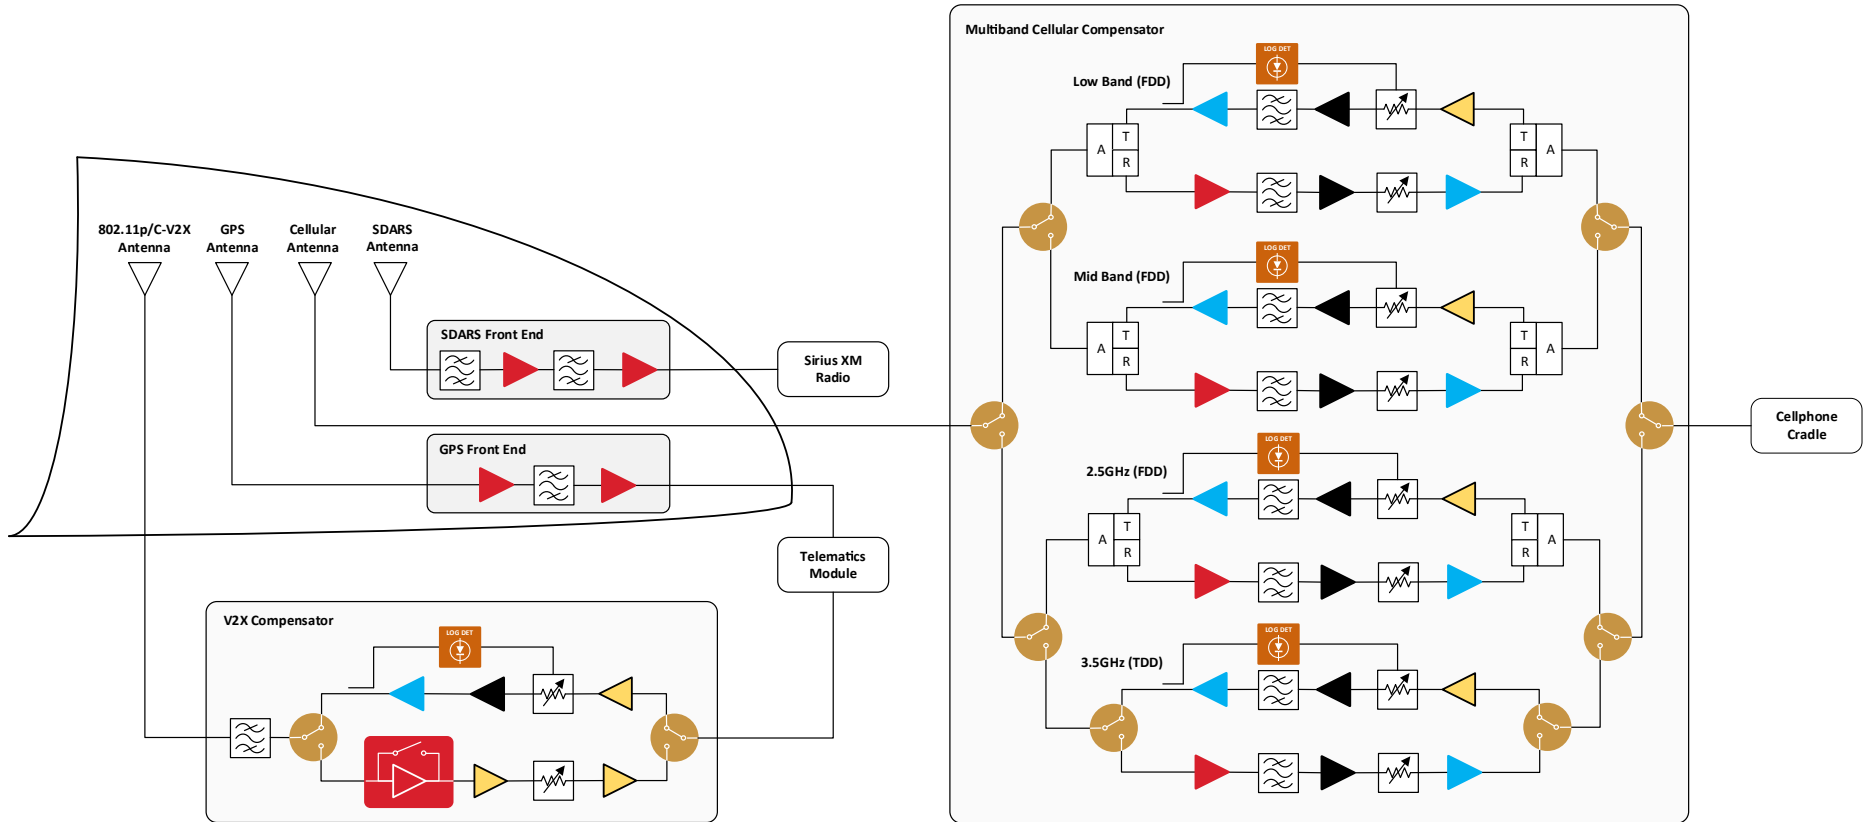





# GPS/GNSS Front End Solutions

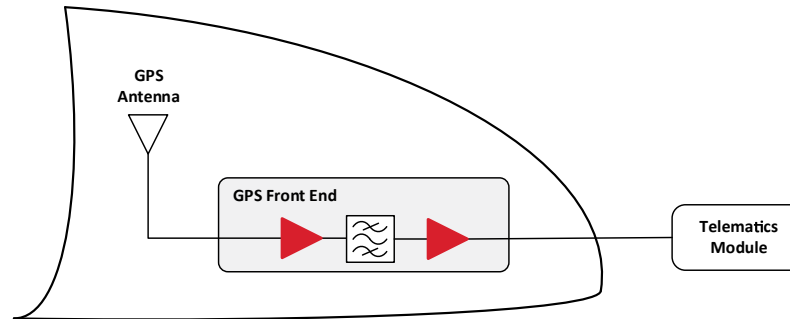

## ▶ LNAs

Part Number	Device Type	Frequency Range (GHz)	Datasheet Tune (MHz)	Reference Conditions	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Features	Package (mm)
<b>GRF2070</b>	Ultra-LNA	0.1-1.5	700-960	5V/70mA/900MHz	20.8	0.35	20	39.5	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
<b>GRF2071</b>	Ultra-LNA	0.7-2.7	2320-2345	5V/70mA/2332.5MHz	19	0.35	21	38	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
<b>GRF2071W</b>	Ultra-LNA	0.7-2.7	1700-2700	5V/60mA/2332.5MHz	19	0.35	21	38	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## GRF2071/2071W Performance with Single Match Tune for GPS/GNSS Bands L1, L2 & L5

Frequency (MHz)	V <sub>DD</sub> (V)	I <sub>DDQ</sub> (mA)	V <sub>EN</sub> (V)	I <sub>EN</sub> (mA)	P <sub>OUT</sub> / Tone (dBm)	Gain (dB)	IIP3 (dBm)	OIP3 (dBm)	IP1dB (dBm)	OP1dB (dBm)	NF (dB)
1100	5.0	61.4	5.0	2.5	0.0	22.9	12.4	35.3	-5.4	16.5	0.39
1200	5.0	61.4	5.0	2.5	0.0	22.7	13.9	36.6	-4.9	16.7	0.39
1300	5.0	61.4	5.0	2.5	0.0	22.2	14.6	36.9	-4.3	16.9	0.39
1400	5.0	61.5	5.0	2.5	0.0	21.7	16.0	37.7	-3.2	17.5	0.38
1500	5.0	61.5	5.0	2.5	0.0	21.0	17.1	38.2	-1.8	18.2	0.38
1600	5.0	61.5	5.0	2.5	0.0	20.3	18.6	38.9	-0.6	18.7	0.38
1700	5.0	61.6	5.0	2.5	0.0	19.6	19.9	39.5	0.7	19.3	0.38


## GRF2070 Performance with Single Match Tune for GPS/GNSS Bands L1, L2 & L5

Frequency (MHz)	V <sub>DD</sub> (V)	I <sub>DDQ</sub> (mA)	V <sub>EN</sub> (V)	I <sub>EN</sub> (mA)	P <sub>OUT</sub> / Tone (dBm)	Gain (dB)	IIP3 (dBm)	OIP3 (dBm)	IP1dB (dBm)	OP1dB (dBm)	NF (dB)
1100	5.0	67.8	2.4	4	4.0	19.1	22.1	41.2	1.4	19.4	0.39
1300	5.0	67.8	2.4	4	4.0	18.0	23.8	41.8	3.0	19.9	0.42
1500	5.0	67.8	2.4	4	4.0	16.6	24.3	40.9	5.0	20.5	0.42
1700	5.0	67.8	2.4	4	4.0	15.2	26.3	41.5	6.4	20.6	0.42

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at [guerrilla-rf.com](http://guerrilla-rf.com).



# SDARS Front End Solutions

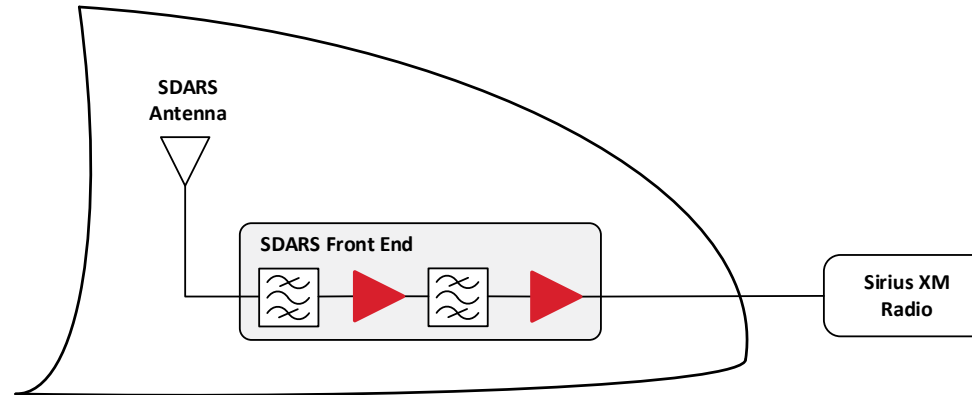

## ▶ First Stage LNAs

Part Number	Device Type	Frequency		Reference Conditions	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Features	Package (mm)
		Range (GHz)	Datasheet Tune (MHz)									
<b>GRF2071W</b>	Ultra-LNA	0.7-2.7	1700-2700	5V/60mA/2332.5MHz	19	0.35	21	38	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
<b>GRF2073W</b>	Ultra-LNA	3.0-6.0	2320-2345	5V/70mA/2332.5MHz	20.5	0.4	19.8	35	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
<b>GRF2074</b>	Ultra-LNA	1.0-6.0	2320-2345	5V/70mA/2332.5MHz	20.5	0.35	17.5	35.5	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
<b>GRF2093W</b>	Ultra-LNA	1.0-6.0	2300-2700	5V/70mA/2332.5MHz	21	0.37	19	36	2.7-5.0	30-100	Ultra-low Noise; High Gain	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## ▶ Second Stage LNAs

Part Number	Device Type	Frequency		Reference Conditions	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Features	Package (mm)
		Range (GHz)	Datasheet Tune (MHz)									
<b>GRF2073W</b>	Ultra-LNA	3.0-6.0	2320-2345	5V/70mA/2332.5MHz	20.5	0.4	19.8	35	2.7-5.0	20-100	Ultra-low Noise; High Gain	2.0 DFN-8
<b>GRF4002W</b>	Ultra-LNA / Linear Driver	0.1-3.8	700-3800	5V/70mA/2.5GHz	15	0.85	23.5	36.5	1.8-5.0	20-80	High Linearity; Low Noise	1.5 DFN-6
<b>GRF4012W*</b>	Broadband LNA / Linear Driver	0.4-4.2	2320-2345	5V/50mA/2332.5MHz	17.8	0.9	21	32	1.8-5.0	20-80	High Gain; Low Noise	1.5 DFN-6
<b>GRF4014W</b>	Broadband LNA / Linear Driver	0.1-6.0	1700-3800	5V/60mA/2332.5MHz	17	0.8	24	39	3.0-8.0	30-130	High Linearity; Low Noise; Broadband	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.


 Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.






## SDARS Front End Solutions, cont'd.

### Dual SAW Reference Design

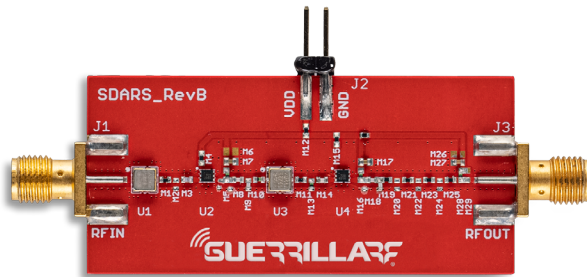

### Single SAW Reference Design

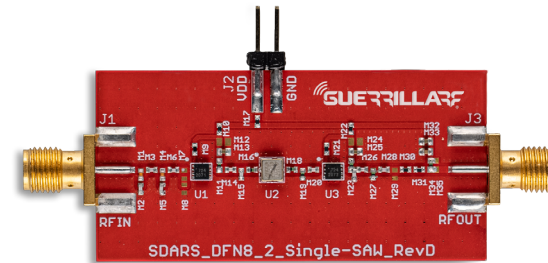

### Cascaded Performance of GRF's SDARS Single and Dual SAW Front End Reference Designs


Config	First Stage LNA	2nd Stage LNA	Solution Cost Ranking	Performance Ranking	Key Differentiators	Maximum Blocker $P_{IN}$ Meeting OOB Rejection	IMRR Margin to Spec (Typ)	IMRR Margin to Spec (Worst Case)	G (dB)	NF (dB)	IIP3 (dBm)	IP1dB (dBm)	$V_{DD}$ (V)	$I_{DD}$ (mA)
Dual SAW	2093W	4014W	5	1	Higher G, Best OOB Rejection, Best IMRR	10+	13	7.5	33.7	0.88	1.6	-10.9	5	100
	2074W	4014W	4	2	Performance Same as Above, GRF2074 Uses Common 2x2mm Pkg	10+	13	7.5	33.7	0.88	1.6	-10.9	5	100
	2073W	4002W	3	3	Cheaper Alternative	6	10	2.5	31	0.95	2	-7.5	5	100
	2073W	4012W	2	4	Cheaper Alternative, Slightly Higher Gain	5.5	10	2.5	32	0.95	-1	-10.5	5	100
Single SAW	2071W	2073W	1	5	Significant Cost Savings by Using Only 1 SAW Filter, Can Only be Used in Absence of Co-Located Cellular Antenna.	-5	7.5	2	33.6	0.78	1.6	-14.5	5	87



Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at [guerrilla-rf.com](http://guerrilla-rf.com).



# Cellular Compensator Solutions

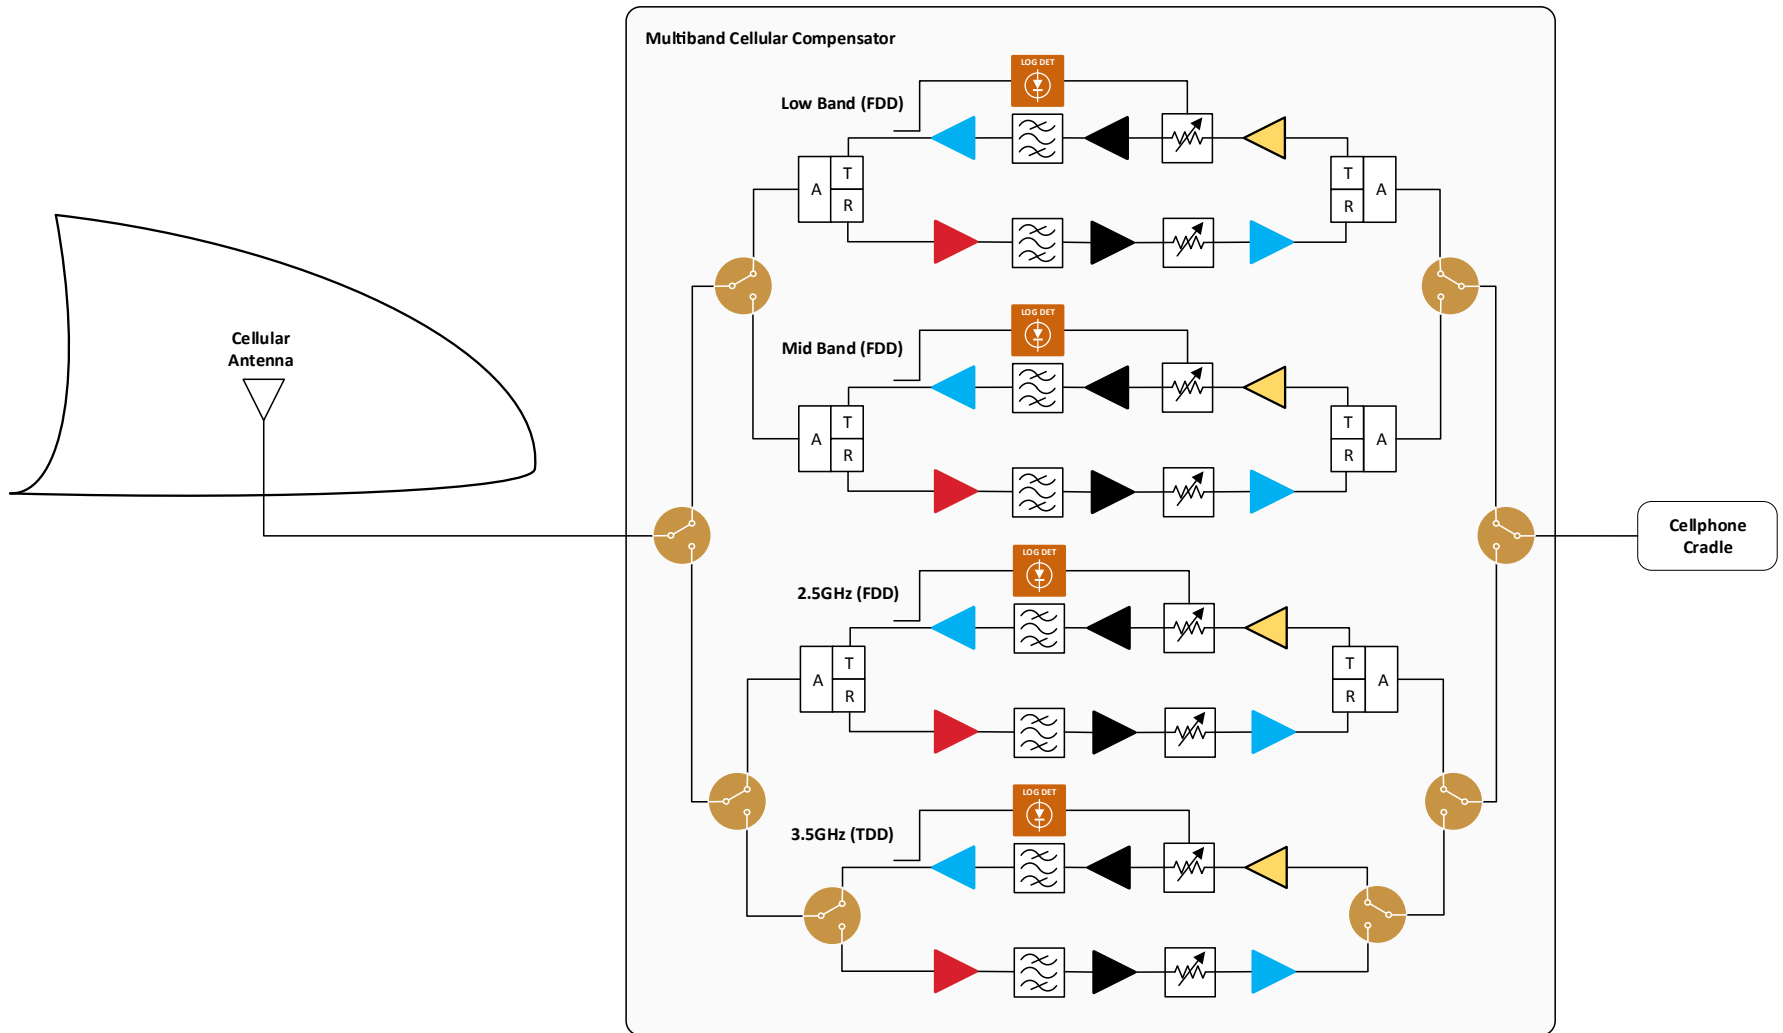

## ▶ LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2071W	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF4002W	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF2100	0.1-3.8	16.5	0.8	10	19	1.8-5.0	6-30	1.5 DFN-6
GRF2108*	0.1-3.8	17	0.9	17.5	19	1.8-5.0	4-20	1.5 DFN-6
GRF2106	0.1-4.2	20.5	0.8	12	26	2.7-5.0	8-30	1.5 DFN-6
GRF2105	0.4-5.0	20.7	0.77	22.5	36	2.7-5.0	20-90	1.5 DFN-6
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073W	3.0-6.0	20.5	0.4	19.8	35	2.7-5.0	20-100	2.0 DFN-8

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.  
W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## ▶ High Linearity Gain Blocks


Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2100	0.1-3.8	16.5	0.8	10	19	1.8-5.0	6-30	1.5 DFN-6
GRF2373	0.1-3.8	18.5	1.2	12.5	25	2.7-5.0	10-25	1.5 DFN-6
GRF4002W	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF2012W	0.05-6.0	14.8	2.7	23	40	2.7-8.0	15-100	1.5 DFN-6
GRF2013W	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## ▶ Linear Drivers

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2012W	0.05-6.0	14.8	2.7	23	40	2.7-8.0	15-100	1.5 DFN-6
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16
GRF2505	4.0-6.0	12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
GRF2013W	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

 Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.

## ▶ Linear Power Amplifiers (Discretos & Modules)

Part Number	Frequency Range (GHz)	Rated P <sub>OUT</sub> <sup>1</sup> (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> (V)	I <sub>DD</sub> (mA)	Package (mm)
GRF5506	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 <sup>2</sup>	3.0 QFN-16
GRF5507	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 <sup>2</sup>	3.0 QFN-16
GRF5508	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 <sup>2</sup>	3.0 QFN-16
GRF5510	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 <sup>2</sup>	3.0 QFN-16
GRF5517	1.7-1.8	22.5	27.5	5.4	32	48	5	305 <sup>2</sup>	3.0 QFN-16
GRF5518	1.8-1.91	23	27	4.2	32	45	5	310 <sup>2</sup>	3.0 QFN-16
GRF5519	1.92-2.0	23	26.5	4.1	32	45	5	310 <sup>2</sup>	3.0 QFN-16
GRF5521*	2.11-2.17	23	31	3.1	33	45	5	250 <sup>2</sup>	3.0 QFN-16
GRF5406* <sup>3</sup>	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 <sup>2</sup>	3.5 LFM
GRF5407* <sup>3</sup>	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 <sup>2</sup>	3.5 LFM
GRF5408* <sup>3</sup>	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 <sup>2</sup>	3.5 LFM
GRF5410* <sup>3</sup>	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 <sup>2</sup>	3.5 LFM
GRF5417* <sup>3</sup>	1.7-1.8	22.5	27.5	5.4	32	48	5	305 <sup>2</sup>	3.5 LFM
GRF5418* <sup>3</sup>	1.8-1.91	23	27	4.2	32	45	5	310 <sup>2</sup>	3.5 LFM
GRF5419* <sup>3</sup>	1.92-2.0	23	26.5	4.1	32	45	5	310 <sup>2</sup>	3.5 LFM
GRF5421* <sup>3</sup>	2.11-2.17	23	31	3.1	33	45	5	250 <sup>2</sup>	3.5 LFM

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Rated P<sub>OUT</sub> Yields Better Than -45dBc ACLR (LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR).

Note 2: I<sub>DD</sub> with RF power applied.

Note 3: Module with Internal Matching.

## RF Switches

Part Number	Switch Type	Frequency		Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	Package (mm)
		Range (GHz)	Path					
GRF6001*	SPDT	0.1 - 10.0	RFC to RF1:	-1	26	50	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-1	26	50		
GRF6011	SPDT	0.1 - 6.0	RFC to RF1:	-0.43	32	49.5	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-0.33	30.5	51		
GRF6011W*	SPDT	0.1 - 6.0	RFC to RF1:	-0.43	32	49.5	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-0.33	30.5	51		

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## RF Power Detectors


Part Number	Frequency Range (GHz)	RF Input Power Range (dBm)	Output Voltage Range (V)	Slope (mV/dB)	Intercept (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> (mA)	Package (mm)

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.





## V2X Compensator Solutions

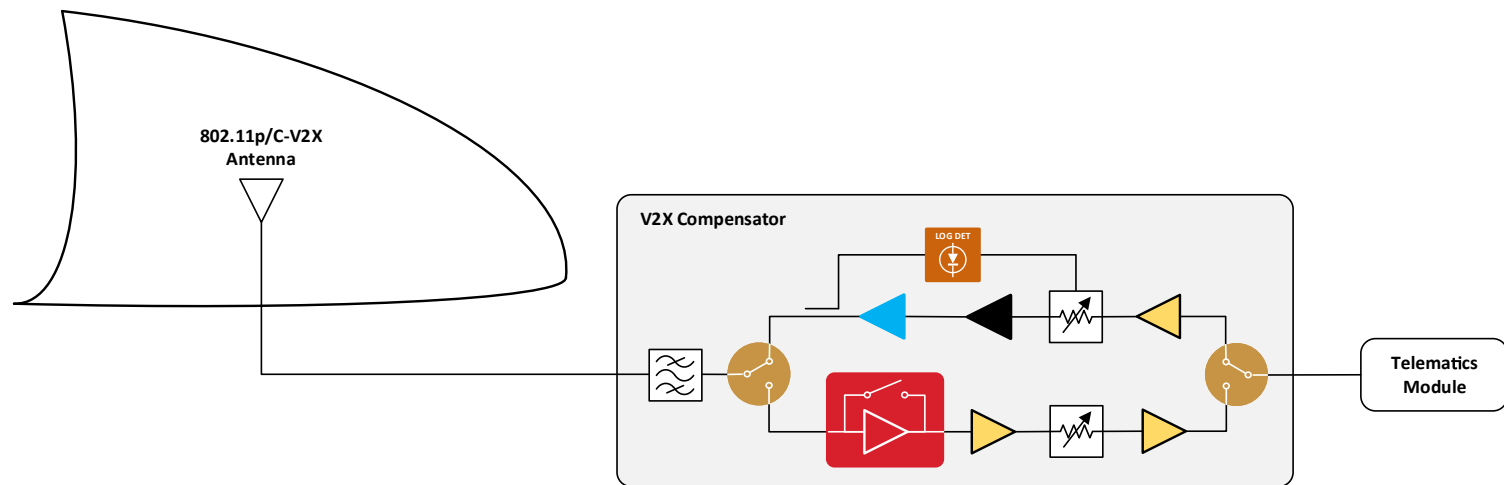

## ▶ LNAs

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
	Range (GHz)								
<b>GRF2074</b>	1.0-6.0		20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
<b>GRF2093W</b>	1.0-6.0		21	0.37	19	36	2.7-5.0	30-100	1.5 DFN-6
<b>GRF2505</b>	4.0-6.0		12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
<b>GRF2501W</b>	4.9-6.0		16	1	7	19	2.7-5.0	12-28	1.5 DFN-6
<b>GRF2101W*</b>	4.0-10.0		18	0.9	10	22	2.7-5.0	12-28	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## ▶ LNAs with Bypass

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
	Range (GHz)								
<b>GRF4142<sup>1</sup></b>	0.1-6.0		8	1.77	19.4	35.4	1.8-5.0	15-80	1.5 DFN-6
<b>GRF2076*<sup>2</sup></b>	0.6-6.0		14.2	1.7	18.5	39.1	2.7-5.0	20-100	1.5 DFN-6
<b>GRF2543</b>	4.9-6.0		14.4	1	13.4	25.5	2.7-5.0	15	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.


Note 1: Performance with 5.7-5.9GHz tune.

Note 2: Performance with 5.5-6.0GHz tune.

## ▶ High Linearity Gain Blocks

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
	Range (GHz)								
<b>GRF2012W</b>	0.05-6.0		14.8	2.7	23	40	2.7-8.0	15-100	1.5 DFN-6
<b>GRF2505</b>	4.0-6.0		12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
<b>GRF2013W</b>	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

 Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at [guerrilla-rf.com](http://guerrilla-rf.com).

## ▶ Linear Drivers

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
	Range (GHz)								
<b>GRF2012W</b>	0.05-6.0		14.8	2.7	23	40	2.7-8.0	15-100	1.5 DFN-6
<b>GRF5511</b>	0.7-6.0		20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16
<b>GRF2505</b>	4.0-6.0		12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
<b>GRF2013W</b>	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## ▶ Linear Power Amplifiers

Part Number	Frequency Range (GHz)	Rated P <sub>OUT</sub> <sup>1</sup> (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> (V)	I <sub>DD</sub> Range (mA)	Package (mm)
<b>GRF5558*</b>	5.77-6.0	25.5	27	4.5	32	45	5	590 <sup>2</sup>	3.0 QFN-16

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Rated P<sub>OUT</sub> for DSRC/802.11p operation.

Note 2: I<sub>DD</sub> with RF power applied.

## ▶ RF Switches

Part Number	Switch Type	Frequency		Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	Package (mm)
		Range (GHz)	Path					
<b>GRF6001*</b>	SPDT	0.1 - 10.0	RFC to RF1:	-1	26	50	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-1	26	50		
<b>GRF6011</b>	SPDT	0.1 - 6.0	RFC to RF1:	-0.43	32	49.5	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-0.33	30.5	51		
<b>GRF6011W*</b>	SPDT	0.1 - 6.0	RFC to RF1:	-0.43	32	49.5	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-0.33	30.5	51		

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.

## ▶ RF Power Detectors

Part Number	Frequency Range (GHz)	RF Input Power Range (dBm)	Output Voltage (V)	Slope (mV/dB)	Intercept (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> (mA)	Package (mm)

W suffix appended to the part number indicates that the device is AEC-Q100 Automotive Qualified.




# ***5G WIRELESS INFRASTRUCTURE SOLUTIONS***





# Millimeter Wave Solutions

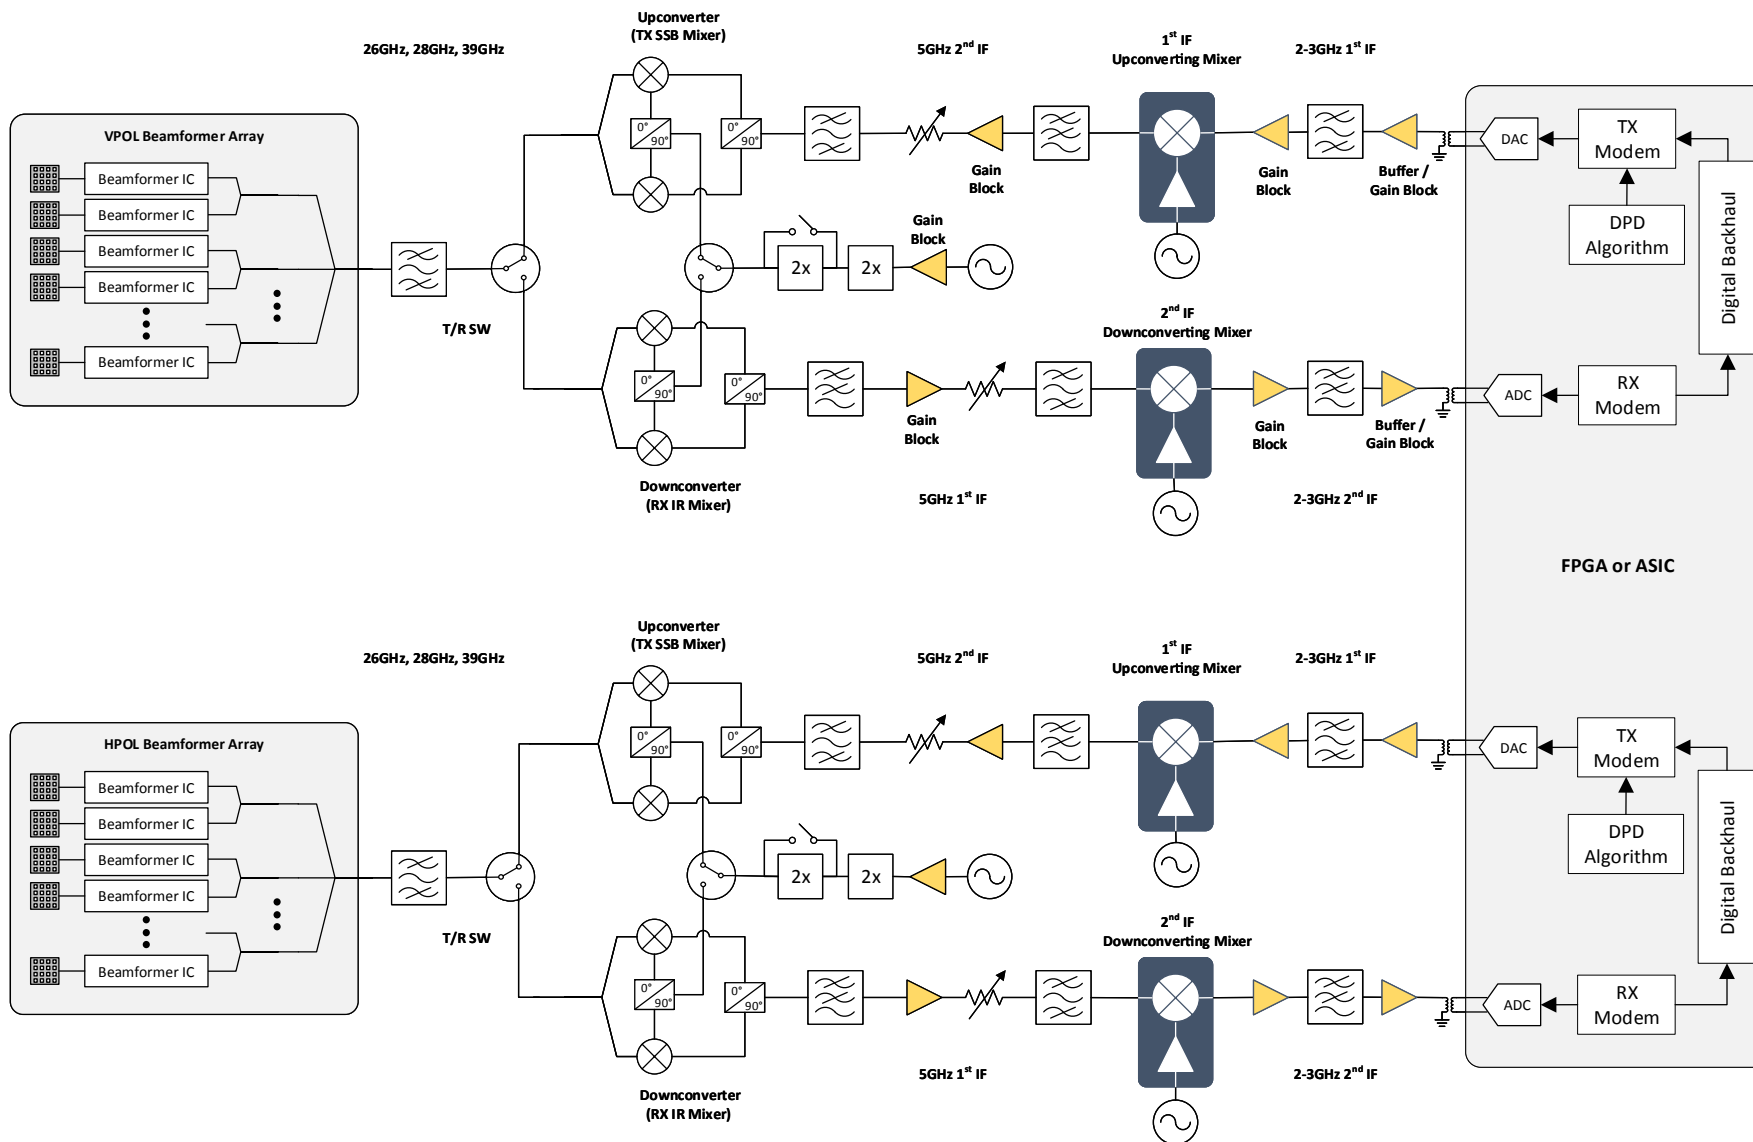



## TX First IF - High Linearity Gain Blocks

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
	Range (GHz)								
GRF2011	0.05-3.8		15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2014	0.05-3.8		15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF2010	0.05-5		10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0		15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2013	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

## TX Second IF - High Linearity Gain Blocks

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
	Range (GHz)								
GRF2012	0.05-6.0		15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2505	4.0-6.0		12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
GRF2013	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

## LO Buffers

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
	Range (GHz)								
GRF2093	1.0-6.0		21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2013	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

## Upconverting Mixers

Part Number	Description	RF/IF (GHz)	LO (GHz)	Conv Gain (dB)	IP1dB (dBm)	IIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
GRF7001	Linear TX/RX Mixer with Integrated LO Buffer	0.1-4.0	0.1-4.0	-6	>17.0	25	3.0-5.0	10-30	Ideal for both TX and RX Applications	1.5 DFN-6
GRF7042*	Double-Balanced TX/RX Mixer with Integrated LO Buffer	0.1-5.0	0.1-4	-7.5	> 13	23.5	3.0-5.0	18.3	Ideal for both TX and RX Applications, Increased Linearity, Better Spurious Suppression, Low LO Drive Levels	2.0 QFN-12

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

## Downconverting Mixers

Part Number	Description	RF/IF (GHz)	LO (GHz)	Conv Gain (dB)	IP1dB (dBm)	IIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Special Features	Package (mm)
GRF7001	Linear TX/RX Mixer with Integrated LO Buffer	0.1-4.0	0.1-4.0	-6	>17.0	25	3.0-5.0	10-30	Ideal for both TX and RX Applications	1.5 DFN-6
GRF7034*	Linear RX Mixer with Integrated LO Buffer and IF Amplifier	0.1-4.0	0.1-4.0	11.8	0	11	3	26	Ideal for RX Applications, IF Amplifier Integration	2.0 QFN-12
GRF7042*	Double-Balanced TX/RX Mixer with Integrated LO Buffer	0.1-5.0	0.1-4	-7.5	> 13	23.5	3.0-5.0	18.3	Ideal for both TX and RX Applications, Increased Linearity, Better Spurious Suppression, Low LO Drive Levels	2.0 QFN-12

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.

## RX First IF - High Linearity Gain Blocks


Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
	Range (GHz)								
GRF2093	1.0-6.0		21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2505	4.0-6.0		12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
GRF2013	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

## RX Second IF - High Linearity Gain Blocks

Part Number	Frequency		Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
	Range (GHz)								
GRF2011	0.05-3.8		15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2014	0.05-3.8		15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF2010	0.05-5		10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0		15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2013	0.05-8.0		18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6



# TDD mMIMO Solutions

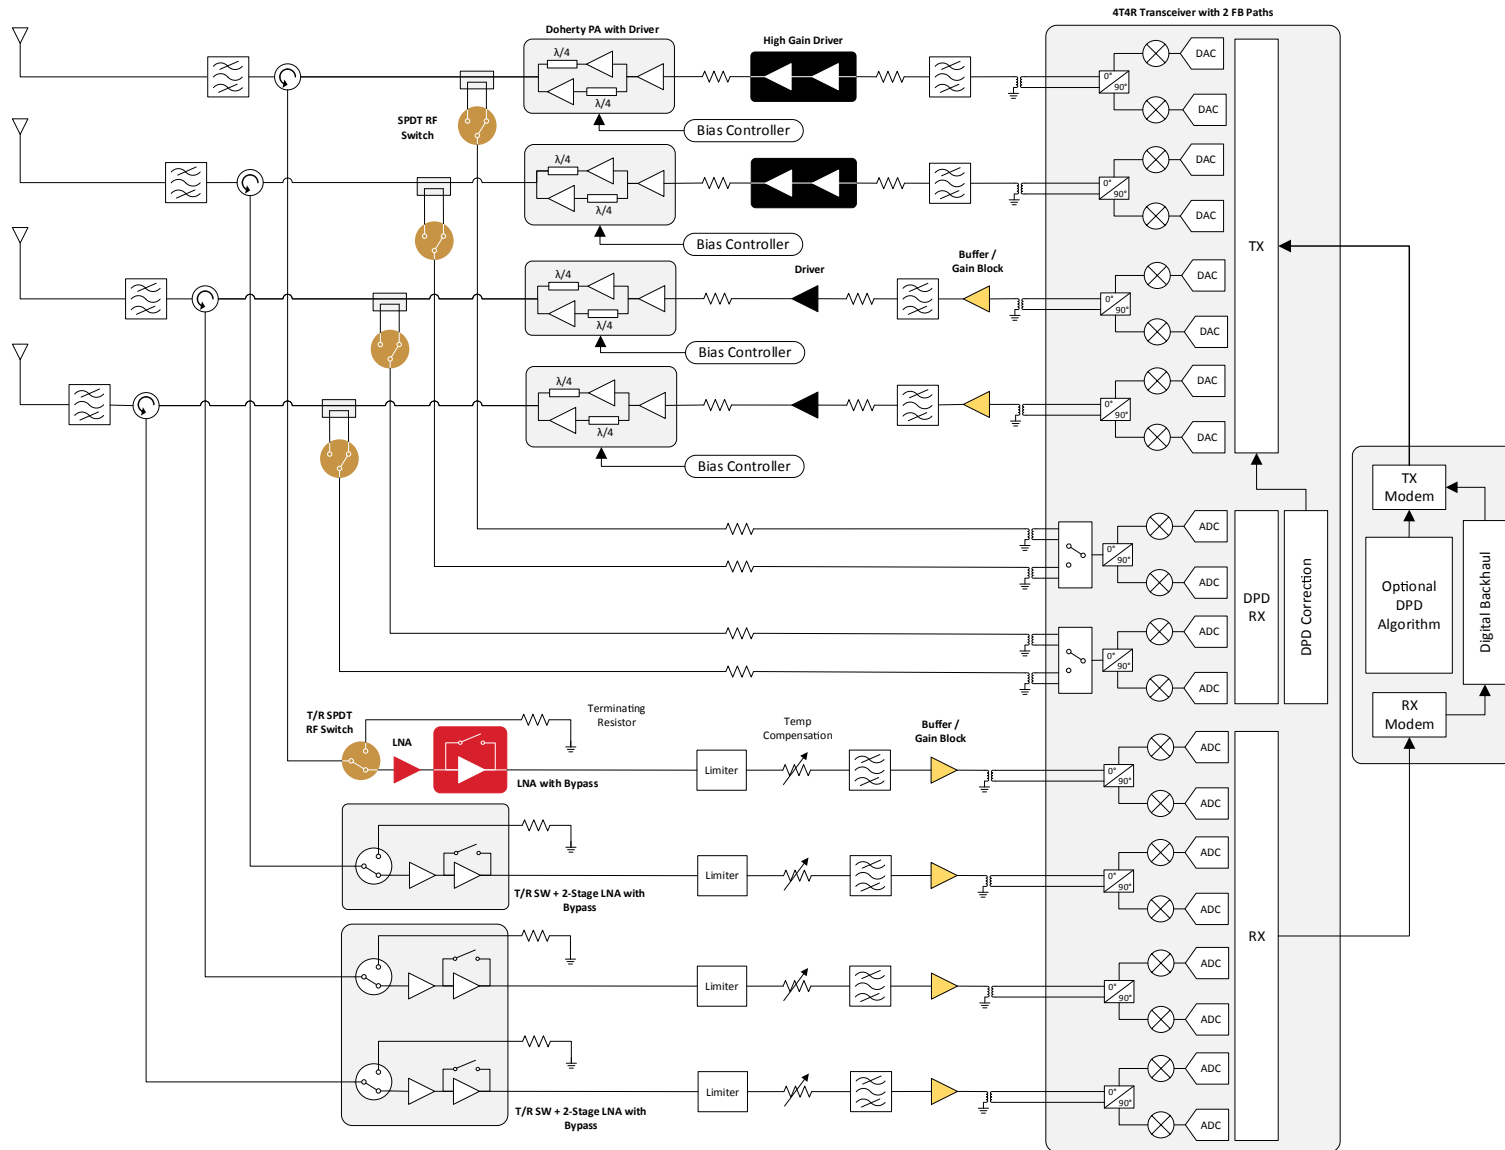

## ▶ LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2105	0.4-5.0	20.7	0.77	22.5	36	2.7-5.0	20-90	1.5 DFN-6
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2093	1.0-6.0	21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

## ▶ LNAs with Bypass

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2042	0.05-6.0	15	2.3	22	39	2.7-5.0	20-100	1.5 DFN-6
GRF4142	0.1-6.0	15.3	0.9	19.3	33	1.8-5.0	15-80	1.5 DFN-6
GRF2076*	0.6-6.0	19.5	0.85	21	37.5	2.7-5.0	20-100	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

## ▶ High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2014	0.05-3.8	15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2010	0.05-5	10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

## ▶ Linear Drivers

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2014	0.05-3.8	15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF4005	0.1-3.8	13	0.85	27.5	43	1.8-5.0	50-200	1.5 DFN-6
GRF4004	0.1-3.8	12.7	0.85	26.5	43	1.8-5.0	30-150	1.5 DFN-6
GRF4003	0.1-3.8	13	0.85	25	41	1.8-5.0	30-120	1.5 DFN-6
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF5040	0.1-3.8	15	0.85	29.8	46.3	4.5-10.0	100-250	3.0 QFN-16
GRF5020	0.1-3.8	17.3	0.8	24.5	37.2	4.5-10.0	50-200	3.0 QFN-16
GRF5123*	1.8-5.0	31/35	2	25	32	3.0-5.5	85-125	3.0 QFN-16
GRF5124*	1.8-5.0	33/38	1.7	25	38	3.0-5.5	85-125	3.0 QFN-16
GRF5010	0.05-6.0	17	0.82	24.5	38.5	4.5-9.0	50-150	3.0 QFN-16
GRF4014	0.1-6.0	16.5	0.8	24	39	3.0-8.0	30-130	1.5 DFN-6
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.


## ▶ RF Switches

Part Number	Switch Type	Frequency Range (GHz)	Path	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	Package (mm)
GRF6001*	SPDT	0.1 - 10.0	RF1 to RF2:	-1	26	50	3.0-5.0	1.5 DFN-6
			RF1 to RF1:	-1	26	50		
GRF6011	SPDT	0.1 - 6.0	RF1 to RF1:	-0.43	32	49.5	3.0-5.0	1.5 DFN-6
			RF1 to RF2:	-0.33	30.5	51		

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.

# 5G FDD mMIMO Solutions

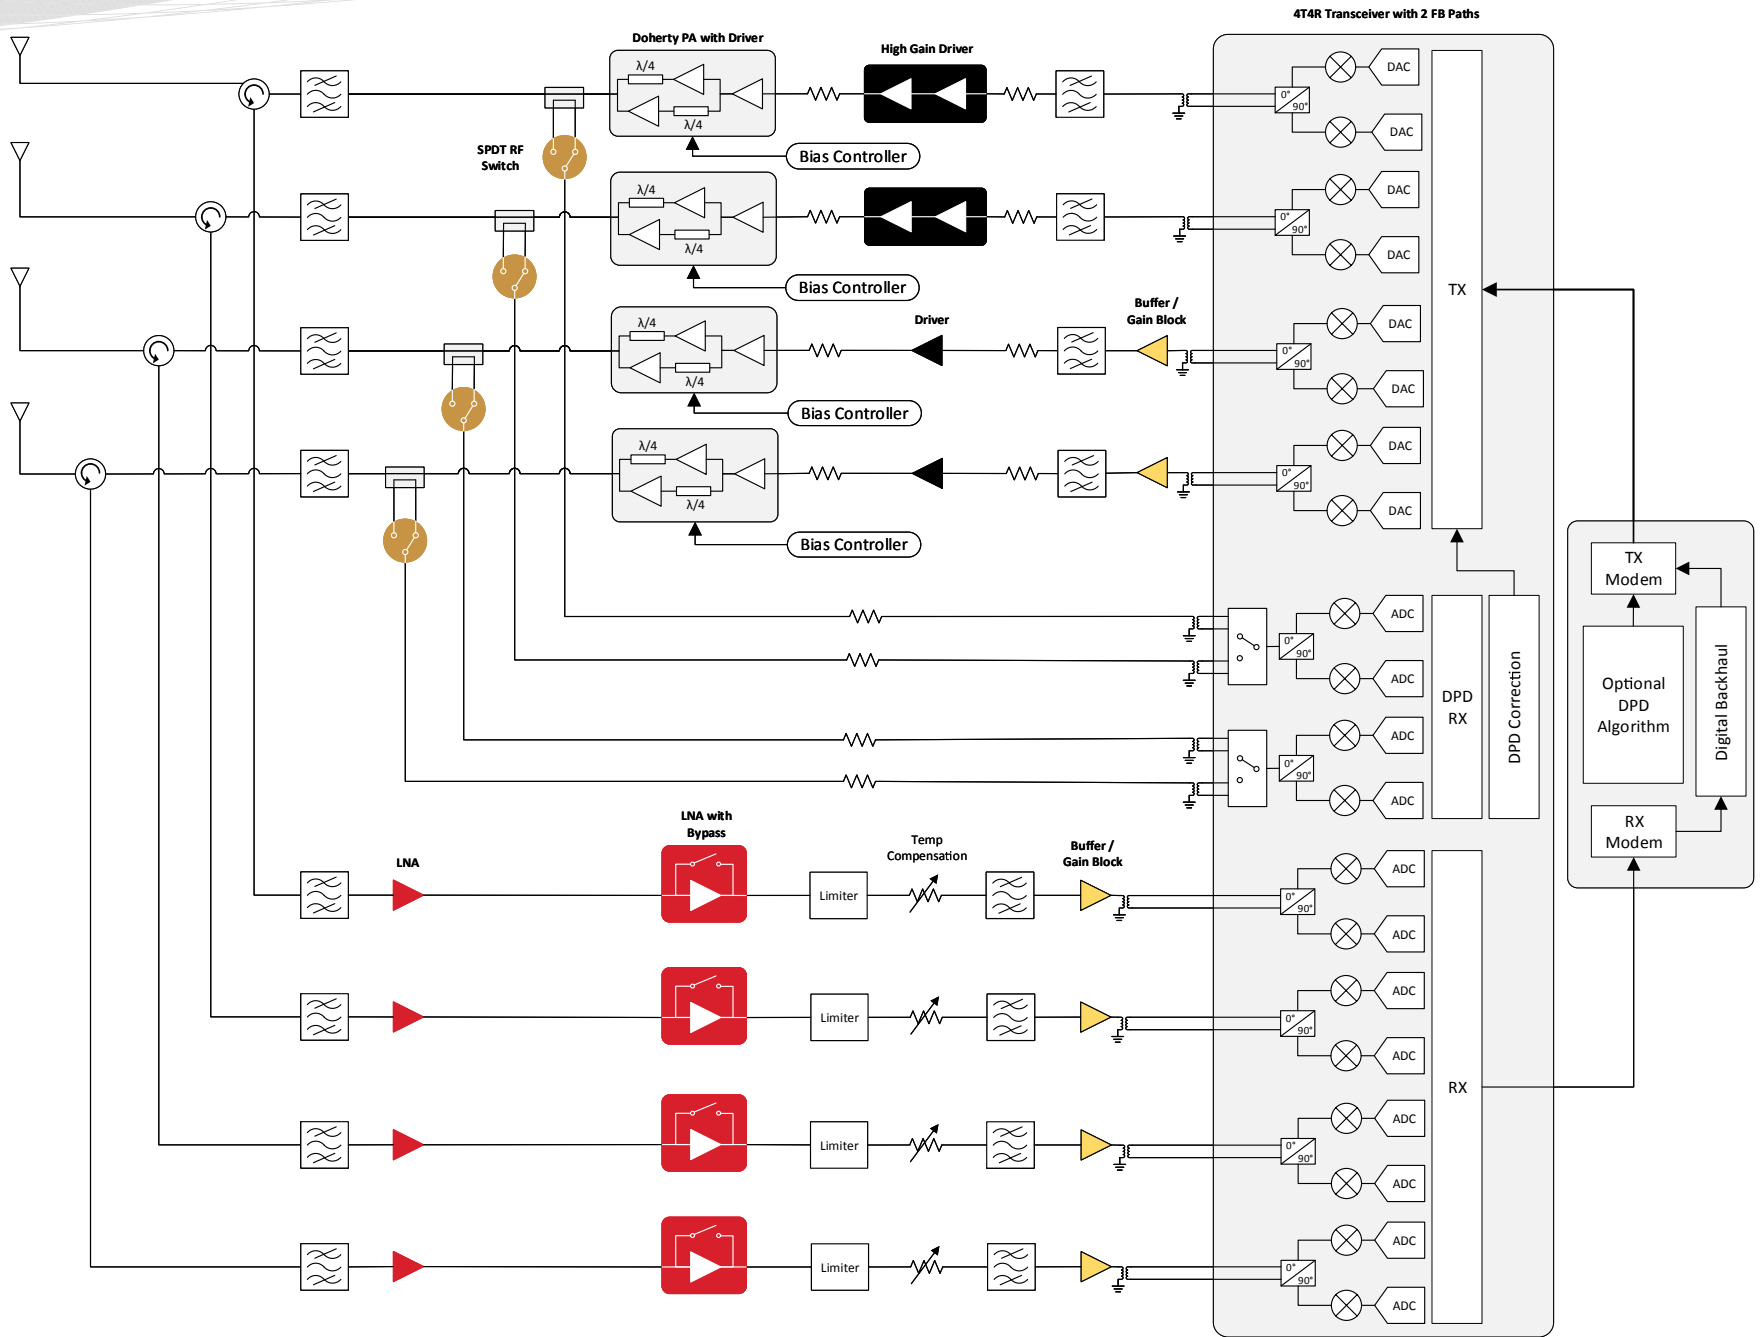

## ▶ LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2105	0.4-5.0	20.7	0.77	22.5	36	2.7-5.0	20-90	1.5 DFN-6
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2093	1.0-6.0	21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

## ▶ LNAs with Bypass

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2042	0.05-6.0	15	2.3	22	39	2.7-5.0	20-100	1.5 DFN-6
GRF4142	0.1-6.0	15.3	0.9	19.3	33	1.8-5.0	15-80	1.5 DFN-6
GRF2076*	0.6-6.0	19.5	0.85	21	37.5	2.7-5.0	20-100	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

## ▶ High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2014	0.05-3.8	15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2010	0.05-5	10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

## ▶ Linear Drivers

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2014	0.05-3.8	15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF4005	0.1-3.8	13	0.85	27.5	43	1.8-5.0	50-200	1.5 DFN-6
GRF4004	0.1-3.8	12.7	0.85	26.5	43	1.8-5.0	30-150	1.5 DFN-6
GRF4003	0.1-3.8	13	0.85	25	41	1.8-5.0	30-120	1.5 DFN-6
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF5040	0.1-3.8	15	0.85	29.8	46.3	4.5-10.0	100-250	3.0 QFN-16
GRF5020	0.1-3.8	17.3	0.8	24.5	37.2	4.5-10.0	50-200	3.0 QFN-16
GRF5123*	1.8-5.0	31/35	2	25	32	3.0-5.5	85-125	3.0 QFN-16
GRF5124*	1.8-5.0	33/38	1.7	25	38	3.0-5.5	85-125	3.0 QFN-16
GRF5010	0.05-6.0	17	0.82	24.5	38.5	4.5-9.0	50-150	3.0 QFN-16
GRF4014	0.1-6.0	16.5	0.8	24	39	3.0-8.0	30-130	1.5 DFN-6
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.


## ▶ RF Switches

Part Number	Switch Type	Frequency Range (GHz)	Path	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	Package (mm)
GRF6001*	SPDT	0.1 - 10.0	RFC to RF1:	-1	26	50	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-1	26	50		
GRF6011	SPDT	0.1 - 6.0	RFC to RF1:	-0.43	32	49.5	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-0.33	30.5	51		

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.



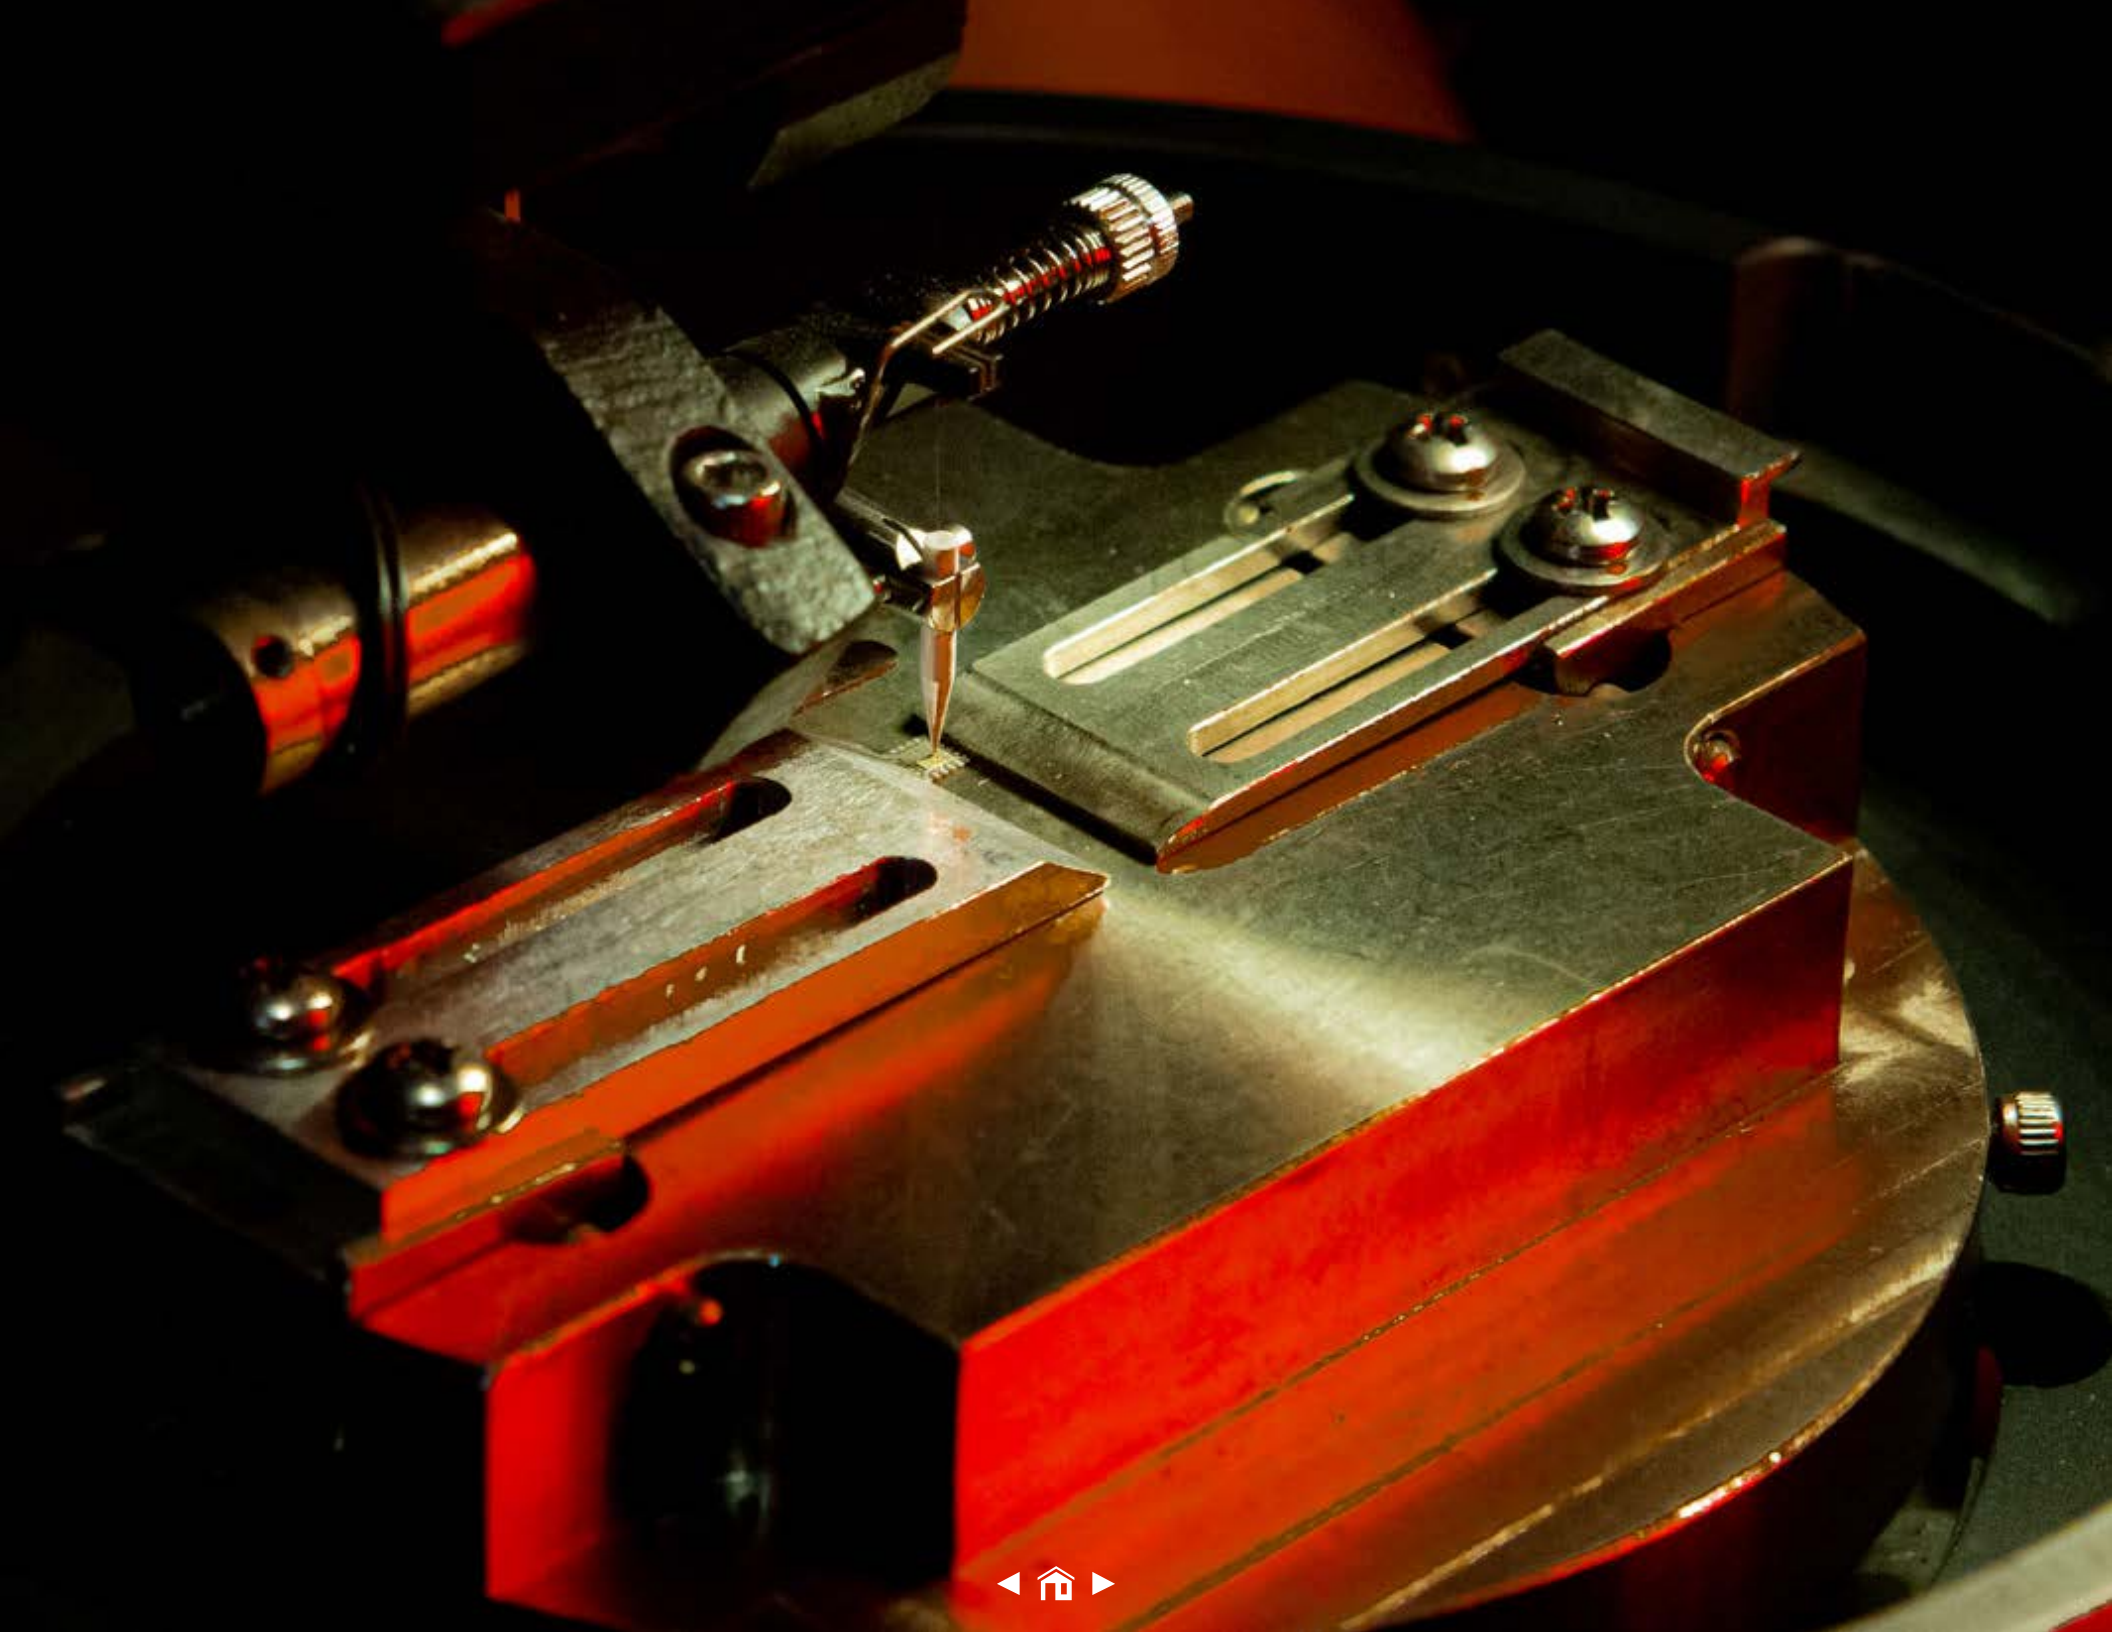




# ***4G WIRELESS INFRASTRUCTURE SOLUTIONS***





# 4G TDD Macrocell Solutions

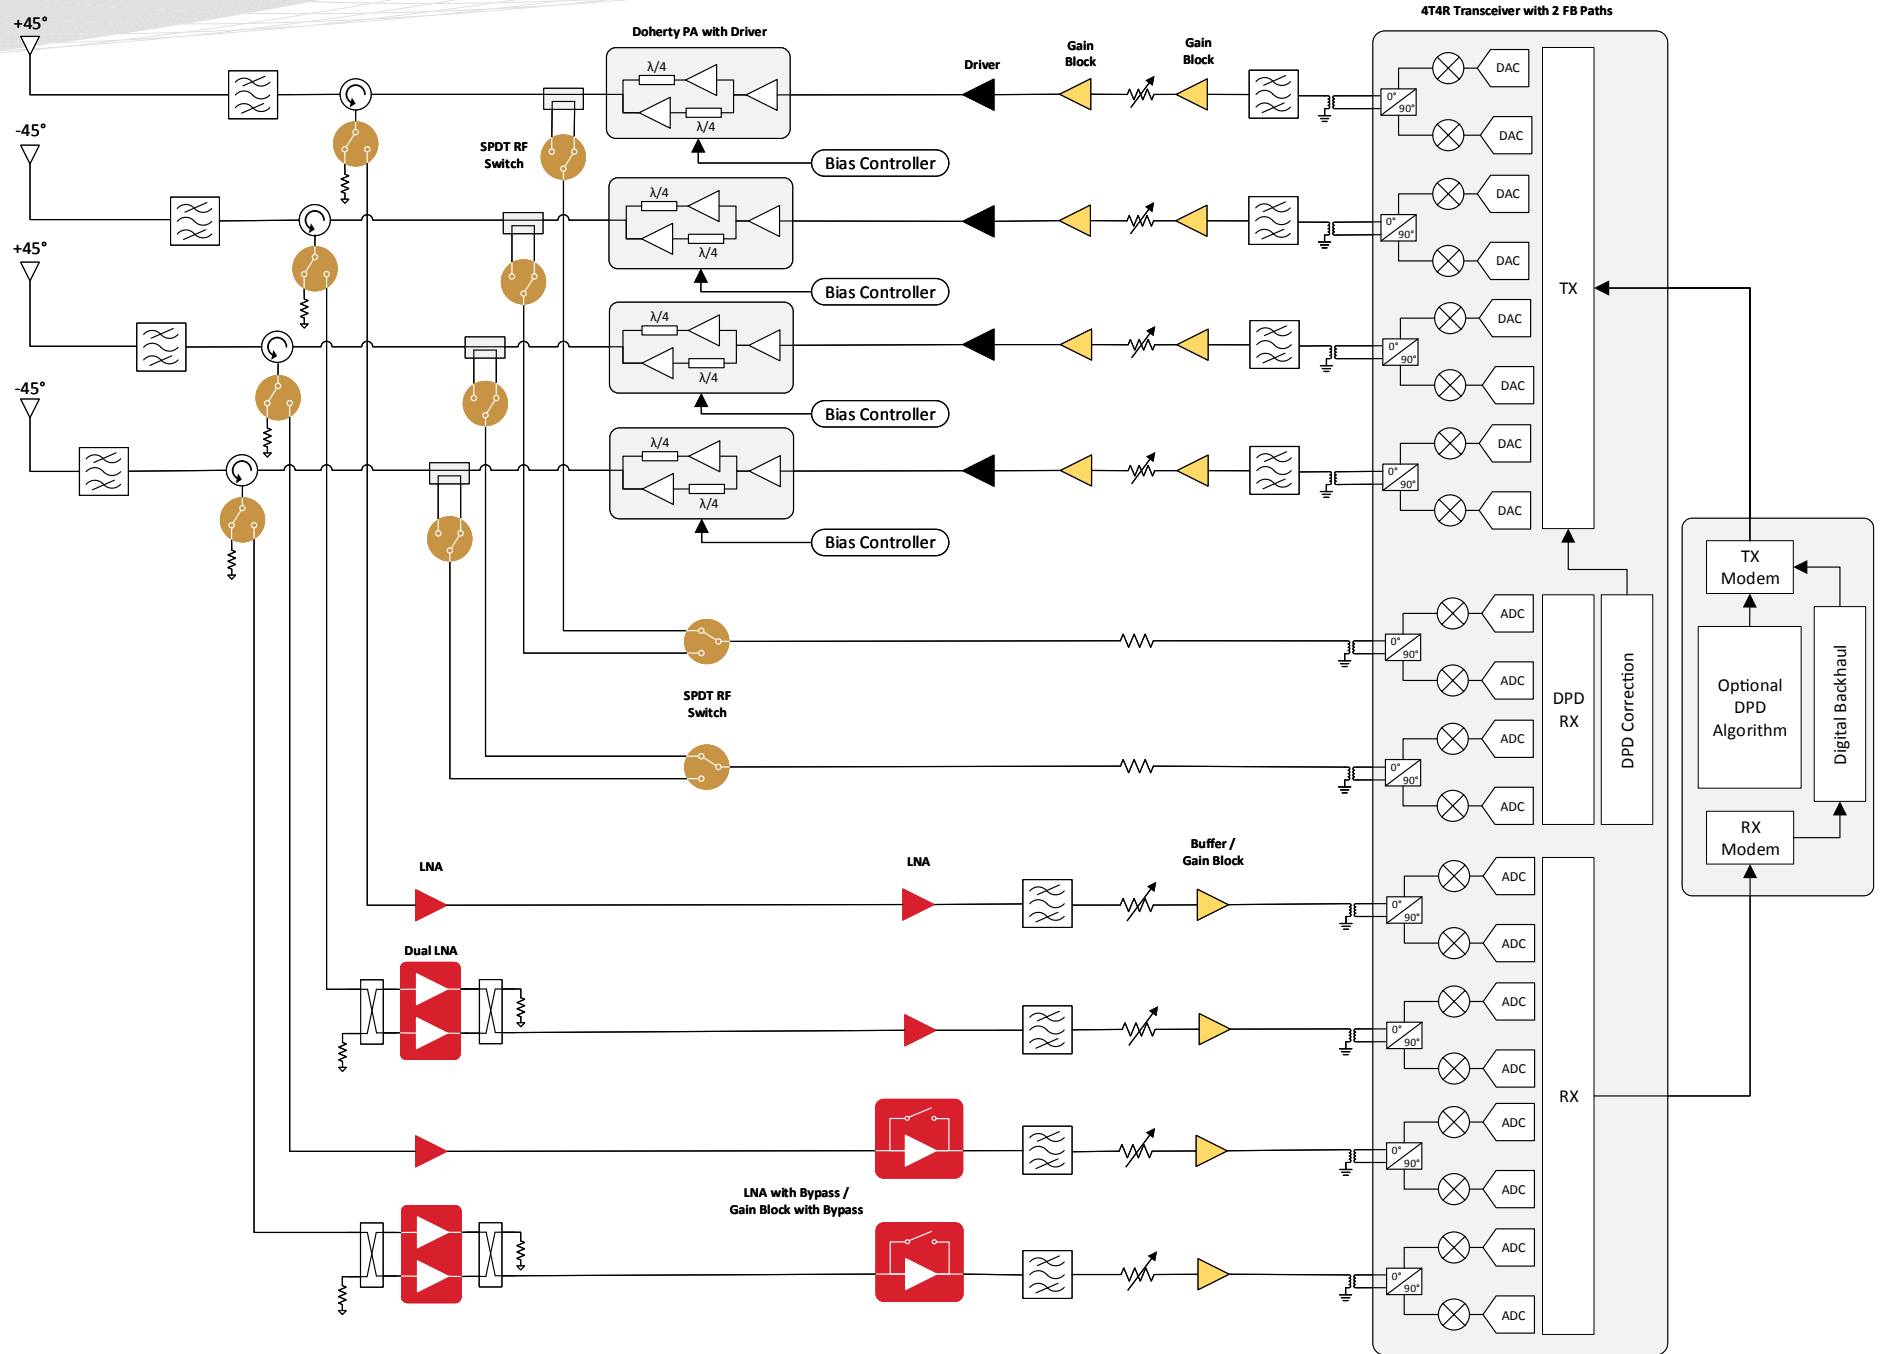

## ▶ LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2105	0.4-5.0	20.7	0.77	22.5	36	2.7-5.0	20-90	1.5 DFN-6
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2093	1.0-6.0	21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

## ▶ Dual LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2078*	0.7-2.7	18.8	0.56	23.9	40.7	5	150	2.0 DFN-8

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

## ▶ LNAs with Bypass

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2042	0.05-6.0	15	2.3	22	39	2.7-5.0	20-100	1.5 DFN-6
GRF4142	0.1-6.0	15.3	0.9	19.3	33	1.8-5.0	15-80	1.5 DFN-6
GRF2076*	0.6-6.0	19.5	0.85	21	37.5	2.7-5.0	20-100	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

## ▶ High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2014	0.05-3.8	15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2010	0.05-5	10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

## ▶ Linear Drivers

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2014	0.05-3.8	15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF4005	0.1-3.8	13	0.85	27.5	43	1.8-5.0	50-200	1.5 DFN-6
GRF4004	0.1-3.8	12.7	0.85	26.5	43	1.8-5.0	30-150	1.5 DFN-6
GRF4003	0.1-3.8	13	0.85	25	41	1.8-5.0	30-120	1.5 DFN-6
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF5040	0.1-3.8	15	0.85	29.8	46.3	4.5-10.0	100-250	3.0 QFN-16
GRF5020	0.1-3.8	17.3	0.8	24.5	37.2	4.5-10.0	50-200	3.0 QFN-16
GRF5123*	1.8-5.0	31/35	2	25	32	3.0-5.5	85-125	3.0 QFN-16
GRF5124*	1.8-5.0	33/38	1.7	25	38	3.0-5.5	85-125	3.0 QFN-16
GRF5010	0.05-6.0	17	0.82	24.5	38.5	4.5-9.0	50-150	3.0 QFN-16
GRF4014	0.1-6.0	16.5	0.8	24	39	3.0-8.0	30-130	1.5 DFN-6
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

## ▶ RF Switches


Part Number	Switch Type	Frequency Range (GHz)	Path	Gain	OP1dB	OIP3	V <sub>DD</sub> Range (V)	Package (mm)
				(dB)	(dBm)	(dBm)		
GRF6001*	SPDT	0.1 - 10.0	RFC to RF1:	-1	26	50	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-1	26	50		
GRF6011	SPDT	0.1 - 6.0	RFC to RF1:	-0.43	32	49.5	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-0.33	30.5	51		

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.



# 4G FDD Macrocell Solutions

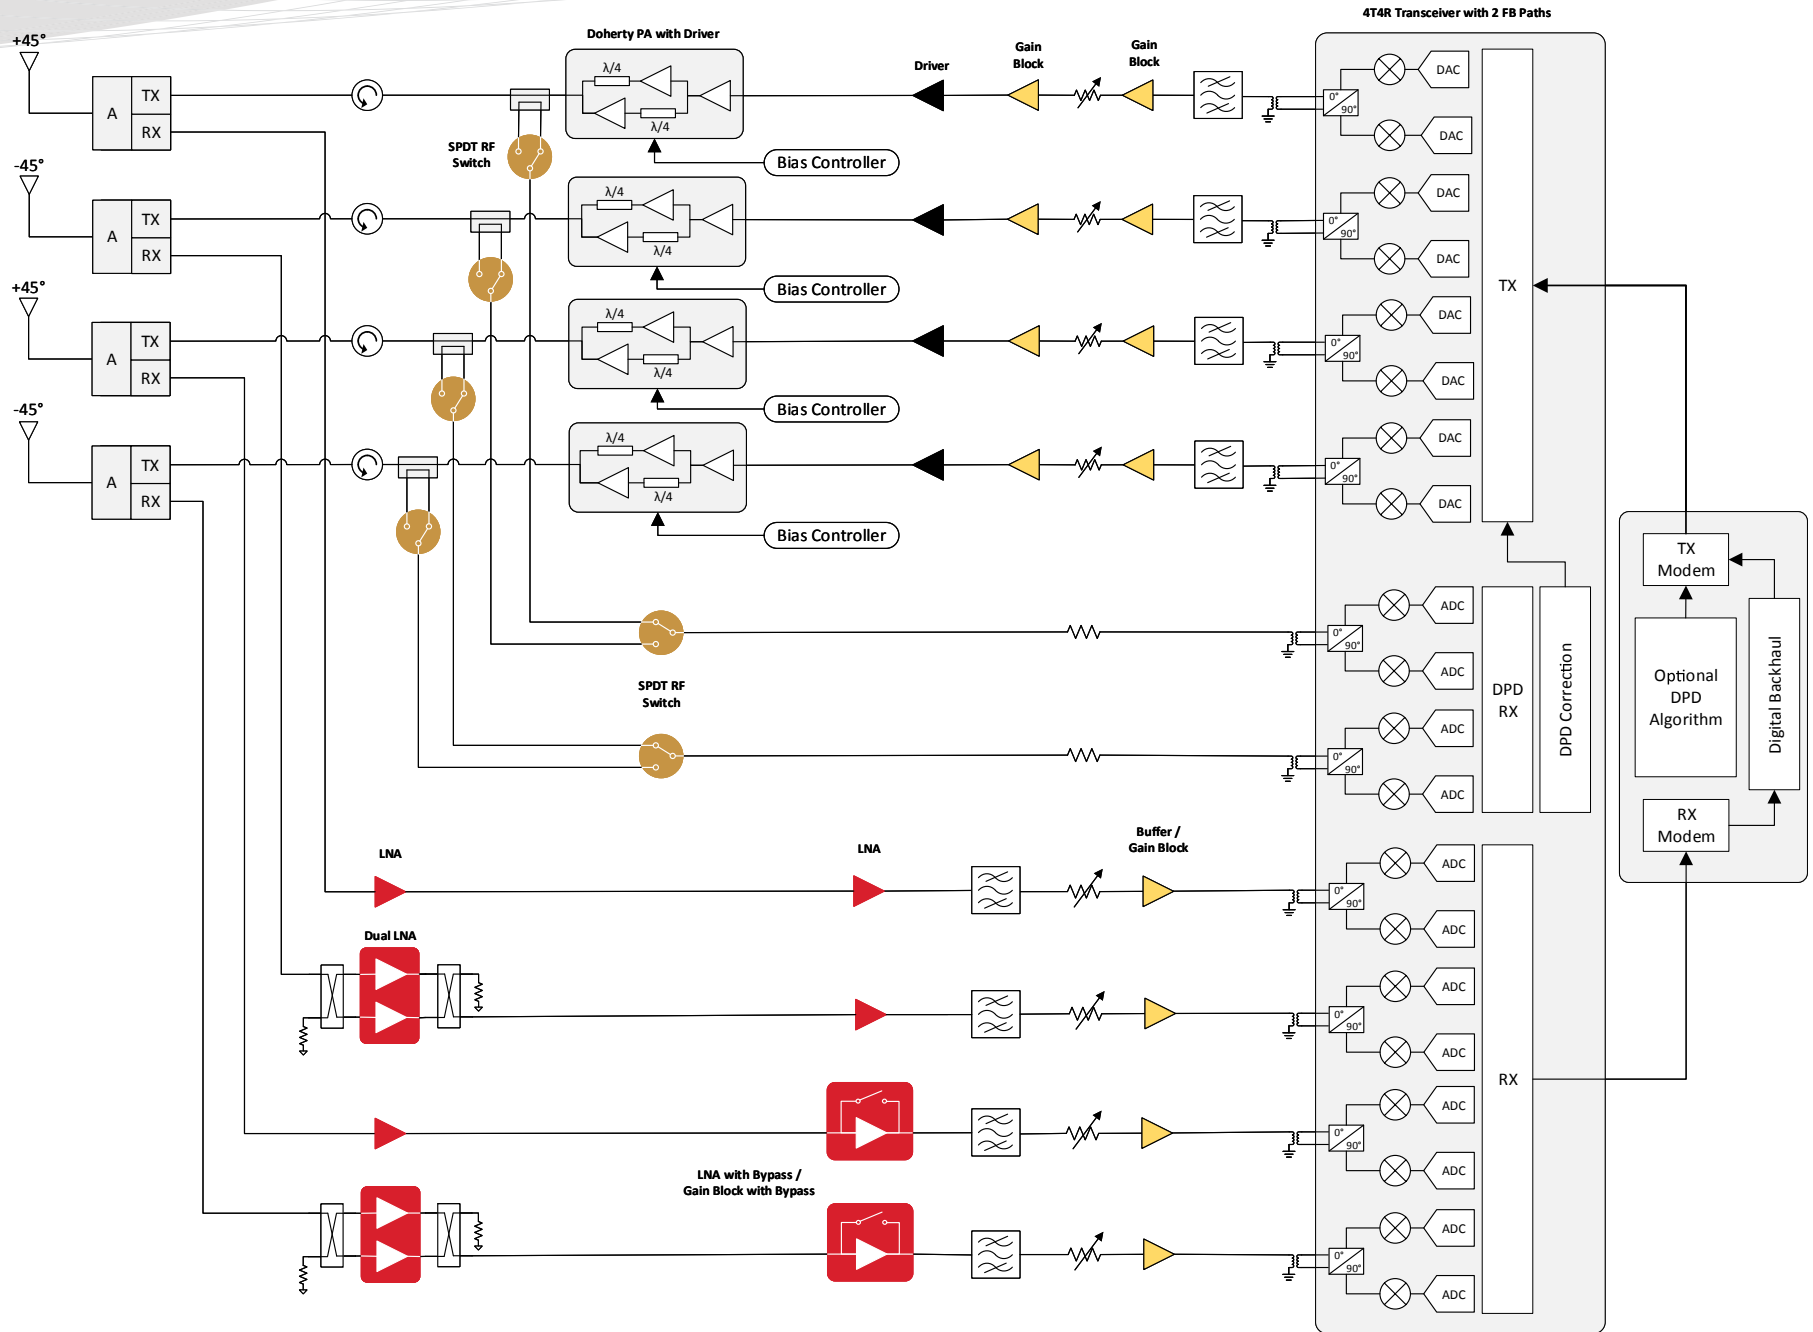

## ▶ LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2105	0.4-5.0	20.7	0.77	22.5	36	2.7-5.0	20-90	1.5 DFN-6
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2093	1.0-6.0	21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

## ▶ Dual LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2078*	0.7-2.7	18.8	0.56	23.9	40.7	5	150	2.0 DFN-8

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

## ▶ LNAs with Bypass

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2042	0.05-6.0	15	2.3	22	39	2.7-5.0	20-100	1.5 DFN-6
GRF4142	0.1-6.0	15.3	0.9	19.3	33	1.8-5.0	15-80	1.5 DFN-6
GRF2076*	0.6-6.0	19.5	0.85	21	37.5	2.7-5.0	20-100	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

## ▶ High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2014	0.05-3.8	15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2010	0.05-5	10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

## ▶ Linear Drivers

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2014	0.05-3.8	15.9	3.3	24	43.5	2.7-8.0	50-180	1.5 DFN-6
GRF4005	0.1-3.8	13	0.85	27.5	43	1.8-5.0	50-200	1.5 DFN-6
GRF4004	0.1-3.8	12.7	0.85	26.5	43	1.8-5.0	30-150	1.5 DFN-6
GRF4003	0.1-3.8	13	0.85	25	41	1.8-5.0	30-120	1.5 DFN-6
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF5040	0.1-3.8	15	0.85	29.8	46.3	4.5-10.0	100-250	3.0 QFN-16
GRF5020	0.1-3.8	17.3	0.8	24.5	37.2	4.5-10.0	50-200	3.0 QFN-16
GRF5123*	1.8-5.0	31/35	2	25	32	3.0-5.5	85-125	3.0 QFN-16
GRF5124*	1.8-5.0	33/38	1.7	25	38	3.0-5.5	85-125	3.0 QFN-16
GRF5010	0.05-6.0	17	0.82	24.5	38.5	4.5-9.0	50-150	3.0 QFN-16
GRF4014	0.1-6.0	16.5	0.8	24	39	3.0-8.0	30-130	1.5 DFN-6
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

## RF Switches

Part Number	Switch Type	Frequency Range (GHz)	Path	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	Package (mm)
GRF6001*	SPDT	0.1 - 10.0	RFC to RF1:	-1	26	50	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-1	26	50		
GRF6011	SPDT	0.1 - 6.0	RFC to RF1:	-0.43	32	49.5	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-0.33	30.5	51		

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.








# ***SMALL CELL SOLUTIONS***





# Small Cell Solutions

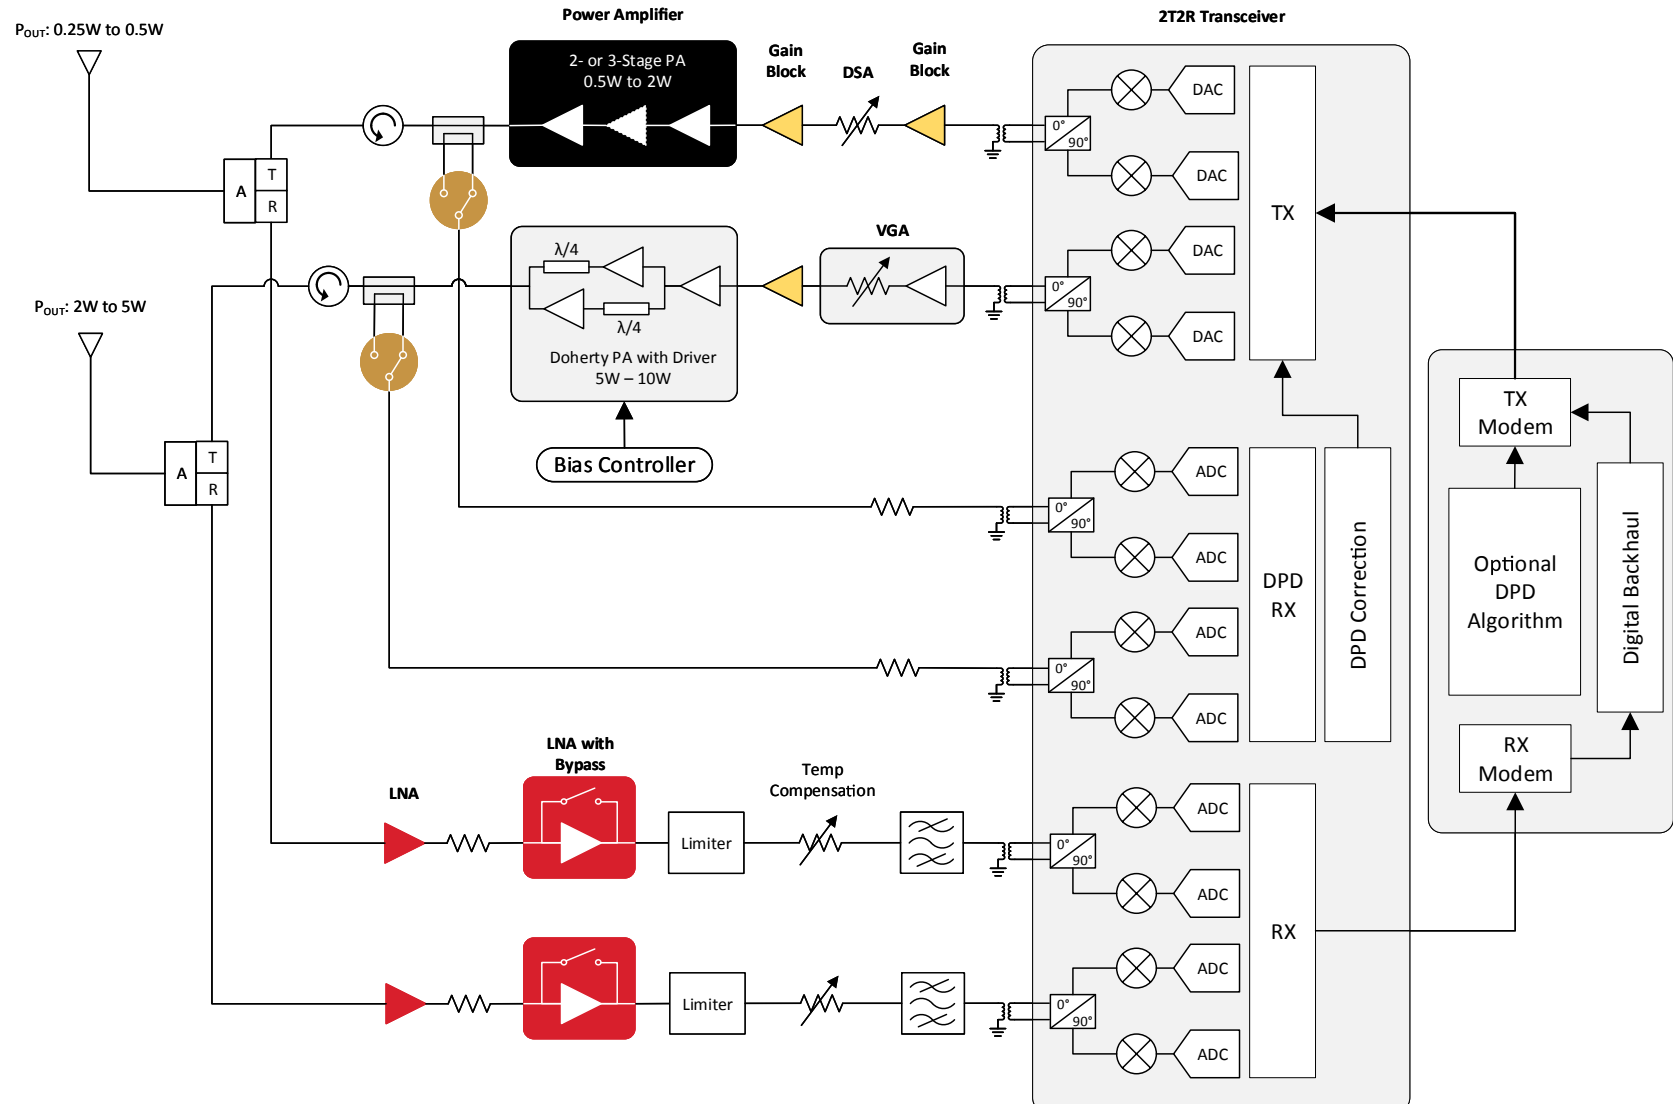

## ▶ LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2080	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2071	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2081	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2093	1.0-6.0	21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

## ▶ LNAs with Bypass

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2042	0.05-6.0	15	2.3	22	39	2.7-5.0	20-100	1.5 DFN-6
GRF4142	0.1-6.0	15.3	0.9	19.3	33	1.8-5.0	15-80	1.5 DFN-6
GRF2076*	0.6-6.0	19.5	0.85	21	37.5	2.7-5.0	20-100	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

## ▶ High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2080	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2071	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2081	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF4005	0.1-3.8	13	0.85	27.5	43	1.8-5.0	50-200	1.5 DFN-6
GRF4004	0.1-3.8	12.7	0.85	26.5	43	1.8-5.0	30-150	1.5 DFN-6
GRF4003	0.1-3.8	13	0.85	25	41	1.8-5.0	30-120	1.5 DFN-6
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2010	0.05-5.0	10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

## ▶ Linear Power Amplifiers (Discretes & Modules)

Part Number	Frequency Range (GHz)	Rated P <sub>OUT</sub> <sup>1</sup> (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> (V)	I <sub>DD</sub> (mA)	Package (mm)
GRF5506	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 <sup>2</sup>	3.0 QFN-16
GRF5507	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 <sup>2</sup>	3.0 QFN-16
GRF5508	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 <sup>2</sup>	3.0 QFN-16
GRF5510	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 <sup>2</sup>	3.0 QFN-16
GRF5517	1.7-1.8	22.5	27.5	5.4	32	48	5	305 <sup>2</sup>	3.0 QFN-16
GRF5518	1.8-1.91	23	27	4.2	32	45	5	310 <sup>2</sup>	3.0 QFN-16
GRF5519	1.92-2.0	23	26.5	4.1	32	45	5	310 <sup>2</sup>	3.0 QFN-16
GRF5521*	2.11-2.17	23	31	3.1	33	45	5	250 <sup>2</sup>	3.0 QFN-16
GRF5406* <sup>3</sup>	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 <sup>2</sup>	3.5 LFM
GRF5407* <sup>3</sup>	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 <sup>2</sup>	3.5 LFM
GRF5408* <sup>3</sup>	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 <sup>2</sup>	3.5 LFM
GRF5410* <sup>3</sup>	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 <sup>2</sup>	3.5 LFM
GRF5417* <sup>3</sup>	1.7-1.8	22.5	27.5	5.4	32	48	5	305 <sup>2</sup>	3.5 LFM
GRF5418* <sup>3</sup>	1.8-1.91	23	27	4.2	32	45	5	310 <sup>2</sup>	3.5 LFM
GRF5419* <sup>3</sup>	1.92-2.0	23	26.5	4.1	32	45	5	310 <sup>2</sup>	3.5 LFM
GRF5421* <sup>3</sup>	2.11-2.17	23	31	3.1	33	45	5	250 <sup>2</sup>	3.5 LFM

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Rated P<sub>OUT</sub> Yields Better Than -45dBc ACLR (LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR).

Note 2: I<sub>DD</sub> with RF power applied.

Note 3: Module with Internal Matching.


## ▶ RF Switches

Part Number	Switch Type	Frequency Range (GHz)	Path	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	Package (mm)
GRF6001*	SPDT	0.1 - 10.0	RFC to RF1: RFC to RF2:	-1 -1	26 26	50 50	3.0-5.0	1.5 DFN-6
GRF6011	SPDT	0.1 - 6.0	RFC to RF1: RFC to RF2:	-0.43 -0.33	32 30.5	49.5 51	3.0-5.0	1.5 DFN-6

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.

# **Picocell/Femtocell Solutions**

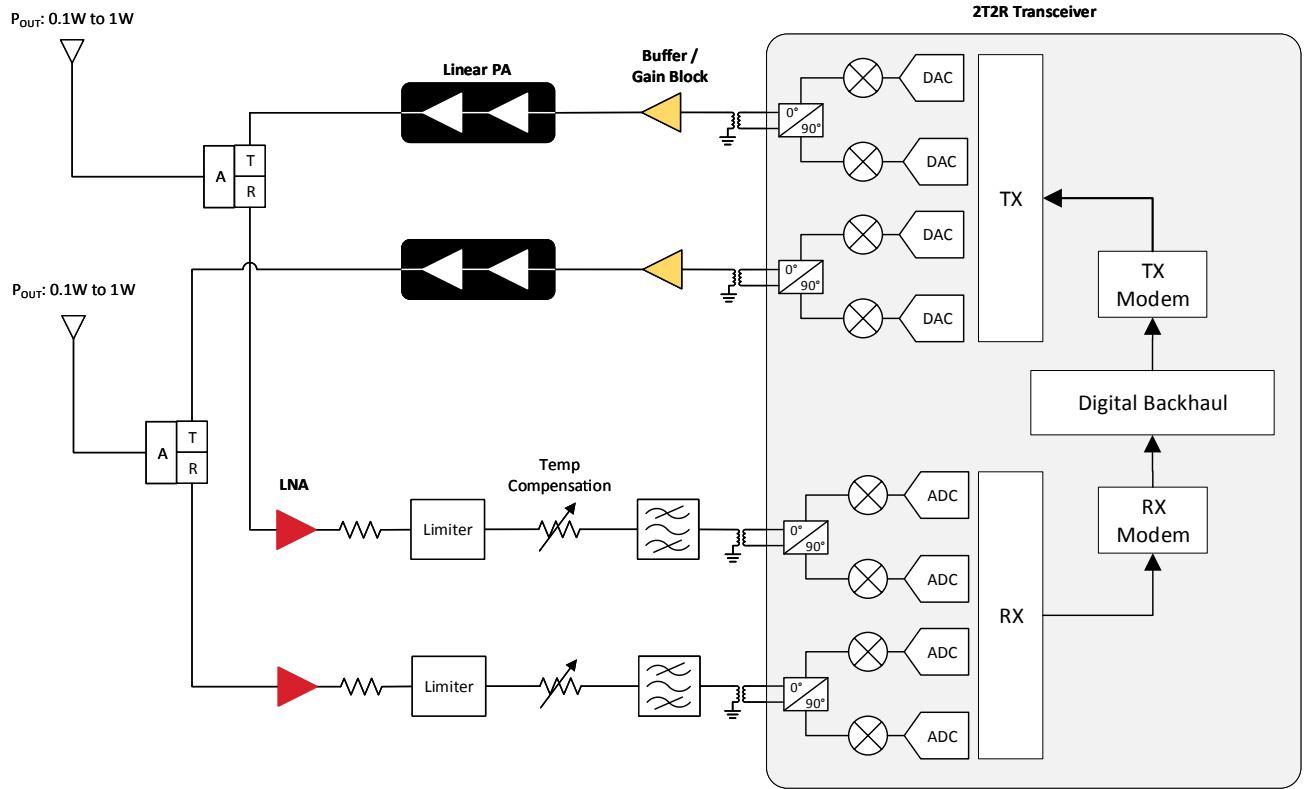

## ▶ LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2080	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2071	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2081	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2074	1.0-6.0	20.5	0.35	17.5	35.5	2.7-5.0	20-100	2.0 DFN-8
GRF2093	1.0-6.0	21	0.38	19	36	2.7-5.0	30-100	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

## ▶ High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2080	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2071	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2081	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF4005	0.1-3.8	13	0.85	27.5	43	1.8-5.0	50-200	1.5 DFN-6
GRF4004	0.1-3.8	12.7	0.85	26.5	43	1.8-5.0	30-150	1.5 DFN-6
GRF4003	0.1-3.8	13	0.85	25	41	1.8-5.0	30-120	1.5 DFN-6
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF2072	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2082	1.5-3.8	19.8	0.55	20	37.5	2.7-5.0	20-100	2.0 DFN-8
GRF2010	0.05-5.0	10.5	3.1	20.5	32.5	2.7-8.0	15-100	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2083	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

## ▶ Linear Power Amplifiers (Discretes & Modules)

Part Number	Frequency Range (GHz)	Rated P <sub>OUT</sub> <sup>1</sup> (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> (V)	I <sub>DD</sub> (mA)	Package (mm)
GRF5506	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 <sup>2</sup>	3.0 QFN-16
GRF5507	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 <sup>2</sup>	3.0 QFN-16
GRF5508	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 <sup>2</sup>	3.0 QFN-16
GRF5510	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 <sup>2</sup>	3.0 QFN-16
GRF5517	1.7-1.8	22.5	27.5	5.4	32	48	5	305 <sup>2</sup>	3.0 QFN-16
GRF5518	1.8-1.91	23	27	4.2	32	45	5	310 <sup>2</sup>	3.0 QFN-16
GRF5519	1.92-2.0	23	26.5	4.1	32	45	5	310 <sup>2</sup>	3.0 QFN-16
GRF5521*	2.11-2.17	23	31	3.1	33	45	5	250 <sup>2</sup>	3.0 QFN-16
GRF5406* <sup>3</sup>	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 <sup>2</sup>	3.5 LFM
GRF5407* <sup>3</sup>	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 <sup>2</sup>	3.5 LFM
GRF5408* <sup>3</sup>	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 <sup>2</sup>	3.5 LFM
GRF5410* <sup>3</sup>	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 <sup>2</sup>	3.5 LFM
GRF5417* <sup>3</sup>	1.7-1.8	22.5	27.5	5.4	32	48	5	305 <sup>2</sup>	3.5 LFM
GRF5418* <sup>3</sup>	1.8-1.91	23	27	4.2	32	45	5	310 <sup>2</sup>	3.5 LFM
GRF5419* <sup>3</sup>	1.92-2.0	23	26.5	4.1	32	45	5	310 <sup>2</sup>	3.5 LFM
GRF5421* <sup>3</sup>	2.11-2.17	23	31	3.1	33	45	5	250 <sup>2</sup>	3.5 LFM

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Rated P<sub>OUT</sub> Yields Better Than -45dBc ACLR (LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR).

Note 2: I<sub>DD</sub> with RF power applied.

Note 3: Module with Internal Matching.



Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.






# ***CELLULAR REPEATERS/BOOSTERS/DAS SOLUTIONS***





# Multi-Band Cellular Repeater/Booster/DAS Solutions

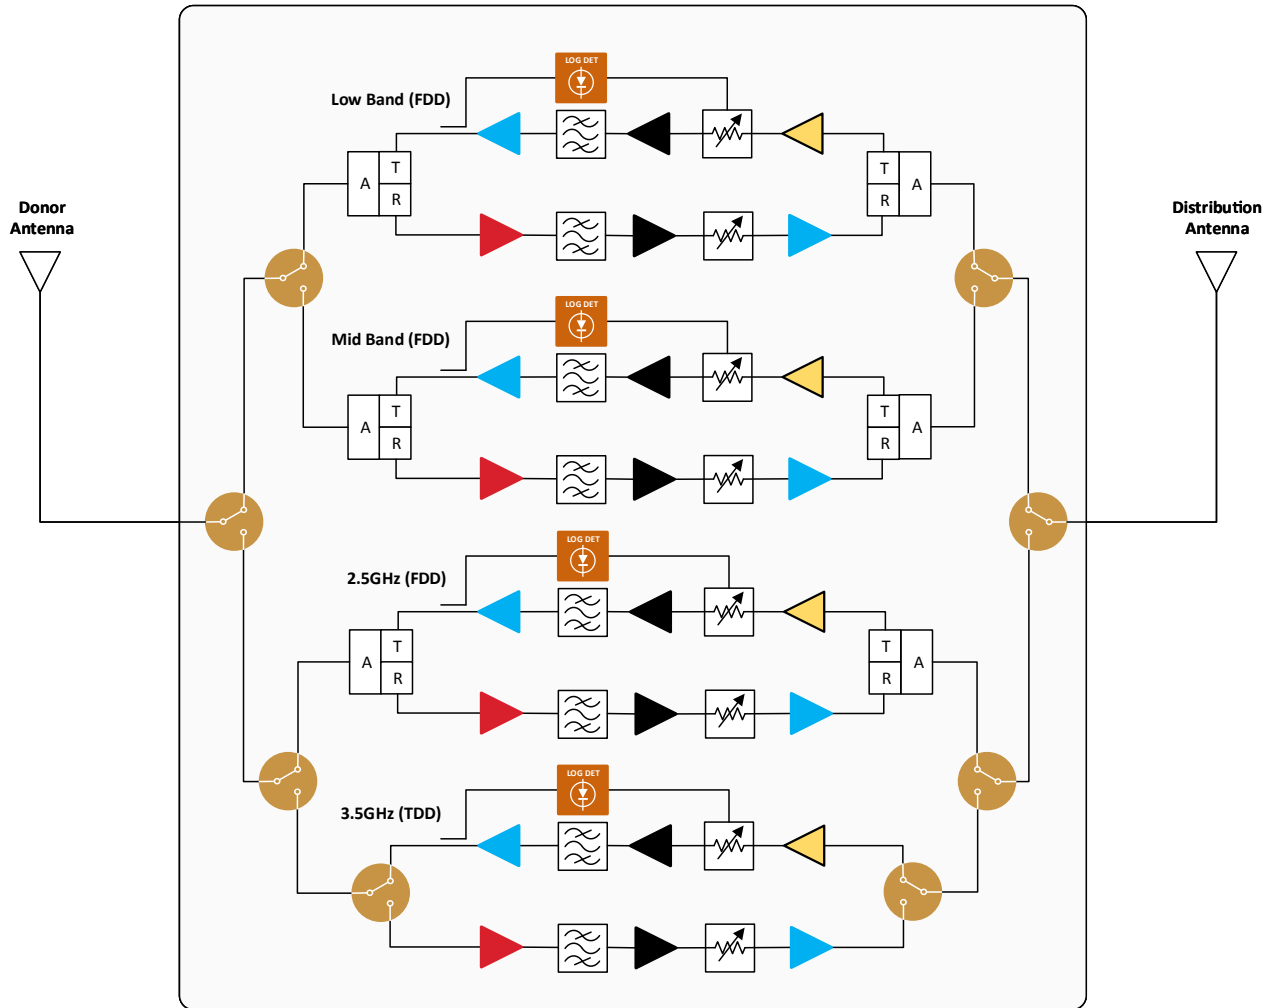

## ▶ LNAs

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2070	0.1-1.5	20.8	0.35	20	39.5	2.7-5.0	20-100	2.0 DFN-8
GRF2071	0.7-2.7	19	0.35	21	38	2.7-5.0	20-100	2.0 DFN-8
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF2100	0.1-3.8	16.5	0.8	10	19	1.8-5.0	6-30	1.5 DFN-6
GRF2108*	0.1-3.8	17	0.9	17.5	19	1.8-5.0	4-20	1.5 DFN-6
GRF2106	0.1-4.2	20.5	0.8	12	26	2.7-5.0	8-30	1.5 DFN-6
GRF2105	0.4-5.0	20.7	0.77	22.5	36	2.7-5.0	20-90	1.5 DFN-6
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8
GRF2073	2.0-6.0	18.6	0.65	18	35	2.7-5.0	20-100	2.0 DFN-8

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

## ▶ High Linearity Gain Blocks

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2011	0.05-3.8	15.2	2	22.7	40	2.7-8.0	15-100	1.5 DFN-6
GRF2100	0.1-3.8	16.5	0.8	10	19	1.8-5.0	6-30	1.5 DFN-6
GRF2373	0.1-3.8	18.5	1.2	12.5	25	2.7-5.0	10-25	1.5 DFN-6
GRF4002	0.1-3.8	15	0.85	23.5	36.5	1.8-5.0	20-80	1.5 DFN-6
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

## ▶ Linear Drivers

Part Number	Frequency Range (GHz)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> Range (mA)	Package (mm)
GRF2012	0.05-6.0	15	2.7	22.5	40	2.7-8.0	30-120	1.5 DFN-6
GRF5511	0.7-6.0	20.1	1.5	26.1	39.6	4.5-9.0	50-200	3.0 QFN-16
GRF2505	4.0-6.0	12.5	1.2	19	30	1.8-5.0	20-60	1.5 DFN-6
GRF2013	0.05-8.0	18.5	1.3	22.5	38.5	2.7-8.0	15-100	1.5 DFN-6

Most devices include detailed performance curves taken over the rated frequency of operation. To access these parametric charts, visit the respective product page at guerrilla-rf.com.

## ▶ Linear Power Amplifiers (Discretos & Modules)

Part Number	Frequency Range (GHz)	Rated P <sub>OUT</sub> <sup>1</sup> (dBm)	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> (V)	I <sub>DD</sub> (mA)	Package (mm)
GRF5506	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 <sup>2</sup>	3.0 QFN-16
GRF5507	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 <sup>2</sup>	3.0 QFN-16
GRF5508	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 <sup>2</sup>	3.0 QFN-16
GRF5510	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 <sup>2</sup>	3.0 QFN-16
GRF5517	1.7-1.8	22.5	27.5	5.4	32	48	5	305 <sup>2</sup>	3.0 QFN-16
GRF5518	1.8-1.91	23	27	4.2	32	45	5	310 <sup>2</sup>	3.0 QFN-16
GRF5519	1.92-2.0	23	26.5	4.1	32	45	5	310 <sup>2</sup>	3.0 QFN-16
GRF5521*	2.11-2.17	23	31	3.1	33	45	5	250 <sup>2</sup>	3.0 QFN-16
GRF5406* <sup>3</sup>	0.66-0.72	24	28.4	4.5	33.3	46.8	5	290 <sup>2</sup>	3.5 LFM
GRF5407* <sup>3</sup>	0.7-0.8	24	30.5	4.5	33.4	47.3	5	305 <sup>2</sup>	3.5 LFM
GRF5408* <sup>3</sup>	0.8-0.9	24	29.7	4.5	33.1	45.4	5	302 <sup>2</sup>	3.5 LFM
GRF5410* <sup>3</sup>	0.88-0.96	24	29.2	4.5	33.8	46.1	5	352 <sup>2</sup>	3.5 LFM
GRF5417* <sup>3</sup>	1.7-1.8	22.5	27.5	5.4	32	48	5	305 <sup>2</sup>	3.5 LFM
GRF5418* <sup>3</sup>	1.8-1.91	23	27	4.2	32	45	5	310 <sup>2</sup>	3.5 LFM
GRF5419* <sup>3</sup>	1.92-2.0	23	26.5	4.1	32	45	5	310 <sup>2</sup>	3.5 LFM
GRF5421* <sup>3</sup>	2.11-2.17	23	31	3.1	33	45	5	250 <sup>2</sup>	3.5 LFM

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

Note 1: Rated P<sub>OUT</sub> Yields Better Than -45dBc ACLR (LTE 20MHz 100RB TM1.1 Downlink Waveform with 9.8dB PAR).

Note 2: I<sub>DD</sub> with RF power applied.

Note 3: Module with Internal Matching.

## RF Switches

Part Number	Switch Type	Frequency Range (GHz)	Path	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	V <sub>DD</sub> Range (V)	Package (mm)
GRF6001*	SPDT	0.1 - 10.0	RFC to RF1:	-1	26	50	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-1	26	50		
GRF6011	SPDT	0.1 - 6.0	RFC to RF1:	-0.43	32	49.5	3.0-5.0	1.5 DFN-6
			RFC to RF2:	-0.33	30.5	51		

\* Product is in Pre-Production. Contact sales@guerrilla-rf.com for minimum order quantity.

## RF Power Detectors

Part Number	Frequency Range (GHz)	RF Input Power Range (dBm)	Output Voltage Range (V)	Slope (mV/dB)	Intercept (dBm)	V <sub>DD</sub> Range (V)	I <sub>DD</sub> (mA)	Package (mm)
GRF1201	0.1-6.0	-20 to +20	1.1-4.3	80	-33.2	2.7-5.0	7	1.5 DFN-6

## **NORTH AMERICA USA EAST**

### **FLORIDA**

Brennan Associates  
P.O. Box 7159  
St. Petersburg, FL 33734  
Phone: (727) 446-5006  
Web: [www.brennanassoc.net](http://www.brennanassoc.net)  
Email: [sales@brennanassoc.net](mailto:sales@brennanassoc.net)

### **NEW YORK**

L-MAR Associates  
6800 Pittsford Palmyra Rd.,  
Suite 125  
Fairport, NY 14450  
Phone: (585) 899-3920  
Web: [www.l-mar.com](http://www.l-mar.com)  
Email: [ep.lepkowski@l-mar.com](mailto:ep.lepkowski@l-mar.com)

### **CONNECTICUT, MASSACHUSETTS, MAINE, NEW HAMPSHIRE, RHODE ISLAND, VERMONT**

RF Associates, Inc.  
430 Boston Rd.  
Topsfield, MA 01983  
Phone: (978) 887-9762  
Web: [www.rfassociates-ne.com](http://www.rfassociates-ne.com)  
Email: [sales@rfassociates-ne.com](mailto:sales@rfassociates-ne.com)

### **METRO NY, LONG ISLAND, NEW JERSEY, PENNSYLVANIA, DELAWARE**

RF Electronic Sales Company, Inc.  
160 Irish Lane  
Islip Terrace, NY 11752  
Phone: (631) 277-0816  
Web: [www.rfsales.com](http://www.rfsales.com)  
Email: [info@rfsales.com](mailto:info@rfsales.com)

### **ALABAMA, GEORGIA, MISSISSIPPI, TENNESSEE, SOUTH CAROLINA, NORTH CAROLINA**

E-Components  
303 Williams Avenue SW, Suite 931  
Huntsville, AL 35801  
Phone: (256) 533-2444  
Web: [www.e-components.com](http://www.e-components.com)  
Email: [jim.covey@e-components.com](mailto:jim.covey@e-components.com)

### **MARYLAND, VIRGINIA, DISTRICT of COLUMBIA**

VP Electronics  
739 Weller Dr.  
Mount Airy, MD 21771  
Phone: (410) 961-3663  
Web: [www.vpelectronics.com](http://www.vpelectronics.com)  
Email: [Vincent.Pirro@vpelectronics.com](mailto:Vincent.Pirro@vpelectronics.com)

### **USA SOUTH - MIDWEST**

### **TEXAS, OKLAHOMA, LOUISIANA, ARKANSAS**

Convergent Technical Sales, Inc.  
P.O. Box 325  
Colleyville, TX 76034  
Phone: (817) 428-3224  
Web: [www.convergentts.com](http://www.convergentts.com)  
Email: [info@convergentts.com](mailto:info@convergentts.com)

### **INDIANA, IOWA, MINNESOTA, WISCONSIN, KANSAS, MISSOURI, NEBRASKA, N. DAKOTA, S. DAKOTA**

Oak Technical Sales, LLC  
1043 Grand Ave., Suite 179  
Saint Paul, MN 55105  
Phone: (612) 840-1651  
Email: [jsnow@oaktechsales.com](mailto:jsnow@oaktechsales.com)

### **MICHIGAN**

Enco Marketing  
20246 Farmington Road  
Livonia, MI 48152  
Phone: (248) 536-0100  
Web: [www.encomarketing.com](http://www.encomarketing.com)  
Email: [del.kauffman@encomarketing.com](mailto:del.kauffman@encomarketing.com)

### **ILLINOIS**

Theta-J Associates  
P.O. Box 5670  
Vernon Hills, IL 60061  
Phone: (847) 549-8820  
Web: [www.theta-j.com](http://www.theta-j.com)  
Email: [sales@theta-j.com](mailto:sales@theta-j.com)

### **USA WEST**

### **SOUTHERN CALIFORNIA, SOUTHERN NEVADA, HAWAII**

ACETEC Inc.  
6540 Lusk Blvd., Suite C-146  
San Diego, CA 92121  
Phone: (858) 784-0900  
Web: [www.acetec.com](http://www.acetec.com)  
Email: [sales@acetec.com](mailto:sales@acetec.com)

### **NORTHERN CALIFORNIA, NORTHERN NEVADA, OREGON, WASHINGTON**

Tritek Solutions, Inc. /Cain-White  
4340 Stevens Creek Blvd, Suite 160  
San Jose, CA 95129  
Phone: (408) 492-0400  
Web: [www.tritekolutions.com](http://www.tritekolutions.com)  
Email: [tyhoeke@tritekolutions.com](mailto:tyhoeke@tritekolutions.com)

## ARIZONA, NEW MEXICO

Arcadia Technical Sales  
303 4939 W Ray Road  
Chandler, AZ 85226  
Phone: (480) 940-6488  
Web: [www.arcadiatech.com](http://www.arcadiatech.com)  
Email: [sales@arcadiatech.com](mailto:sales@arcadiatech.com)

## CANADA

### OTTAWA, MONTREAL and WESTERN CANADA

Repwave, Inc.  
9 Shaughnessy Crescent  
Ottawa, ON K2K 2P1  
Canada  
Phone: (613) 797-5385  
Web: [www.repwave.ca](http://www.repwave.ca)  
Email: [fmasciotra@repwave.ca](mailto:fmasciotra@repwave.ca)

### TORONTO, SOUTHWESTERN ONTARIO and WESTERN CANADA

Repwave, Inc.  
254 Caves Court  
Milton, ON L9T 5J2  
Canada  
Phone: (647) 883-7360  
Web: [www.repwave.ca](http://www.repwave.ca)  
Email: [claughren@repwave.ca](mailto:claughren@repwave.ca)

## AMERICAS

Guerrilla RF  
Scott Montgomery  
Phone: (214) 213-7396  
Email: [smontgomery@guerrilla-rf.com](mailto:smontgomery@guerrilla-rf.com)

## EUROPE

Wisteria Solutions  
10 Rue de Penthièvre  
75008 Paris  
France  
Philippe Roux  
Phone: +33647620742  
Web: [www.wisteria-solutions.com](http://www.wisteria-solutions.com)  
Email: [contact@wisteria-solutions.com](mailto:contact@wisteria-solutions.com)

## MIDDLE EAST

### ISRAEL

STG International Ltd  
Derech Hashalom 53  
Givatayim 53454  
Israel  
Phone: +972 (0) 03-7331456  
Web: [www.stggroup.co.il](http://www.stggroup.co.il)  
Email: [stg@stggroup.co.il](mailto:stg@stggroup.co.il)

## ASIA

### CHINA, HONG KONG

Guerrilla RF  
Juby Zhou  
Phone: +86 86 8897 6099  
Email: [bzhou@guerrilla-rf.com](mailto:bzhou@guerrilla-rf.com)

### JAPAN

Guerrilla RF  
Kazu Shibata  
Phone: +81 80 5180 5632  
Email: [mshibata@guerrilla-rf.com](mailto:mshibata@guerrilla-rf.com)

### TAIWAN, SINGAPORE, SOUTHEAST ASIA

Guerrilla RF  
Joshua Lin  
Phone: +886 936 613 693  
Email: [hllin@guerrilla-rf.com](mailto:hllin@guerrilla-rf.com)

### KOREA

Telcom International Inc.  
76, Seocho-daero, Seocho-Gu  
Seoul, Korea  
Phone: +82-2-582-9448  
Web: [www.telcom.kr](http://www.telcom.kr)  
Email: [jwchoi@telcom.kr](mailto:jwchoi@telcom.kr)

©2021 Guerrilla RF, Inc. All rights reserved. This document, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions in this document or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise is granted by this document for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks and trade secrets. All rights are reserved by Guerrilla RF. All information herein, products, product information, datasheets, and datasheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its datasheet, product information,

documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATASHEETS AND DATASHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.