

30×6 DOTS MATRIX LED DRIVER

DESCRIPTION

The IS31FL3742 is a general purpose 30×6 LED Matrix programmed via an I2C compatible interface. Each LED can be dimmed individually with 8-bit PWM data and 8-bit scaling data which allowing 256 steps of linear PWM dimming and 256 steps of DC current adjustable level.

Additionally each LED open and short state can be detected, IS31FL3742 store the open or short information in Open-Short Registers. The Open-Short Registers allowing MCU to read out via I2C compatible interface. Inform MCU whether there are LEDs open or short and the locations of open or short LEDs.

FEATURES

- Supply voltage range from 2.7V to 5.5V
- 30 Current Sink × 9 SW matrix size: drive up to 180 LEDs or 60 RGBs
- Individual 256 PWM control steps
- Individual 256 DC current steps
- Global 255 current setting
- SDB rising edge reset I2C module
- Interrupt and state lookup registers
- Individual open and short error detect function
- De-ghost
- QFN-48 (6mm×6mm) package

QUICK START

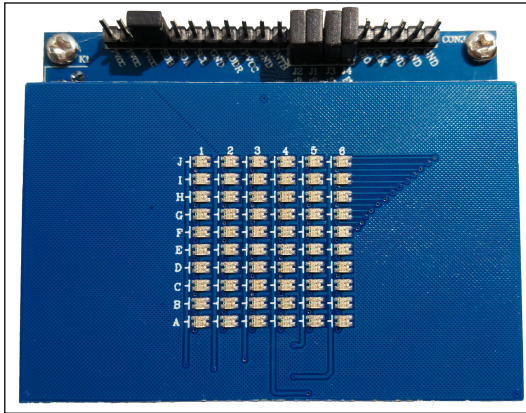


Figure 1: Photo of IS31FL3742 Evaluation Board

RECOMMENDED EQUIPMENT

- 5.0V, 2A power supply

ABSOLUTE MAXIMUM RATINGS

- ≤ 5.5V power supply

Caution: Do not exceed the conditions listed above, otherwise the board will be damaged.

PROCEDURE

The IS31FL3742 evaluation board is fully assembled and tested. Follow the steps listed below to verify board operation.

Caution: Do not turn on the power supply until all connections are completed.

- 1) Short J4 and EXT (Open=Ext control).
- 2) Short J1 and SDA (Connect SDA to U2).
- 3) Short J2 and SCL (Connect SCL to U2).
- 4) Short J3 and SDB (Connect SDB to U2).
- 5) Turn on the power supply/Plug in the Micro USB
Pay attention to the supply current. If the current exceeds 1.5A, please check for circuit fault.

EVALUATION BOARD OPERATION

The IS31FL3742 evaluation board has three animation display modes. Press K1 to switch configurations.

- 1) Rainbow wave#1
- 2) Rainbow wave#2
- 3) Rain
- 4) Visor

Note: IS31FL3742 solely controls the FxLED function on the evaluation board.

ORDERING INFORMATION

Part No.	Temperature Range	Package
IS31FL3742-QFLS4-EB	-40°C to +125°C (Industrial)	QFN-48, Lead-free

Table 1: Ordering Information

For pricing, delivery, and ordering information, please contact ISSI's analog marketing team at analog@issi.com or (408) 969-6600.

30×6 DOTS MATRIX LED DRIVER

SOFTWARE SUPPORT

J4 and 3V default setting is closed (jumper on). If it is open (no jumper), the on-board MCU will configure its own I2C/SDB/ADDR pins to High Impedance status so an external source can driver the I2C/SDB signals to control the IS31FL3742 LED driver.

The ADDR pin is pulled low via R34 setting the device address of IS31FL3742 to 0x60.

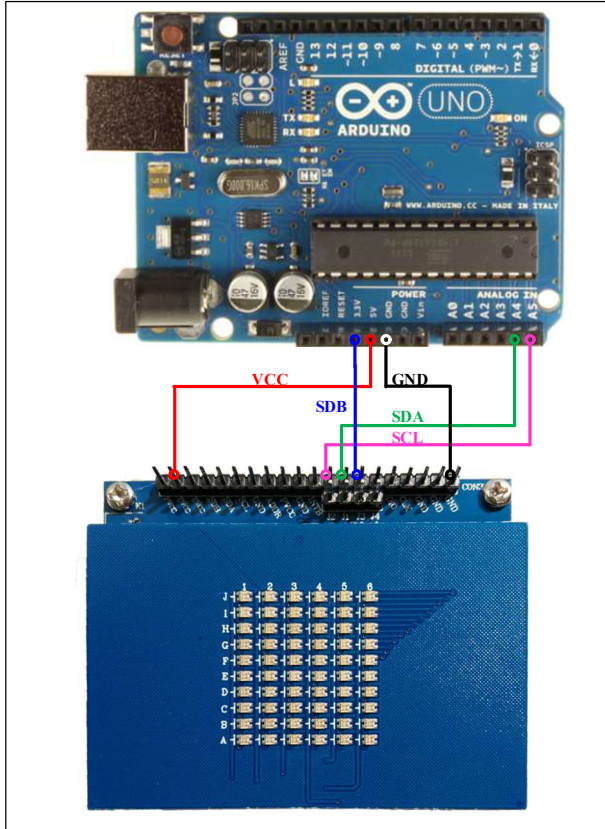


Figure 2: Photo of Arduino UNO connected to Evaluation Board

The steps listed below are an example using the Arduino for external control.

The Arduino hardware consists of an Atmel microcontroller with a bootloader allowing quick

firmware updates. First download the latest Arduino Integrated Development Environment IDE (1.6.12 or greater) from www.arduino.cc/en/Main/Software. Also download the Wire.h library from www.arduino.cc/en/reference/wire and verify that pgmspace.h is in the directory ...program Files(x86)/Arduino/hardware/tools/avr/avr/include/avr/. Then download the latest IS31FL3742 test firmware (sketch) from the ISSI website <http://www.issi.com/US/product-analog-fxled-driver.shtml>.

- 1) Open J4 and 3V.
- 2) Open PVCC and SDB.
- 3) Connect the 5 pins from Arduino board to IS31FL3742 EVB:
 - a) Arduino 5V pin to IS31FL3742 EVB PVCC.
 - b) Arduino GND to IS31FL3742 EVB GND.
 - c) Arduino SDA (A4) to IS31FL3742 EVB J1.
 - d) Arduino SCL (A5) to IS31FL3742 EVB J2.
 - e) If Arduino use 3.3V MCU VCC, connect 3.3V to IS31FL3742 EVB SDB, if Arduino use 5.0V MCU VCC, connect 5.0V to EVB SDB.
(Arduino UNO is 5.0V, so SDB=5.0V)
- 4) Use the test code in appendix I or download the test firmware (sketch) from the ISSI website, a .txt file and copy the code to Arduino IDE, compile and upload to Arduino.
- 5) Run the Arduino code as appendix I.
- 6) In EVB code, the ADDR pin is pulled low via 100k, so the device address is 0x60. When J1~J4 are disconnect, the ADDR pin can be changed by connecting the ADDR as follows:
 - a) ADDR=VCC, device address=0x66.
 - b) ADDR=SCL, device address=0x62.
 - c) ADDR=SDA, device address=0x64.

Please refer to the datasheet to get more information about IS31FL3742.

30x6 DOTS MATRIX LED DRIVER

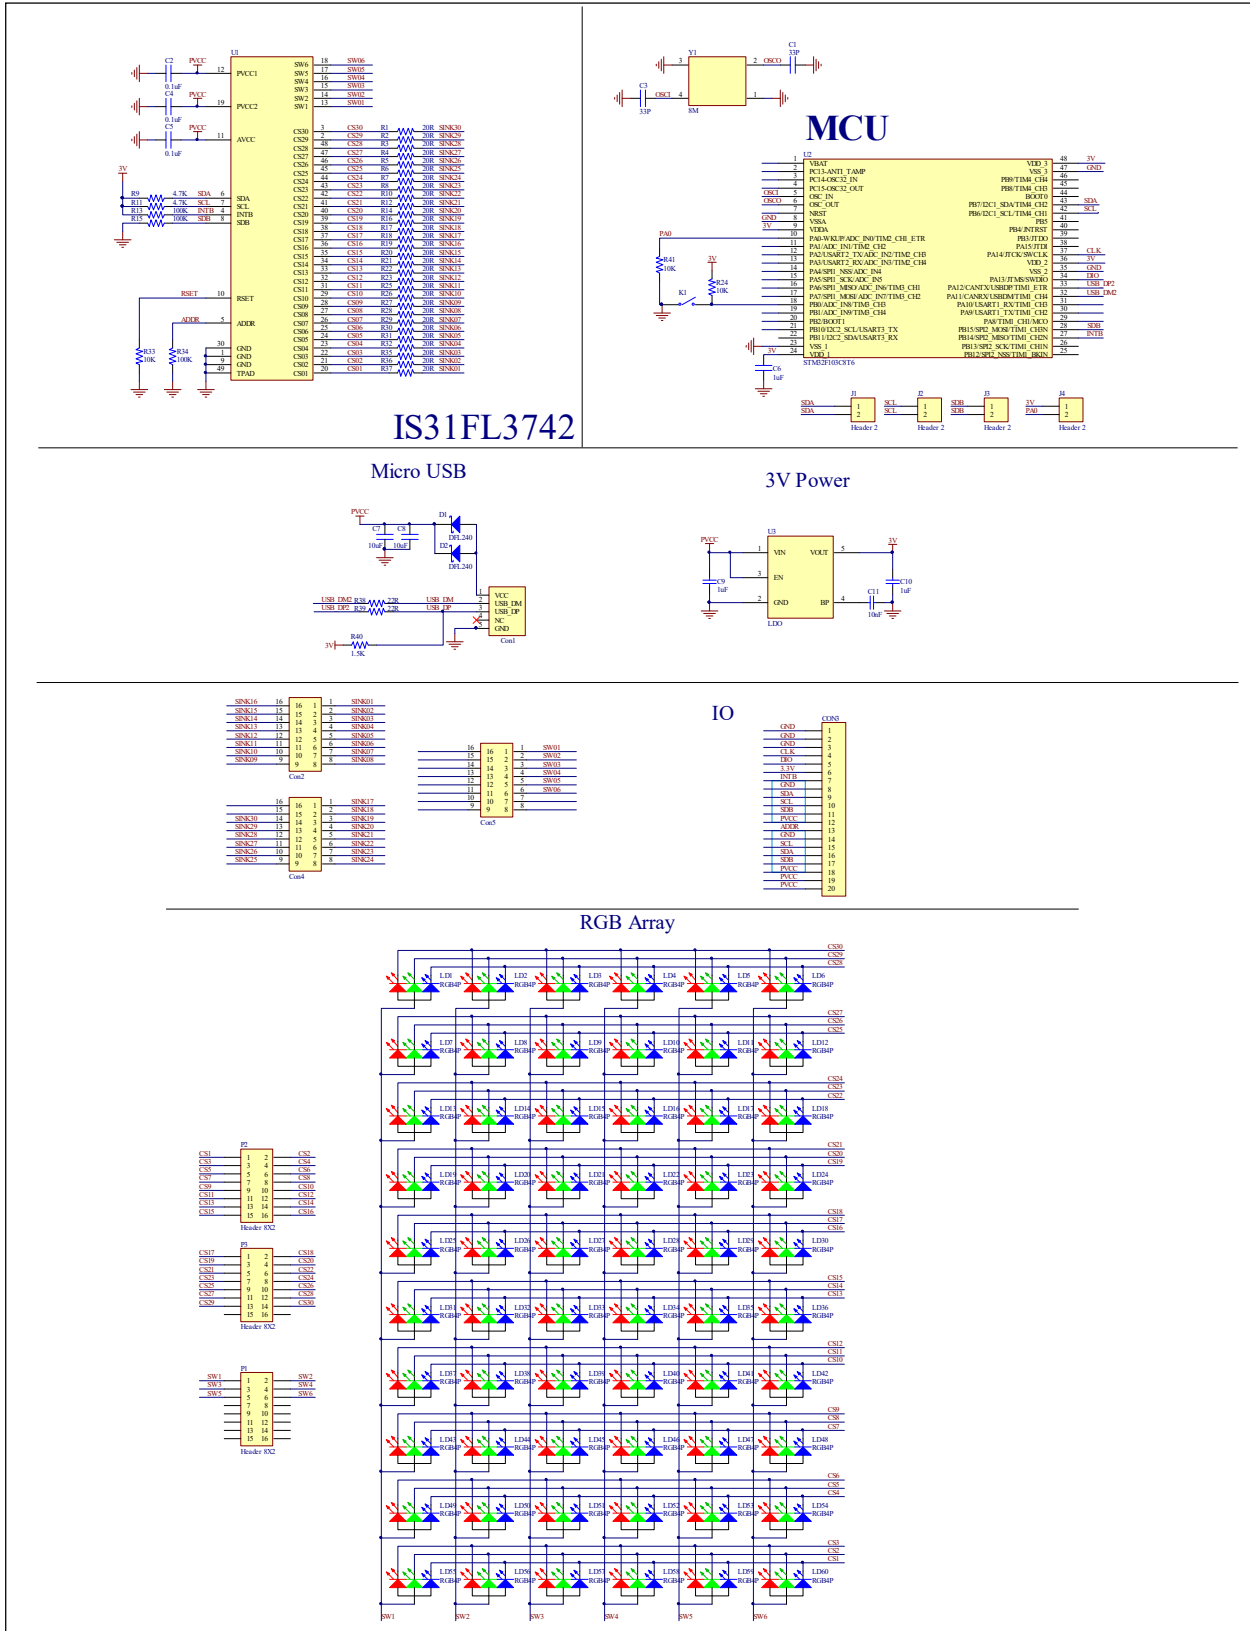


Figure 3: IS31FL3742 Application Schematic



30×6 DOTS MATRIX LED DRIVER

BILL OF MATERIALS

Name	Symbol	Description	Qty	Supplier	Part No.
LED Driver	U1	Matrix LED Driver	1	ISSI	IS31FL3742
MCU	U2	Microcontroller	1	STM	STM32F103C8T6
LDO	U3	Linear Regulator	1	SGMICRO	SGM2019-3.3V
Diode	LD1~LD60	RGB LED, SMD	60	Everlight	9-237/R6GHBHC-A01/2T
Diode	D1,D2	Diode, SMD	2	DIODES	DFLS240
Crystal	Y1	Crystal, 8MHz	1	JB	HC-49S
Resistor	R9,R11	RES,4.7k,1/16W,±5%,SMD	2	Yageo	RC0603JR-074K7L
Resistor	R13,R15,R34	RES,100k,1/16W,±5%,SMD	3	Yageo	RC0603JR-07100KL
Resistor	R33,R41,R24	RES,10k,1/16W,±5%,SMD	3	Yageo	RC0603JR-0710KL
Resistor	R40	RES,1.5k,1/16W,±5%,SMD	1	Yageo	RC0603JR-071K5L
Resistor	R38,R39	RES,22R,1/16W,±5%,SMD	2	Yageo	RC0603JR-0722RL
Resistor	R1,R4,R7,R12, R17,R20,R23,R27, R30,R35	RES,20R,1/16W,±5%,SMD (Note 1)	10	Yageo	RC0603JR-0720RL
Resistor	R2,R3,R5,R6,R8, R10,R14,R16,R18, R19,R21,R22,R25, R26,R28,R29,R31, R32,R36,R37	RES,20R,1/16W,±5%,SMD	20	Yageo	RC0603JR-0720RL
Capacitor	C2,C4,C5	CAP,0.1µF,16V,±20%,SMD	3	Yageo	CC0603KKX7R9BB104
Capacitor	C6,C9,C10	CAP,1µF,16V,±20%,SMD	3	Yageo	CC0603KKX7R9BB105
Capacitor	C1,C3	CAP,33pF,16V,±20%,SMD	2	Yageo	CC0603KKX7R9BB330
Capacitor	C11	CAP,10µF,16V,±20%,SMD	1	Yageo	CC0603KKX7R9BB103
Capacitor	C7,C8	CAP,10µF,16V, ±20%,SMD	2	Yageo	CC0805KKX7R9BB106
Button	K1	Button SMD	1		

Bill of Materials, refer to Figure 3 above.

Note 1: The value of these resistors on the evaluation board is 20Ω. For PVCC=5V and red LED application, prefer 51Ω for these resistors as shown in datasheet Figure 1.

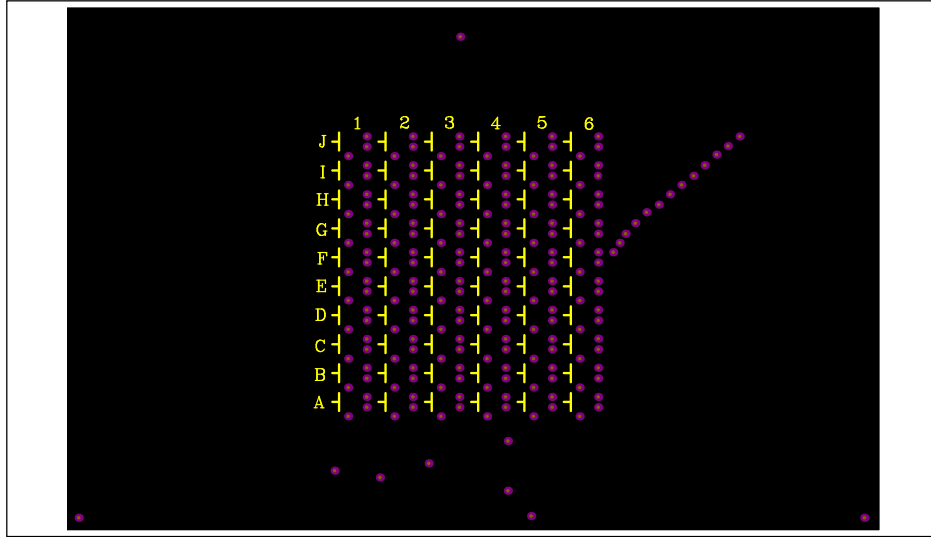


Figure 8: LED Board Component Placement Guide - Top Layer

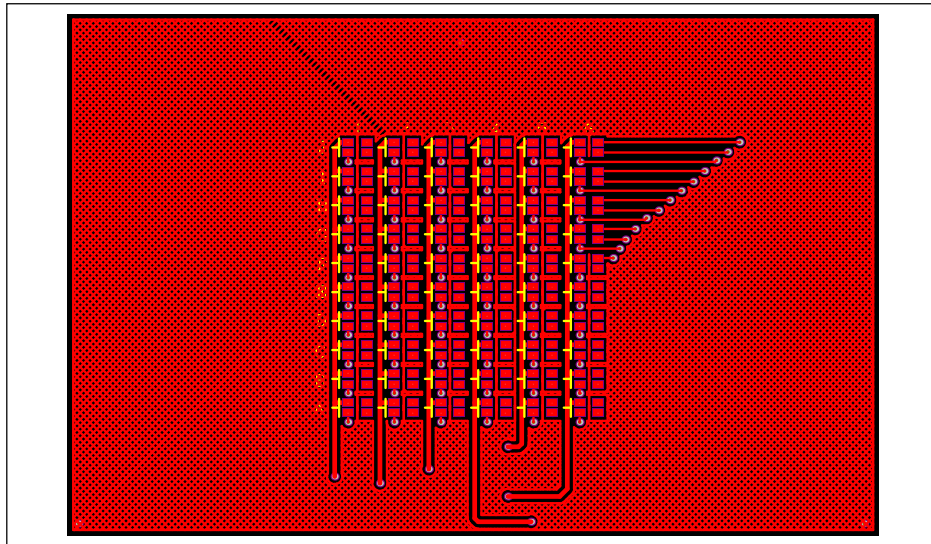


Figure 9: LED Board PCB Layout - Top Layer

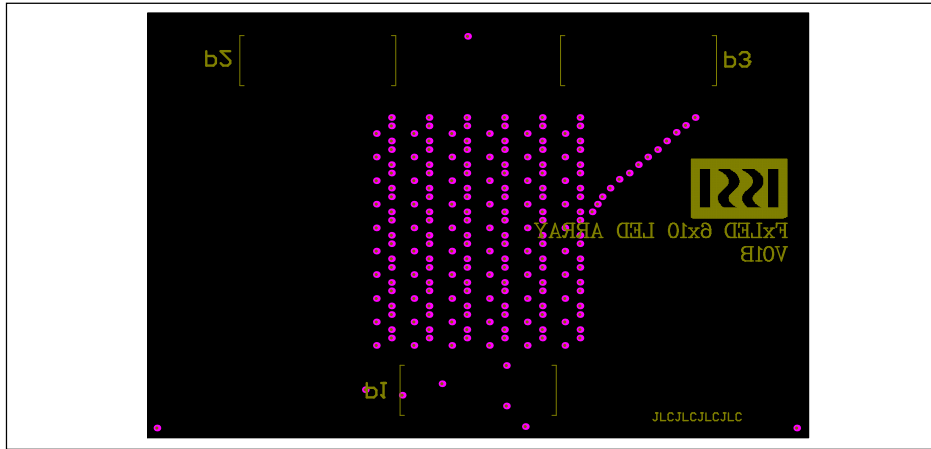


Figure 10: LED Board Component Placement Guide - Bottom Layer

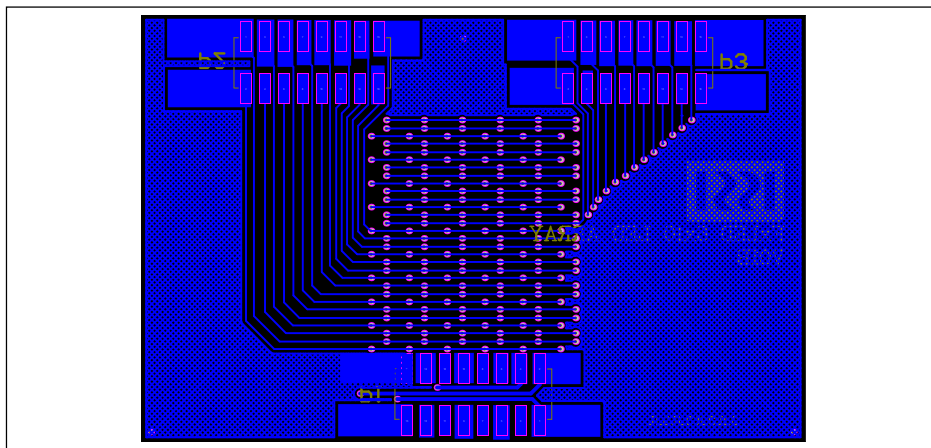


Figure 11: LED Board PCB Layout - Bottom Layer

Copyright © 2018 Integrated Silicon Solution, Inc. All rights reserved. ISSI reserves the right to make changes to this specification and its products at any time without notice. ISSI assumes no liability arising out of the application or use of any information, products or services described herein. Customers are advised to obtain the latest version of this device specification before relying on any published information and before placing orders for products. Integrated Silicon Solution, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless Integrated Silicon Solution, Inc. receives written assurance to its satisfaction, that:

- a.) the risk of injury or damage has been minimized;
- b.) the user assume all such risks; and
- c.) potential liability of Integrated Silicon Solution, Inc is adequately protected under the circumstances



30×6 DOTS MATRIX LED DRIVER

REVISION HISTORY

Revision	Detail Information	Date
A	Initial release	2018.03.09

APPENDIX I : IS31FL3742 Arduino Test Code V01A

```
#include<Wire.h>
#include<avr/pgmspace.h>

#define Addr_GND 0x60
#define R 0xFF
#define G 0x00
#define B 0xFF
uint8_t i,j;

const PROGMEM byte PWM_Gama64[64]=
{
  0x00,0x01,0x02,0x03,0x04,0x05,0x06,0x07,
  0x08,0x09,0x0b,0x0d,0x0f,0x11,0x13,0x16,
  0x1a,0x1c,0x1d,0x1f,0x22,0x25,0x28,0x2e,
  0x34,0x38,0x3c,0x40,0x44,0x48,0x4b,0x4f,
  0x55,0x5a,0x5f,0x64,0x69,0x6d,0x72,0x77,
  0x7d,0x80,0x88,0x8d,0x94,0x9a,0xa0,0xa7,
  0xac,0xb0,0xb9,0xbf,0xc6,0xcb,0xcf,0xd6,
  0xe1,0xe9,0xed,0xf1,0xf6,0xfa,0xfe,0xff
};

void setup() {
  Wire.begin();
  Wire.setClock(1000000);//I2C 1MHz
  Init_3742(R, G, B);
}

void loop() {
  IS31FL3742_Test_mode1();//breath mode
}

void IS_IIC_WriteByte(uint8_t Dev_Add,uint8_t Reg_Add,uint8_t Reg_Dat)
{
  Wire.beginTransmission(Dev_Add/2); // transmit to device IS31FL373x
  Wire.write(Reg_Add); // sends regaddress
  Wire.write(Reg_Dat); // sends regaddress
  Wire.endTransmission(); // stop transmitting
}

void Init_3742(uint8_t Rdata, uint8_t Gdata, uint8_t Bdata)
{
  IS_IIC_WriteByte(Addr_GND,0xfe,0xc5);//unlock
  IS_IIC_WriteByte(Addr_GND,0xfd,0x02);//write page 2
  for(i=2;i<0xB4;i+=3)
```

```

{
    IS_IIC_WriteByte(Addr_GND,i,Rdata);//R LED Scaling
}
for(i=1;i<0xB4;i+=3)
{
    IS_IIC_WriteByte(Addr_GND,i,Gdata);//G LED Scaling
}
for(i=0;i<0xB4;i+=3)
{
    IS_IIC_WriteByte(Addr_GND,i,Bdata);//B LED Scaling
}

IS_IIC_WriteByte(Addr_GND,0xfe,0xc5);//unlock
IS_IIC_WriteByte(Addr_GND,0xfd,0x00);//write page 0
for(i=0;i<0xB4;i++)
{
    IS_IIC_WriteByte(Addr_GND,i,0x00);//write all PWM set 0x00
}

IS_IIC_WriteByte(Addr_GND,0xfe,0xc5);//unlock
IS_IIC_WriteByte(Addr_GND,0xfd,0x04);//write page 4
IS_IIC_WriteByte(Addr_GND,0x01,0x7F);//global current
IS_IIC_WriteByte(Addr_GND,0x00,0x01);//normal operation
}

void IS31FL3742_Test_mode1(void)
{
    IS_IIC_WriteByte(Addr_GND,0xFD,0x00);//write frist frame
    for (j=0;j<64;j++)//all LED ramping up
    {
        IS_IIC_WriteByte(Addr_GND,0xfe,0xc5);//unlock
        IS_IIC_WriteByte(Addr_GND,0xFD,0x00);//write page 0
        for(i=0;i<0xB4;i++)
        {
            IS_IIC_WriteByte(Addr_GND,i,pgm_read_byte_near(&PWM_Gama64[j]));//set all PWM
        }
        delay(10);//10ms
    }
    delay(1000); //keep on 1s

    for (j=63;j>0;j--)//all LED ramping down
    {
        IS_IIC_WriteByte(Addr_GND,0xfe,0xc5);//unlock
        IS_IIC_WriteByte(Addr_GND,0xFD,0x00);//write page 0
        for(i=0;i<0xB4;i++)

```