

## ISL68201-99140DEMO1Z

### Demonstration Board User Guide

UG068  
Rev 0.00  
March 10, 2016

The [ISL68201](#) is a single-phase synchronous buck PWM controller featuring Intersil's proprietary R4™ Technology, which has extremely fast transient performance, accurately regulated frequency control and all internal compensation. The ISL68201 supports a wide 4.5V to 24V input voltage range and a wide 0.5V to 5.5V output range. It includes programmable functions and telemetries for easy use and high system flexibility using SMBus, PMBus, or I<sup>2</sup>C interface. See the [ISL68201](#) datasheet for more details.

The [ISL99140](#) is a high performance DrMOS power stage designed for high frequency power conversion. By combining a high performance FET driver and MOSFETs in an advanced package, high density DC/DC converters may be created.

The ISL68201-99140DEMO1Z is a 6-layer board demonstrating a compact 17mmx17mm 35A synchronous buck converter. Transient performance, fault protections, DC/AC regulations, PMBus programming, power sequencing, margining and other features can be evaluated using this board.

The PMBus dongle (ZLUSBEVAL3Z), i.e., USB-to-PMBus™ adapter, and USB cable are included in the demonstration kit. Intersil's PowerNavigator™ evaluation software can be installed from Intersil's website and evaluate the full PMBus functionality of the part using a PC running Microsoft Windows 7 or 8.

## References

- [ISL68201](#) datasheet
- [AN1900](#), "USB to PMBus™ Adapter"
- Intersil's [PowerNavigator™](#) User Guide

## Key Features

- 35A synchronous buck converter with PMBus control
- On-board transient load with adjustable di/dt
- Configurable through resistor pins
- Cascadable PMBus connectors
- Integrated LDOs for single rail solution
- Enable switch and power-good indicator
- All ceramics solution with SP capacitor footprint option

## Target Specifications

- V<sub>IN</sub> = 4.75V to 14.5V
- V<sub>OUT</sub> = 1V/35A full load
- f<sub>SW</sub> = 400kHz
- Peak efficiency:
  - 88.3% at 15A/1V<sub>OUT</sub>/12V<sub>IN</sub>
  - 94.5% at 10A/2.5V<sub>OUT</sub>/5V<sub>IN</sub>
- Output regulation: 1V ±8mV
- I/O capacitor rating: C<sub>IN</sub> - 16V; C<sub>OUT</sub> - 4V
- Compact size: 17mmx17mm
- With or without PMBus/SMBus/I<sup>2</sup>C capability

## Ordering Information

| PART NUMBER          | DESCRIPTION   |
|----------------------|---|
| ISL68201-99140DEMO1Z | ISL68201-99140 demonstration kit (demonstration board, dongle, USB cable) |

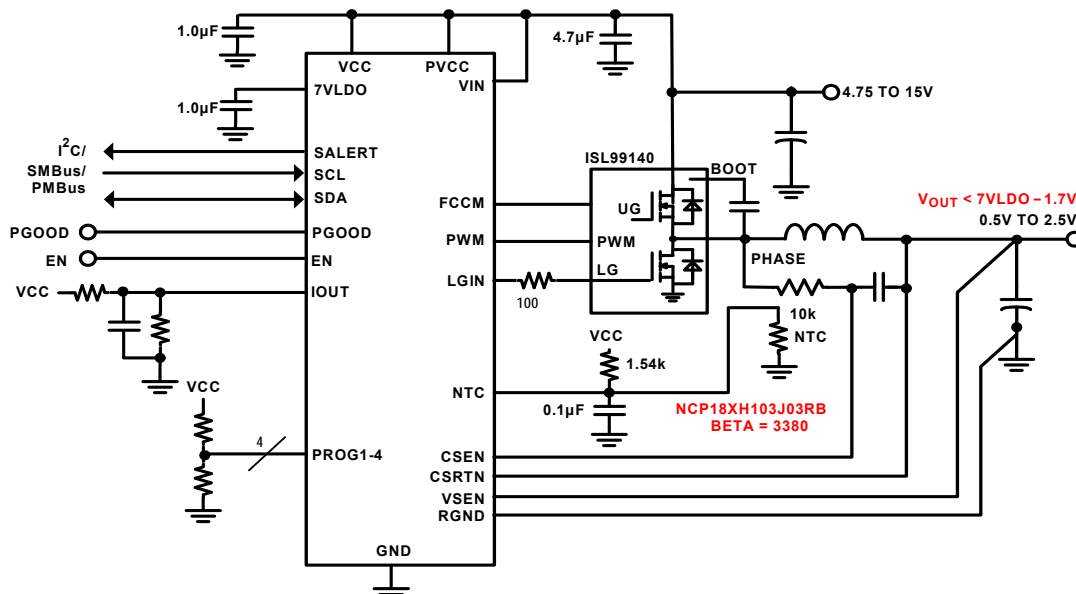


FIGURE 1. ISL68201-99140DEMO1Z SIMPLIFIED SCHEMATIC

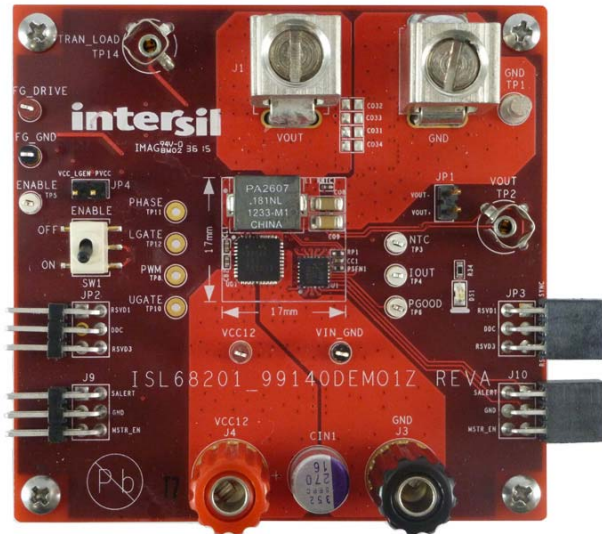


FIGURE 2. DEMONSTRATION BOARD TOP VIEW

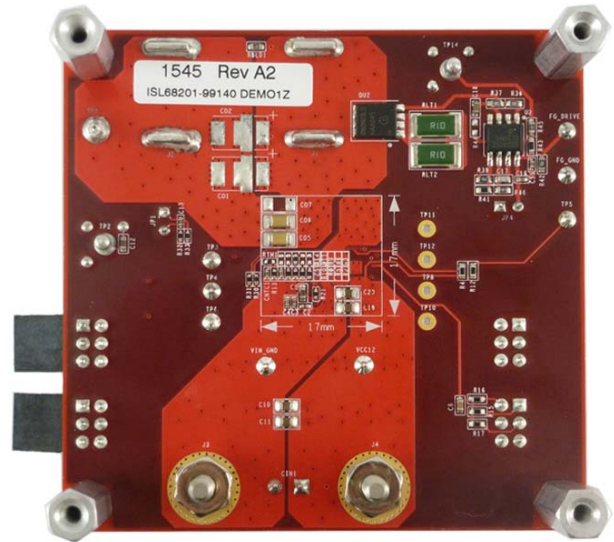


FIGURE 3. DEMONSTRATION BOARD BOTTOM VIEW

## Demonstration Board Description

The ISL68201-99140DEMO1Z provides all circuitry required to demonstrate the key features of the ISL68201. A majority of the features of the ISL68201, such as optimal transient response with Intersil's R4™ Modulator, 8-bit programmable boot voltage levels, selectable switching frequency in continuous conduction mode, selectable PFM operation option for improved light-load efficiency, power-good monitor for soft-start and fault detection, over-temperature protection, output overcurrent and short-circuit protection, and output overvoltage protection are available on this demonstration board.

[Figure 1](#) shows a simplified schematic diagram of the ISL68201-99140DEMO1Z board. [Figure 6](#) shows the detailed 35A buck solution schematics, while [Figure 7](#) shows the I/O connectors, auxiliary circuits and on-board transient circuits. [Figures 8](#) through [30](#) show typical performance data and [Figures 31](#) through [38](#) show the PCB board layout. The default programming pins setting is given on the upper right corner of [Figure 6](#) and the Bill of Materials (BOM) is included for reference beginning on [page 9](#).

The ISL68201-99140DEMO1Z board can run by itself without a series bus communication. The operational configuration is fully programmable via the programming pins (PROG1-4).

The ISL68201 however, utilizes the PMBus/SMBus/I<sup>2</sup>C protocol and provides the flexibility for digital power management and performance optimization prior to finalizing the hardware configuration on the programming pins.

The buck regulator in the ISL68201-99140DEMO1Z board is a single input rail design, i.e., everything is biased by the input supply (typically 12V). The resistor divider on the EN pin ( $R_4$  and  $R_{12}$ ) can set the input supply undervoltage protection level and its hysteresis. The “ENABLE” switch is a hardware operational control, alternately, the series bus ON\_OFF\_CONFIG and OPERATION commands can be used for software operational control.

Furthermore, an on-board transient load, as shown on [Figure 4](#), with di/dt and load step amplitude is controlled by a function generator. Since this auxiliary circuit draws more than 10mA current, the jumper on JP5 should be removed for accurate efficiency measurement.

Intersil's PowerNavigator™ evaluation software is compatible with Windows XP, 7 or 8 operating systems and can be used to evaluate the series bus functionality of the ISL68201. The software and user guide can be found on following Intersil website: <http://www.intersil.com/powernavigator>.

## Quick Start Guide

### Stand-Alone Operation

1. Set ENABLE switch to “OFF” position.
2. Connect a power supply (off) to input connectors (J4-VIN and J2-GND).
3. Set input power supply voltage level (no more than 15V) and current limiting (no more than 1A for 0A load).
4. Turn the power supply on.
5. Set ENABLE switch to “ON” position.
6. Increase power supply current limit enough to support more than the full load.
7. Apply load to output connectors (J1-VOUT and J2-SGND).
8. Monitor operation using an oscilloscope.

### PMBus Operation

1. Connect supplied Intersil's dongle to J9.
2. Connect supplied USB cable from computer to the dongle.
3. After the input supply powers up, open the PowerNavigator evaluation software.
4. Select detected ISL68201 device (Address - 60h) and follow Intersil's PowerNavigator™ user guide.
5. Monitor and configure the board using PMBus commands in the evaluation software.

## Configuration

The default programming pin settings of the ISL68201-99140DEMO1Z board can be found at the resistor reader table on the upper right corner of ["ISL68201-99140DEMO1Z Schematics" on page 7](#) or read back via Intersil's [PowerNavigator™](#) software. Each PMBus command can be loaded or programmed via the PowerNavigator™ software. Note that ISL68201 does not have NVM to store the operational configuration however, it can be set by the resistor programming pins (PROG1-4) or programmed by the series bus master before powering up. If a series bus master is available in the system, the ISL68201-based rail can be fully controlled via software for the power-up/power-down sequencing and operational configuration without a soldering iron.

## Load Transient

The on-board transient load can be controlled by a function generator, whose inputs are connected to FG\_DRIVE2 and FG\_GND2. The function generator's output is terminated by R<sub>42</sub> at the input terminal, while its amplitude and dV/dt set the load amplitude and di/dt on the 50mΩ load (R<sub>LT1</sub>/R<sub>LT2</sub>). The transient load can be monitored with a scope probe on TP15. Note that the duty cycle of applied load should be less than 10% duty cycle with <10ms pulse width to keep the average power of R<sub>LT1</sub>/R<sub>LT2</sub> less than its power rating.

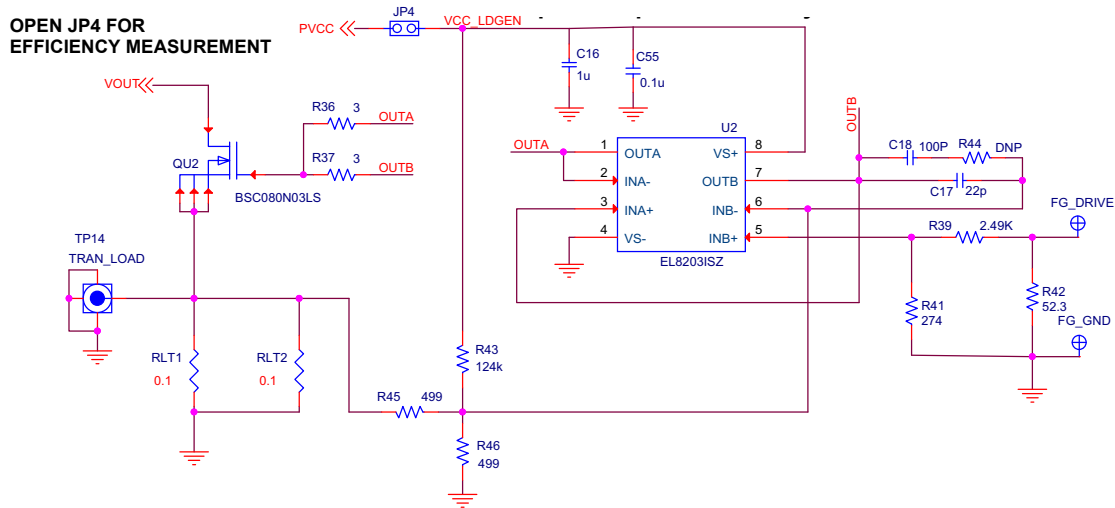


FIGURE 4. ON-BOARD LOAD TRANSIENT



FIGURE 5. ISL68201-99140DEMO1Z DEMONSTRATION KIT SET-UP

## Design Modifications

When modifying the design, it will require a new set of L/DCR matching for different inductor, divider on the PROG pins for different operational configuration,  $R_{SEN1}$  for OCP, and  $I_{OUT}$  network for accurate digital  $I_{OUT}$ ; higher input capacitor rating to support higher than 16V input, higher output capacitor rating to support higher than 4V output. Refer to [ISL68201](#) datasheet and [PowerNavigator™](#) software for proper design modifications including L/DCR matching, thermal compensation, OCP and digital  $I_{OUT}$  fine tuning.

Two examples are provided in [Table 1](#), showing the recommended design modifications to accommodate the

application cases with 5V and 3.3V output voltages. Some fine tuning might be needed depending upon the rework and final layout design.

For the 5V input voltage applications with  $4.5V < V_{IN} < 5.5V$  requirement, the “VIN”, “VCC”, “PVCC” and “7VLD0” pins should be shorted together, to connect with the input supply for optimal performance;  $R_{12}$  should be removed as well.

Note that all devices in the same bus should set different addresses for unique identification and proper communication. JP2, 3, 9 and 10 connectors are designed to cascade many Intersil's solutions for easy communication and system evaluation prior to the system integration and design.

TABLE 1. DESIGN EXAMPLES

| REFERENCE DESIGNATOR | 5.0V AT 16A  | 3.3V AT 16A | 3.3V AT 30A   | COMMENTS  |
|----------------------|--|-------------|---|---|
| L1                   | 680nH, 1.72mΩ<br>Vendor: Würth Electronic;<br>Part Number: 744334006     |             | 470nH, 0.165mΩ<br>Vendor: Würth Electronic;<br>Part Number: 744309047 | Reduce Output ripple current; typically higher voltage output needs higher inductance.  |
| C05, C06, C08, C09   | 100μF/X5R/6.3V/1206<br>Vendor: Murata;<br>Part Number: GRM21BR60J107ME11 |             |   | Increase $C_{OUT}$ rating to support higher $V_{OUT}$ . Also capacitance of ceramic capacitors decreases with increased output voltage. |
| PROG1 (DC)           | DFh  | BFh         | BFh   | Set correct $V_{BOOT} = V_{OUT}$  |
| R3                   | 147k, 1%   | 105k, 1%    | 105k, 1%  |   |
| PROG2 (DD)           | A0h  | BFh         | BFh   | Set Different PMBus Addresses as needed<br>TCOMP = 15<br>PFM DISABLED   |
| R5                   | 105k, 1%   | DNP         | DNP   |   |
| R6                   | DNP  | 105k, 1%    | 105k, 1%  |   |
| PROG3 (DE)           | 0Dh  | 0Dh         | 0Dh   | Set AV = 13<br>$f_{sw} = 500kHz$<br>OCP = Retry<br>25kHz Clamp Disabled   |
| R8                   | 24.3k, 1%  | 24.3k, 1%   | 24.3k, 1%   |   |
| R9                   | 16.9k, 1%  | 16.9k, 1%   | 16.9k, 1%   |   |
| PROG4 (DF)           | 08h  | 08h         | 08h   | Set RR = 400k<br>SS = 1.25mV/μs<br>AVMLTI = 1x  |
| R10                  | 15k, 1%  | 15k, 1%     | 15k, 1%   |   |
| R11                  | 29.4k, 1%  | 29.4k, 1%   | 29.4k, 1%   |   |
| RP1                  | 4.99k, 1%  | 4.99k, 1%   | 3.57k, 1%   | L/DCR Matching  |
| R <sub>SEN1</sub>    | 536, 1%  | 536, 1%     | 62, 1%  | Set OCP   |
| R13                  | 11k, 1%  | 11k, 1%     | 15k, 1%   | Set $I_{OUT}$ to 1A/1A Slope  |
| R14                  | TBD  | TBD         | TBD   | Pull-up value depends upon final layout design  |

NOTE: Some fine tuning might be needed depending upon the rework and final layout design.



## Design and Layout Considerations

To ensure a first pass design, the schematics design must be done correctly and the board must be carefully laid out.

As a general rule, power layers should be close together, either on the top or bottom of the board, with the weak analog or logic signal layers on the opposite side of the board or internal layers. The ground-plane layer should be in between the power layers and the signal layers to provide shielding. Often, the layer below the top and the layer above the bottom should be the ground layers.

There are two sets of components in a DC/DC converter, the power components and the small signal components. The power components are the most critical because they switch large amount of energy. The small signal components connect to sensitive nodes or supply critical bypassing current and signal coupling.

The power components should be placed first and these include MOSFETs, input and output capacitors and the inductor. Keeping the distance between the power train and the control IC short helps keep the gate drive traces short. These drive signals include the LGATE, UGATE, GND, PHASE and BOOT.

When placing MOSFETs, try to keep the source of the upper MOSFETs and the drain of the lower MOSFETs as close as thermally possible. Input high frequency capacitors should be placed close to the drain of the upper MOSFETs and the source of the lower MOSFETs. Place the output inductor and output capacitors between the MOSFETs and the load. High frequency output decoupling capacitors (ceramic) should be placed as close as possible to the decoupling target, making use of the shortest connection paths to any internal planes. Place the components in such a way that the area under the IC has less noise traces with high  $dV/dt$  and  $di/dt$ , such as gate signals, phase node signals and VIN plane.

[Tables 2](#) and [3](#) provide a design and layout checklist that a designer must pay attention to.

TABLE 2. DESIGN AND LAYOUT CHECKLIST

| PIN NAME | NOISE SENSITIVITY | DESCRIPTION   |
|----------|-------------------|---|
| EN       | Yes               | There is an internal 1 $\mu$ s filter. Decoupling the capacitor is NOT needed. However, if needed, use a low time constant one to avoid too large a shutdown delay. |
| VIN      | Yes               | Place 16V+ X7R 1 $\mu$ F in close proximity to the VIN pin and the system ground plane.   |
| 7VLDO    | Yes               | Place 10V+ X7R 1 $\mu$ F in close proximity to the 7VLDO pin and the system ground plane.   |
| VCC      | Yes               | Place X7R 1 $\mu$ F in close proximity to the VCC pin and the system ground plane.  |

TABLE 2. DESIGN AND LAYOUT CHECKLIST (Continued)

| PIN NAME   | NOISE SENSITIVITY | DESCRIPTION  |
|------------|-------------------|--|
| SCL, SDA   | Yes               | 50kHz to 1.25MHz signal when the SMBus, PMBus, or I <sup>2</sup> C is sending commands. Pairing up with SALERT and routing carefully back to SMBus, PMBus or I <sup>2</sup> C master. 20 mils spacing within SDA, SALERT, and SCL; and more than 30 mils to all other signals. Refer to the SMBus, PMBus or I <sup>2</sup> C design guidelines and place proper terminated (pull-up) resistance for impedance matching. Tie them to GND when not used.               |
| SALERT     | No                | Open-drain and high $dv/dt$ pin during transitions. Route it in the middle of SDA and SCL. Tie it to GND when not used.  |
| PGOOD      | No                | Open-drain pin. Tie it to ground when not used.  |
| RGND, VSEN | Yes               | Differential pair routed to the remote sensing points with sufficient decoupling ceramics capacitors and not across or go above/under any switching nodes (BOOT, PHASE, UGATE, LGATE) or planes (VIN, PHASE, VOUT) even though they are not in the same layer. At least 20 mils spacing from other traces. DO NOT share the same trace with CSRTN.   |
| CSRTN      | Yes               | Connect to the output rail side of the output inductor or current sensing resistor pin with a series resistor in close proximity to the pin. The series resistor sets the current gain and should be within 40 $\Omega$ and 3.5k $\Omega$ . Decoupling ( $\sim 0.1\mu F/X7R$ ) on the output end (not the pin) is optional and might be required for long sense trace and a poor layout.   |
| CSEN       | Yes               | Connect to the phase node side of the output inductor or current sensing resistor pin with L/DCR or ESL/R <sub>SEN</sub> matching network in close proximity to CSEN and CSRTN pins. Differentially routing back to the controller with at least 20 mils spacing from other traces. Should NOT cross or go above/under the switching nodes [BOOT, PHASE, UGATE, LGATE] and power planes (VIN, PHASE, VOUT) even though they are not in the same layer.               |
| NTC        | Yes               | Place NTC 10k (Murata, NCP15XH103J03RC, $\beta = 3380$ ) in close proximity to the output inductor's output rail, not close to MOSFET side; the return trace should be 20 mils away from other traces. Place 1.54k $\Omega$ pull-up and decoupling capacitor (typically 0.1 $\mu$ F) in close proximity to the controller. The pull-up resistor should be exactly tied to the same point as VCC pin, not through an RC filter. If not used, connect this pin to VCC. |
| IOUT       | Yes               | Scale R such that IOUT pin voltage is 2.5V at 63.875A load. Place R and C in general proximity to the controller. The time constant of RC should be sufficient as an averaging function for the digital I <sub>OUT</sub> . An external pull-up resistor to VCC is recommended to cancel I <sub>OUT</sub> offset at 0A load.  |

TABLE 2. DESIGN AND LAYOUT CHECKLIST (Continued)

| PIN NAME | NOISE SENSITIVITY | DESCRIPTION  |
|----------|-------------------|--|
| PROG1-4  | No                | Resistor divider must be referenced to VCC pin and the system ground; they can be placed anywhere. DO NOT use decoupling capacitors on these pins.                                     |
| GND      | Yes               | Directly connect to low noise area of the system ground. The GND PAD should use at least 4 vias. Separate analog ground and power ground with a 0Ω resistor is highly NOT recommended. |
| FCCM     | No                | DO NOT make it across or under external components of the controller. Keep it at least 20 mils away from sensitive nodes.  |
| PWM      | No                | DO NOT make it across or under external components of the controller. Keep it at least 20 mils away from any other traces.   |
| LGIN     | No                | Keep it at least 20 mils away from sensitive nodes. A series 100Ω resistor to low-side gate signal is required for noise attenuation.  |
| PVCC     | Yes               | Place X7R 4.7μF in proximity to the PVCC pin and the system ground plane.  |

TABLE 3. TOP LAYOUT TIPS

| NUMBER | DESCRIPTION  |
|--------|--|
| 1      | The layer next to controller (top or bottom) should be a ground layer. Separate analog ground and power ground with a 0Ω resistor is highly NOT recommended. Directly connect GND PAD to low noise area of the system ground with at least 4 vias. |
| 2      | Never place a controller and its external components above or under VIN plane or any switching nodes.  |
| 3      | Never share CSRTN and VSEN on the same trace.  |
| 4      | Place the input rail decoupling ceramic capacitors closely to the high-side FET. Never use only one via and a trace to connect the input rail decoupling ceramics capacitors; must connect to VIN and GND planes.                                  |
| 5      | Place all decoupling capacitors in close proximity to the controller and the system ground plane.  |
| 6      | Connect remote sense (VSEN and RGND) to the load and ceramic decoupling capacitors nodes; never run this pair below or above switching noise plane.  |
| 7      | Always double check critical component pinout and their respective footprints.   |

# ISL68201-99140DEMO1Z Schematics

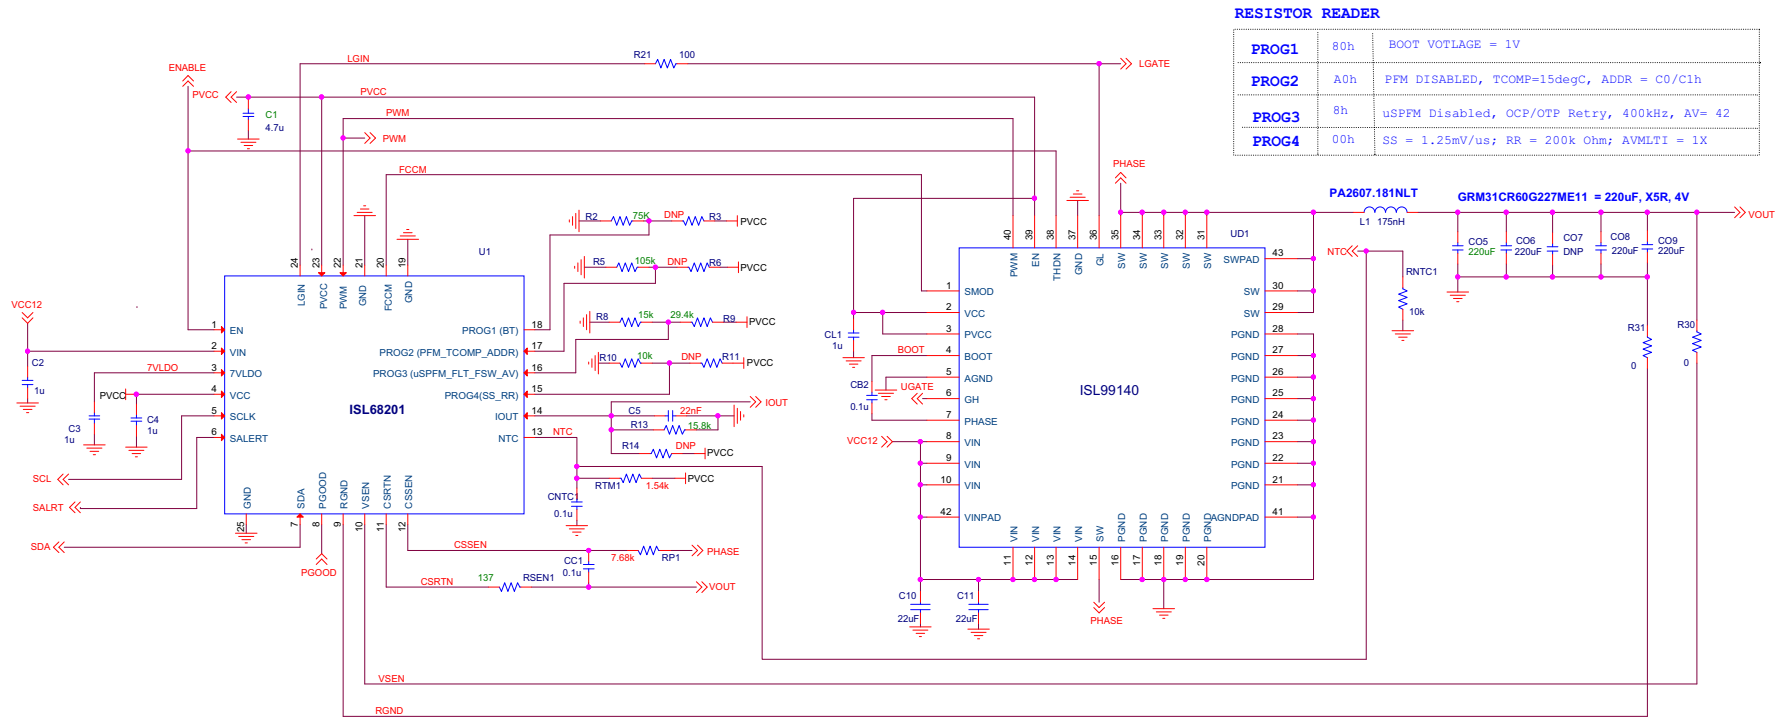


FIGURE 6. ISL68201-99140DEMO1Z 1V AT 35A BUCK SOLUTION SCHEMATICS (1 OF 2)

# ISL68201-99140DEMO1Z Schematics (Continued)

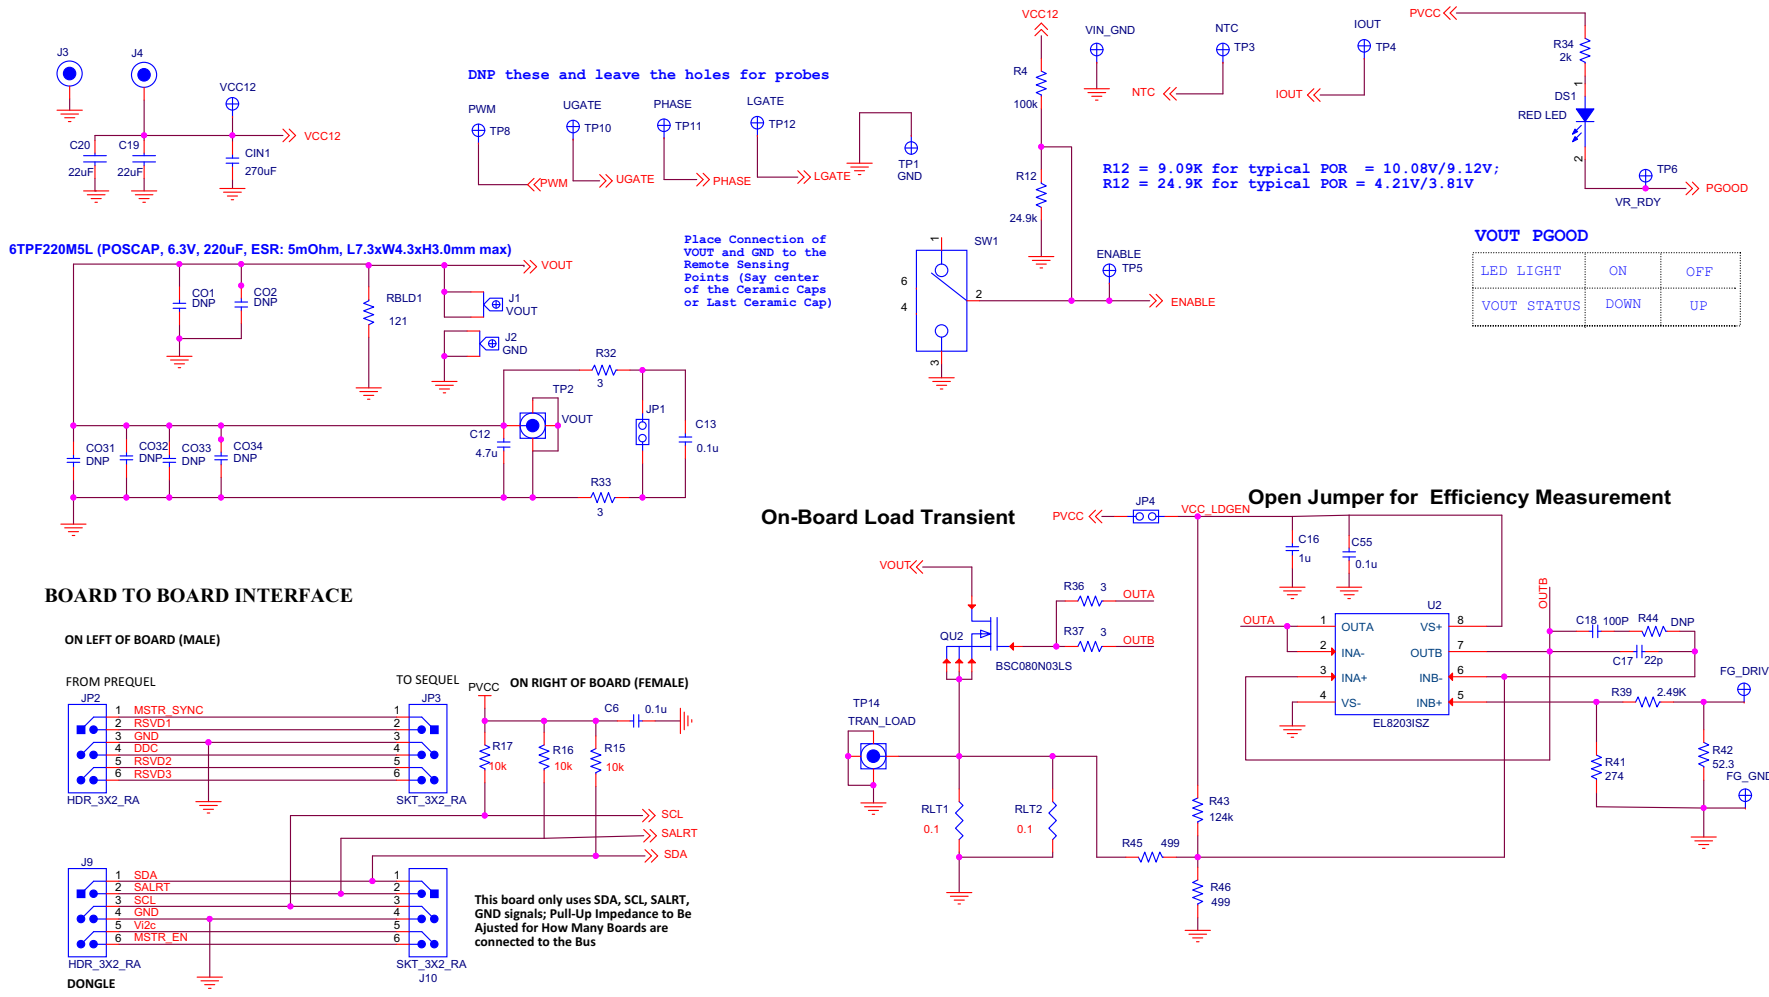


FIGURE 7. I/O CONNECTORS, AUXILIARY CIRCUITS AND ON-BOARD TRANSIENT LOAD SCHEMATICS (2 OF 2)



## Bill of Materials

| QTY   | REFERENCE DESIGNATOR | DESCRIPTION                          | PCB FOOTPRINT         | MANUFACTURER             | PART NUMBER         |
|---|----------------------|--------------------------------------|-----------------------|--------------------------|---------------------|
| 1   | U1                   | R4 Wrapper                           | QFN24_157X157_197_EPC | INTERSIL                 | ISL68201IRZ-REVC    |
| 1   | UD1                  | 40A DrMOS PWR MODULE                 | EPQFN40_6X6           | INTERSIL                 | ISL99140IRZ         |
| 1   | CIN1                 | 270 $\mu$ F/16V/8x9/10m $\Omega$     | CAPR_315X275_150_P    | SANYO                    | 16SEPC270MX         |
| 1   | C1                   | 4.7 $\mu$ F/6.3V/X5R                 | SM0603                | VENKEL                   | C0603X5R6R3-475KNE  |
| 2   | C2, C3               | 1.0 $\mu$ F/16V/X7R                  | SM0402                | TDK                      | C1005X5R1C105K050BC |
| 1   | C4                   | 1 $\mu$ F/6.3V/X5R                   | SM0402                | PANASONIC                | ECJ-0EBOJ105K       |
| 1   | C5                   | 22nF/50V/X7R                         | SM0402                | JOHANSON DIELECTRICS INC | 500R07W223KV4T      |
| 1   | C6                   | 0.1 $\mu$ F/16V/X7R                  | SM0603                | MURATA                   | GRM39X7R104K016AD   |
| 3   | CB2, CC1, CNTC1      | 0.1 $\mu$ F/16V/X7R                  | SM0402                | VENKEL                   | C0402X7R160-104KNE  |
| 4   | C10, C11, C19, C20   | 22 $\mu$ F/16V/X5R                   | SM0805                | VENKEL                   | C0805X5R160-226KNE  |
| 4   | CO5, CO6, CO8, CO9   | 220 $\mu$ F/4V/X5R                   | SM1206                | MURATA                   | GRM31CR60G227ME11   |
| 1   | L1                   | 175nH, 0.29m $\Omega$                | SMD, 10.4X7.9         | PULSE                    | PA2607.181NLT       |
| 1   | R2                   | 75k $\Omega$ , 1%                    | SM0402                | VENKEL                   | CR0402-16W-7502FT   |
| 1   | R4                   | 100k $\Omega$ , 1%                   | SM0603                | VENKEL                   | CR0603-10W-1003FT   |
| 1   | R5                   | 105k $\Omega$ , 1%                   | SM0402                | VENKEL                   | CR0402-16W-1053FT   |
| 1   | R8                   | 15k $\Omega$ , 1%                    | SM0402                | PANASONIC                | ERJ-3EKF1502V       |
| 1   | R9                   | 29.4k $\Omega$ , 1%                  | SM0402                | VENKEL                   | CR0402-16W-2942FT   |
| 1   | R10                  | 10k $\Omega$ , 1%                    | SM0402                | PANASONIC                | ERJ-2RKF1002X       |
| 3   | R15, R16, R17        | 10k $\Omega$ , 1%                    | SM0603                | VENKEL                   | CR0603-10W-1002FT   |
| 1   | R12                  | 24.9k $\Omega$ , 1%                  | SM0603                | PANASONIC                | ERJ-3EKF2492V       |
| 1   | R13                  | 15.8k $\Omega$ , 1%                  | SM0402                | YAGEO                    | RC0402FR-0715K8L    |
| 1   | R21                  | 100 $\Omega$ , 1%                    | SM0402                | VENKEL                   | CR0402-16W-101JT    |
| 2   | R30, R31             | 0 $\Omega$                           | SM0402                | PANASONIC                | ERJ-2RKF00R0X       |
| 1   | RBLD1                | 121 $\Omega$ , 1%                    | SM0603                | VISHAY/DALE              | CRCW0603121RFKTA    |
| 1   | RNTC1                | 10k $\Omega$ NTC, 5%, $\beta$ = 3380 | SM0402                | MURATA                   | NCP15XH103J03RC     |
| 1   | RP1                  | 7.68k $\Omega$ , 1%                  | SM0402                | PANASONIC                | ERJ-2RKF7681X       |
| 1   | RSEN1                | 137 $\Omega$ , 1%                    | SM0402                | PANASONIC                | ERJ-2RKF1370X       |
| 1   | RTM1                 | 1.54k $\Omega$ , 1%                  | SM0402                | PANASONIC                | ERJ-2RKF1541X       |
| <b>DEMONSTRATION BOARD SPECIFIC AUXILIARY PARTS BILL OF MATERIALS</b> |                      |                                      |                       |                          |                     |
| 1   | U2                   | Dual Amp/500MHz/5V                   | SOIC8                 | INTERSIL                 | EL8203ISZ           |
| 1   | QU2                  | 8m $\Omega$ N-MOSFET                 | LPAK                  | INFINEON                 | BSC080N03LS G       |
| 1   | DS1                  | LED/RED/0805/CLEAR                   | SM0805                | WURTH ELEKTRONIK         | 150080RS75000       |
| 1   | SW1                  | Enable Switch                        | GT11SC                | C&K DIVISION             | GT11MSCBE           |
| 1   | C12                  | 4.7 $\mu$ F/6.3V/X5R                 | SM0603                | VENKEL                   | C0603X5R6R3-475KNE  |
| 2   | C13, C55             | 0.1 $\mu$ F/16V/X7R                  | SM0402                | VENKEL                   | C0402X7R160-104KNE  |
| 1   | C16                  | 1 $\mu$ F/6.3V/X5R                   | SM0402                | PANASONIC                | ECJ-0EBOJ105K       |
| 1   | C17                  | 22pF/50V/C0G                         | SM0603                | VENKEL                   | C0603C0G500-220JNE  |
| 1   | C18                  | 100pF/50V/C0G                        | SM0603                | PANASONIC                | ECJ-1VC1H101J       |

**Bill of Materials (Continued)**

| QTY | REFERENCE DESIGNATOR | DESCRIPTION                             | PCB FOOTPRINT   | MANUFACTURER                 | PART NUMBER       |
|-----|----------------------|---|-----------------|------------------------------|-------------------|
| 2   | J1, J2               | Screw Terminal                          | B2C-PCB         | INTERNATIONAL HYDRAULICS INC | B2C-PCB           |
| 1   | J3                   | Female Banana Jack, Black               | 111-07xx-001    | JOHNSON COMPONENTS           | 111-0703-001      |
| 1   | J4                   | Female Banana Jack, Red                 | 111-07xx-001    | JOHNSON COMPONENTS           | 111-0702-001      |
| 2   | J8, J9               | CONN-HEADER, 2x3, BRKAWY, 2.54mm, TIN   | CONN6           | SAMTEC                       | TSW-103-08-T-D-RA |
| 2   | J10, J11             | CONN-SOCKET STRIP, TH, 2x3, 2.54mm, TIN | CONN6           | SAMTEC                       | SSQ-103-02-T-D-RA |
| 2   | JP1, JP4             | 2-pin 0.1" spacing Jumper               | CONN2           | BERG/FCI                     | 69190-202HLF      |
| 1   | TP1                  | Probe Ground                            | TP-150C100P-RTP | KEYSTONE                     | 1514-2            |
| 2   | TP2, TP14            | Probe Jack                              | TEK131-4353-00  | TEKTRONIX                    | 131-4353-00       |
| 4   | TP3, TP4, TP5, TP6   | Test Point                              | MTP500x         | KEYSTONE                     | 5002              |
| 2   | VCC12, FG_DRIVE      | Test Point RED                          | MTP500x         | KEYSTONE                     | 5000              |
| 2   | VIN_GND, FG_GND      | Test Point BLACK                        | MTP500x         | KEYSTONE                     | 5001              |
| 4   | R32, R33, R36, R37   | 3 $\Omega$ , 1%                         | SM0603          | VENKEL                       | CR0603-10W-03R0FT |
| 1   | R34                  | 2k $\Omega$ , 1%                        | SM0603          | KOA                          | RK73H1JTDD2001F   |
| 1   | R39                  | 2.49k $\Omega$ , 1%                     | SM0603          | KOA                          | RK73H1JTDD2491F   |
| 1   | R42                  | 52.3 $\Omega$ , 1%                      | SM0603          | PANASONIC                    | ERJ-3EKF52R3V     |
| 1   | R41                  | 274 $\Omega$ , 1%                       | SM0603          | VENKEL                       | CR0603-10W-2740FT |
| 1   | R43                  | 124k $\Omega$ , 1%                      | SM0603          | YAGEO                        | 9C06031A1243FKHFT |
| 2   | R45, R46             | 499 $\Omega$ , 1%                       | SM0603          | VENKEL                       | CR0603-10W-4990FT |
| 2   | RLT1, RLT2           | 0.1 $\Omega$ , 1%                       | SM2512          | CTS RESISTOR                 | 73L7R10J          |

# Performance Data

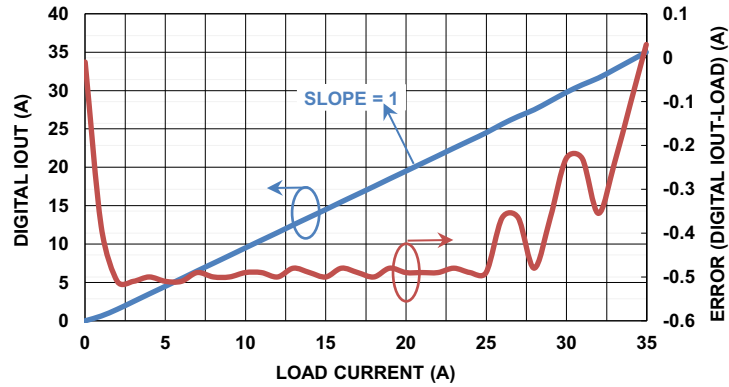


FIGURE 8. TYPICAL DIGITAL OUTPUT CURRENT

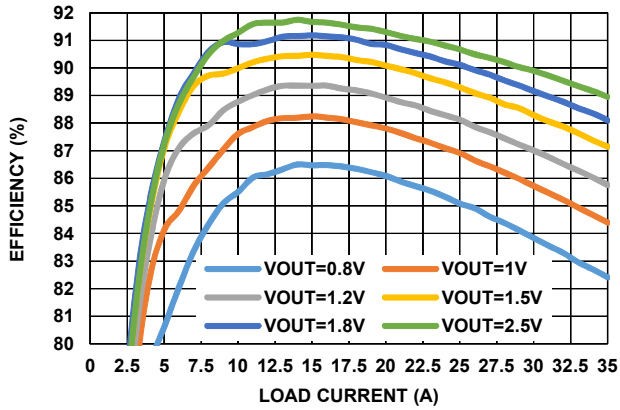


FIGURE 9. EFFICIENCY,  $V_{IN} = 12V$ ,  $f_{SW} = 400kHz$

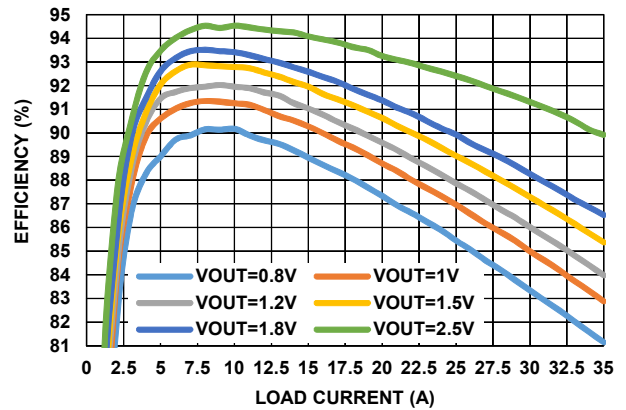


FIGURE 10. EFFICIENCY,  $V_{IN} = 5V$ ,  $f_{SW} = 400kHz$

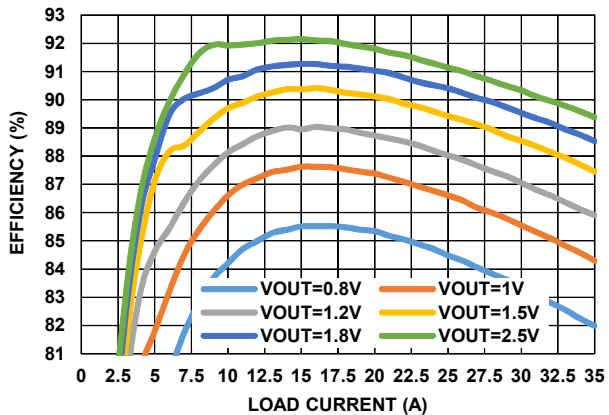


FIGURE 11. EFFICIENCY,  $V_{IN} = 12V$ ,  $f_{SW} = 500kHz$

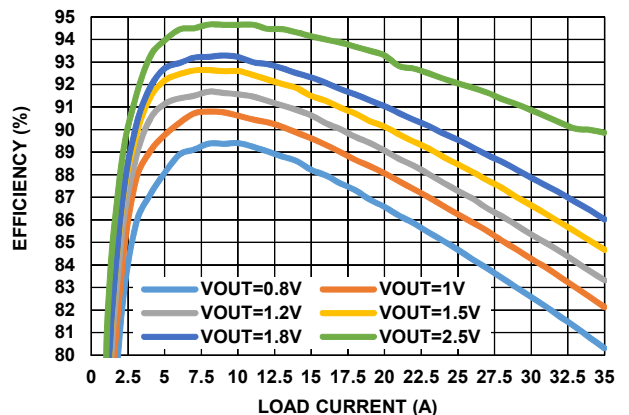


FIGURE 12. EFFICIENCY,  $V_{IN} = 5V$ ,  $f_{SW} = 500kHz$

## Performance Data (Continued)

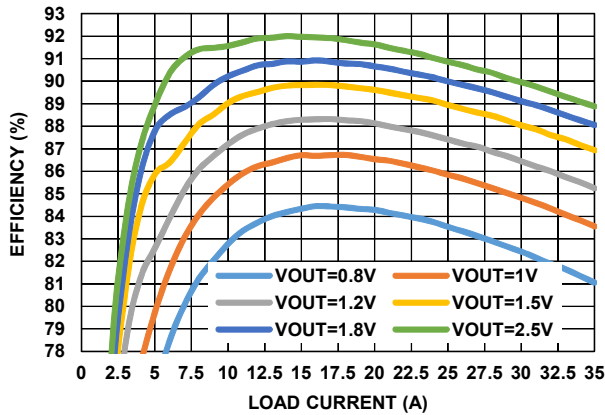


FIGURE 13. EFFICIENCY,  $V_{IN} = 12V$ ,  $f_{SW} = 600kHz$

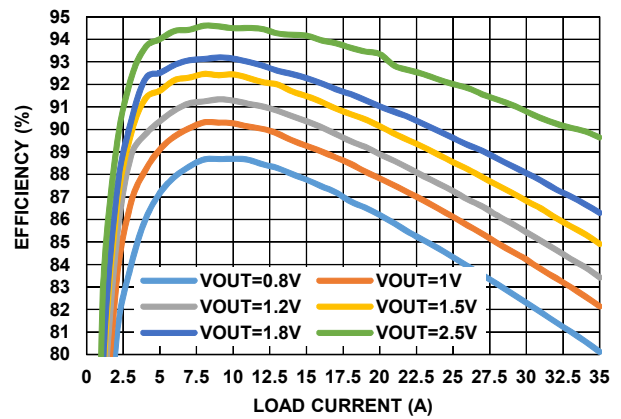


FIGURE 14. EFFICIENCY,  $V_{IN} = 5V$ ,  $f_{SW} = 600kHz$

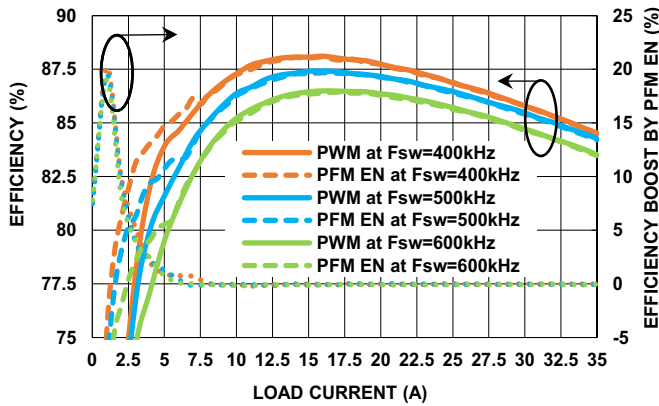


FIGURE 15. EFFICIENCY COMPARISON OF PWM MODE AND PFM ENABLED MODE,  $V_{IN} = 12V$ ,  $V_{OUT} = 1V$

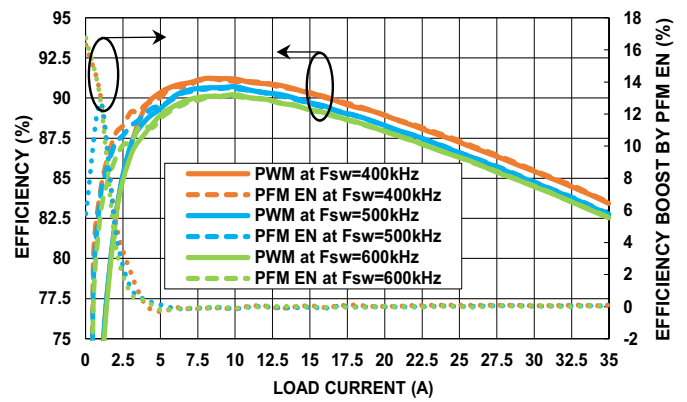


FIGURE 16. EFFICIENCY COMPARISON OF PWM MODE AND PFM ENABLED MODE,  $V_{IN} = 5V$ ,  $V_{OUT} = 1V$

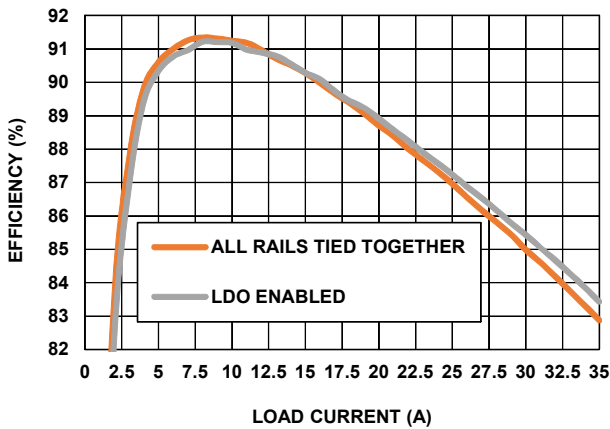


FIGURE 17. EFFICIENCY COMPARISON OF LDO ENABLED AND BYPASSED,  $V_{IN} = 5V$ ,  $V_{OUT} = 1V$ ,  $f_{SW} = 500kHz$

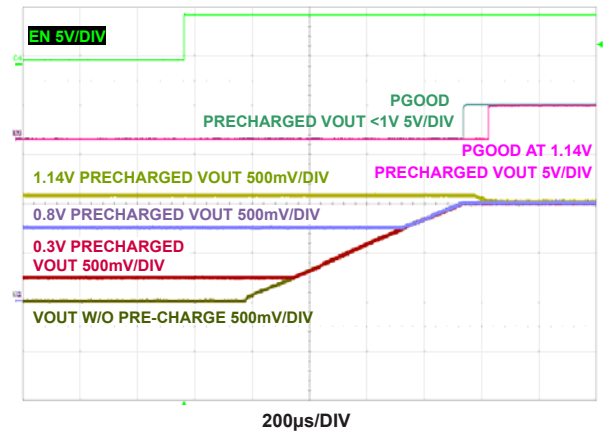


FIGURE 18. POWER-UP WITH/WITHOUT PRE-CHARGED LOAD

**Performance Data** (Continued)

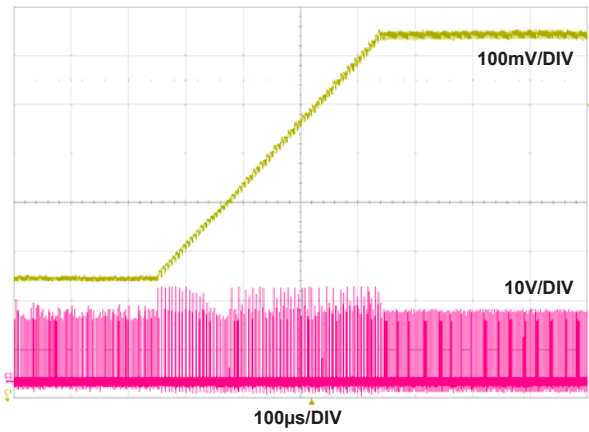


FIGURE 19.  $V_{OUT}$  RAMP-UP FROM 0.5V TO 1V IN PWM MODE (CH1-VOUT, CH2-PHASE)

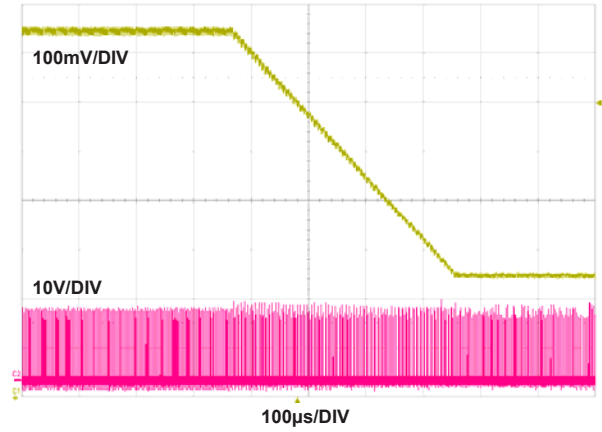


FIGURE 20.  $V_{OUT}$  RAMP-DOWN FROM 1V TO 0.5V IN PWM MODE (CH1-VOUT, CH2-PHASE)

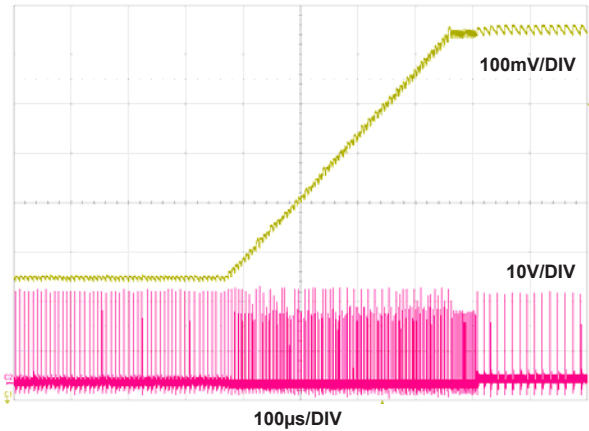


FIGURE 21.  $V_{OUT}$  RAMP-UP FROM 0.5V TO 1V IN PFM MODE (CH1-VOUT, CH2-PHASE)

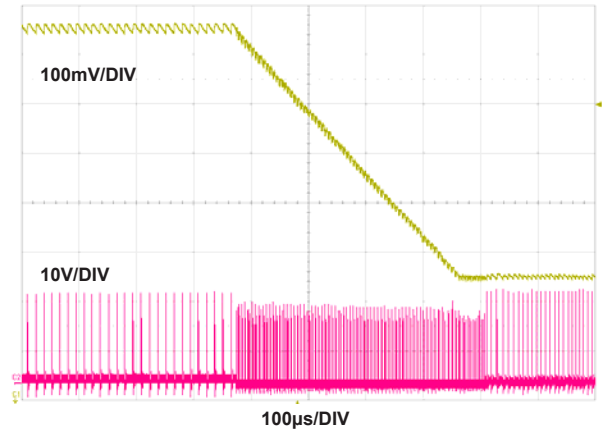


FIGURE 22.  $V_{OUT}$  RAMP-DOWN FROM 1V TO 0.5V IN PFM MODE (CH1-VOUT, CH2-PHASE)

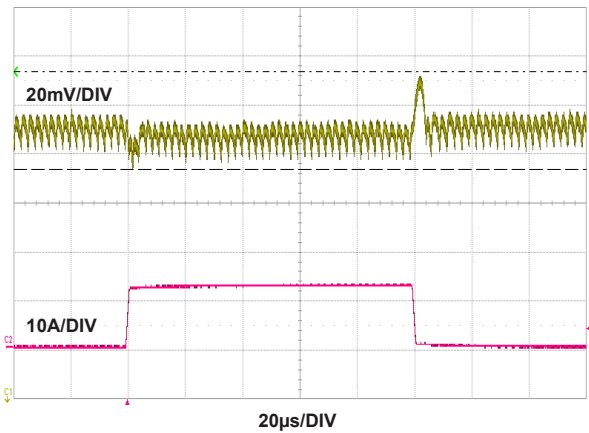


FIGURE 23. STEP RESPONSE AT PWM MODE,  $V_{OUT} = 1V$ ,  $f_{SW} = 400kHz$ , LOAD PROFILE: 0.25A TO 12.75A AT 25A/ $\mu s$  (CH1-VOUT, CH2-LOAD)

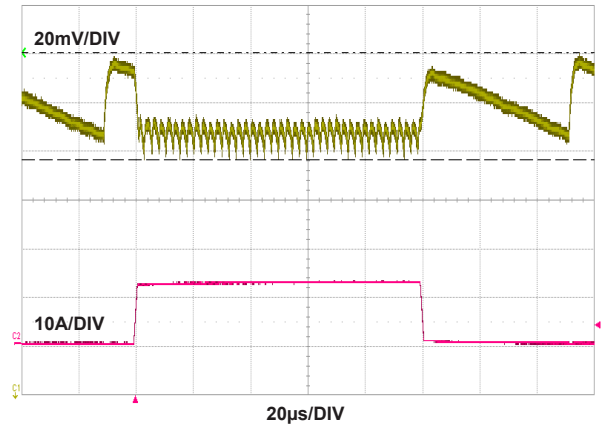


FIGURE 24. STEP RESPONSE AT PFM ENABLED MODE,  $V_{OUT} = 1V$ ,  $f_{SW} = 400kHz$ , LOAD PROFILE: 0.25A TO 12.75A AT 25A/ $\mu s$  (CH1-VOUT, CH2-LOAD)

## Performance Data (Continued)

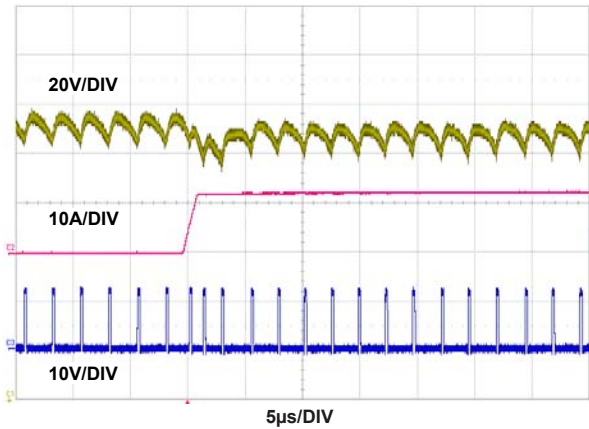


FIGURE 25. STEP RESPONSE TO LOAD STEP AT PWM MODE,  $V_{OUT} = 1V$ ,  $f_{SW} = 400kHz$ , LOAD PROFILE: 0.25A TO 12.75A AT 25A/ $\mu s$  (CH1-VOUT, CH2-LOAD, CH3-PHASE)

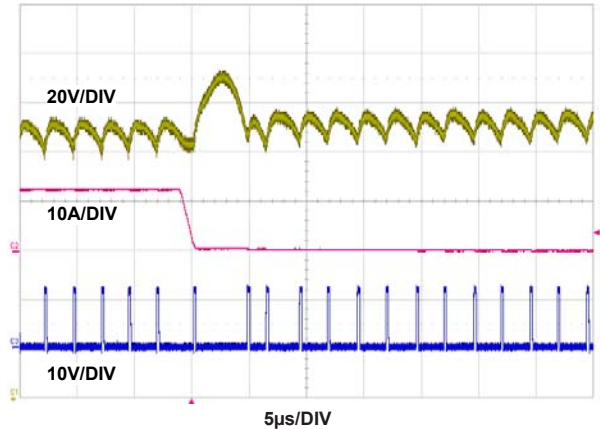


FIGURE 26. STEP RESPONSE TO LOAD RELEASE AT PWM MODE,  $V_{OUT} = 1V$ ,  $f_{SW} = 400kHz$ , LOAD PROFILE: 0.25A TO 12.75A AT 25A/ $\mu s$  (CH1-VOUT, CH2-LOAD, CH3-PHASE)

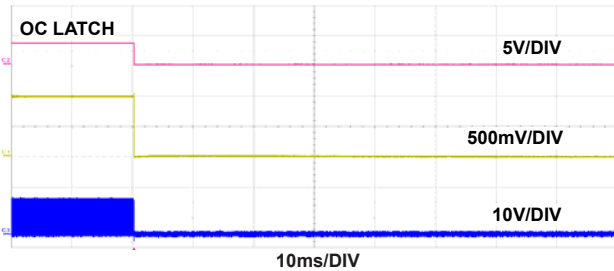
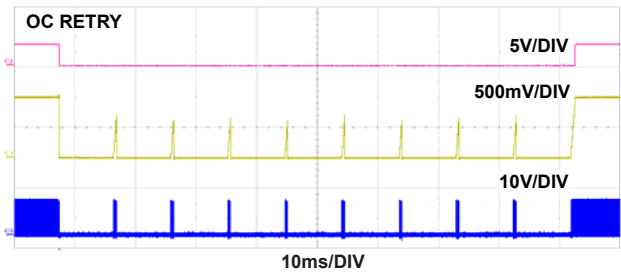


FIGURE 27. OVERCURRENT AND SHORT-CIRCUIT PROTECTION (CH1-VOUT, CH2-PGOOD, CH3-PHASE)

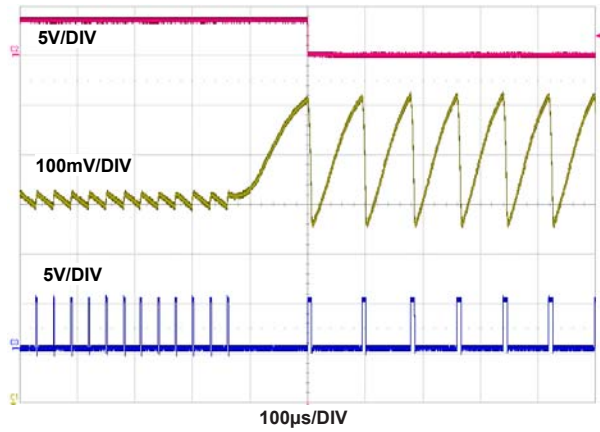


FIGURE 28. OVERVOLTAGE PROTECTION (CH1-VOUT, CH2-PGOOD, CH3-LGATE)

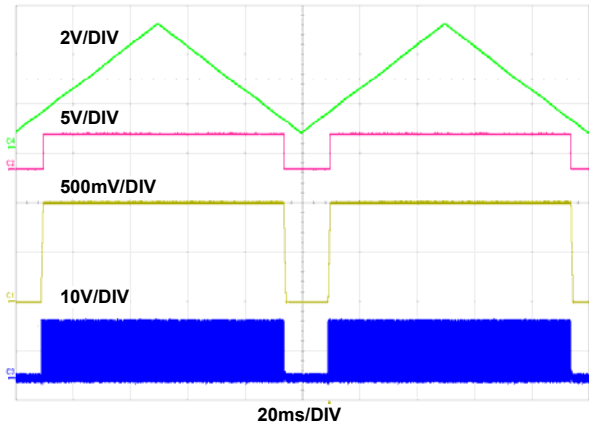


FIGURE 29. OVER-TEMPERATURE PROTECTION AT 1A LOAD (CH1-VOUT, CH2-LOAD, CH3-PHASE, CH4-NTC)

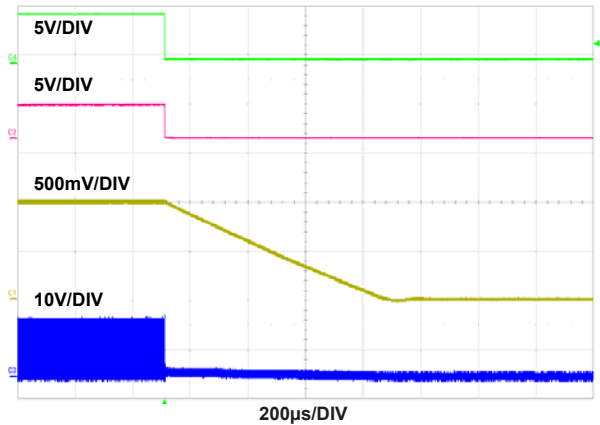


FIGURE 30. POWER-DOWN AT  $V_{OUT} = 1V$ , 1A LOAD (CH1-VOUT, CH2-PGOOD, CH3-PHASE, CH4-EN)



# ISL68201-99140DEMO1Z Board Layout

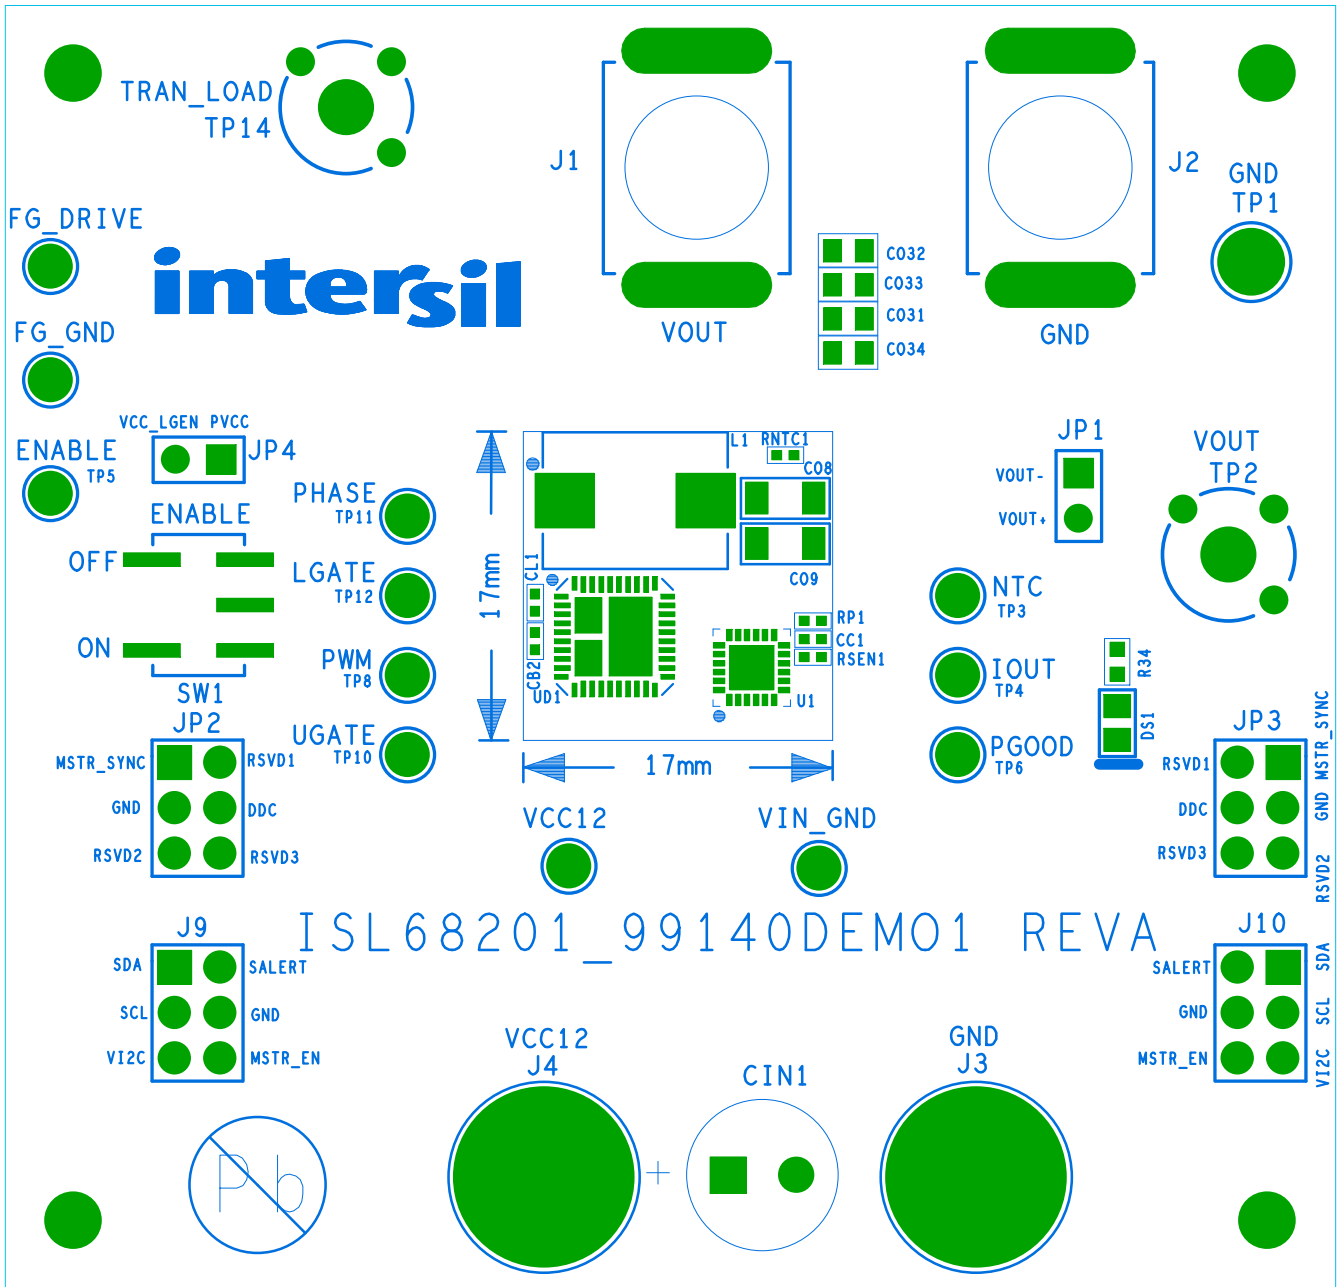


FIGURE 31. PCB - TOP ASSEMBLY

# ISL68201-99140DEMO1Z Board Layout (Continued)

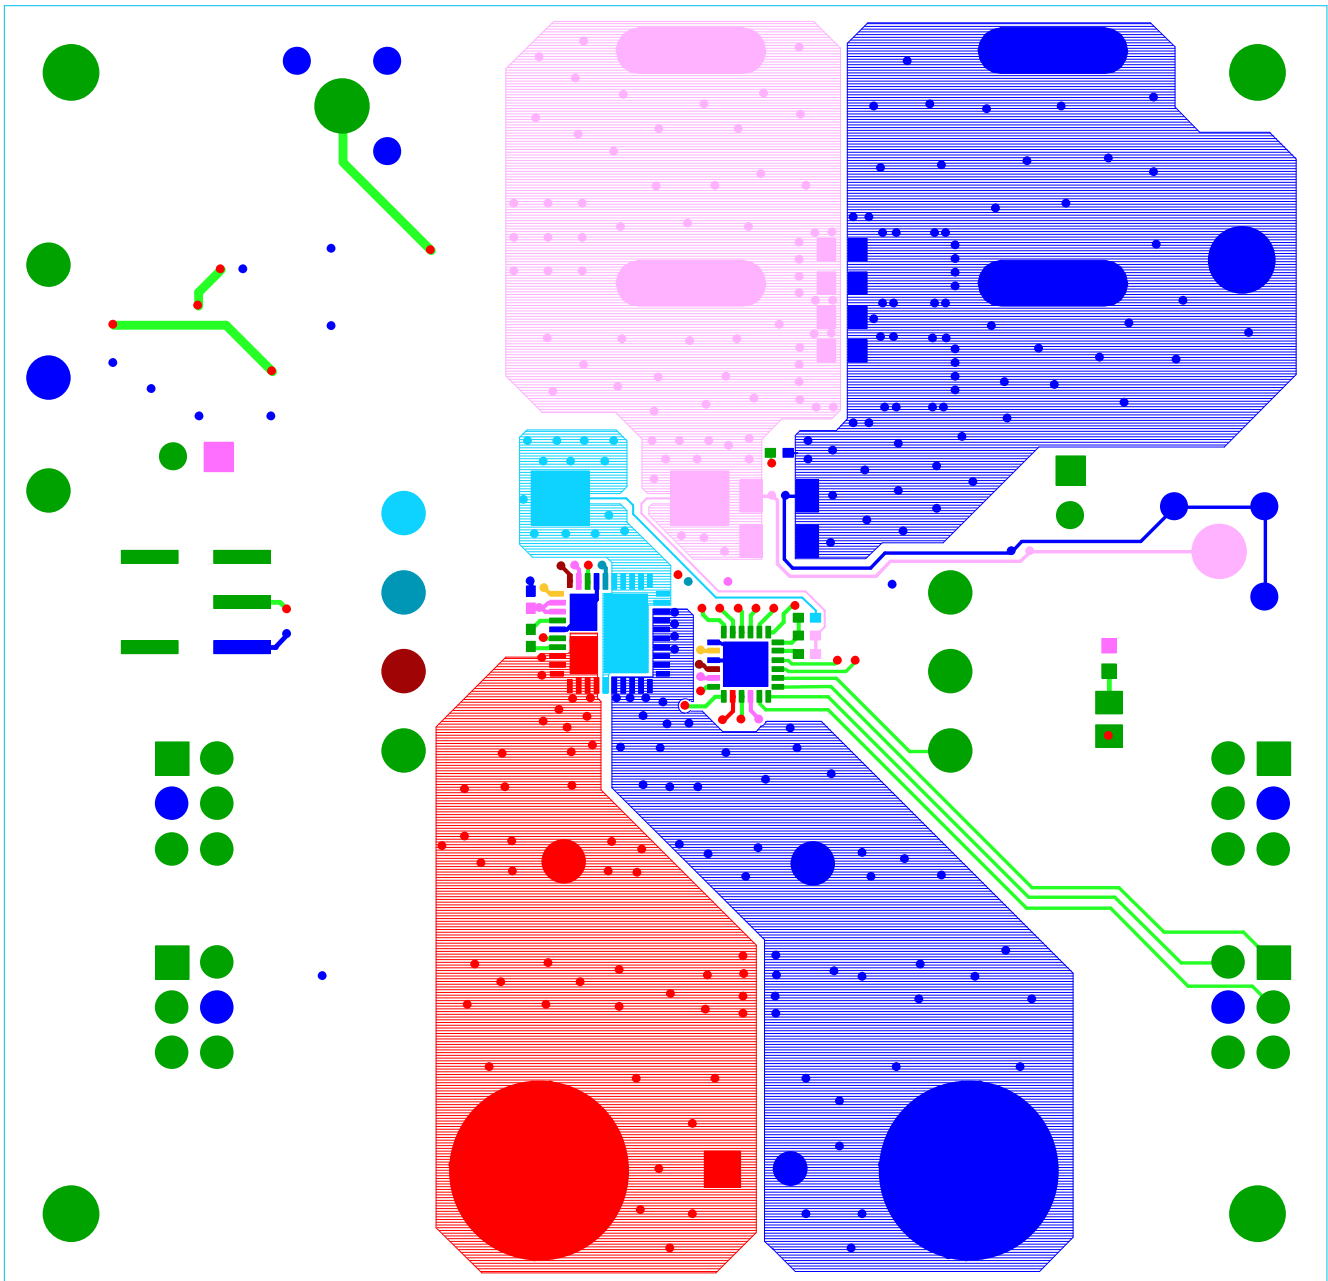


FIGURE 32. PCB - TOP LAYER

**ISL68201-99140DEMO1Z Board Layout** (Continued)

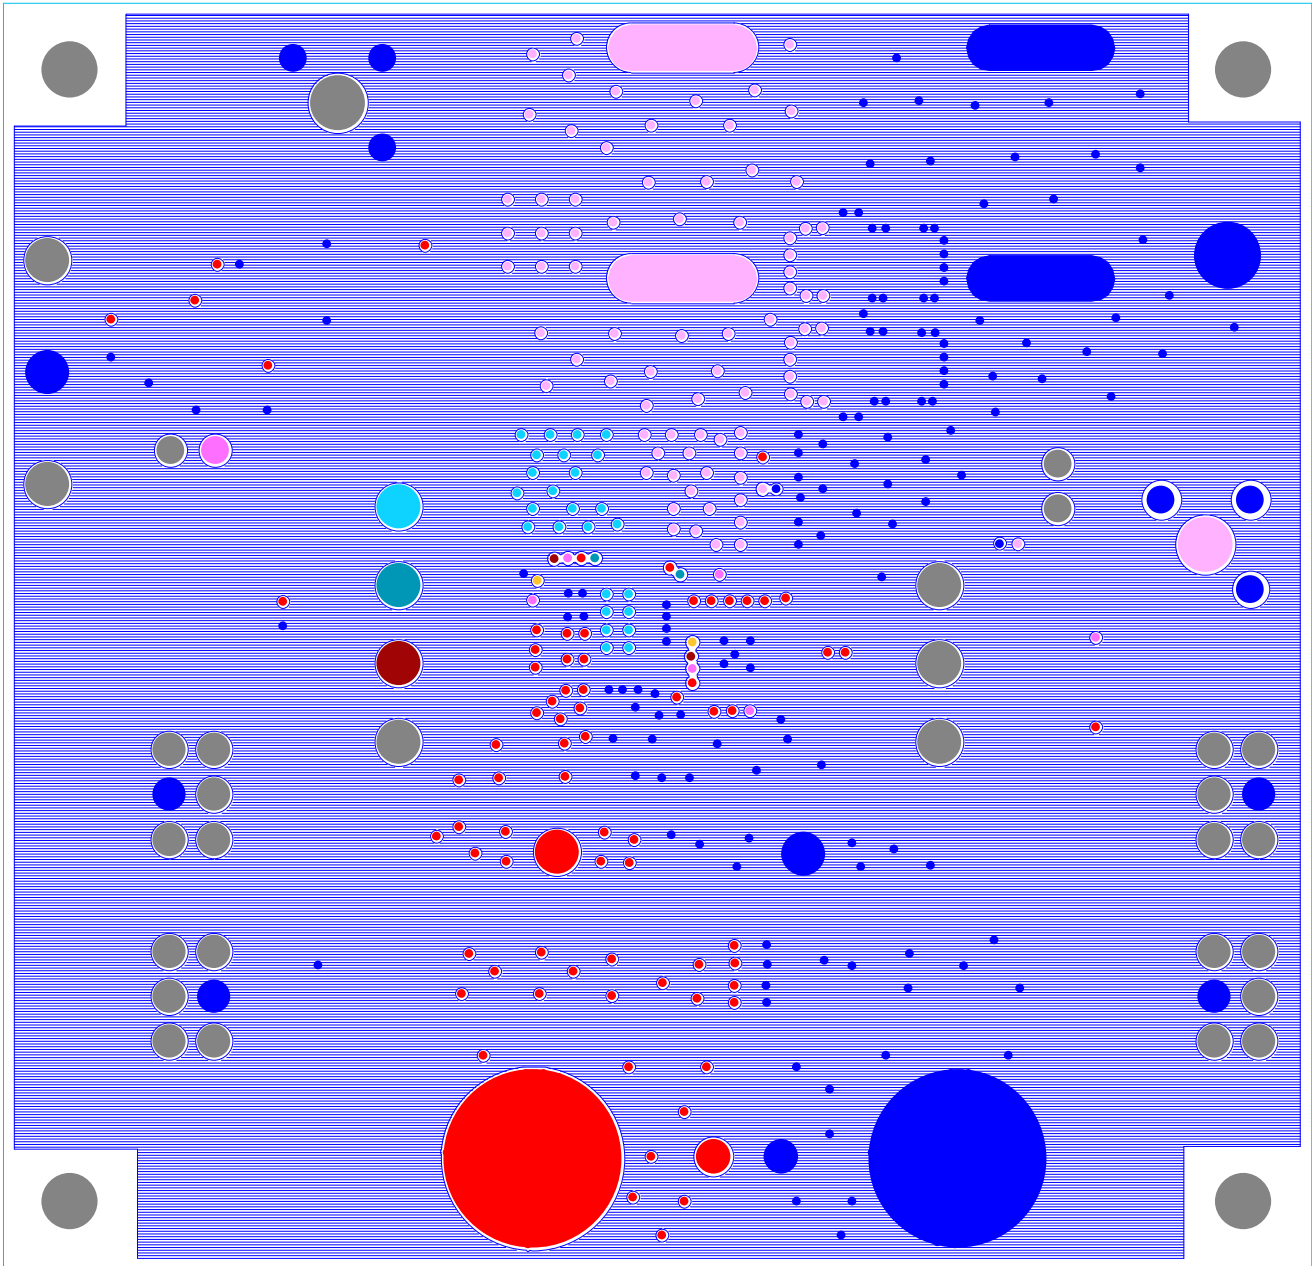


FIGURE 33. PCB - INNER LAYER 2 (TOP VIEW)

## ISL68201-99140DEMO1Z Board Layout (Continued)

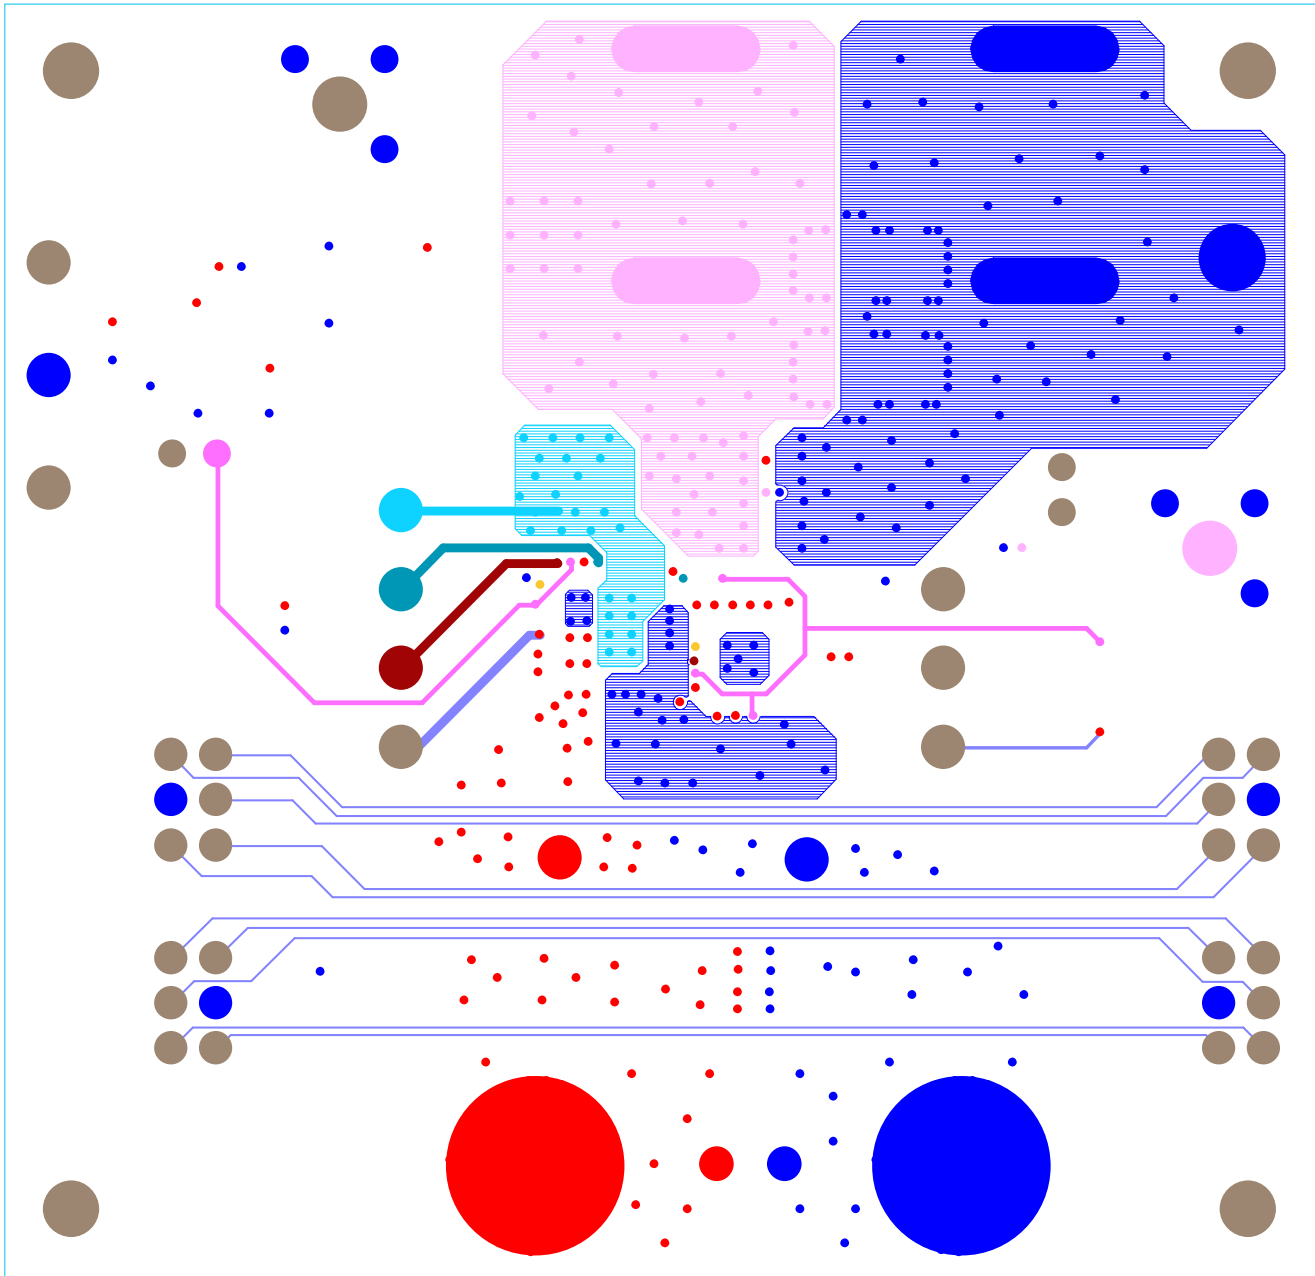


FIGURE 34. PCB - INNER LAYER 3 (TOP VIEW)

**ISL68201-99140DEMO1Z Board Layout** (Continued)

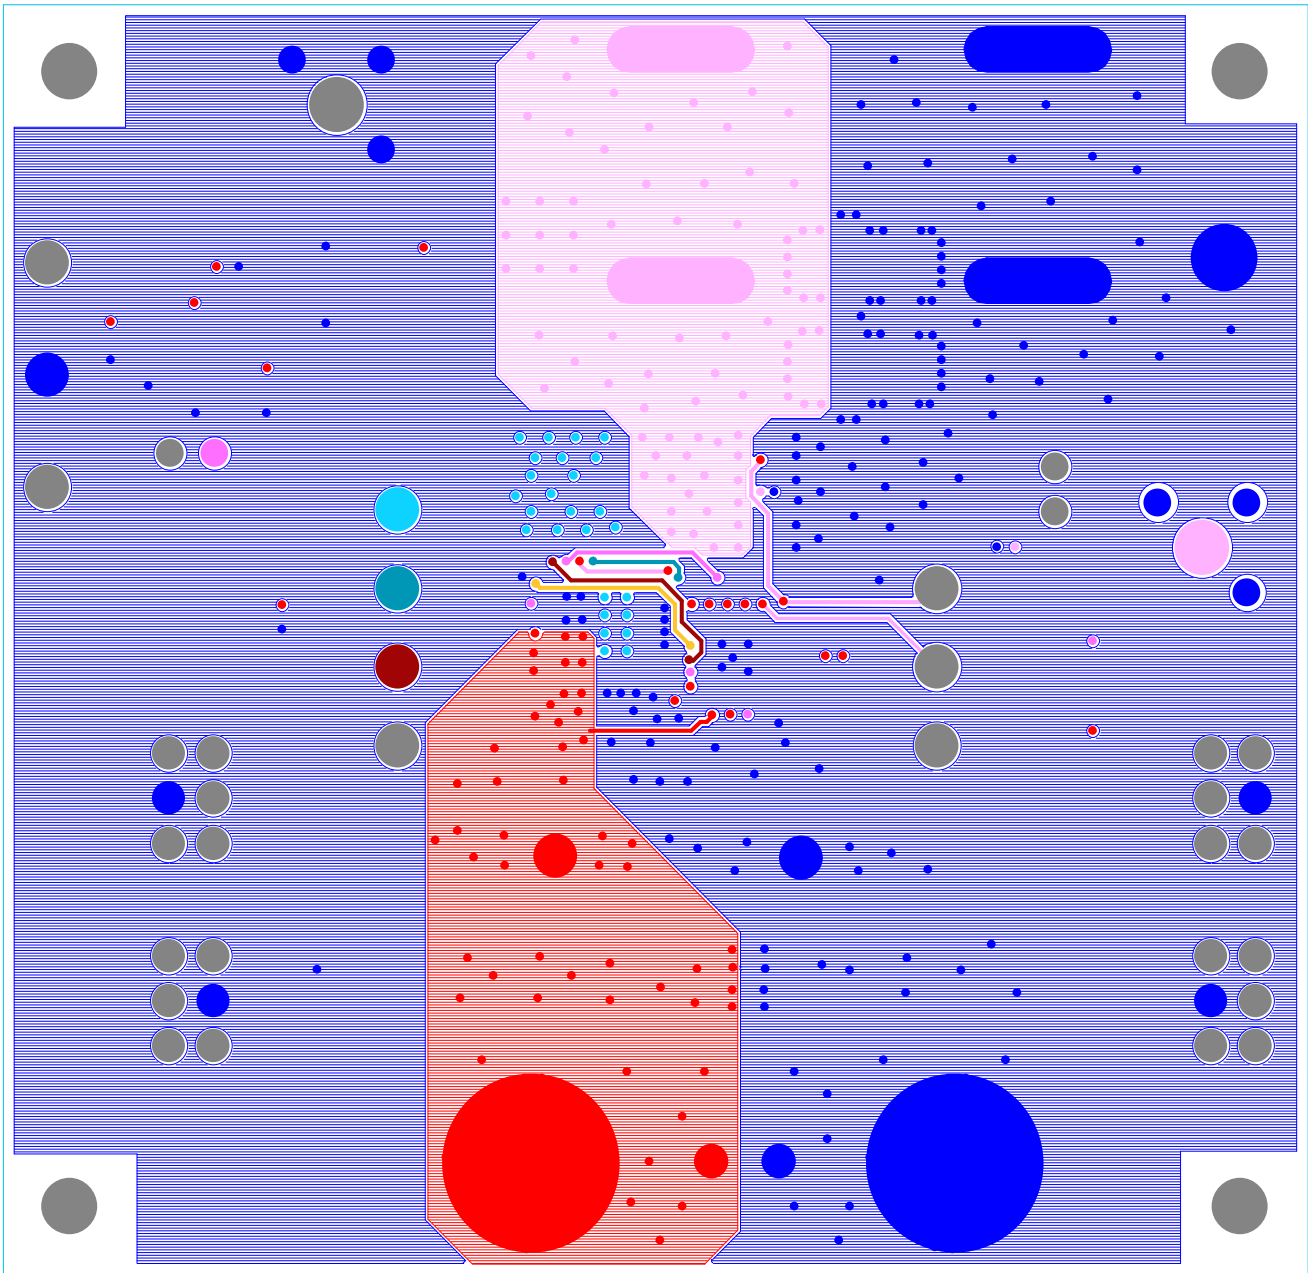


FIGURE 35. PCB - INNER LAYER 4 (TOP VIEW)

# ISL68201-99140DEMO1Z Board Layout (Continued)

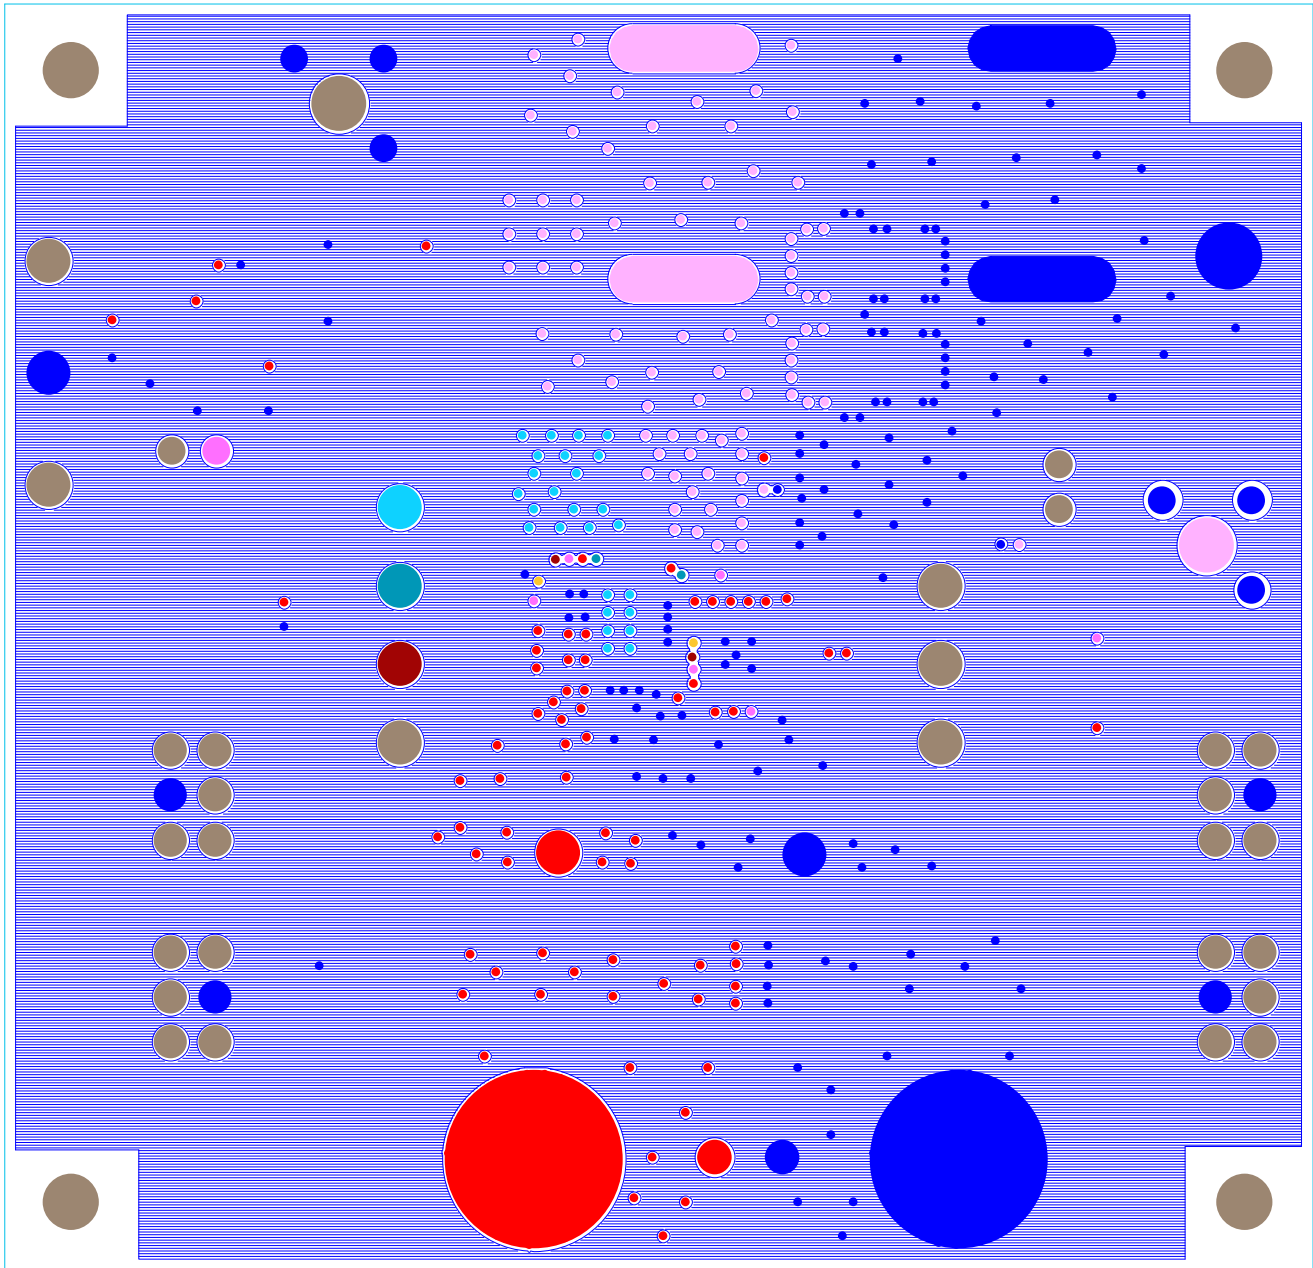


FIGURE 36. PCB - INNER LAYER 5 (TOP VIEW)



# ISL68201-99140DEMO1Z Board Layout (Continued)

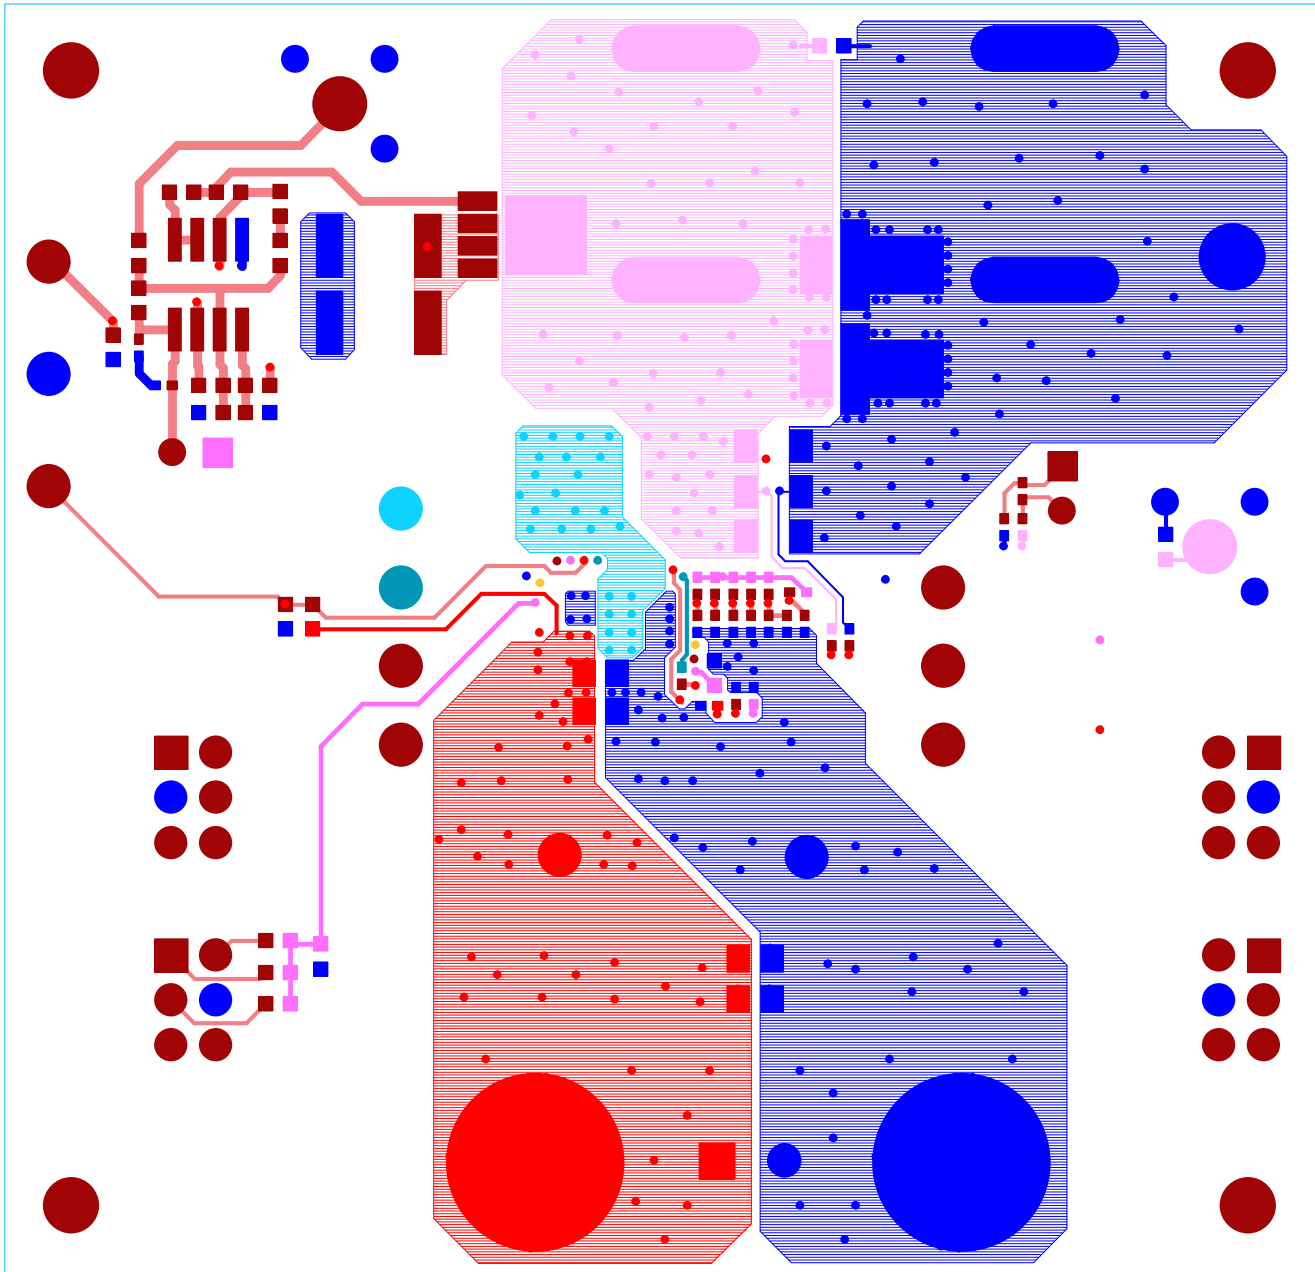


FIGURE 37. PCB - BOTTOM LAYER (TOP VIEW)

**ISL68201-99140DEMO1Z Board Layout (Continued)**

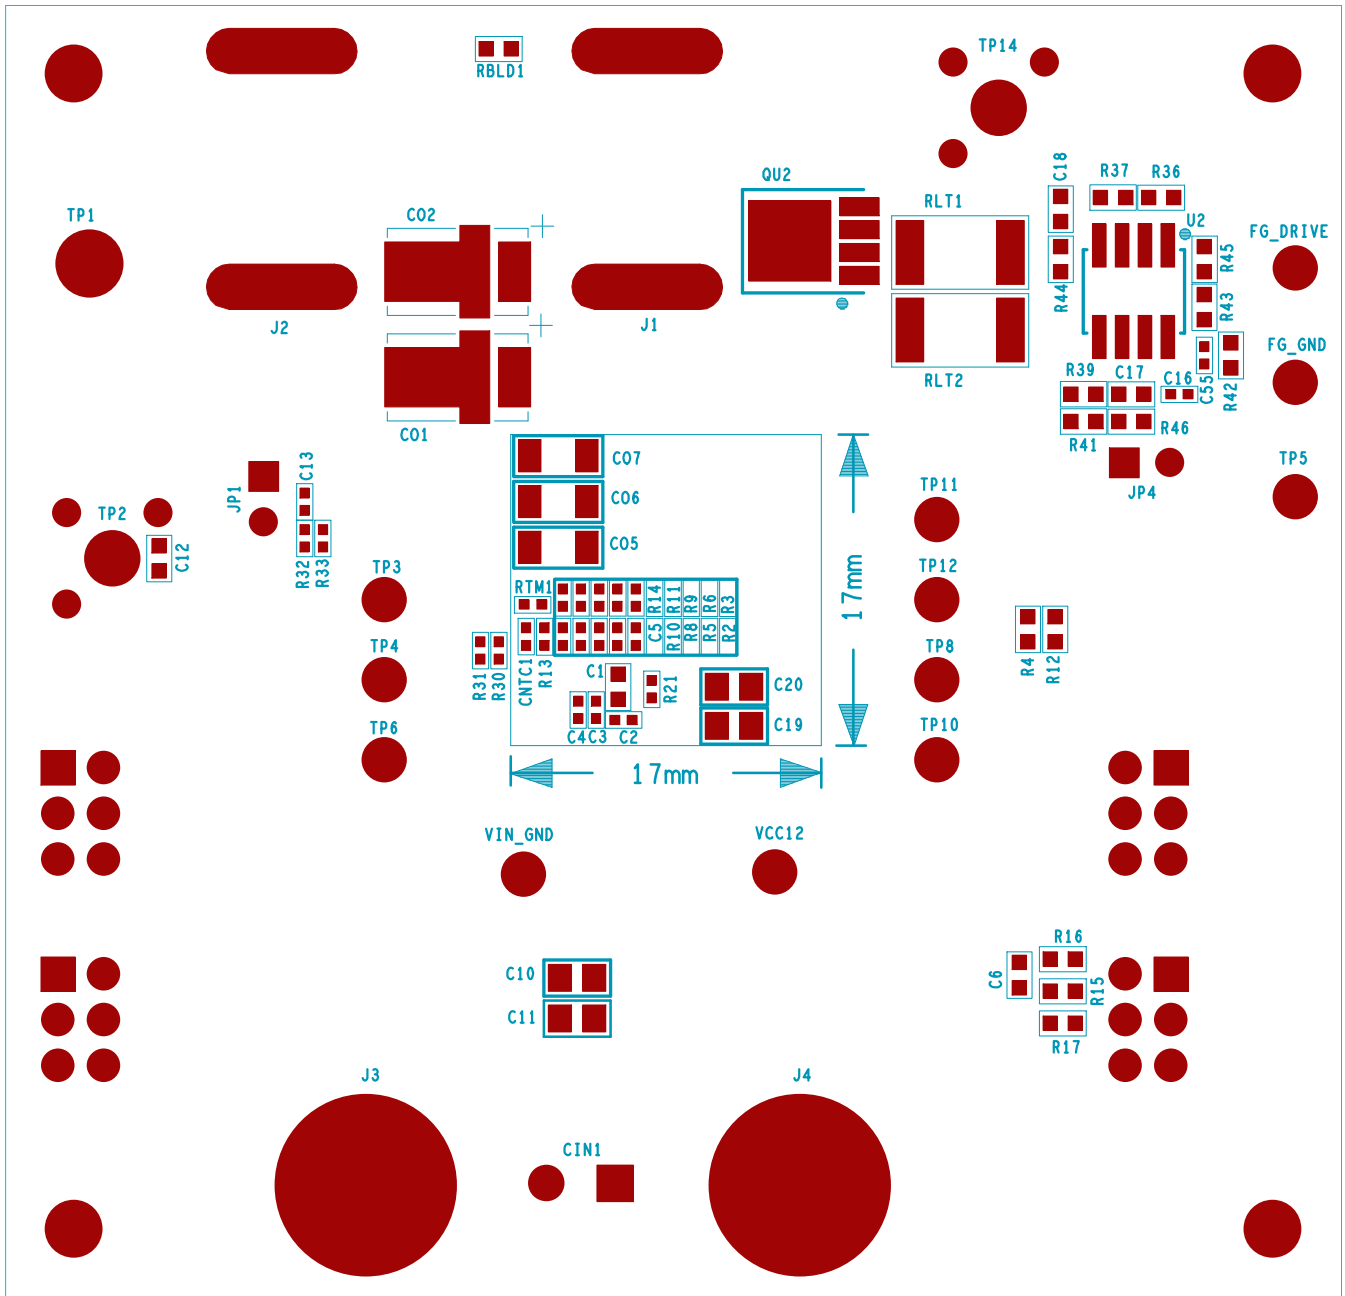


FIGURE 38. PCB - BOTTOM ASSEMBLY (TOP VIEW)