

LED Driver

LNP-C 40W Series / LNP-07A40WBCA



LNP-C

Highlights & Features

- Constant current design
- Input voltage from 198-264Vac
- Up to 90.5% efficiency
- Independent or built-in type
- Meets IEC/EN 61000-3-2, Class C
- Fixed output current
- IP20 assembly for indoor applications

Safety Standards



Model Number:	LNP-07A40WBCA
Unit Weight:	0.18 kg (0.4 lb)
Dimensions (L x W x D):	115 x 45 x 29 mm (4.53 x 1.77 x 1.14 inch)

General Description

Delta LNP-C series of fixed output current LED drivers comes with affordable and reliable features. Compatible with COB and mid-power LEDs from any LED manufacturer. Independent type housing design for stand-alone installations. Various output current selection for different lumen application. Meet major Europe safety certifications and are compliant with EN55015 Immunity/Emissions/Harmonic requirements. The products are designed and rigorously tested to work in various indoor LED lighting conditions.

Model Information

LNP-C LED Driver

Model Number	Input Voltage Range	Rated Output Voltage	Rated Output Current
LNP-07A40WBCA	220-240Vac Typical 198-264Vac Range	39-57Vdc	700mA

Model Numbering

LNP –	A	40W	B	C	A
LED Driver Series P	Output Current 07A – 700mA	Output Power (40W series model)	Function B – Fixed type	Region C – EMEA & Others	Product Type A – Independent

LED Driver

LNP-C 40W Series / LNP-07A40WBCA

Specifications

Model Number	LNP-07A40WBCA
--------------	---------------

Input Ratings / Characteristics

Normal Input Voltage	220-240Vac
Input Voltage Range	198-264Vac
Normal Input Frequency	50/60 Hz
Input Frequency Range	47-63 Hz
Normal Input Current	0.25A
Efficiency ¹⁾	230Vac 90.5% typ
No Load Power Consumption	< 0.6W @ 230Vac
Inrush Current (Apk / 50%-us) (Cold Start)	10A/250us @ 230Vac
Max. no. of LED Driver for Circuit Breaker	45 pcs for MCB (B type 16A 100% Relative number) / (C type 16A 100% Relative number)
Power Factor	> 0.95 @ 230Vac/50Hz at > 25W load
Total Harmonic Distortion	< 20% @ 230Vac/50Hz at > 25W load
Leakage Current	< 0.7mA @ 230Vac

1) 100% Load (typical) and tested after 30 minutes warm up.

Output Ratings / Characteristics


Nominal Output Current	700mA
Output Voltage Range	39-57Vdc
Max. No Load Output Voltage	63Vdc
Output Power Range	27.3-40W
Output Current Tolerance	± 10%
Line Regulation	± 5%
Load Regulation	± 5%
Output Current Ripple	Low frequency, 30% @ max load, 40% @ 28W load (ripple = (pk-avg)/avg)
Rise Time	< 80ms @ 230Vac
Start-up Time	< 300ms @ 230Vac
Hold-up Time	0.5ms typ. @ 230Vac (100% load)

Mechanical

Casing	Plastic, Color: White, Potting by Asphalt
Dimensions (L x W x D)	115 x 45 x 29 mm (4.53 x 1.77 x 1.14 inch)
Unit Weight	0.18 kg (0.4 lb)
Cooling System	Convection
Input Connector	Terminal, 2-pole (L & N), pin spacing 3.5mm, push-button, 0.75~1.5mm ² , stripping 9-10mm
Output Connector	Terminal, 2-pole (LED+/-), pin spacing 3.5mm, push-button, 0.75~1.5mm ² , stripping 9-10mm

LED Driver

LNP-C 40W Series / LNP-07A40WBCA

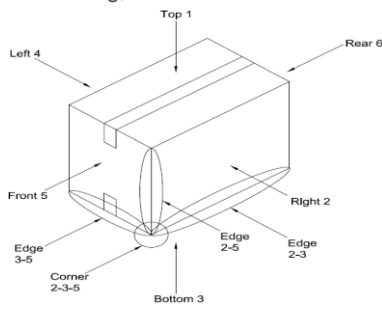Model Number		LNP-07A40WBCA
Environment		
Ambient Temperature	Operating	-25°C to +50°C
	Storage	-25°C to +85°C
Maximum Case Temperature		+85°C
Lifetime Case Temperature		+85°C
Maximum Housing Temperature		+110°C
Relative Humidity	Operating	10 to 90% RH (Non-Condensing)
	Storage	5 to 95% RH (Non-Condensing)
Drop Test	Non-Operating	According to ASTM D-775, 40cm height. Drop to concrete floor as below drawing, total 10 times.
		
Vibration	Non-Operating	IEC 60068-2-6, Random: 5 Hz to 10 Hz (1G); 30 min per axis for all X, Y, Z direction

Protections

Over Voltage	58-63Vdc
	Auto-Recovery when the fault is removed
Open Load	Auto-Recovery when the fault is removed
Short Circuit	Auto-Recovery when the fault is removed
Over Temperature	Auto-Recovery when the fault is removed
Ingress Protection Classification	20
Suitable for Luminaires Class	Class II. Insulation Class according to IEC 60598

Reliability Data

Lifetime	50,000 hrs. at lifetime case temperature
MTBF	500,000 hrs. as per Telcordia SR-332 (ta: +50°C)

Safety Standards / Directives

Electrical Safety	CB scheme ENEC SELV	IEC 61347-1, IEC 61347-2-13 EN 61347-1, EN 61347-2-13, EN 62384 SELV
CE		In conformance with EMC Directive 2014/30/EU and Low Voltage Directive 2014/35/EU
Material and Parts		RoHS Directive 2011/65/EU Compliant
Galvanic Isolation	Input to Output	3.75kVac

LED Driver

LNP-C 40W Series / LNP-07A40WBCA

Model Number	LNP-07A40WBCA	
---------------------	----------------------	--


EMC

Emissions (CE & RE)	Compliance to EN 55015:2013 Class B	
Immunity	Compliance to EN 61547:2009	
Electrostatic Discharge	IEC 61000-4-2:2008 Ed.2.0	ESD, Criteria A ¹⁾ or B ²⁾ Air Discharge: 8kV; Contact Discharge: 4kV
Radiated Field	IEC 61000-4-3:2010 Ed.3.2	RS, Criteria A1 80MHz-1GHz, 3V/m with 1kHz Sine Wave / 80% AM Modulation
Electrical Fast Transient / Burst	IEC 61000-4-4:2012 Ed.3.0	EFT, Criteria A ¹⁾ or B ²⁾ 1kV
Surge	IEC 61000-4-5:2014 Ed.3.0	Criteria A ¹⁾ or B ²⁾ Common Mode ³⁾ : 2kV; Differential Mode ⁴⁾ : 1kV 1.2/50µs, 8/20µs Combination Wave with 2ohms (L-N), 12ohms (L-PE & N-PE) source impedance
Conducted	IEC 61000-4-6:2013 Ed.4.0	CS, Criteria A ¹⁾ 150kHz-80MHz, 3Vrms
Power Frequency Magnetic Fields	IEC 61000-4-8:2009 Ed.2.0	PFMF, Criteria A ¹⁾ 3A/Meter
Voltage Dips	IEC 61000-4-11:2004 Ed.2.0	Criteria A ¹⁾ or B ²⁾ ; 100% dip; 0.5 cycle; Self Recoverable 30% dip; 10 cycle; Self Recoverable
Harmonic Current Emission	IEC 61000-3-2:2014	Class C (230Vac @ 100% load)
Voltage Fluctuation & Flicker	IEC 61000-3-3:2013	


1) Criteria A: Normal performance within the specification limits
2) Criteria B: Temporary degradation or loss of function which is self-recoverable

3) Asymmetrical: Common mode (Line to earth)
4) Symmetrical: Differential mode (Line to line)

Lifetime VS Case Temperature

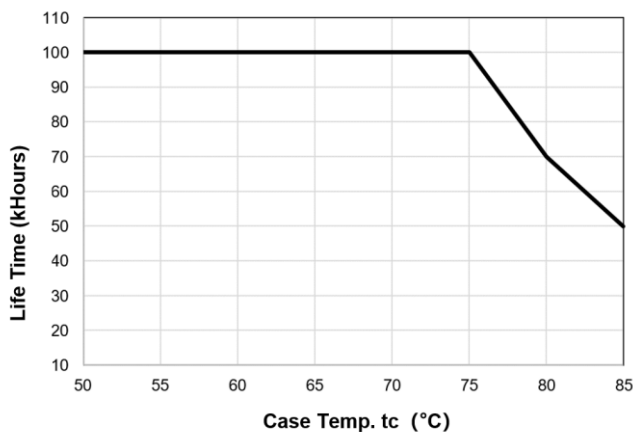


Lifetime VS Ambient Temperature

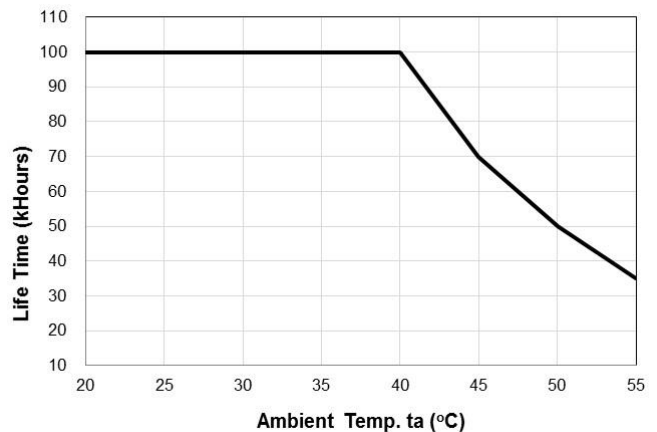


LED Driver

LNP-C 40W Series / LNP-07A40WBCA


Efficiency VS Output Power

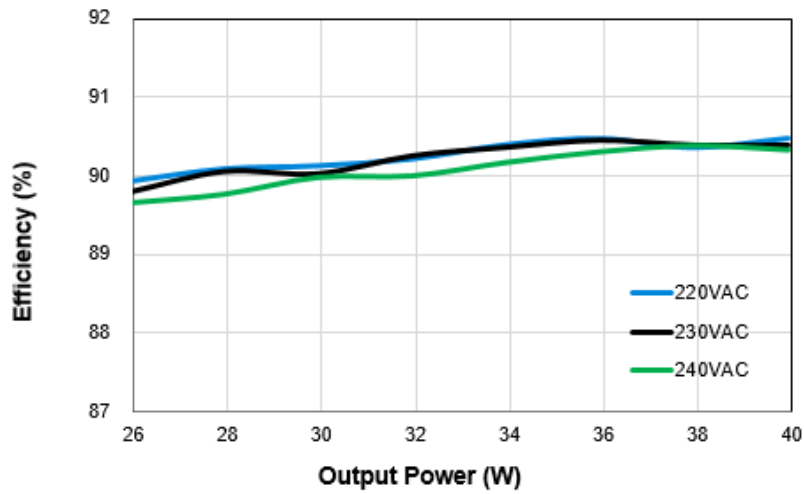

Power Factor VS Output Power

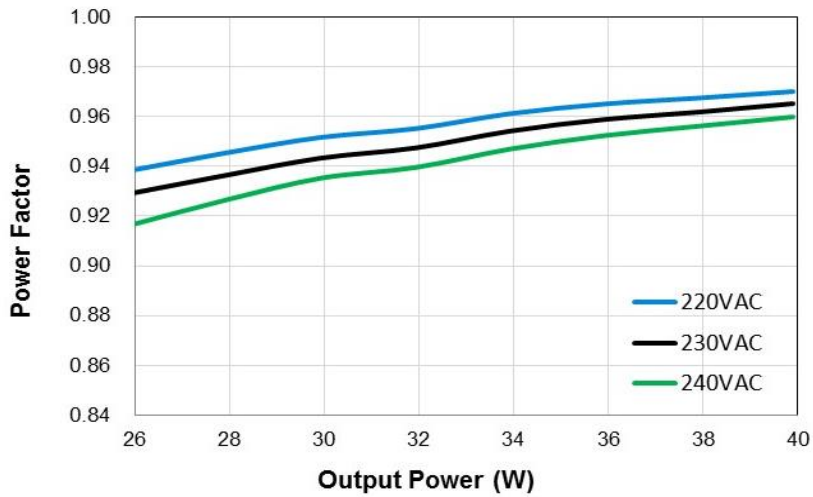

Total Harmonic Distortion VS Output Power

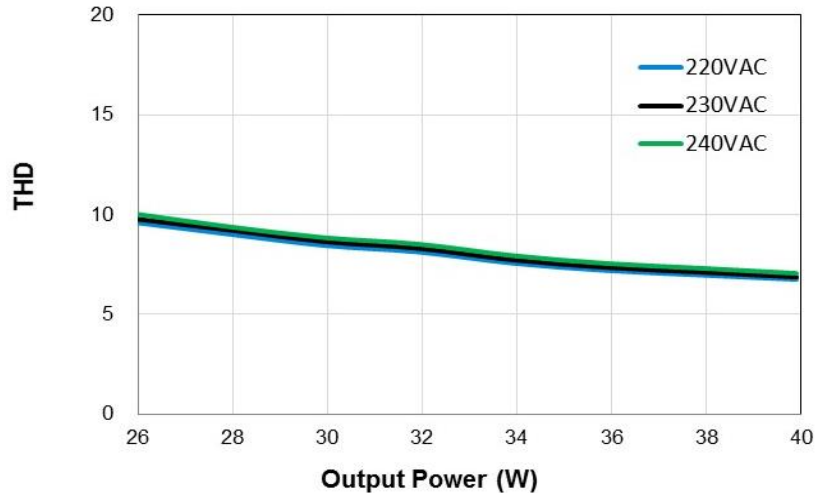


LED Driver

LNP-C 40W Series / LNP-07A40WBCA

Dimensions

L x W x D: 115 x 45 x 29 mm (4.53 x 1.77 x 1.14 inch)

Independent Type

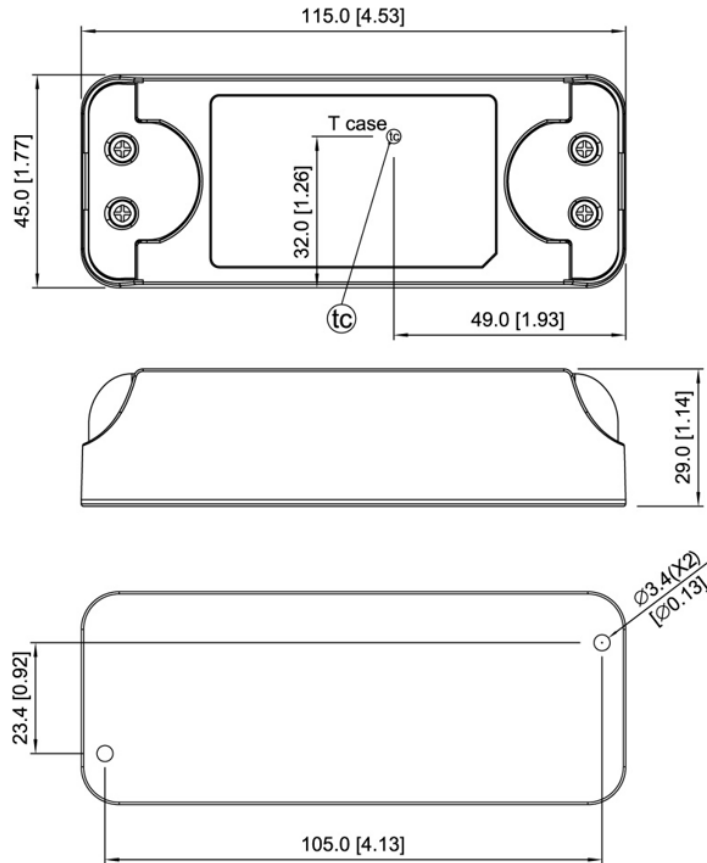

Wiring Connection



LED Driver

LNP-C 40W Series / LNP-07A40WBCA

Assembly & Installation

Mounting holes for LED driver assembly onto the mounting surface.

<p>Ⓐ, Ⓑ</p>	<p>Mounting holes for the LED driver (device). There are 1 mounting holes at either end of the device (locations Ⓐ and Ⓑ in Fig.1). The device shall be mounted using 1 mounting hole on both sides. Mounting shall be done using M3 screws with minimum length of 4mm. If customer's end system or panel where the device is mounted does not have screw threads, please use suitable metal screw and nut to secure the device.</p>
<p>Ⓒ</p>	<p>Surface Ⓒ belongs to customer's end product or panel where the device is mounted. The device should be mounted on a sturdy heat conducting surface with minimum of 2 mounting holes, as detailed above.</p>

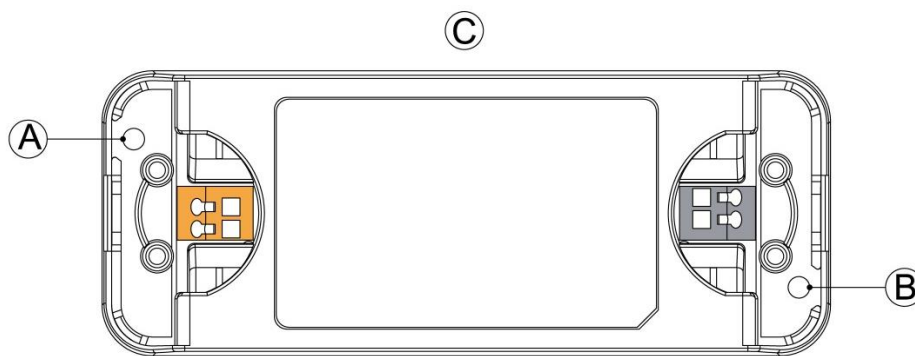


Fig. 1 Mounting Hole Locations

Safety Instructions

- ALWAYS switch mains of input power OFF before connecting and disconnecting the input voltage to the device. If mains are not turned OFF, there is risk of explosion / severe damage.
- To guarantee sufficient convection cooling, keep a distance of 50mm above and lateral distance to nearby objects.
- The device is not recommended to be placed on low thermal conductive surfaces. For example, plastics.
- DO NOT insert any objects into the device.
- Note that the enclosure of the device can become very hot depending on the surrounding air temperature and output load connected to the device. Risk of burns!
- The current rating for the all wires, connected to the input and output wires of the device, must be rated higher than or equal to the input and output current of the power supply. Please refer to the product specifications.
- For device with dimming function, always ensure the dimming control is working properly.
- Please ensure the correct tools are used for all adjustments and installations of the device. If in doubt, please consult your local Delta support or contact us via info@DeltaPSU.com.

LED Driver

LNP-C 40W Series / LNP-07A40WBCA

Functions

Start-up Time

The time required for the output voltage to reach 90% of its final steady state set value, after the input voltage is applied.


Rise Time

The time required for the output voltage to change from 10% to 90% of its final steady state set value.

Hold-up Time


Time between the collapse of the AC input voltage, and the output falling to 95% of its steady state set value.

■ Graph illustrating the Start-up Time, Rise Time, and Hold-up Time

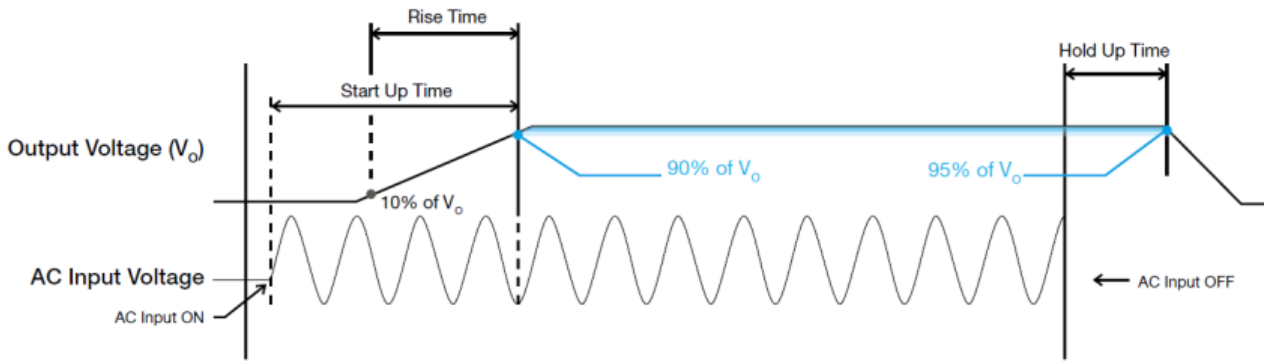

Inrush Current


Inrush current is the peak, instantaneous, input current measured and, occurs when the input voltage is first applied. For AC input voltages, the maximum peak value of inrush current will occur during the first half cycle of the applied AC voltage. This peak value decreases exponentially during subsequent cycles of AC voltage.

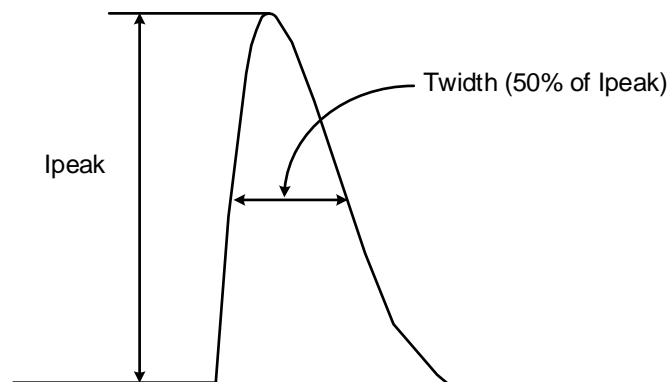

LED Driver

LNP-C 40W Series / LNP-07A40WBCA

Operating Methods of LED Modules-CV and CC Operation

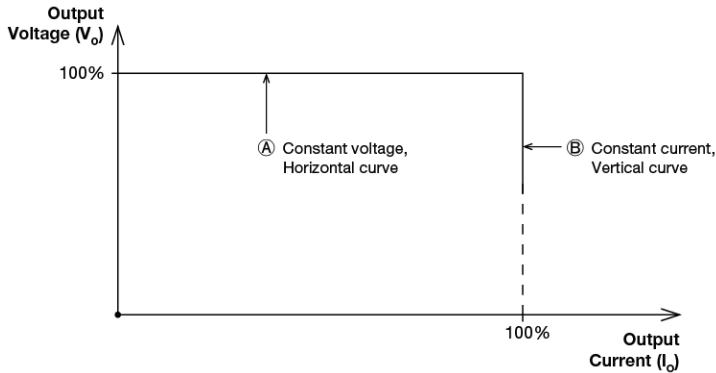

A typical LED power supply is able to either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs. Delta's LED drivers integrate CV+CC characteristics; so operation in CV mode (with external LED driver), in region (A) or CC mode (direct drive, at area B).

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues or other questions with these adjustment methods, please contact with Delta.

Over Voltage Protections (Auto-Recovery)

The LED driver's Overvoltage Protections (OVP) will be activated when output voltage is achieved trigger point defined at OVP range. Upon such an occurrence, the I_o (output current) will start to droop.

Short Circuit Protection (Auto-Recovery)

The LED driver's output OLP function also provides protection against short circuits. When a short circuit is applied, the LED driver will operate in "hiccup mode". It will return to normal operation after the short circuit is removed.

Overload & Overcurrent Protection (Auto-Recovery)

The power supply's Overload (OLP) and Overcurrent (OCP) Protections will be activated when output is between 95% and 108% of I_o (max load). Upon such an occurrence, the V_o (output voltage) will start to droop. Once the power supply has reached its maximum power limit, the protection will be activated; and, the power supply will operate in "CC mode". The power supply will recover once the fault condition once the cause of OLP or OCP is removed, and I_o is back within the specified range.

Over Temperature Protection (Auto-Recovery)

As mentioned above, the power supply also has Over Temperature Protection (OTP). In the event of a higher operating temperature at 100% load, the power supply will run into OTP when the operating temperature is beyond what is recommended in the de-rating graph. When activated, the output voltage will go into bouncing mode until the temperature drops to its normal operating temperature as recommended in the de-rating graph.