

## Double-Balanced Mixer 18 - 46 GHz

Rev. V2

### Features

- Low Conversion Loss: 6.5 dB
- High Linearity: 20 dBm IIP3
- Wide IF Bandwidth: DC to 20 GHz
- High Isolation
- Die Size: 1.15 × 0.97 × 0.10 mm
- RoHS\* Compliant


### Description

MAMX-011037-DIE is a double-balanced passive diode mixer MMIC. The mixer offers low conversion loss, high linearity and a wide IF bandwidth. The double-balanced circuit configuration provides excellent port isolation while internal 50-ohm matching simplifies its application.

This mixer is well suited for applications such as test and measurement, microwave radio and radar.

MAMX-011037-DIE is also available in a 3 mm QFN package. Refer to datasheet MAMX-011054.

### Functional Schematic

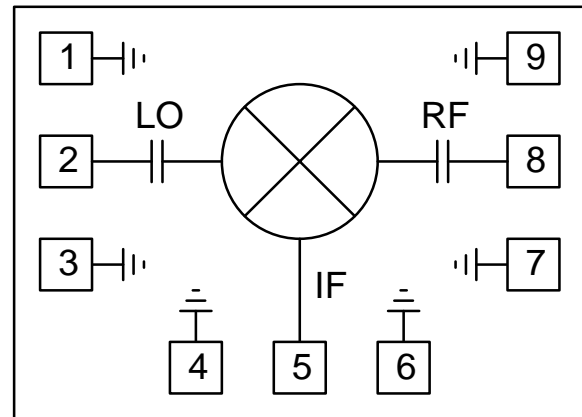

### Ordering Information

Part Number	Package
MAMX-011037-DIE	Vacuum Release Gel Pack <sup>1</sup>
MAMX-011037-SB2	Sample Board

1. Die quantity varies.

### Bond-pad Configuration

Pad No.	Function	Pad No.	Function
1	GND <sup>2</sup>	6	GND <sup>2</sup>
2	LO	7	GND <sup>2</sup>
3	GND <sup>2</sup>	8	RF
4	GND <sup>2</sup>	9	GND <sup>2</sup>
5	IF	10	GND <sup>3</sup>

2. These pads are internally connected to ground, and they can be left unconnected.
3. The backside of the die must be connected to RF, DC and thermal ground.

\* Restrictions on Hazardous Substances, European Union Directive 2011/65/EU.

## Double-Balanced Mixer 18 - 46 GHz

Rev. V2

**Electrical Specifications<sup>4</sup>:**  $F_{IF} = 1\text{GHz}$ ,  $P_{LO} = +15\text{ dBm}$ ,  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50\ \Omega$

Parameter	Test Conditions	Units	Min.	Typ.	Max.
LO and RF Frequency	—	GHz	18	—	46
IF Frequency	—	GHz	0	—	20
LO Power	—	dBm	—	15	—
Conversion Loss	18 - 24 GHz	dB	—	6.5	12
	24 - 40 GHz			6.5	10
	40 - 46 GHz			6.5	11
Input P1dB	—	dBm	—	12	—
Input IP3	$P_{RF} = -10\text{ dBm/ tone}$ , $\Delta f = 1\text{ MHz}$	dBm	—	20	—
Input IP2	$P_{RF} = -10\text{ dBm/ tone}$ , $\Delta f = 1\text{ MHz}$	dBm	—	50	—
LO-to-RF Isolation	—	dB	—	35	—
LO-to-IF Isolation	18 - 24 GHz	dB	25	37	—
	24 - 40 GHz		27	45	
	40 - 46 GHz		23	44	
RF-to-IF Isolation	18 - 24 GHz	dB	—	10	—
	24 - 40 GHz		8	24	
	40 - 46 GHz		13	27	
RF Return Loss	RF = 40 GHz	dB	—	5	—
IF Return Loss	IF = 1 GHz	dB	—	15	—

4. All specifications refer to down-conversion operation, unless otherwise noted.

### Absolute Maximum Ratings<sup>5,6</sup>

Parameter	Absolute Maximum
LO Power	23 dBm
RF or IF Power	20 dBm
Junction Temperature <sup>7</sup>	+150°C
Operating Temperature	-55°C to +85°C
Storage Temperature	-65°C to +150°C

5. Exceeding any one or combination of these limits may cause permanent damage to this device.
6. MACOM does not recommend sustained operation near these survivability limits.
7. Operating at nominal conditions with  $T_J \leq +150^\circ\text{C}$  will ensure  $\text{MTTF} > 1 \times 10^6$  hours.

### Handling Procedures

Please observe the following precautions to avoid damage:

### Static Sensitivity

These electronic devices are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these HBM Class 1B devices.

2


MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

## Double-Balanced Mixer 18 - 46 GHz


Rev. V2

Typical Performance Curves,  $P_{LO} = +15 \text{ dBm}$ ,  $T_A = 25^\circ\text{C}$


**IF Bandwidth & Return Loss**

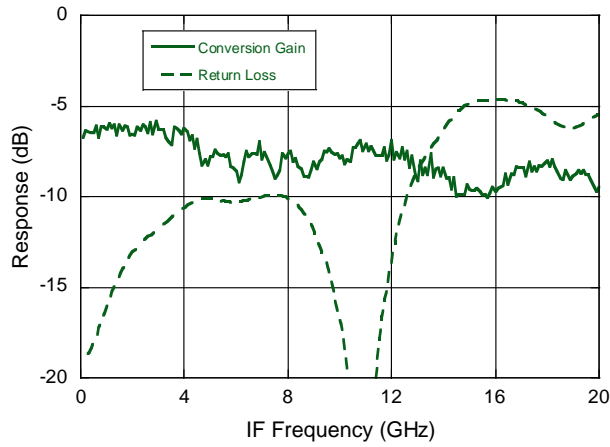

**Isolation**

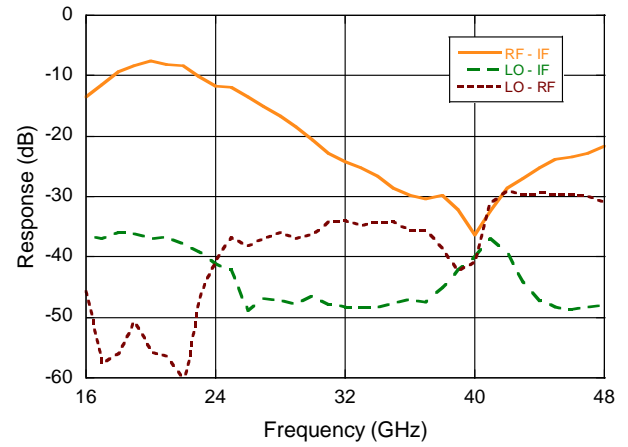

**RF Return Loss**

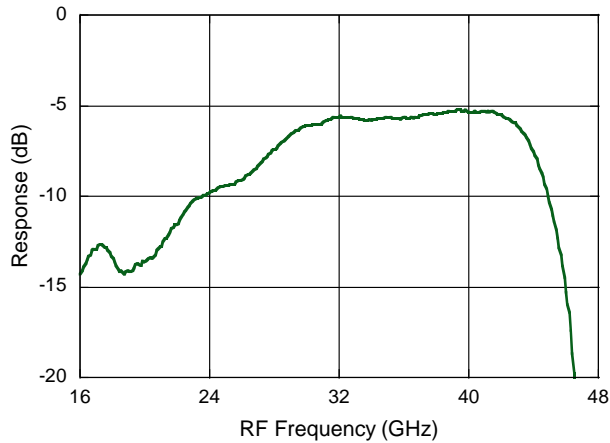


## Double-Balanced Mixer 18 - 46 GHz


Rev. V2

### Typical Performance Curves vs. LO Power, $T_A = 25^\circ\text{C}$


**Conversion Gain**

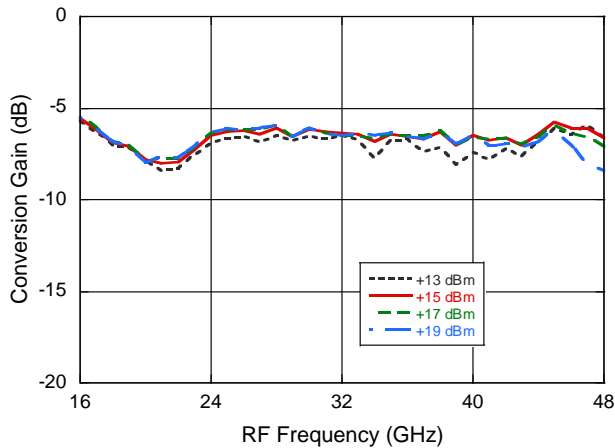


**Input P1dB**

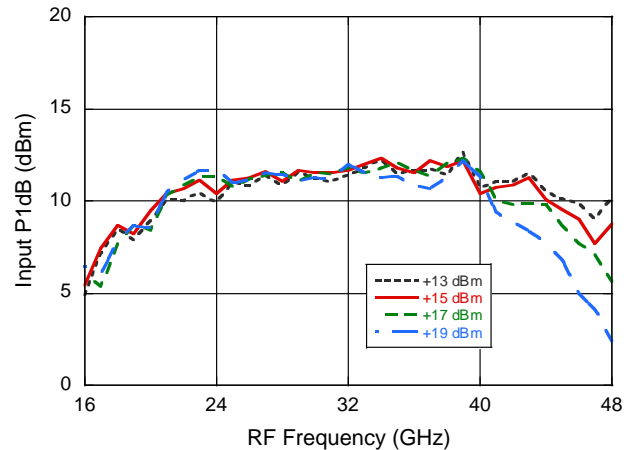


**Input IP3 at  $P_{LO} = +15\text{ dBm}$**

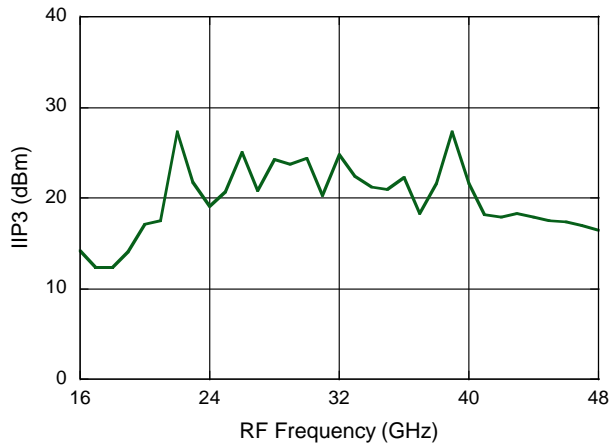

**Input IP2 at  $P_{LO} = +15\text{ dBm}$**

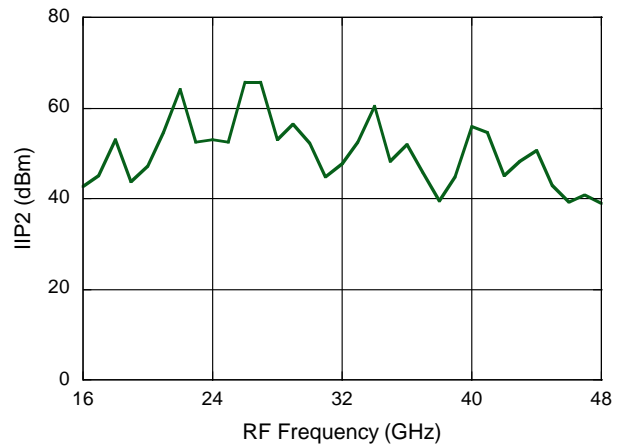


**Up Conversion Gain**

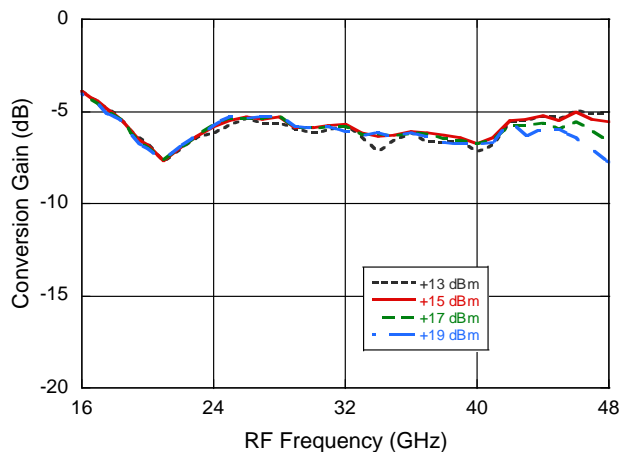


All performance curves refer to down-conversion operation, unless otherwise noted.  
Two-tone input power = -10 dBm each tone, 1 MHz spacing.

**Typical Performance Curves vs. Temperature, P<sub>LO</sub> = +15 dBm**


**Conversion Gain**

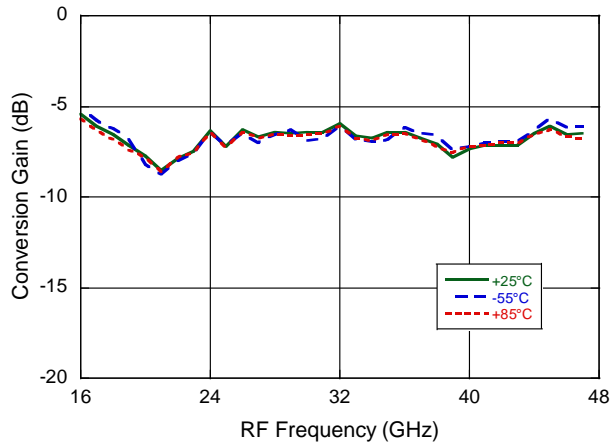

**Input IP3**

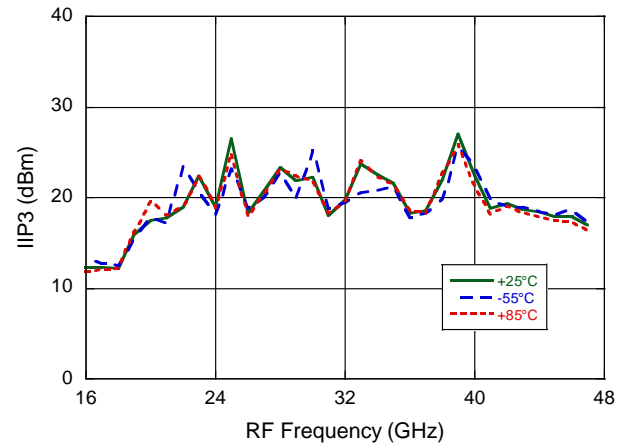

**Input IP2**

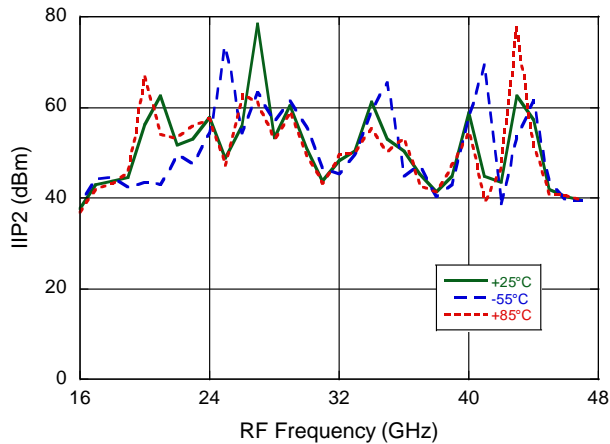

All performance curves refer to down-conversion operation, unless otherwise noted.  
Two-tone input power = -10 dBm each tone, 1 MHz spacing.


## MxN Spurious Rejection @ IF Port (dBc IF)

RF = 24 GHz @ -10 dBm

LO = 25 GHz @ +15 dBm

MxRF	NxLO				
	0	1	2	3	4
0	x	14	24	x	x
1	4	0	22	x	x
2	75	61	67	66	x
3	x	86	66	71	75
4	x	x	88	99	95

## Assembly Guideline

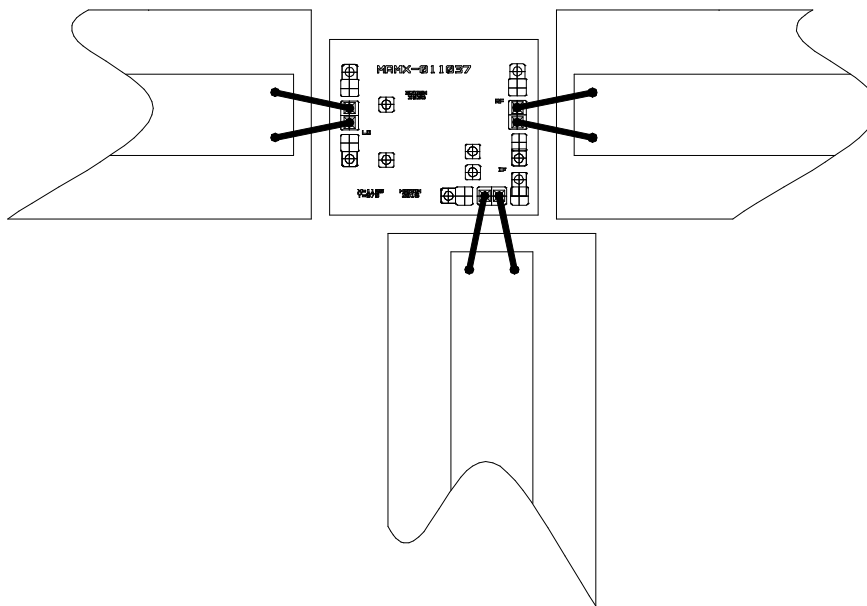

### Notes:

Attach bare die to PCB or carrier using conductive epoxy. Bond die signal pads to PCB 50  $\Omega$  traces using 1.0 mil gold wire. Two bond wires are recommended on each signal pad for optimal performance. There is no need to bond the die GND pads.


# MAMX-011037-DIE



Double-Balanced Mixer  
18 - 46 GHz

Rev. V2

## Outline Drawing

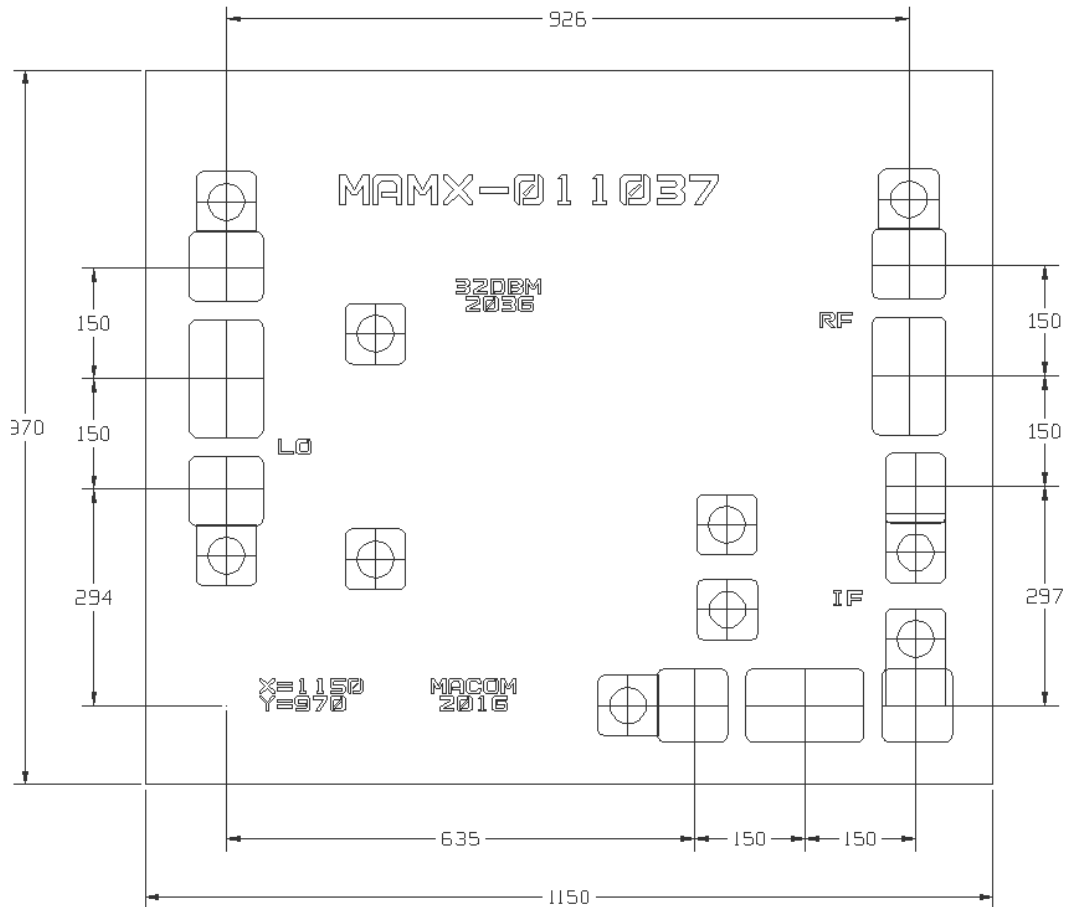

### Notes:

Units are in microns with a tolerance of  $\pm 5 \mu\text{m}$ , except for die exterior dimensions which are street-center-to-street-center – nominal kerf,  $\pm 20 \mu\text{m}$  tolerance.

Die thickness is  $100 \pm 10 \mu\text{m}$ .

RF, LO and IF Bond-pads are  $160 \times 100 \mu\text{m}$ .