



[Evaluation Kit Available](#)



[Design Resources](#)



[Tools and Models](#)



[Support](#)

Click [here](#) to ask an associate for production status of specific part numbers.

## PMIC with Ultra Low I<sub>Q</sub> Voltage Regulators and Battery Charger for Small Lithium Ion Systems

# MAX14745

### General Description

The MAX14745 is a battery-charge-management solution ideal for low-power wearable applications. The device includes a linear battery charger with a smart power selector and several power-optimized peripherals. The MAX14745 features two ultra-low quiescent current buck regulators and three ultra-low quiescent current low-dropout (LDO) linear regulators, providing up to five regulated voltages, each with an ultra-low quiescent current, allows designers to minimize power consumption and extend battery life in 24/7 operation devices, such as those in the wearable market.

The battery charger features a smart power selector that allows operation on a dead battery when connected to a power source. To avoid overloading a power adapter, the input current to the smart power selector is limited based on an I<sup>2</sup>C register setting. If the charger power source is unable to supply the entire system load, the smart power control circuit supplements the system load with current from the battery. The charger also supports temperature dependent charge currents.

The two synchronous, high-efficiency step-down buck regulators feature a variable frequency mode for increased efficiency during light-load operation. The output voltage of these regulators can be programmed through I<sup>2</sup>C with the default preconfigured. The buck regulators can support dynamic voltage scaling to further improve system power consumption.

The three configurable LDOs each have a dedicated input pin. Each LDO regulator output voltage can be programmed through I<sup>2</sup>C with the default preconfigured. The linear regulators can also be configured to operate as power switches that may be used to disconnect the quiescent load of the system peripherals.

The MAX14745 features a programmable power controller that allows the device to be configured for applications that require the device be in a true-off, or always-on, state. The controller also provides a delayed reset signal and voltage sequencing.

The MAX14745 is available in a 36-bump, 0.4mm pitch, 2.72mm x 2.47mm wafer-level package (WLP).

### Benefits and Features

- Extend System Use Time Between Battery Charging
  - Dual Ultra-Low-I<sub>Q</sub> 200mA Buck Regulators
    - Output Programmable from 0.8V to 2.375V and 0.8V to 3.95V
    - 0.9μA (typ) Quiescent Current (Buck 1)
    - Optional Fixed Peak-Current Mode to Optimize Ripple Frequency in Noise-Sensitive Applications
  - Three Ultra-Low-I<sub>Q</sub> 100mA LDOs
  - LDO1
    - Output Programmable from 0.8V to 3.6V
    - 0.6μA (typ) Quiescent Current
    - 2.7V to 5.5V Input with Dedicated Pin
  - LDO2/3
    - Output Programmable from 0.9V to 4V
    - 1μA (typ) Quiescent Current
    - 1.71V to 5.5V Input with Dedicated Pin
- Easy-to-Implement Li<sup>+</sup> Battery Charging
  - Smart Power Selector
  - 28V/-5.5V Tolerant Input
  - Thermistor Monitor
- Minimize Solution Footprint Through High Integration
  - Provides Five Regulated Voltage Rails
  - Switch Mode Option on Each LDO
- Optimize System Control
  - Monitors Pushbutton for Ultra-Low Power Mode
  - Power-On Reset Delay and Voltage Sequencing
  - On-Chip Voltage Monitor Multiplexer

### Applications

- Wearable Electronics
- Fitness Monitors
- Rechargeable IoT devices

**Ordering Information appears at end of data sheet.**

---

**TABLE OF CONTENTS**


---

|   |    |
|---|----|
| General Description . . . . .                         | 1  |
| Benefits and Features . . . . .                       | 1  |
| Applications . . . . .                                | 1  |
| Typical Application Circuit . . . . .                 | 5  |
| Absolute Maximum Ratings . . . . .                    | 6  |
| Package Information . . . . .                         | 6  |
| Electrical Characteristics . . . . .                  | 7  |
| Typical Operating Characteristics . . . . .           | 22 |
| Bump Configuration . . . . .                          | 25 |
| Bump Description . . . . .                            | 25 |
| Block Diagram . . . . .                               | 27 |
| Detailed Description . . . . .                        | 27 |
| Power Regulation . . . . .                            | 27 |
| Power On/Off and Reset Control . . . . .              | 27 |
| Power Sequencing . . . . .                            | 30 |
| Smart Power Selector . . . . .                        | 31 |
| Thermal Current Regulation . . . . .                  | 31 |
| System Load Switch . . . . .                          | 32 |
| Input Limiter . . . . .                               | 32 |
| Fast-Charge Current Setting . . . . .                 | 33 |
| Thermistor Monitoring with Charger Shutdown . . . . . | 33 |
| I <sup>2</sup> C Interface . . . . .                  | 35 |
| I <sup>2</sup> C Addresses . . . . .                  | 35 |
| Thermistor Monitoring with Charger Shutdown . . . . . | 36 |
| I <sup>2</sup> C Interface . . . . .                  | 38 |
| Start, Stop, And Repeated Start Conditions . . . . .  | 38 |
| Slave Address . . . . .                               | 38 |
| Bit Transfer . . . . .                                | 38 |
| Single-Byte Write . . . . .                           | 38 |
| Burst Write . . . . .                                 | 39 |
| Single Byte Read . . . . .                            | 39 |
| Burst Read . . . . .                                  | 40 |
| Acknowledge Bits . . . . .                            | 40 |
| I <sup>2</sup> C Register Map . . . . .               | 41 |
| I <sup>2</sup> C Register Descriptions . . . . .      | 43 |
| Applications Information . . . . .                    | 62 |

---

**TABLE OF CONTENTS (continued)**


---

|                                      |    |
|--------------------------------------|----|
| Inductor Selection . . . . .         | 62 |
| Output Capacitor Selection . . . . . | 62 |
| Input Capacitor Selection . . . . .  | 62 |
| PCB Layout and Routing . . . . .     | 62 |
| Ordering Information . . . . .       | 66 |
| Chip Information . . . . .           | 66 |
| Revision History . . . . .           | 67 |

---

**LIST OF FIGURES**


---

|   |    |
|---|----|
| Figure 1. Power Function Input Control Modes Flow Diagrams . . . . .                        | 29 |
| Figure 2a. Power-On Sequencing . . . . .  | 30 |
| Figure 2b. Power-On Sequencing Without Battery . . . . .                                    | 31 |
| Figure 3. Smart Power Selector Current/Voltage Behavior . . . . .                           | 32 |
| Figure 4a. Charging Behavior Using Thermistor Monitoring Mode . . . . .                     | 34 |
| Figure 4b. Charging Behavior Using JEITA Monitoring 1 and 2 Modes . . . . .                 | 34 |
| Figure 5a. Charger State Diagram (Thermistor Monitoring with Charger Shutdown) . . . . .    | 36 |
| Figure 5b. Battery Charger State Diagram (JEITA Monitoring with Charger Shutdown) . . . . . | 37 |
| Figure 6. I <sup>2</sup> C START, STOP and REPEATED START Conditions . . . . .              | 38 |
| Figure 7. Write Byte Sequence . . . . .   | 38 |
| Figure 8. Burst Write Sequence . . . . .  | 39 |
| Figure 9. Read Byte Sequence . . . . .  | 39 |
| Figure 10. Burst Read Sequence . . . . .  | 40 |
| Figure 11. Acknowledge . . . . .  | 40 |

---

**LIST OF TABLES**


---

|  |    |
|--|----|
| Table 1. Power Function Input Control Modes . . . . .                    | 28 |
| Table 2. Thermistor Monitoring/JEITA Monitoring Enable Control . . . . . | 35 |
| Table 3. I <sup>2</sup> C Slave Addresses . . . . .                      | 38 |
| Table 4. ChipId Register (0x00) . . . . .                                | 43 |
| Table 5. ChipRev Register (0x01) . . . . .                               | 43 |
| Table 6. StatusA Register (0x02) . . . . .                               | 43 |
| Table 7. StatusB Register (0x03) . . . . .                               | 44 |

**LIST OF TABLES (continued)**

|  |    |
|--|----|
| Table 8. StatusC Register (0x04) . . . . .               | 45 |
| Table 9. IntA Register (0x05) . . . . .                  | 46 |
| Table 10. IntB Register (0x06) . . . . .                 | 46 |
| Table 11. IntMaskA Register (0x07) . . . . .             | 47 |
| Table 12. IntMaskB Register (0x08) . . . . .             | 48 |
| Table 13. ILimCntl Register (0x09) . . . . .             | 48 |
| Table 14. ChgCntlA Register (0x0A) . . . . .             | 49 |
| Table 15. ChgCntlB Register (0x0B) . . . . .             | 50 |
| Table 16. ChTmr Register (0x0C) . . . . .                | 51 |
| Table 17. Buck1Cfg Register (0x0D) . . . . .             | 51 |
| Table 18. Buck1VSet Register (0x0E) . . . . .            | 52 |
| Table 19. Buck2Cfg Register (0x0F) . . . . .             | 52 |
| Table 20. Buck2VSet Register (0x10) . . . . .            | 53 |
| Table 21. Buck1/2ISet Register (0x11) . . . . .          | 53 |
| Table 22. LDO1Cfg Register (0x12) . . . . .              | 54 |
| Table 23. LDO1VSet Register (0x13) . . . . .             | 54 |
| Table 24. LDO2Cfg Register (0x14) . . . . .              | 55 |
| Table 25. LDO2VSet Register (0x15) . . . . .             | 55 |
| Table 26. LDO3Cfg Register (0x16) . . . . .              | 56 |
| Table 27. LDO3VSet Register (0x17) . . . . .             | 56 |
| Table 28. ThrmCfg Register (0x18) . . . . .              | 57 |
| Table 29. ThrmCfg Register (0x19) . . . . .              | 58 |
| Table 30. MONCfg Register (0x1A) . . . . .               | 58 |
| Table 31. BootCfg Register (0x1B) . . . . .              | 59 |
| Table 32. PinStat Register (0x1C) . . . . .              | 59 |
| Table 33. Buck1/2Extra Control Register (0x1D) . . . . . | 60 |
| Table 34. PwrCfg Register (0x1E) . . . . .               | 61 |
| Table 35. PwrCmd Register (0x1F) . . . . .               | 61 |
| Table 36. Suggested Inductors . . . . .                  | 62 |
| Table 37. Output Capacitor Values* . . . . .             | 62 |
| Table 38. Register Bit Default Values . . . . .          | 63 |
| Table 39. Register Default Values . . . . .              | 65 |



**Absolute Maximum Ratings**

(Voltages referenced to GND.)

SDA, SCL, THM, RST, SYS, PFN1, PFN2, MPC0, MPC1, INT, MON, BAT, LED, L1IN, L2IN, L3IN..... -0.3V to +6.0V  
 B1LX, B2LX, B1OUT, B2OUT, EXT ..... -0.3V to (V<sub>SYS</sub> + 0.3V)  
 L1OUT ..... -0.3V to (V<sub>L1IN</sub> + 0.3V)  
 L2OUT ..... -0.3V to (V<sub>L2IN</sub> + 0.3V)  
 L3OUT ..... -0.3V to (V<sub>L3IN</sub> + 0.3V)  
 CHGIN ..... -6V to +30V  
 CAP ..... -0.3V to min (|V<sub>CHGIN</sub>| + 0.3V, +6V)  
 SET ..... -0.3V to V<sub>BAT</sub> + 0.3V

Continuous Current into CHGIN, BAT, SYS .....±1000mA  
 Continuous Current into any other terminal ..... ±100mA  
 Continuous Power Dissipation (multilayer board at +70°C):  
     6 x 6 Array 36-Bump 2.72mm x 2.47mm  
     0.4mm Pitch WLP (derate 21.70mW/°C)..... 1.74W  
 Operating Temperature Range..... -40°C to +85°C  
 Junction Temperature..... +150°C  
 Storage Temperature Range ..... -65°C to +150°C  
 Soldering Temperature (reflow) ..... +260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

**Package Information**

|   |  |
|---|--|
| <b>PACKAGE TYPE: 36 WLP</b>                 |  |
| Package Code                                | W362D2+1                                       |
| Outline Number                              | <a href="#">21-0897</a>                        |
| Land Pattern Number                         | Refer to <a href="#">Application Note 1891</a> |
| <b>THERMAL RESISTANCE, FOUR-LAYER BOARD</b> |  |
| Junction to Ambient (θ <sub>JA</sub> )      | 46°C/W   |

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maximintegrated.com/thermal-tutorial](http://www.maximintegrated.com/thermal-tutorial).

## Electrical Characteristics

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER  | SYMBOL                  | CONDITIONS   | MIN | TYP  | MAX   | UNITS |
|--|-------------------------|--|-----|------|-------|-------|
| <b>GLOBAL SUPPLY CURRENT (L_IN Connected to SYS)</b>   |                         |  |     |      |       |       |
| Charger Input Current  | I <sub>CHG</sub>        | All functions disabled   |     | 0.26 |       | mA    |
|  |                         | Power on, V <sub>CHGIN</sub> = 5V<br>SYS switch closed, buck regulators enabled, LDO1 enabled, I <sub>SYS</sub> = 0A, I <sub>B_OUT</sub> = 0A, I <sub>L_OUT</sub> = 0A       |     |      | 1.5   |       |
| BAT Input Current  | I <sub>BAT</sub>        | Power off, V <sub>CHGIN</sub> = 0V,<br>SYS switch open   |     | 0.96 | 1.7   | μA    |
|  |                         | Power on, V <sub>CHGIN</sub> = 0V<br>SYS switch closed, 2x buck regulators enabled, LDOs disabled. I <sub>SYS</sub> = 0A, I <sub>B_OUT</sub> = 0A                            |     | 2.8  | 4.3   |       |
|  |                         | Power on, V <sub>CHGIN</sub> = 0V<br>SYS switch closed, 2x buck regulators enabled, LDO1 enabled, I <sub>SYS</sub> = 0A, I <sub>B_OUT</sub> = 0A, I <sub>L_OUT</sub> = 0A    |     | 3.5  | 7     |       |
|  |                         | Power on, V <sub>CHGIN</sub> = 0V<br>SYS switch closed, 2x buck regulators enabled, 3x LDOs enabled, I <sub>SYS</sub> = 0A, I <sub>B_OUT</sub> = 0A, I <sub>L_OUT</sub> = 0A |     | 5.2  |       |       |
| <b>BUCK REGULATOR 1</b><br>(V <sub>SYS</sub> = +3.7V, L = 2.2μH, C = 2.2μF, V <sub>B1OUT</sub> = 1.2V) |                         |  |     |      |       |       |
| Input Voltage  | V <sub>IN_BUCK1</sub>   | Input voltage = V <sub>SYS</sub>   | 2.7 |      | 5.5   | V     |
| Output Voltage   | V <sub>OUT_BUCK1</sub>  | 25mV step resolution   | 0.8 |      | 2.375 | V     |
| Output UVLO Voltage  | V <sub>UVLO_BUCK1</sub> | <b>Note:</b> For V <sub>OUT</sub> < UVLO ZC is imposed   |     | 0.44 | 0.7   | V     |
| Quiescent Supply Current   | I <sub>Q_BUCK1</sub>    | Buck enabled, I <sub>B1OUT</sub> = 0mA, V <sub>SYS</sub> = 3.7V, V <sub>B1OUT</sub> = 1.2V (Note 2)  |     | 0.9  | 1.3   | μA    |
| Dropout Quiescent Supply Current   | I <sub>QDO_BUCK1</sub>  | I <sub>B1OUT</sub> = 0mA, (V <sub>SYS</sub> - V <sub>OUT</sub> ) ≤ 0.1V  |     | 1.1  |       | mA    |
| Shutdown Supply Current with Active Discharge Enabled  | I <sub>SD_BUCK1</sub>   | Buck1 disabled, Buck1ActDSC=1.   |     | 60   |       | μA    |
| Output Accuracy  | ACC <sub>BUCK1</sub>    | I <sub>B1OUT</sub> = 1mA   | -3  |      | +3.1  | %     |
| Peak-to-Peak Ripple  | V <sub>PPRIPPLE1</sub>  | Buck1ISet = 100mA, C <sub>OUT</sub> = 2.2μF, I <sub>B1OUT</sub> = 1mA  |     | 10   |       | mV    |
| I <sub>PEAK</sub> Set Range  | I <sub>PEAK_BUCK1</sub> | 25mA step resolution set by Buck1ISet[3:0].  | 50  |      | 375   | mA    |

## Electrical Characteristics (continued)

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                      | SYMBOL                       | CONDITIONS   | MIN | TYP   | MAX  | UNITS |
|--|------------------------------|--|-----|-------|------|-------|
| Load Regulation Error                          | V <sub>LOADR_BUCK1</sub>     | Buck1ISet = 150mA,<br>Buck1IAdptEnb = 0,<br>I <sub>B1OUT</sub> = 300mA   |     | -3    |      | %     |
| Line Regulation Error                          | V <sub>LINER_BUCK1</sub>     | V <sub>B1OUT</sub> = 1.2V; V <sub>SYS</sub> from 2.7V<br>to 5.5V   |     | 3     |      | mV    |
| Maximum Operating<br>Output Current            | I <sub>OUT_BUCK1</sub>       | V <sub>SYS</sub> = 3.7V, Buck1VSet = 1.2V,<br>Buck1ISet = 200mA, Buck1IAdptEnb<br>= 0, load regulation error = -5% | 200 | 500   |      | mA    |
| B1OUT Pulldown<br>Current                      | I <sub>LEAK_B1OUT</sub>      | Buck1 enabled  |     | 110   |      | nA    |
| B1OUT Pulldown<br>Resistance                   | R <sub>PD_B1OUT</sub>        | Buck1 disabled, V <sub>B1OUT</sub> = 1.2V  |     | 12    |      | MΩ    |
| pMOS On-Resistance                             | R <sub>ONP_BUCK1</sub>       | Buck1FFET = 0  |     | 0.27  | 0.5  | Ω     |
|  |                              | Buck1FFET = 1  |     | 0.55  | 1    | Ω     |
| nMOS On-Resistance                             | R <sub>ONN_BUCK1</sub>       | Buck1FFET = 0  |     | 0.24  | 0.45 | Ω     |
|  |                              | Buck1FFET = 1  |     | 0.43  | 0.9  | Ω     |
| Freewheeling<br>On-Resistance                  | R <sub>ONFW_BUCK1</sub>      | V <sub>SYS</sub> = 3.7V, V <sub>B1OUT</sub> = 1.2V   |     | 7.3   | 13   | Ω     |
| Minimum T <sub>ON</sub>                        | T <sub>ON_MIN</sub>          |  |     | 40    | 80   | ns    |
| Maximum Duty Cycle                             | D <sub>MAX_BUCK1</sub>       | Buck1IAdptEnb = 0  |     | 98    |      | %     |
| Switching Frequency                            | f <sub>SW_BUCK1</sub>        | Load regulation error = -3%  |     | 3     |      | MHz   |
| Average Current During<br>Short-Circuit to GND | I <sub>SHRT_BUCK1</sub>      | Buck1ISet = 150mA,<br>Buck1IAdptEnb = 0, V <sub>B1OUT</sub> = 0V   |     | 100   |      | mA    |
| BLX Leakage Current                            | I <sub>BLX_BUCK1</sub>       |  |     | 0.005 | 1    | μA    |
| Active Discharge Current                       | I <sub>PD_BUCK1</sub>        | V <sub>B1OUT</sub> = 1.2V  |     | 17    |      | mA    |
| Passive Discharge<br>Resistance                | R <sub>PD_BUCK1</sub>        | V <sub>B1OUT</sub> = 1.2V  |     | 9     |      | kΩ    |
| Full Turn-On Time                              | t <sub>ON_BUCK1</sub>        | Time from enable to full current<br>capability, Buck1Fst = 0   |     | 58    |      | ms    |
| Efficiency                                     | Eff <sub>BUCK1</sub>         | I <sub>LOAD</sub> = 10mA, Buck1ISet = 150mA,<br>Inductor = BOURNS SRP2010-<br>2R2M, V <sub>B1OUT</sub> = 1.2V      |     | 87    |      | %     |
| BLX Rising/Falling Slew<br>Rate                | SR <sub>BLX_BUCK1</sub>      | Buck1LowEMI = 0  |     | 2     |      | V/ns  |
|  |                              | Buck1LowEMI = 1  |     | 0.5   |      |       |
| Thermal-Shutdown<br>Temperature                | T <sub>SHDN_BUCK1</sub>      |  |     | 140   |      | °C    |
| Thermal-Shutdown<br>Temperature Hysteresis     | T <sub>SHDN_HYST_BUCK1</sub> |  |     | 10    |      | °C    |



## Electrical Characteristics (continued)

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER  | SYMBOL                   | CONDITIONS   | MIN | TYP  | MAX  | UNITS |
|--|--------------------------|--|-----|------|------|-------|
| <b>BUCK REGULATOR 2</b><br>(V <sub>SYS</sub> = +3.7V, L = 2.2μH, C = 2.2μF, V <sub>B2OUT</sub> = 1.2V) |                          |  |     |      |      |       |
| Input Voltage  | V <sub>IN_BUCK2</sub>    | Input voltage = V <sub>SYS</sub>   | 2.7 |      | 5.5  | V     |
| Output Voltage   | V <sub>OUT_BUCK2</sub>   | 50mV step resolution   | 0.8 |      | 3.95 | V     |
| Output UVLO Voltage  | V <sub>UVLO_BUCK2</sub>  | <b>Note:</b> For V <sub>OUT</sub> < UVLO ZC is imposed   |     | 0.44 | 0.7  | V     |
| Quiescent Supply Current   | I <sub>Q_BUCK2</sub>     | Buck enabled, I <sub>B2OUT</sub> = 0mA, V <sub>SYS</sub> = 3.7V, V <sub>B2OUT</sub> = 1.2V (Note 2)    |     | 1    | 1.3  | μA    |
| Dropout Quiescent Supply Current   | I <sub>QDO_BUCK2</sub>   | I <sub>B2OUT</sub> = 0mA, V <sub>SYS</sub> - V <sub>B2OUT</sub> ≤ 0.1V                                 |     | 1.1  |      | mA    |
| Shutdown Supply Current with Active Discharge Enabled  | I <sub>SD_BUCK2</sub>    | Buck1 disabled, Buck2ActDSC = 1.   |     | 60   |      | μA    |
| Output Accuracy  | ACC <sub>BUCK2</sub>     | I <sub>B2OUT</sub> = 1mA, V <sub>B2OUT</sub> < 3.4V  | -3  |      | +3.1 | %     |
| Peak-to-Peak Ripple  | V <sub>PPRIPPLE2</sub>   | Buck2ISet = 100mA, C <sub>OUT</sub> = 2.2μF, I <sub>B2OUT</sub> = 1mA                                  |     | 10   |      | mV    |
| I <sub>PEAK</sub> Set Range  | I <sub>PEAK_BUCK2</sub>  | 25mA step resolution set by Buck2ISet[3:0].  | 50  |      | 375  | mA    |
| Load Regulation Error  | V <sub>LOADR_BUCK2</sub> | Buck2ISet = 150mA, Buck2IAdptEnb = 0, I <sub>B2OUT</sub> = 300mA                                       |     | -3   |      | %     |
| Line Regulation Error  | V <sub>LINER_BUCK2</sub> | V <sub>B2OUT</sub> = 1.2V; V <sub>SYS</sub> from 2.7V to 5.5V  |     | 3    |      | mV    |
| Maximum Operating Output Current   | I <sub>OUT_BUCK2</sub>   | V <sub>SYS</sub> = 3.7V, Buck2VSet = 1.2V, Buck2ISet = 200mA, Buck2IAdptEnb = 0, load regulation = -5% | 200 | 500  |      | mA    |
| B2OUT Pulldown Current   | I <sub>LEAK_B2OUT</sub>  | Buck2 enabled  |     | 220  |      | nA    |
| B2OUT Pulldown Resistance  | R <sub>PD_B2OUT</sub>    | Buck2 disabled, V <sub>B2OUT</sub> = 1.2V  |     | 6    |      | MΩ    |
| pMOS On-Resistance   | R <sub>ONP_BUCK2</sub>   | Buck2FFET = 0  |     | 0.27 | 0.5  | Ω     |
|  |                          | Buck2FFET = 1  |     | 0.55 | 1    | Ω     |
| nMOS On-Resistance   | R <sub>ONN_BUCK2</sub>   | Buck2FFET = 0  |     | 0.24 | 0.45 | Ω     |
|  |                          | Buck2FFET = 1  |     | 0.43 | 0.9  | Ω     |
| Freewheeling On-Resistance   | R <sub>ONFW_BUCK2</sub>  | V <sub>SYS</sub> = 3.7V, V <sub>B2OUT</sub> = 1.2V   |     | 7.3  | 13   | Ω     |

**Electrical Characteristics (continued)**

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER  | SYMBOL                       | CONDITIONS  | MIN | TYP   | MAX  | UNITS |
|--|------------------------------|---|-----|-------|------|-------|
| Minimum T <sub>ON</sub>  | T <sub>ON_MIN</sub>          |   |     | 40    | 80   | ns    |
| Maximum Duty Cycle   | D <sub>MAX_BUCK2</sub>       | Buck2IAdptEnb = 0   |     | 98    |      | %     |
| Switching Frequency  | f <sub>SW_BUCK2</sub>        | Load regulation error = -3%   |     | 3     |      | MHz   |
| Average Current During Short-Circuit to GND  | I <sub>SHRT_BUCK2</sub>      | Buck2ISet = 150mA,<br>Buck2IAdptEnb = 0, V <sub>B2OUT</sub> = 0V  |     | 100   |      | mA    |
| BLX Leakage Current  | I <sub>BLX_BUCK2</sub>       |   |     | 0.005 | 1    | μA    |
| Active Discharge Current   | I <sub>PD_BUCK2</sub>        | V <sub>B2OUT</sub> = 1.2V   |     | 17    |      | mA    |
| Passive Discharge Resistance   | R <sub>PD_BUCK2</sub>        | V <sub>B2OUT</sub> = 1.2V   |     | 9     |      | kΩ    |
| Full Turn-On Time  | T <sub>ON_BUCK2</sub>        | Time from enable to full current capability, Buck2Fst = 0   |     | 58    |      | ms    |
| Efficiency   | Eff <sub>BUCK2</sub>         | I <sub>LOAD</sub> = 10mA, Buck2ISet = 150mA,<br>Inductor = BOURNS SRP2010-2R2M, V <sub>B2OUT</sub> = 1.2V |     | 87    |      | %     |
| BLX Rising/Falling Slew Rate   | SR <sub>BLX_BUCK2</sub>      | Buck2LowEMI = 0   |     | 2     |      | V/ns  |
|  |                              | Buck2LowEMI = 1   |     | 0.5   |      |       |
| Thermal-Shutdown Temperature   | T <sub>SHDN_BUCK2</sub>      |   |     | 140   |      | °C    |
| Thermal-Shutdown Temperature Hysteresis  | T <sub>SHDN_HYST_BUCK2</sub> |   |     | 10    |      | °C    |
| <b>LDO1</b><br>(C = 1μF, unless otherwise noted. Typical values are at V <sub>L1IN</sub> = 3.7V, with I <sub>L1OUT</sub> = 10mA, V <sub>L1OUT</sub> = 3V.) |                              |   |     |       |      |       |
| Input Voltage  | V <sub>INLDO1</sub>          | LDO mode  |     | 2.7   | 5.5  | V     |
|  |                              | Switch mode   |     | 1.2   | 5.5  | V     |
| Quiescent Supply Current   | I <sub>Q_LDO1</sub>          | LDO enabled, I <sub>L1OUT</sub> = 0μA   |     | 0.55  | 4    | μA    |
|  |                              | LDO enabled, I <sub>L1OUT</sub> = 0μA,<br>Switch mode   |     | 0.45  |      |       |
| Shutdown Supply Current with Active Discharge Enabled  | I <sub>SD_LDO1</sub>         | LDO1 disabled. LDO1ActDSC=1.  |     | 55    |      | μA    |
| Maximum Output Current   | I <sub>L1OUT_MAX</sub>       |   |     | 100   |      | mA    |
| Output Voltage   | V <sub>L1OUT</sub>           |   |     | 0.8   | 3.6  | V     |
| Output Accuracy  | ACC <sub>LDO1</sub>          | V <sub>L1IN</sub> = (V <sub>L1OUT</sub> + 0.5V) or higher,<br>I <sub>L1OUT</sub> = 100μA                  |     | -2.7  | +2.7 | %     |

## Electrical Characteristics (continued)

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                  | SYMBOL                      | CONDITIONS  | MIN   | TYP   | MAX   | UNITS |
|--|-----------------------------|---|-------|-------|-------|-------|
| Dropout Voltage                            | V <sub>DROP_LDO1</sub>      | V <sub>L1IN</sub> = 3V, I <sub>L1OUT</sub> = 100mA,<br>LDO1VSet = 3V          |       |       | 102   | mV    |
| Line Regulation Error                      | V <sub>LINEREG_LDO1</sub>   | V <sub>L1IN</sub> = (V <sub>L1OUT</sub> + 0.5V) to 5.5V                       | -0.12 | 0.022 | +0.12 | %/V   |
| Load Regulation Error                      | V <sub>LOADREG_LDO1</sub>   | I <sub>L1OUT</sub> = 100μA to 100mA   |       | 0.002 | 0.005 | %/mA  |
| Line Transient                             | V <sub>LINETRAN_LDO1</sub>  | V <sub>L1IN</sub> = 4V to 5V, 200ns rise time                                 |       | ±36   |       | mV    |
|  |                             | V <sub>L1IN</sub> = 4V to 5V, 1μs rise time                                   |       | ±28   |       | mV    |
| Load Transient                             | V <sub>LOADTRAN_LDO1</sub>  | I <sub>L1OUT</sub> = 0mA to 10mA, 200ns<br>rise time                          |       | 145   |       | mV    |
|  |                             | I <sub>L1OUT</sub> = 0mA to 100mA, 200ns<br>rise time                         |       | 290   |       | mV    |
| Passive Discharge<br>Resistance            | R <sub>PD_LDO1</sub>        |   | 5     | 10    | 16    | KΩ    |
| Active Discharge Current                   | I <sub>ADL_LDO1</sub>       | V <sub>L1IN</sub> = 3.7V  | 7     | 20    | 37    | mA    |
| Switch Mode Resistance                     | R <sub>ON_LDO1</sub>        | V <sub>L1IN</sub> = 2.7V, I <sub>L1OUT</sub> = 100mA                          |       | 0.5   | 0.85  | Ω     |
|  |                             | V <sub>L1IN</sub> = 1.8V, I <sub>L1OUT</sub> = 100mA                          |       | 0.76  | 1.3   |       |
|  |                             | V <sub>L1IN</sub> = 1.2V, I <sub>L1OUT</sub> = 5mA                            |       | 1.7   | 2.8   |       |
| Turn-On Time                               | t <sub>ON_LDO1</sub>        | I <sub>L1OUT</sub> = 0mA, time from 10% to<br>90% of final value              |       | 1.6   | 3.7   | ms    |
|  |                             | I <sub>L1OUT</sub> = 0mA, time from 10% to<br>90% of final value, Switch mode |       | 0.25  | 0.65  |       |
| Short-Circuit Current<br>Limit             | I <sub>SHRT_LDO1</sub>      | V <sub>L1IN</sub> = 2.7V, V <sub>L1OUT</sub> = GND                            | 150   | 345   | 550   | mA    |
|  |                             | V <sub>L1IN</sub> = 2.7V, V <sub>L1OUT</sub> = GND,<br>Switch mode            | 150   | 335   | 550   | mA    |
| Thermal-Shutdown<br>Temperature            | T <sub>SHDN_LDO1</sub>      |   |       | 150   |       | °C    |
| Thermal-Shutdown<br>Temperature Hysteresis | T <sub>SHDN_HYST_LDO1</sub> |   |       | 16    |       | °C    |
| Output Noise                               | OUT <sub>NOISE</sub>        | 10Hz to 100kHz, V <sub>L1IN</sub> = 5V,<br>V <sub>L1OUT</sub> = 3.3V          |       | 110   |       | μVrms |
|  |                             | 10Hz to 100kHz, V <sub>L1IN</sub> = 5V,<br>V <sub>L1OUT</sub> = 2.5V          |       | 95    |       |       |
|  |                             | 10Hz to 100kHz, V <sub>L1IN</sub> = 5V,<br>V <sub>L1OUT</sub> = 1.2V          |       | 60    |       |       |
|  |                             | 10Hz to 100kHz, V <sub>L1IN</sub> = 5V,<br>V <sub>L1OUT</sub> = 0.8V          |       | 60    |       |       |

## Electrical Characteristics (continued)

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER  | SYMBOL                     | CONDITIONS  | MIN  | TYP   | MAX   | UNITS |
|--|----------------------------|---|------|-------|-------|-------|
| <b>LDO2</b><br>(C = 1μF, unless otherwise noted. Typical values are at V <sub>L2IN</sub> = 3.7V, with I <sub>L2OUT</sub> = 10mA, V <sub>L2OUT</sub> = 3V.) |                            |   |      |       |       |       |
| Input Voltage  | V <sub>INLDO2</sub>        | LDO mode  | 1.71 |       | 5.5   | V     |
|  |                            | Switch mode   | 1.2  |       | 5.5   | V     |
| Quiescent Supply Current   | I <sub>Q_LDO2</sub>        | I <sub>L2OUT</sub> = 0μA  |      | 1     | 5.1   | μA    |
|  |                            | I <sub>L2OUT</sub> = 0μA, Switch mode   |      | 0.5   |       |       |
| Quiescent Supply Current in Dropout  | I <sub>QDO_LDO2</sub>      | I <sub>L2OUT</sub> = 0μA, V <sub>L2IN</sub> = 2.9V, LDO2VSet = 3V.                    |      | 1.8   |       | μA    |
| Shutdown Supply Current with Active Discharge Enabled  | I <sub>SD_LDO2</sub>       | LDO2 disabled. LDO2ActDSC=1.  |      | 54    |       | μA    |
| Maximum Output Current   | I <sub>L2OUT_MAX</sub>     | V <sub>L2IN</sub> ≥ 2.7V  | 100  |       |       | mA    |
|  |                            | V <sub>L2IN</sub> = 1.8V or lower   | 50   |       |       | mA    |
| Output Voltage   | V <sub>L2OUT</sub>         |   | 0.9  |       | 4     | V     |
| Output Accuracy  | ACC <sub>LDO2</sub>        | V <sub>L2IN</sub> = (V <sub>L2OUT</sub> + 0.5V) or higher, I <sub>L2OUT</sub> = 100μA | -2.7 |       | +2.7  | %     |
| Dropout Voltage  | V <sub>DROP_LDO2</sub>     | V <sub>L2IN</sub> = 3V, I <sub>L2OUT</sub> = 100mA, LDO2VSet = 3V                     |      |       | 100   | mV    |
| Line Regulation Error  | V <sub>LINEREG_LDO2</sub>  | V <sub>L2IN</sub> = (V <sub>L2OUT</sub> + 0.5V) to 5.5V                               | -0.4 | +0.05 | +0.4  | %/V   |
| Load Regulation Error  | V <sub>LOADREG_LDO2</sub>  | I <sub>L2OUT</sub> = 100μA to 100mA   |      | 0.001 | 0.005 | %/mA  |
| Line Transient   | V <sub>LINETRAN_LDO2</sub> | V <sub>L2IN</sub> = 4V to 5V, 200ns rise time   |      | ±35   |       | mV    |
|  |                            | V <sub>L2IN</sub> = 4V to 5V, 1μs rise time   |      | ±25   |       | mV    |
| Load Transient   | V <sub>LOADTRAN_LDO2</sub> | I <sub>L2OUT</sub> = 0mA to 10mA, 200ns rise time                                     |      | 100   |       | mV    |
|  |                            | I <sub>L2OUT</sub> = 0mA to 100mA, 200ns rise time                                    |      | 200   |       | mV    |
| Passive Discharge Resistance   | R <sub>PD_LDO2</sub>       |   | 5    | 10    | 16    | KΩ    |
| Active Discharge Current   | I <sub>ADL_LDO2</sub>      | V <sub>L2IN</sub> = 3.7V  | 7    | 20    | 37    | mA    |
| Switch Mode Resistance   | R <sub>ON_LDO2</sub>       | V <sub>L2IN</sub> = 2.7V, I <sub>L2OUT</sub> = 100mA                                  |      | 0.46  | 0.76  | Ω     |
|  |                            | V <sub>L2IN</sub> = 1.8V, I <sub>L2OUT</sub> = 50mA                                   |      | 0.7   | 1.15  |       |
|  |                            | V <sub>L2IN</sub> = 1.2V, I <sub>L2OUT</sub> = 5mA                                    |      | 1.7   | 2.6   |       |
| Turn-On Time   | t <sub>ON_LDO2</sub>       | I <sub>L2OUT</sub> = 0mA, time from 10% to 90% of final value                         |      | 1.5   | 3.7   | ms    |
|  |                            | I <sub>L2OUT</sub> = 0mA, time from 10% to 90% of final value, Switch mode            |      | 0.25  | 0.65  |       |

**Electrical Characteristics (continued)**

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER   | SYMBOL                      | CONDITIONS  | MIN  | TYP  | MAX  | UNITS |
|---|-----------------------------|---|------|------|------|-------|
| Short-Circuit Current Limit   | I <sub>SHRT_LDO2</sub>      | V <sub>L2IN</sub> = 2.7V, V <sub>L2OUT</sub> = GND                                    | 140  | 340  | 600  | mA    |
|   |                             | V <sub>L2IN</sub> = 2.7V, V <sub>L2OUT</sub> = GND, Switch mode                       | 140  | 330  | 600  | mA    |
| Thermal-Shutdown Temperature  | T <sub>SHDN_LDO2</sub>      |   |      | 150  |      | °C    |
| Thermal-Shutdown Temperature Hysteresis   | T <sub>SHDN_HYST_LDO2</sub> |   |      | 21   |      | °C    |
| Output Noise  | OUT <sub>NOISE</sub>        | 10Hz to 100kHz, V <sub>L2IN</sub> = 5V, V <sub>L2OUT</sub> = 3.3V                     |      | 150  |      | μVrms |
|   |                             | 10Hz to 100kHz, V <sub>L2IN</sub> = 5V, V <sub>L2OUT</sub> = 2.5V                     |      | 125  |      |       |
|   |                             | 10Hz to 100kHz, V <sub>L2IN</sub> = 5V, V <sub>L2OUT</sub> = 1.2V                     |      | 90   |      |       |
|   |                             | 10Hz to 100kHz, V <sub>L2IN</sub> = 5V, V <sub>L2OUT</sub> = 0.9V                     |      | 80   |      |       |
| L2IN UVLO   | V <sub>UVLO_LDO2</sub>      | V <sub>L2IN</sub> Falling   | 1.14 | 1.38 |      | V     |
|   |                             | V <sub>L2IN</sub> Rising  |      | 1.4  | 1.64 |       |
| <b>LDO3</b>   |                             |   |      |      |      |       |
| (C = 1μF, unless otherwise noted. Typical values are at V <sub>L3IN</sub> = 3.7V, with I <sub>L3OUT</sub> = 10mA, V <sub>L3OUT</sub> = 3V.) |                             |   |      |      |      |       |
| Input Voltage   | V <sub>INLDO3</sub>         | LDO mode  | 1.71 |      | 5.5  | V     |
|   |                             | Switch mode   | 1.2  |      | 5.5  | V     |
| Quiescent Supply Current  | I <sub>Q_LDO3</sub>         | I <sub>L3OUT</sub> = 0μA  |      | 1    | 5.1  | μA    |
|   |                             | I <sub>L3OUT</sub> = 0μA, Switch mode   |      | 0.5  |      |       |
| Quiescent Supply Current in Dropout   | I <sub>QDO_LDO3</sub>       | I <sub>L3OUT</sub> = 0μA, V <sub>L3IN</sub> = 2.9V, LDO3VSet = 3V.                    |      | 1.8  |      | μA    |
| Shutdown Supply Current with Active Discharge Enabled   | I <sub>SD_LDO3</sub>        | LDO3 disabled. LDO3ActDSC=1.  |      | 54   |      | μA    |
| Maximum Output Current  | I <sub>L3OUT_MAX</sub>      | V <sub>L3IN</sub> ≥ 2.7V  | 100  |      |      | mA    |
|   |                             | V <sub>L3IN</sub> = 1.8V or lower   | 50   |      |      | mA    |
| Output Voltage  | V <sub>L3OUT</sub>          |   | 0.9  |      | 4    | V     |
| Output Accuracy   | ACC <sub>LDO3</sub>         | V <sub>L3IN</sub> = (V <sub>L3OUT</sub> + 0.5V) or higher, I <sub>L3OUT</sub> = 100μA | -2.7 |      | +2.7 | %     |
| Dropout Voltage   | V <sub>DROP_LDO3</sub>      | V <sub>L3IN</sub> = 3V, I <sub>L3OUT</sub> = 100mA, LDO3VSet = 3V                     |      |      | 100  | mV    |

## Electrical Characteristics (continued)

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                               | SYMBOL                      | CONDITIONS   | MIN  | TYP   | MAX   | UNITS |
|---|-----------------------------|--|------|-------|-------|-------|
| Line Regulation Error                   | V <sub>LINEREG_LDO3</sub>   | V <sub>L3IN</sub> = (V <sub>L3OUT</sub> + 0.5V) to 5.5V                    | -0.4 | +0.05 | +0.4  | %/V   |
| Load Regulation Error                   | V <sub>LOADREG_LDO3</sub>   | I <sub>L3OUT</sub> = 100μA to 100mA  |      | 0.001 | 0.005 | %/mA  |
| Line Transient                          | V <sub>LINETRAN_LDO3</sub>  | V <sub>L3IN</sub> = 4V to 5V, 200ns rise time                              |      | ±35   |       | mV    |
|   |                             | V <sub>L3IN</sub> = 4V to 5V, 1μs rise time                                |      | ±25   |       | mV    |
| Load Transient                          | V <sub>LOADTRAN_LDO3</sub>  | I <sub>L3OUT</sub> = 0mA to 10mA, 200ns rise time                          |      | 100   |       | mV    |
|   |                             | I <sub>L3OUT</sub> = 0mA to 100mA, 200ns rise time                         |      | 200   |       | mV    |
| Passive Discharge Resistance            | R <sub>PD_LDO3</sub>        |  | 5    | 10    | 16    | KΩ    |
| Active Discharge Current                | I <sub>ADL_LDO3</sub>       | V <sub>L3IN</sub> = 3.7V   | 7    | 20    | 37    | mA    |
| Switch Mode Resistance                  | R <sub>ON_LDO3</sub>        | V <sub>L3IN</sub> = 2.7V, I <sub>L3OUT</sub> = 100mA                       |      | 0.46  | 0.76  | Ω     |
|   |                             | V <sub>L3IN</sub> = 1.8V, I <sub>L3OUT</sub> = 100mA                       |      | 0.7   | 1.15  |       |
|   |                             | V <sub>L3IN</sub> = 1.2V, I <sub>L3OUT</sub> = 5mA                         |      | 1.7   | 2.6   |       |
| Turn-On Time                            | t <sub>ON_LDO3</sub>        | I <sub>L3OUT</sub> = 0mA, time from 10% to 90% of final value              |      | 1.5   | 3.7   | ms    |
|   |                             | I <sub>L3OUT</sub> = 0mA, time from 10% to 90% of final value, Switch mode |      | 0.25  | 0.65  |       |
| Short-Circuit Current Limit             | I <sub>SHRT_LDO3</sub>      | V <sub>L3IN</sub> = 2.7V, V <sub>L3OUT</sub> = GND                         | 140  | 340   | 600   | mA    |
|   |                             | V <sub>L3IN</sub> = 2.7V, V <sub>L3OUT</sub> = GND, Switch mode            | 140  | 330   | 600   | mA    |
| Thermal-Shutdown Temperature            | T <sub>SHDN_LDO3</sub>      |  |      | 150   |       | °C    |
| Thermal-Shutdown Temperature Hysteresis | T <sub>SHDN_HYST_LDO3</sub> |  |      | 21    |       | °C    |
| Output Noise                            | OUT <sub>NOISE</sub>        | 10Hz to 100kHz, V <sub>L3IN</sub> = 5V, V <sub>L3OUT</sub> = 3.3V          |      | 150   |       | μVrms |
|   |                             | 10Hz to 100kHz, V <sub>L3IN</sub> = 5V, V <sub>L3OUT</sub> = 2.5V          |      | 125   |       |       |
|   |                             | 10Hz to 100kHz, V <sub>L3IN</sub> = 5V, V <sub>L3OUT</sub> = 1.2V          |      | 80    |       |       |
|   |                             | 10Hz to 100kHz, V <sub>L3IN</sub> = 5V, V <sub>L3OUT</sub> = 0.9V          |      | 60    |       |       |
| L3IN UVLO                               | V <sub>UVLO_LDO3</sub>      | V <sub>L3IN</sub> Falling  | 1.14 | 1.38  |       | V     |
|   |                             | V <sub>L3IN</sub> Rising   |      | 1.4   | 1.64  |       |

**Electrical Characteristics (continued)**

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER   | SYMBOL                        | CONDITIONS   | MIN  | TYP  | MAX  | UNITS |
|---|-------------------------------|--|------|------|------|-------|
| <b>CHGIN TO SYS PATH</b><br>(V <sub>CHGIN</sub> = 5.0V, V <sub>SYS</sub> = V <sub>SYS_REG</sub> ) |                               |  |      |      |      |       |
| Allowed CHGIN Input Voltage Range   | V <sub>CHGIN_RNG</sub>        |  | -5.5 |      | 28   | V     |
| V <sub>CHGIN</sub> Detect Threshold   | V <sub>CHGIN_DET</sub>        | Rising   | 3.8  | 3.9  | 4.1  | V     |
|   |                               | Falling  | 3.0  | 3.1  | 3.2  |       |
| V <sub>CHGIN</sub> Overvoltage Threshold  | V <sub>CHGIN_OV</sub>         | Rising   | 7.2  | 7.5  | 7.8  | V     |
| V <sub>CHGIN</sub> Overvoltage Threshold Hysteresis   | V <sub>CHGIN_OV_HYS</sub>     |  |      | 200  |      | mV    |
| V <sub>CHGIN</sub> Valid Trip Point   | V <sub>CHGIN-SYS_TP</sub>     | V <sub>CHGIN</sub> – V <sub>SYS</sub> , Rising,<br>V <sub>BAT</sub> = 4V | +30  | +145 | +290 | mV    |
| V <sub>CHGIN</sub> Valid Trip Point Hysteresis  | V <sub>CHGIN-SYS_TP_HYS</sub> |  |      | 275  |      | mV    |
| Input Limiter Current   | I <sub>LIM</sub>              | ILimCntl[1:0] = 00   |      | 0    |      | mA    |
|   |                               | ILimCntl[1:0] = 01   |      | 90   | 100  |       |
|   |                               | ILimCntl[1:0] = 10   |      | 450  | 550  |       |
|   |                               | ILimCntl[1:0] = 11   |      | 1000 |      |       |
| Internal CAP Regulator  | V <sub>CAP</sub>              | V <sub>CHGIN</sub> = 5V  | 3.9  | 4.2  | 4.7  | V     |
| CHGIN-SYS Regulation Voltage  | V <sub>CHGIN-SYS</sub>        | V <sub>CHGIN</sub> = 4V, I <sub>SYS</sub> = 1mA                          |      | 40   |      | mV    |
| CHGIN to SYS On-Resistance  | R <sub>CHGIN-SYS</sub>        | V <sub>CHGIN</sub> = 4.4V, I <sub>SYS</sub> = 500mA                      |      | 370  | 660  | mΩ    |
| Thermal-Shutdown Temperature  | T <sub>CHGIN_SHDN</sub>       | (Note 3)   |      | +150 |      | °C    |
| Thermal-Shutdown Temperature Hysteresis   | T <sub>CHGIN_SHDN_HYS</sub>   |  |      | 30   |      | °C    |
| Input Current Soft-Start Time   | t <sub>SFST_LIM</sub>         |  |      | 1    |      | ms    |
| Internal Supply Switchover Threshold  | V <sub>CCINT_TH</sub>         | V <sub>CHGIN</sub> = V <sub>CAP</sub> rising, V <sub>BAT</sub> = 4.2V    | 2.5  | 2.8  | 3.0  | V     |

**Electrical Characteristics (continued)**

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER  | SYMBOL                    | CONDITIONS   | MIN                         | TYP                         | MAX                         | UNITS |
|--|---------------------------|--|-----------------------------|-----------------------------|-----------------------------|-------|
| <b>SYS, BATTERY, AND VCCINT UVLOs</b>  |                           |  |                             |                             |                             |       |
| SYS UVLO Threshold   | V <sub>SYSUVLO_R</sub>    | Rising   |                             | 2.64                        | 2.69                        | V     |
|  | V <sub>SYSUVLO_F</sub>    | Falling  | 2.57                        | 2.62                        | 2.67                        | V     |
| SYS UVLO Threshold Hysteresis  | V <sub>SYSUVLO_HYS</sub>  | Hysteresis   |                             | 26                          |                             | mV    |
| SYS UVLO Falling Debounce Time   | t <sub>SYSUVLO_FDEB</sub> | SYS Falling  |                             | 20                          |                             | μs    |
| V <sub>CCINT</sub> UVLO Threshold (POR)  | V <sub>UVLO</sub>         | V <sub>CCINT</sub> Rising  | 0.8                         | 1.82                        | 2.6                         | V     |
| V <sub>CCINT</sub> UVLO Threshold Hysteresis   | V <sub>UVLO_HYS</sub>     |  |                             | 140                         |                             | mV    |
| BAT UVLO Threshold   | V <sub>BAT_UVLO</sub>     | Rising (Valid only when CHGIN is present. When V <sub>BAT</sub> < V <sub>BAT_UVLO</sub> , the BAT-SYS switch opens and BAT is connected to SYS through a diode.) | 1.9                         | 2.05                        | 2.2                         | V     |
| BAT UVLO Threshold Hysteresis  | V <sub>BAT_UVLO_HYS</sub> | Hysteresis   |                             | 50                          |                             | mV    |
| <b>BATTERY CHARGER (See Figure 5a and Figure 5b)</b>   |                           |  |                             |                             |                             |       |
| (V <sub>BAT</sub> = 4.2V. Typical values are at V <sub>CHGIN</sub> = 5.0V, V <sub>SYS</sub> = V <sub>SYS_REG</sub> ) |                           |  |                             |                             |                             |       |
| Allowed BAT Voltage Range  | V <sub>BAT_RNG</sub>      |  | 0                           |                             | 5.5                         | V     |
| BAT to SYS On-Resistance   | R <sub>BAT-SYS</sub>      | V <sub>BAT</sub> = 4.2V, I <sub>BAT</sub> = 300mA  |                             | 80                          | 140                         | mΩ    |
| Current Reduce Thermal Threshold Temperature   | T <sub>CHG_LIM</sub>      | (Note 4)   |                             | 120                         |                             | °C    |
| BAT-to-SYS Switch-On Threshold   | V <sub>BAT-SYS-ON</sub>   | SYS falling  | 10                          | 22                          | 35                          | mV    |
| BAT-to-SYS Switch-Off Threshold  | V <sub>BAT-SYS-OFF</sub>  | SYS rising   | -3                          | -1.5                        | 0                           | mV    |
| SYS-BAT Regulation Voltage   | V <sub>SYS_REG</sub>      | V <sub>CHGIN</sub> = 5V, I <sub>SYS</sub> = 1mA  | V <sub>BatReg</sub> + 140mV | V <sub>BatReg</sub> + 200mV | V <sub>BatReg</sub> + 260mV | V     |



Electrical Characteristics (continued)

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER   | SYMBOL                    | CONDITIONS                               | MIN  | TYP                       | MAX  | UNITS              |
|---|---------------------------|--|------|---------------------------|------|--------------------|
| SYS Threshold Voltage<br>Charger Limiting Current<br>(Note 5) | V <sub>SYS_LIM</sub>      | SysMin = 000,<br>V <sub>BAT</sub> > 3.6V |      | V <sub>BAT</sub> +<br>0.1 |      | V                  |
|   |                           | SysMin = 000,<br>V <sub>BAT</sub> < 3.4V |      | 3.6                       |      |                    |
|   |                           | SysMin = 001,<br>V <sub>BAT</sub> < 3.4V |      | 3.7                       |      |                    |
|   |                           | SysMin = 010,<br>V <sub>BAT</sub> < 3.4V |      | 3.8                       |      |                    |
|   |                           | SysMin = 011,<br>V <sub>BAT</sub> < 3.4V |      | 3.9                       |      |                    |
|   |                           | SysMin = 100,<br>V <sub>BAT</sub> < 3.4V | 3.86 | 4                         | 4.14 |                    |
|   |                           | SysMin = 101,<br>V <sub>BAT</sub> < 3.4V |      | 4.1                       |      |                    |
|   |                           | SysMin = 110,<br>V <sub>BAT</sub> < 3.4V |      | 4.2                       |      |                    |
|   |                           | SysMin = 111,<br>V <sub>BAT</sub> < 3.4V |      | 4.3                       |      |                    |
| Charger Current Soft-Start Time                               | t <sub>CHG_SOFT</sub>     |  |      | 1                         |      | ms                 |
| <b>PRECHARGE</b>  |                           |  |      |                           |      |                    |
| Precharge Current   | I <sub>PCHG</sub>         | IPChg = 00                               |      | 5                         |      | %I <sub>FChg</sub> |
|   |                           | IPChg = 01                               | 9    | 10                        | 11   |                    |
|   |                           | IPChg = 10                               |      | 20                        |      |                    |
|   |                           | IPChg = 11                               |      | 30                        |      |                    |
| Prequalification Threshold                                    | V <sub>BAT_PChg</sub>     | VPChg = 000                              |      | 2.1                       |      | V                  |
|   |                           | VPChg = 001                              | 2.15 | 2.25                      | 2.35 |                    |
|   |                           | VPChg = 010                              |      | 2.40                      |      |                    |
|   |                           | VPChg = 011                              |      | 2.55                      |      |                    |
|   |                           | VPChg = 100                              |      | 2.7                       |      |                    |
|   |                           | VPChg = 101                              |      | 2.85                      |      |                    |
|   |                           | VPChg = 110                              |      | 3.0                       |      |                    |
|   |                           | VPChg = 111                              |      | 3.15                      |      |                    |
| Prequalification Threshold Hysteresis                         | V <sub>BAT_PChg_HYS</sub> |  |      | 90                        |      | mV                 |

Electrical Characteristics (continued)

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                             | SYMBOL                | CONDITIONS                           | MIN                        | TYP                       | MAX  | UNITS              |       |
|---------------------------------------|-----------------------|--------------------------------------|----------------------------|---------------------------|------|--------------------|-------|
| <b>FAST CHARGE</b>                    |                       |                                      |                            |                           |      |                    |       |
| SET Current Gain Factor               | K <sub>SET</sub>      |                                      |                            | 2000                      |      | A/A                |       |
| SET Regulation Voltage                | V <sub>SET</sub>      |                                      |                            | 1                         |      | V                  |       |
| Fast-Charge Current                   | I <sub>FChg</sub>     | R <sub>SET</sub> = 400kΩ             |                            | 5                         |      | mA                 |       |
|                                       |                       | R <sub>SET</sub> = 40kΩ              | 45                         | 50                        | 55   |                    |       |
|                                       |                       | R <sub>SET</sub> = 4kΩ               | 450                        | 500                       | 550  |                    |       |
| Fast-Charge Current Accuracy (Note 6) | I <sub>FChg_ACC</sub> | R <sub>SET</sub> Range = 4kΩ to 40kΩ | -10                        |                           | +10  | %                  |       |
| <b>MAINTAIN CHARGE</b>                |                       |                                      |                            |                           |      |                    |       |
| Charge Done Qualification             | I <sub>Chg_DONE</sub> | ChgDone = 00                         |                            | 5                         |      | %I <sub>FChg</sub> |       |
|                                       |                       | ChgDone = 01                         | 8.5                        | 10                        | 11.5 |                    |       |
|                                       |                       | ChgDone = 10                         |                            | 20                        |      |                    |       |
|                                       |                       | ChgDone = 11                         |                            | 30                        |      |                    |       |
| BAT Regulation Voltage (Note 7)       | V <sub>BatReg</sub>   | BatReg = 0000                        |                            | 4.05                      |      | V                  |       |
|                                       |                       | BatReg = 0001                        |                            | 4.10                      |      |                    |       |
|                                       |                       | BatReg = 0010                        |                            | 4.15                      |      |                    |       |
|                                       |                       | BatReg = 0011                        | T <sub>A</sub> = +25°C     | 4.179                     | 4.2  |                    | 4.221 |
|                                       |                       |                                      | T <sub>A</sub> = 0 to +45C | 4.168                     | 4.2  |                    | 4.232 |
|                                       |                       | BatReg = 0100                        |                            | 4.25                      |      |                    |       |
|                                       |                       | BatReg = 0101                        |                            | 4.3                       |      |                    |       |
|                                       |                       | BatReg = 0110                        |                            | 4.35                      |      |                    |       |
|                                       |                       | BatReg = 0111                        |                            | 4.4                       |      |                    |       |
|                                       |                       | BatReg = 1000                        |                            | 4.45                      |      |                    |       |
|                                       |                       | BatReg = 1001                        |                            | 4.5                       |      |                    |       |
|                                       |                       | BatReg = 1010                        |                            | 4.55                      |      |                    |       |
|                                       |                       | BatReg = 1011                        |                            | 4.6                       |      |                    |       |
| BAT Recharge Threshold                | V <sub>BatReChg</sub> | BatReChg = 00                        |                            | V <sub>BatReg</sub> - 70  |      | mV                 |       |
|                                       |                       | BatReChg = 01                        |                            | V <sub>BatReg</sub> - 120 |      |                    |       |
|                                       |                       | BatReChg = 10                        |                            | V <sub>BatReg</sub> -170  |      |                    |       |
|                                       |                       | BatReChg = 11                        |                            | V <sub>BatReg</sub> -220  |      |                    |       |

## Electrical Characteristics (continued)

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                   | SYMBOL               | CONDITIONS   | MIN  | TYP  | MAX  | UNITS              |
|---|----------------------|--|------|------|------|--------------------|
| <b>CHARGER TIMER</b>                        |                      |  |      |      |      |                    |
| Maximum Prequalification Time               | t <sub>PChg</sub>    | PChgTmr = 00   |      | 30   |      | min                |
|   |                      | PChgTmr = 01   |      | 60   |      |                    |
|   |                      | PChgTmr = 10   |      | 120  |      |                    |
|   |                      | PChgTmr = 11   |      | 240  |      |                    |
| Maximum Fast-Charge Time                    | t <sub>FChg</sub>    | FChgTmr = 00   |      | 75   |      | min                |
|   |                      | FChgTmr = 01   |      | 150  |      |                    |
|   |                      | FChgTmr = 10   |      | 300  |      |                    |
|   |                      | FChgTmr = 11   |      | 600  |      |                    |
| Maintain-Charge Time                        | t <sub>TOChg</sub>   | TOChgTmr = 00  |      | 0    |      | min                |
|   |                      | TOChgTmr = 01  |      | 15   |      |                    |
|   |                      | TOChgTmr = 10  |      | 30   |      |                    |
|   |                      | TOChgTmr = 11  |      | 60   |      |                    |
| Timer Accuracy                              | t <sub>CHG_ACC</sub> |  | -10  |      | +10  | %                  |
| Timer Extend Threshold                      | TIMEXD_THRES         | If charge current is reduced due to ILIM or TDIE this is the percentage of charge current below which timer clock operates at half speed |      | 50   |      | %I <sub>FChg</sub> |
| Timer Suspend Threshold                     | TIMSUS_THRES         | If charge current is reduced due to ILIM or TDIE this is the percentage of charge current below which timer clock pauses                 |      | 20   |      | %I <sub>FChg</sub> |
| <b>THERMISTOR MONITOR AND NTC DETECTION</b> |                      |  |      |      |      |                    |
| THM Hot Threshold                           | T <sub>4</sub>       | V <sub>THM</sub> falling, MAX14745A/<br>MAX14745C  | 30.9 | 32.9 | 34.9 | %CAP               |
|   |                      | V <sub>THM</sub> falling, MAX14745D/<br>MAX14745E  | 21.3 | 23.3 | 25.3 |                    |
| THM Warm Threshold                          | T <sub>3</sub>       | V <sub>THM</sub> falling, MAX14745A/<br>MAX14745C  | 48   | 50   | 52   |                    |
|   |                      | V <sub>THM</sub> falling, MAX14745D/<br>MAX14745E  | 30.9 | 32.9 | 34.9 |                    |
| THM Cool Threshold                          | T <sub>2</sub>       | V <sub>THM</sub> rising  | 62.5 | 64.5 | 66.5 |                    |
| THM Cold Threshold                          | T <sub>1</sub>       | V <sub>THM</sub> rising  | 71.9 | 73.9 | 75.9 |                    |
| THM Disable Threshold                       | THMDIS               | V <sub>THM</sub> rising  | 91   | 93   | 95   |                    |
| THM Threshold Hysteresis                    | THMHYS               |  |      | 60   |      |                    |
| THM Input Leakage                           | I <sub>LKG_THM</sub> |  | -1   |      | 1    | μA                 |

**Electrical Characteristics (continued)**

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER   | SYMBOL               | CONDITIONS            | MIN | TYP | MAX | UNITS |
|---|----------------------|-----------------------|-----|-----|-----|-------|
| <b>START UP TIMING (See Figure 2)</b>                 |                      |                       |     |     |     |       |
| Boot Delay  | t <sub>RST</sub>     | BootDly = 00          |     | 80  |     | ms    |
|   |                      | BootDly = 01          |     | 120 |     |       |
|   |                      | BootDly = 10          |     | 220 |     |       |
|   |                      | BootDly = 11          |     | 420 |     |       |
| Boot Delay Timer Accuracy                             | t <sub>RST_ACC</sub> |                       | -10 |     | 10  | %     |
| <b>DIGITAL SIGNALS</b>                                |                      |                       |     |     |     |       |
| Input Logic-High (SDA, SCL, MPC0, MPC1, PFN1, PFN2)   | V <sub>IH</sub>      |                       | 1.4 |     |     | V     |
| Input Logic-Low (SDA, SCL, MPC0, MPC1, PFN1, PFN2)    | V <sub>IL</sub>      |                       |     |     | 0.5 | V     |
| Output Logic-Low (SDA, RST, INT, LED, PFN2)           | V <sub>OL</sub>      | I <sub>OL</sub> = 4mA |     |     | 0.4 | V     |
| High Level Leakage Current (SDA, RST, INT, LED, PFN2) | I <sub>LK</sub>      |                       |     |     | 1   | μA    |
| SCL Clock Frequency                                   | f <sub>SCL</sub>     |                       |     |     | 400 | kHz   |
| Bus Free Time Between a STOP and START Condition      | t <sub>BUF</sub>     |                       | 1.3 |     |     | μs    |
| START Condition (Repeated) Hold Time                  | t <sub>HD:STA</sub>  | (Note 8)              | 0.6 |     |     | μs    |
| Low Period of SCL Clock                               | t <sub>LOW</sub>     |                       | 1.3 |     |     | μs    |
| High Period of SCL Clock                              | t <sub>HIGH</sub>    |                       | 0.6 |     |     | μs    |
| Setup Time for a Repeated START Condition             | t <sub>SU:STA</sub>  |                       | 0.6 |     |     | μs    |
| Data Hold Time  | t <sub>HD:DAT</sub>  | (Note 9)              | 0   |     | 0.9 | μs    |
| Data Setup Time                                       | t <sub>SU:DAT</sub>  | (Note 9)              | 100 |     |     | ns    |
| Setup Time for STOP Condition                         | t <sub>SU:STO</sub>  |                       | 0.6 |     |     | μs    |
| Spike Pulse Widths Suppressed by Input Filter         | t <sub>SP</sub>      | (Note 10)             |     | 50  |     | ns    |









## Electrical Characteristics (continued)

(V<sub>CHGIN</sub> = 5.0V, V<sub>BAT</sub> = 3.7V, T<sub>A</sub> = -40°C to +85°C, all registers in their default state, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

- Note 1:** All devices are 100% production tested at T<sub>A</sub> = +25°C. Limits over the operating temperature range guaranteed by design.
- Note 2:** This value is included in the I<sub>BAT</sub> quiescent current values for the ON states.
- Note 3:** When the die temperature exceeds T<sub>CHGIN\_SHDN</sub>, the CHGIN to SYS path opens, and the charger is turned off.
- Note 4:** When the die temperature exceeds T<sub>CHG\_LIM</sub>, the charger current starts to decrease.
- Note 5:** This is the threshold at which the charger starts to limit the current due to SYS dropping; if V<sub>SYS</sub> drops below this value the charger will not move to maintain charge.
- Note 6:** Fast charge current accuracy tested only at 50mA and 500mA, all other values guaranteed by design.
- Note 7:** Values over temperature are not production tested and guaranteed by characterization.
- Note 8:** f<sub>SCL</sub> must meet the minimum clock low time plus the rise/fall times.
- Note 9:** The maximum t<sub>HD:DAT</sub> has to be met only if the device does not stretch the low period (t<sub>LOW</sub>) of the SCL signal.
- Note 10:** Filters on SDA and SCL suppress noise spikes at the input buffers and delay the sampling instant.










Typical Operating Characteristics

(V<sub>BAT</sub> = 3.7V, V<sub>CHGIN</sub> = 0V, registers in their default state, T<sub>A</sub> = +25°C, unless otherwise noted.)

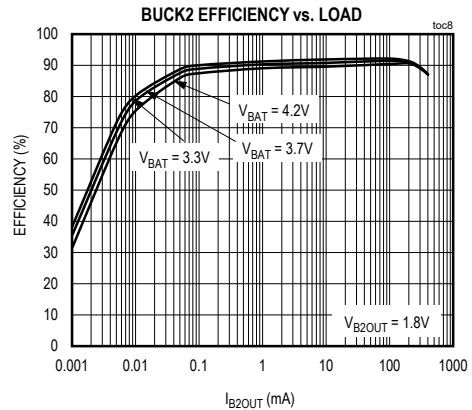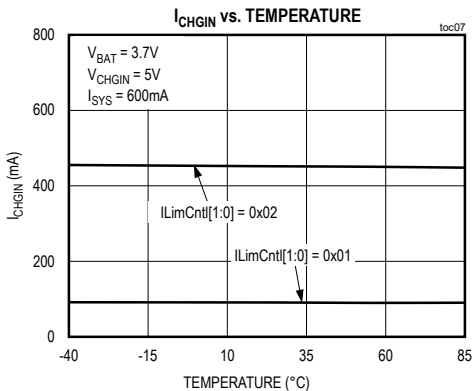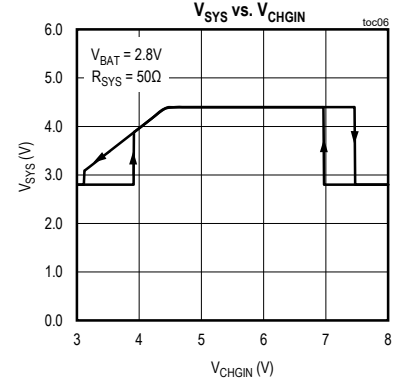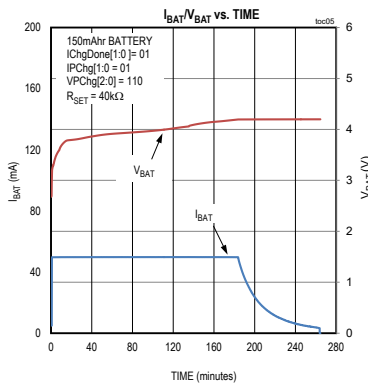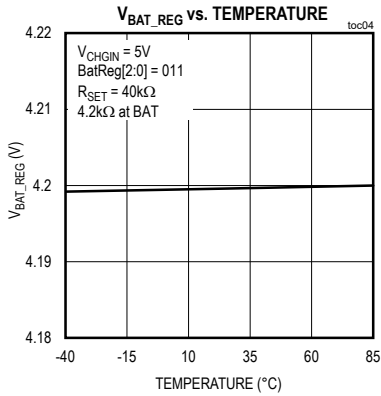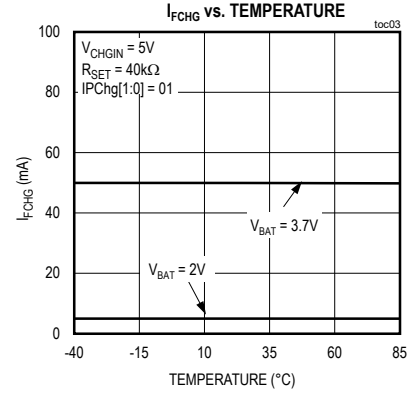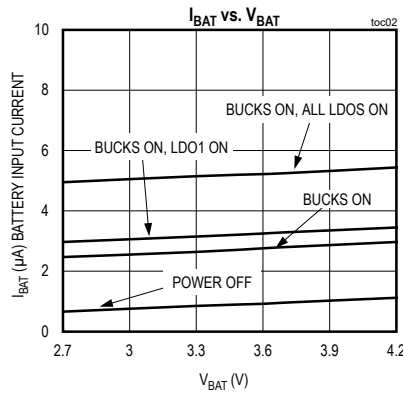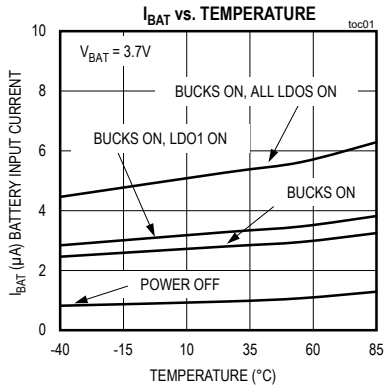






Typical Operating Characteristics (continued)

(V<sub>BAT</sub> = 3.7V, V<sub>CHGIN</sub> = 0V, registers in their default state, T<sub>A</sub> = +25°C, unless otherwise noted.)

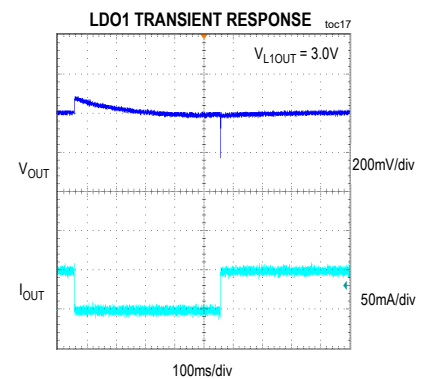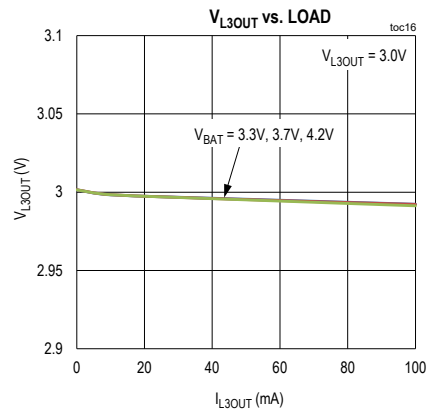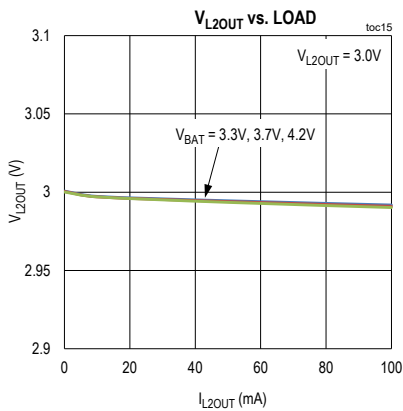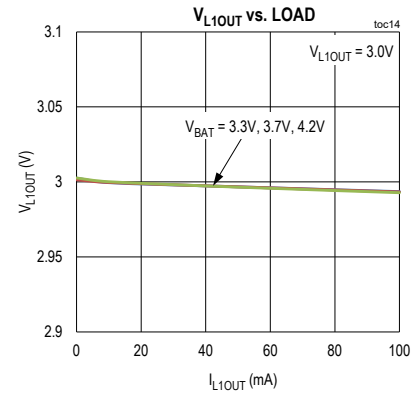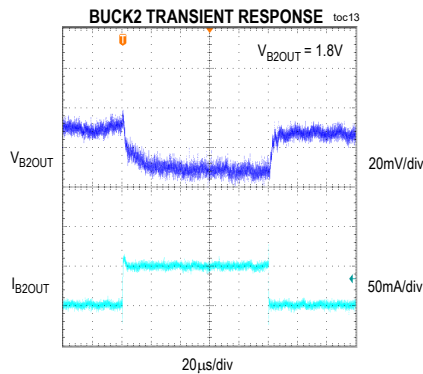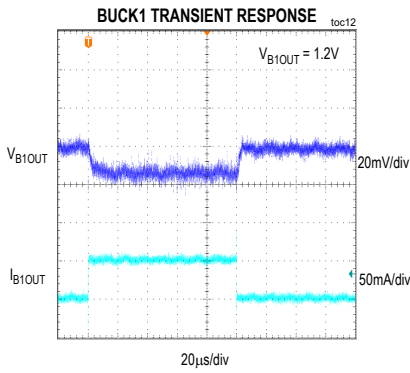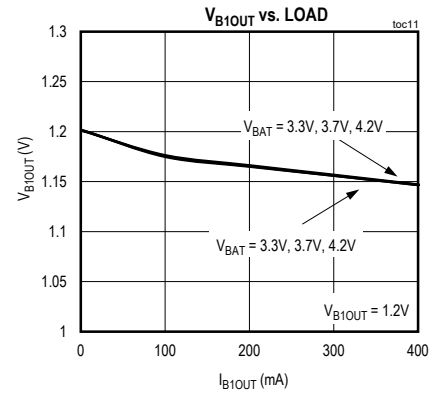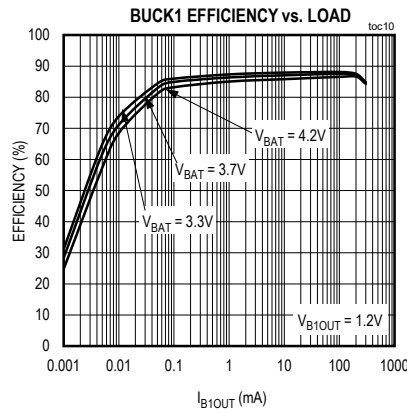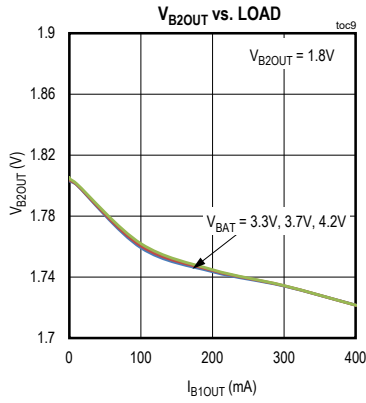


Typical Operating Characteristics (continued)

(V<sub>BAT</sub> = 3.7V, V<sub>CHGIN</sub> = 0V, registers in their default state, T<sub>A</sub> = +25°C, unless otherwise noted.)

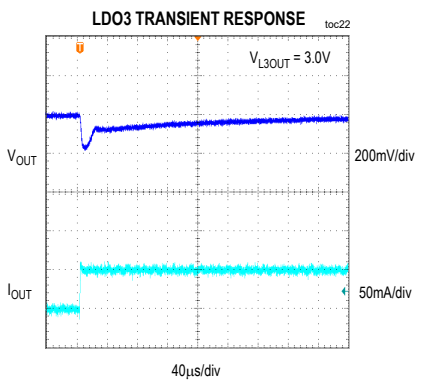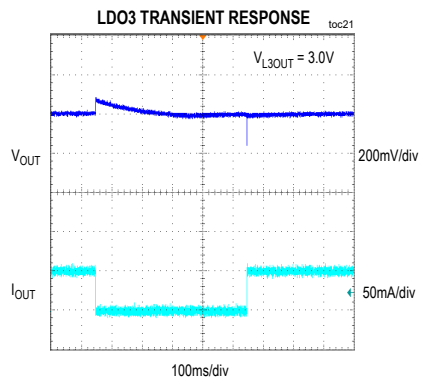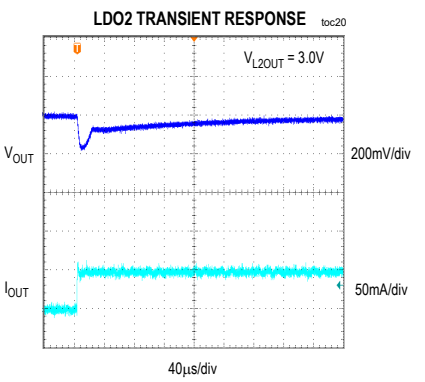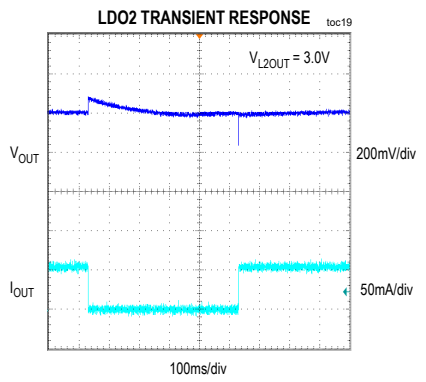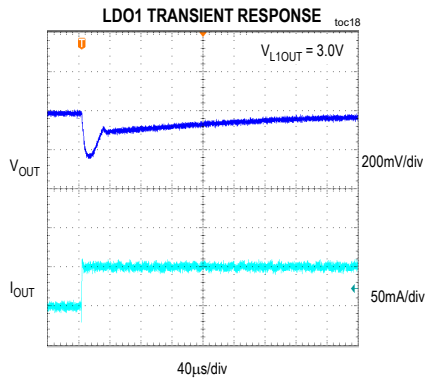



**Bump Configuration**

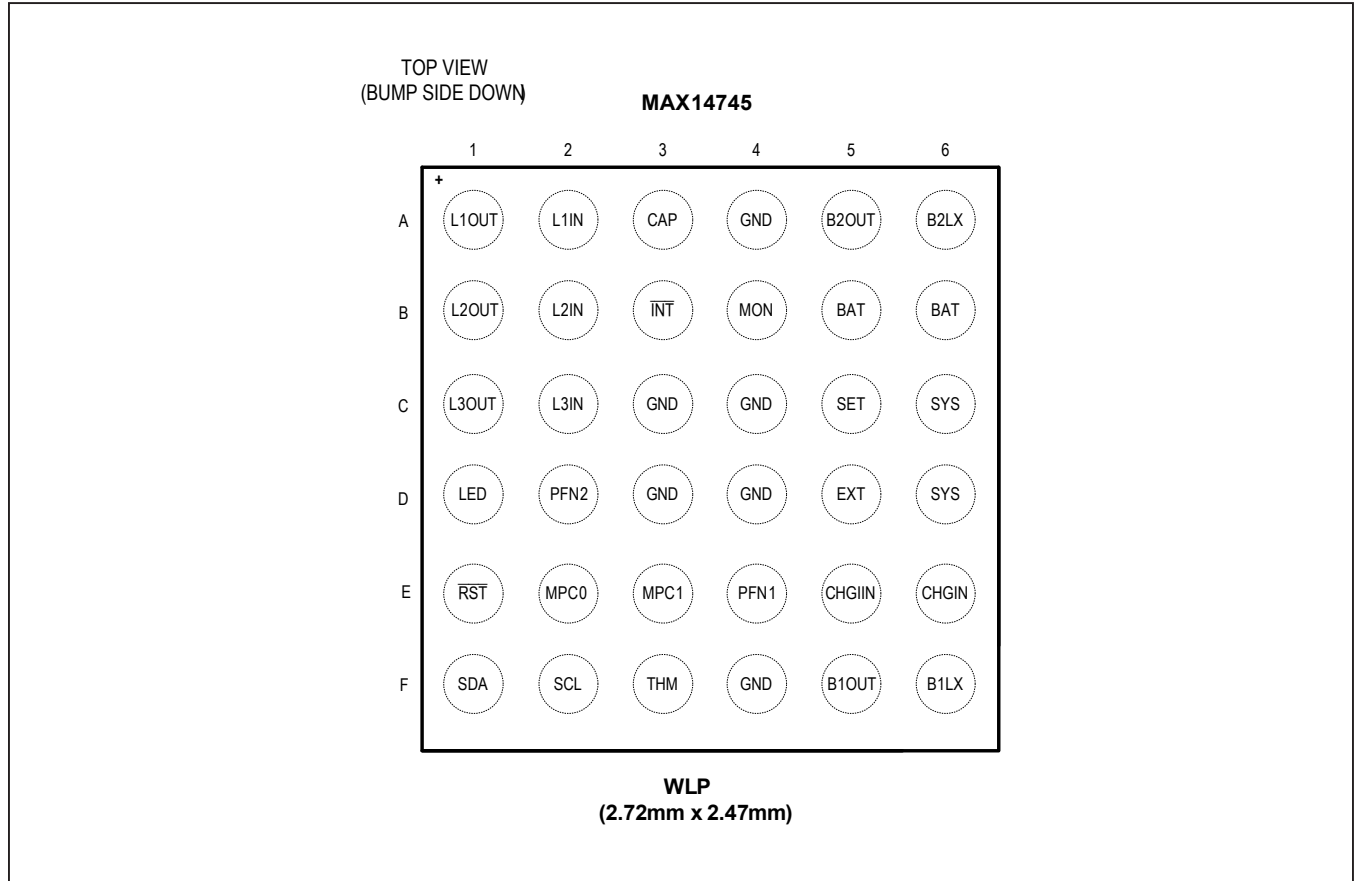

**Bump Description**


| BUMP                     | NAME  | FUNCTION  |
|--------------------------|-------|---|
| A1                       | L1OUT | LDO1 Output. Bypass with a minimum 1µF capacitor to GND.  |
| A2                       | L1IN  | LDO1 Input  |
| A3                       | CAP   | Bypass for Internal LDO. Bypass with a 1µF capacitor to GND.  |
| A4, C3, C4<br>D3, D4, F4 | GND   | Ground  |
| A5                       | B2OUT | 0.8V – 3.95V Buck Regulator Output Feedback. Bypass with a 10µF capacitor to GND.                               |
| A6                       | B2LX  | 0.8V – 3.95V Buck Regulator Switch. Connect 2.2µH inductor to B2OUT.  |
| B1                       | L2OUT | LDO2 Output. Bypass with a minimum 1µF capacitor to GND.  |
| B2                       | L2IN  | LDO2 Input  |
| B3                       | INT   | Open-Drain, Active-Low Interrupt Output.  |
| B4                       | MON   | Voltage Monitor Pin   |
| B5, B6                   | BAT   | Battery Connection. Connect BAT to a positive battery terminal, bypass BAT with a minimum 1µF capacitor to GND. |

## Bump Description (continued)

| PIN    | NAME             | FUNCTION   |
|--------|------------------|--|
| C1     | L3OUT            | LDO3 Output. Bypass with a minimum 1μF capacitor to GND.   |
| C2     | L3IN             | LDO3 Input   |
| C5     | SET              | External Resistor For Battery Charge Current Level Setting. Do not connect any external capacitance on this pin; maximum allowed capacitance ( $C_{SET} < 5\mu s/R_{SET}$ ) pF.  |
| C6, D6 | SYS              | System Load Connection. Connect SYS to the system load. Bypass SYS with a minimum 10μF low-ESR ceramic capacitor to GND.   |
| D1     | LED              | LED Open-Drain Pulldown Current. Add an external current limiting pullup resistor.   |
| D2     | PFN2             | Power Function Control Input/Output. Programmable functionality via PwrFnMode. See Table 1.  |
| D5     | EXT              | Push-Pull Gate Drive for Optional External pFET from BAT-to-SYS. Output is pulled to GND when charger is disconnected and internal BAT-SYS FET is switched on. Otherwise, this output is pulled high to the SYS voltage. |
| E1     | $\overline{RST}$ | Power-On Reset Output. Active-low, open-drain.   |
| E2     | MPC0             | Multipurpose Configuration Input 0   |
| E3     | MPC1             | Multipurpose Configuration Input 1   |
| E4     | PFN1             | Power Function Control Input. Programmable functionality via PwrFnMode. See Table 1.   |
| E5, E6 | CHGIN            | -5.5V/+28V Protected Charger Input. Bypass CHGIN with 1μF capacitor to GND.  |
| F1     | SDA              | Open-Drain, I <sup>2</sup> C Serial Data Input/Output.   |
| F2     | SCL              | I <sup>2</sup> C Serial Clock Input  |
| F3     | THM              | Battery Temperature Thermistor Measurement Connection. Connect a 10kΩ resistor from THM to CAP and a 10kΩ, 3380β NTC thermistor from THM to GND.   |
| F5     | B1OUT            | 0.8V – 2.375V Buck Regulator Output Feedback. Bypass B1OUT with a 10μF capacitor to GND.   |
| F6     | B1LX             | 0.8V – 2.375V Buck Regulator Switch Terminal. Connect B1LX to B1OUT with a 2.2μH inductor.   |

**Note:** All capacitance values listed in this document refer to effective capacitance. Be sure to specify capacitors that will meet these requirements under typical system operating conditions taking into consideration the effects of voltage and temperature.

Block Diagram

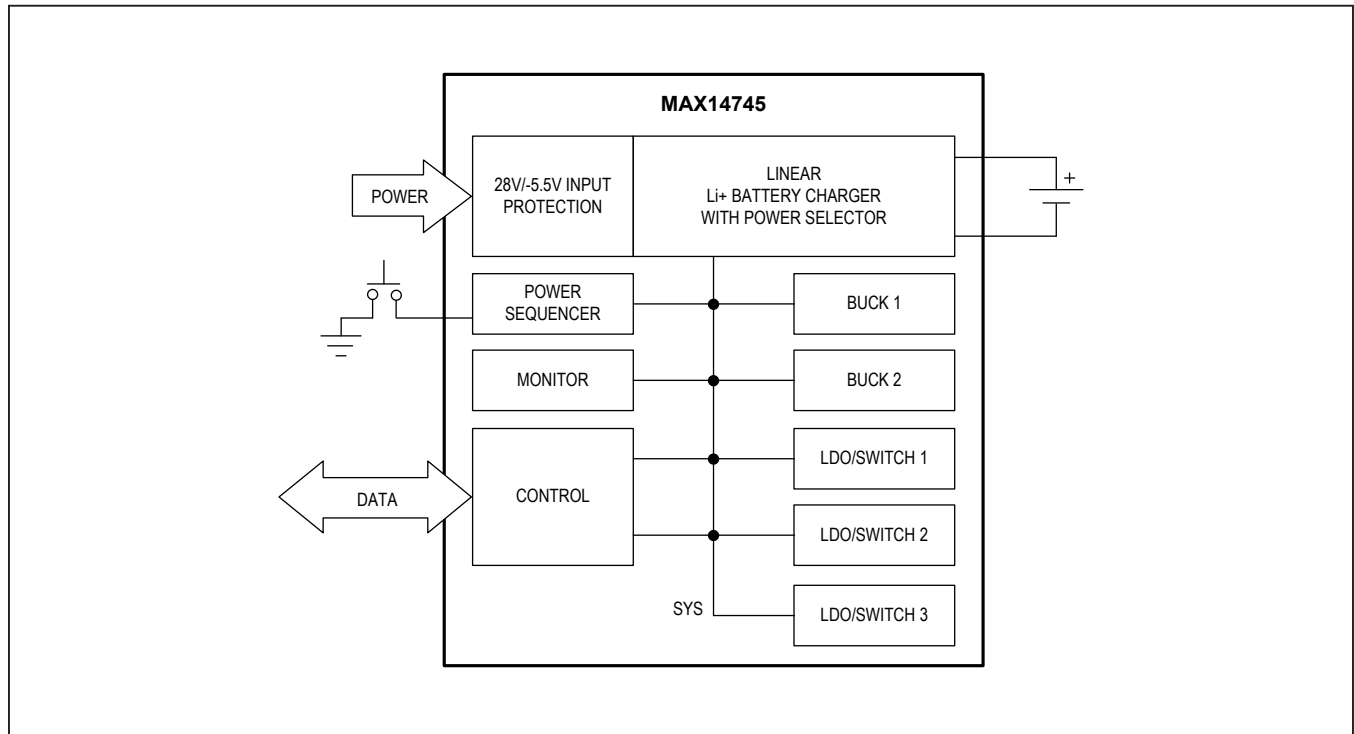

Detailed Description

Power Regulation

The MAX14745 family includes two high-efficiency, low quiescent current buck regulators, and three low quiescent current linear regulators that are also configurable as power switches. Excellent light-load efficiency allows the switching regulators to run continuously without significant energy cost.

Power On/Off and Reset Control

The behavior of power function control pins (PFN1 and PFN2) is preconfigured to support one of the multiple types of wearable application cases. [Table 1](#) describes the behavior of the PFN1 and PFN2 pins based on the PwrRstCfg[3:0] bits and [Figure 1](#) shows basic flow diagrams associated with each mode.

A Soft-Reset generates a 10ms logic low pulse at  $\overline{RST}$  and resets all registers to their default values. A Hard-Reset initiates a complete Power-On Reset sequence and generates a 50ms logic-low pulse at  $\overline{RST}$ .

Table 1. Power Function Input Control Modes

| PwrRstCfg[3:0]**            | PFN1**   | PFN1 PU/PD<br>PFNxResEna = 1 | PFN2**                                      | PFN2 PU/PD<br>PFNxResEna = 1 | Available PwrCmd |      |      |
|-----------------------------|--|------------------------------|---|------------------------------|------------------|------|------|
|                             |  |                              |   |                              | OFF              | HARD | SOFT |
| On/ $\overline{\text{Off}}$ | ENABLE   | PULLDOWN                     | Manual $\overline{\text{Reset}}$            | PULLUP*                      | NO               | NO   | YES  |
|                             | On/Off Mode with 10ms debounce. PFN1 is the active-high on/off control input. PFN2 is the active-low soft-reset input.   |                              |   |                              |                  |      |      |
| $\overline{\text{On}}$ /Off | DISABLE  | PULLUP*                      | Manual $\overline{\text{Reset}}$            | PULLUP*                      | NO               | NO   | YES  |
|                             | On/Off Mode with 10ms debounce. PFN1 is the active-low on/off control. PFN2 is the active-low soft-reset input.  |                              |   |                              |                  |      |      |
| AON                         | Hard-Reset on PFN1 Rising  | PULLDOWN                     | Soft-Reset on PFN2 Rising                   | PULLDOWN                     | YES              | YES  | YES  |
|                             | Always-On Mode. A rising edge on PFN1 generates a hard reset after a 200ms delay. A rising edge on PFN2 generates a soft-reset after a 200ms delay. In this mode, the device can only enter the off state by writing to the PwrCmd register.   |                              |   |                              |                  |      |      |
| $\overline{\text{AON}}$     | Hard-Reset on PFN1 Falling   | PULLUP*                      | Soft-Reset on PFN2 Falling                  | PULLUP*                      | YES              | YES  | YES  |
|                             | Always-On Mode. A falling edge on PFN1 generates a hard-reset after a 200ms delay. A falling edge on PFN2 generates a soft-reset after a 200ms delay. In this mode, the device can only enter the off state by writing to the PwrCmd register.   |                              |   |                              |                  |      |      |
| CR High                     | Hard-Reset on CHGIN insertion When PFN1 High   | PULLDOWN                     | Soft-Reset CHGIN Insertion When PFN2 High   | PULLDOWN                     | YES              | YES  | YES  |
|                             | Charger Reset High Mode. When PFN1 is high, a CHGIN insertion generates a hard-reset after a 200ms delay. When PFN2 is high, a CHGIN insertion generates a soft-reset after a 200ms delay. In this mode, the device can only enter the off state by writing to the PwrCmd register.  |                              |   |                              |                  |      |      |
| CR Low                      | Hard-Reset on CHGIN Insertion When PFN1 low  | PULLUP*                      | Soft-Reset on CHGIN Insertion When PFN2 Low | PULLUP*                      | YES              | YES  | YES  |
|                             | Charger Reset Low Mode. When PFN1 is low, a CHGIN insertion generates a Hard-Reset after a 200ms delay. When PFN2 is low, a CHGIN insertion generates a Soft-Reset after a 200ms delay. In this mode, the device can only enter the off state by writing to the PwrCmd register.   |                              |   |                              |                  |      |      |
| $\overline{\text{KIN}}$     | $\overline{\text{KIN}}$  | PULLUP*                      | $\overline{\text{KOUT}}$                    | NONE                         | YES              | YES  | YES  |
|                             | Custom Button Mode. PFN1 is the active-low $\overline{\text{KIN}}$ button input. PFN2 is the open-drain $\overline{\text{KOUT}}$ output, which buffers the $\overline{\text{KIN}}$ input. The device can enter the off state by either a $\overline{\text{KIN}}$ press (>12s) or by writing to the PwrCmd register. A CHGIN insertion or a $\overline{\text{KIN}}$ press (>400ms) can exit the off state.          |                              |   |                              |                  |      |      |
| CSR1                        | $\overline{\text{KIN}}$  | PULLUP*                      | $\overline{\text{KOUT}}$                    | NONE                         | YES              | NO   | NO   |
|                             | Custom Soft Reset 1. PFN1 is the active-low $\overline{\text{KIN}}$ button input. PFN2 is the open-drain $\overline{\text{KOUT}}$ output, which buffers the $\overline{\text{KIN}}$ input. A $\overline{\text{KIN}}$ press (>12s) generates a soft-reset. The device can only enters the off state through the PwrCmd register. A CHGIN insertion or a $\overline{\text{KIN}}$ press (>3s) can exit the off state. |                              |   |                              |                  |      |      |
| CSR2                        | $\overline{\text{KIN}}$  | PULLUP*                      | Manual $\overline{\text{Reset}}$            | NONE                         | YES              | YES  | YES  |
|                             | Custom Soft-Reset 2. PFN1 is the active-low $\overline{\text{KIN}}$ button input. PFN2 is the active-low soft-reset input. A PFN2 press (>12s) generates a soft-reset. In this mode, the device can only enter the off state by writing to the PwrCmd register.  |                              |   |                              |                  |      |      |

\* Pullup is connected to an internal supply, V<sub>CCINT</sub>. (V<sub>CCINT</sub> = V<sub>CAP</sub> if V<sub>CAP</sub> > V<sub>CCINT\_TH</sub>, or V<sub>CCINT</sub> = V<sub>BAT</sub> if V<sub>CAP</sub> < V<sub>CCINT\_TH</sub>).

\*\* PwrRstCfg[3:0] is read-only; the functions of PFN1 and PFN2 cannot be changed through I<sup>2</sup>C

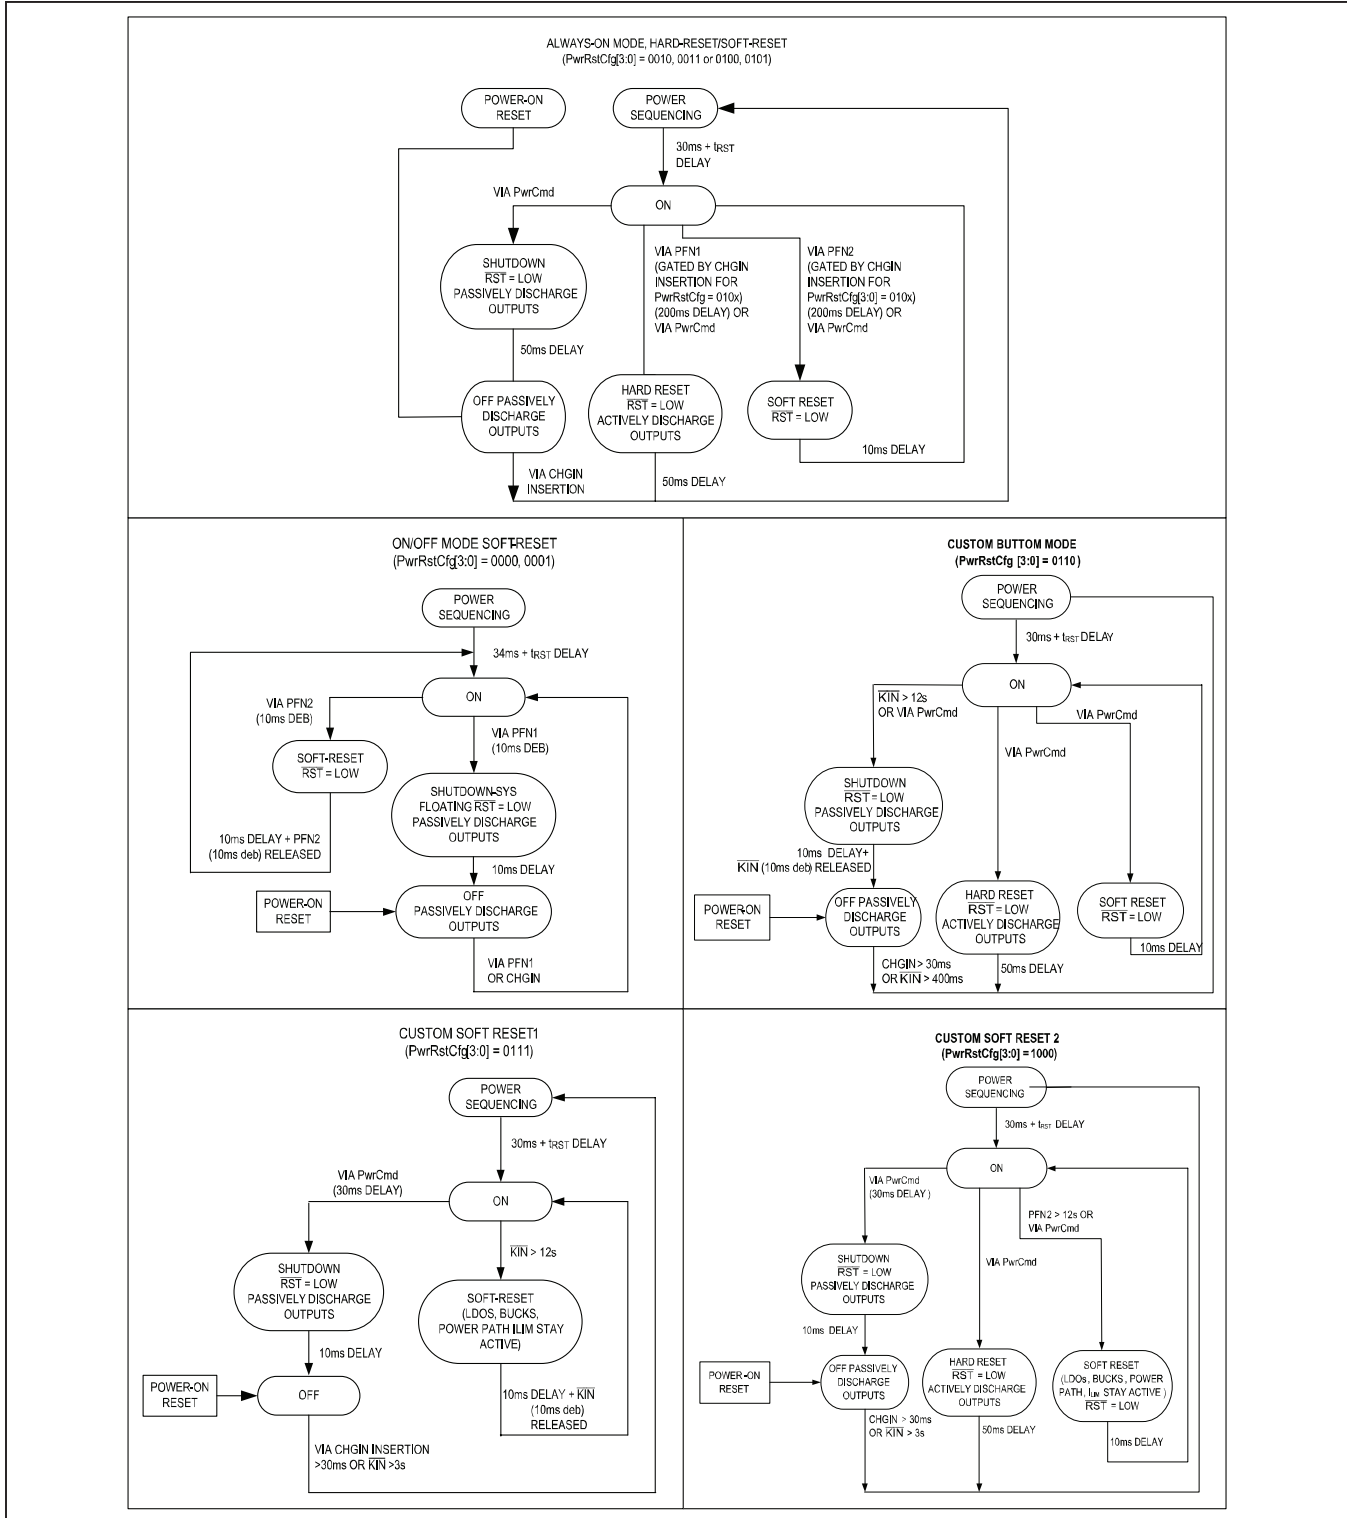


Figure 1. Power Function Input Control Modes Flow Diagrams

**Power Sequencing**

There are multiple configuration options for the sequencing of the buck regulators and LDOs during power-on. See [Table 1](#) for details. Regulators can be configured to turn on at one of the four points during the power-on process: 0% t<sub>RST</sub>, 25% t<sub>RST</sub>, 50% t<sub>RST</sub>, and 100% t<sub>RST</sub>. The reset delay t<sub>RST</sub> can be set to 80ms, 120ms, 220ms, or 420ms by BootDly[1:0] in the BootCfg register. The power-on sequencing is depicted in [Figure 2a](#) and [Figure 2b](#).

Additionally, the regulators can be selected to default off and can be turned on with an I<sup>2</sup>C command after  $\overline{\text{RST}}$  is released. Each LDO regulator can be configured to be always-on as long as SYS or BAT is present.

In general, if an undervoltage condition is detected on SYS the device goes into the off state. However if there is a valid voltage on CHGIN the behavior is determined by the ChgAlwTry setting. If ChgAlwTry = 0, and an undervoltage condition is detected on SYS during the sequencing process the device turns SYS and all other external resources off and waits for CHGIN removal. On CHGIN removal the device enters the off state to avoid draining the battery. If ChgAlwTry = 1, the process will continually recheck the SYS undervoltage condition every 500ms until it is no longer valid before continuing with the sequencing process.

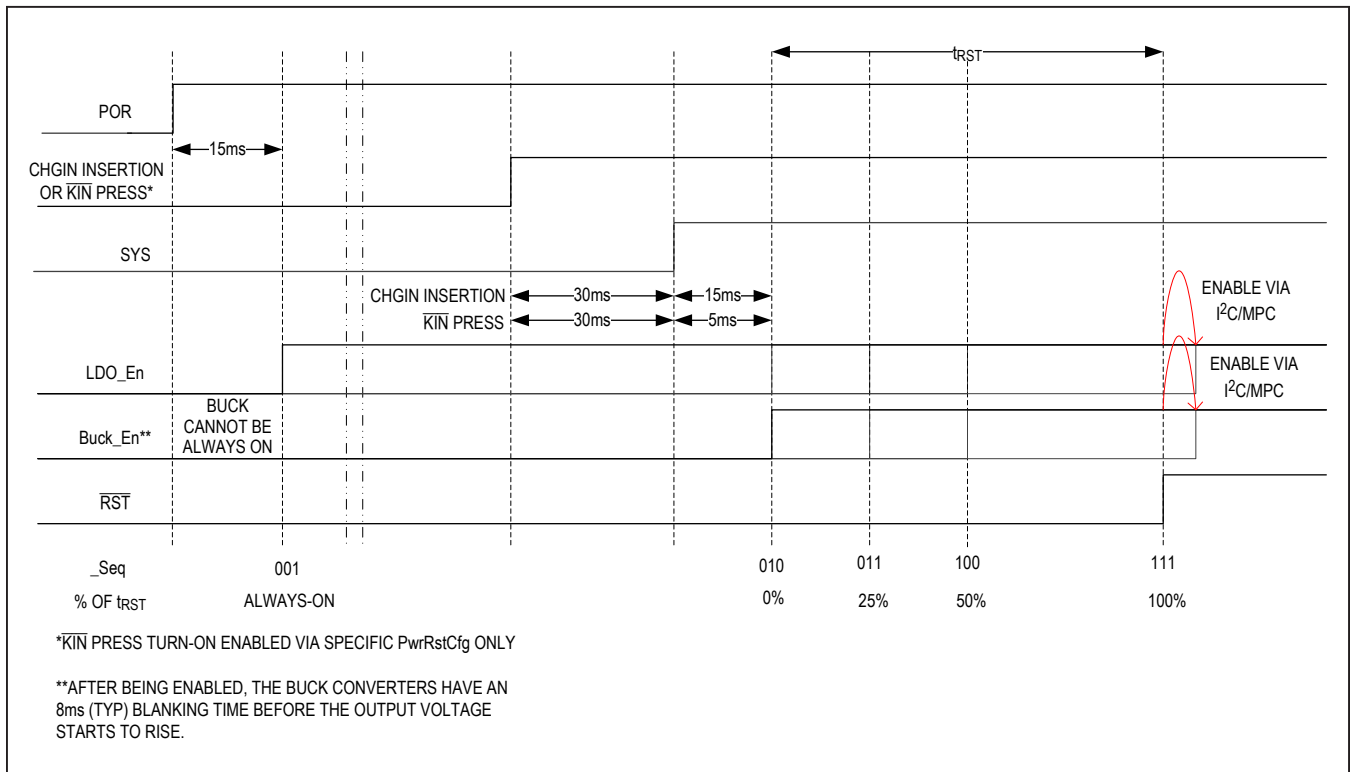


Figure 2a. Power-On Sequencing

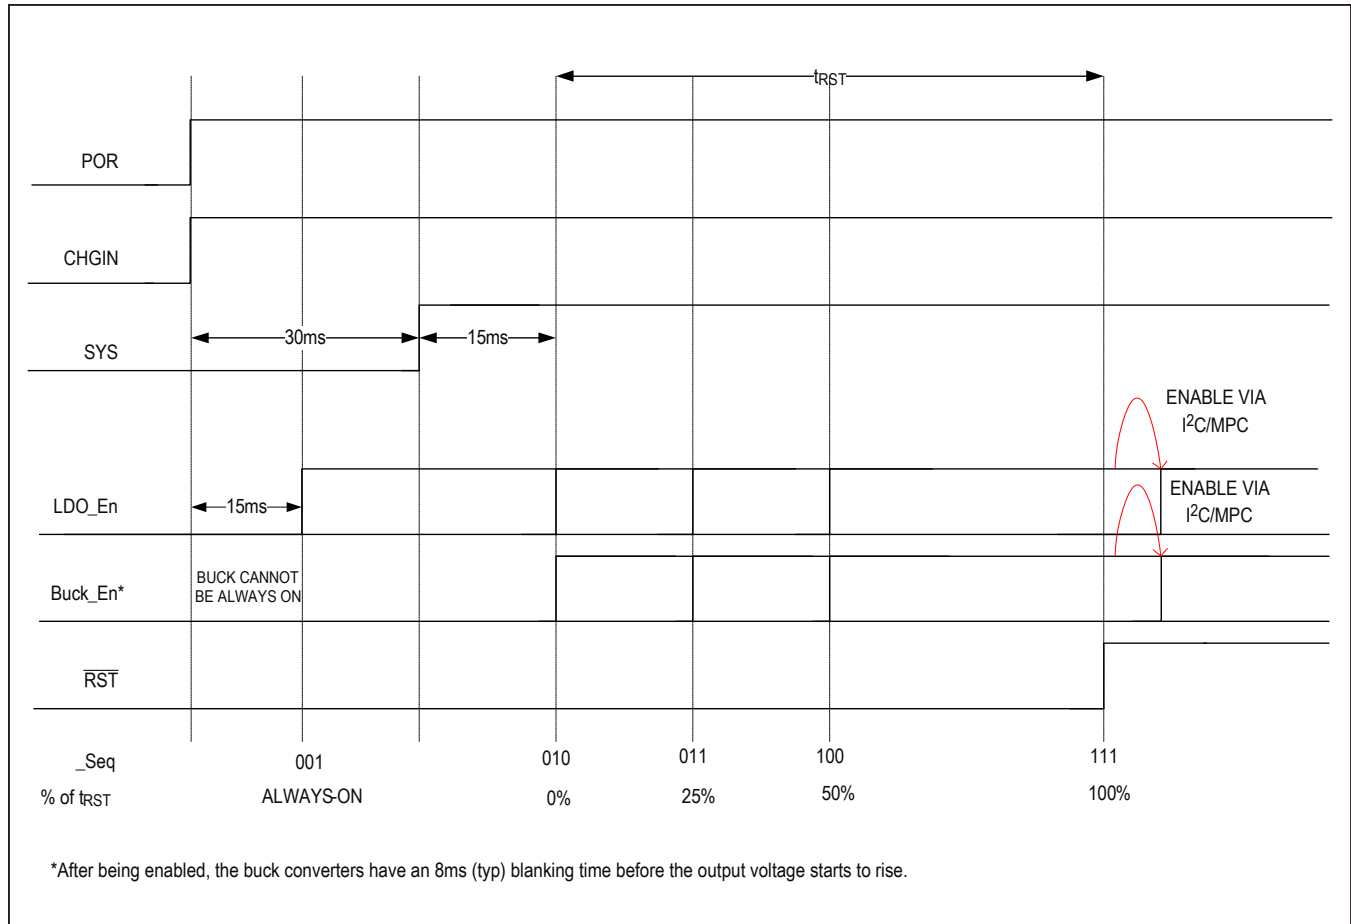


Figure 2b. Power-On Sequencing Without Battery

### Smart Power Selector

The smart power selector seamlessly distributes power from the external CHGIN input to the battery (BAT) and the system (SYS). With both an external adapter and battery connected, the smart power selector basic functions are:

- When the system load requirements are less than the input current limit, the battery is charged with residual power from the input.
- When the system load requirements exceed the input current limit, the battery supplies supplemental current to the load.

- When the battery is connected and there is no external power input, the system is powered from the battery.

### Thermal Current Regulation

In case the die temperature exceeds the normal limit, the MAX14745 will attempt to limit the temperature increase by reducing the input current from CHGIN. In this condition, the system load has priority over charger current, so the input current is first reduced by lowering the charge current. If the junction temperature continues to rise and reaches the maximum operating limit, no input current is drawn from CHGIN and the battery powers the entire system load.

**System Load Switch**

An internal 80mΩ (typ) MOSFET connects SYS to BAT when no voltage source is available on CHGIN. When an external source is detected at CHGIN, this switch opens and SYS is powered from the input source through the input current limiter. The SYS-to-BAT switch also prevents V<sub>SYS</sub> from falling below V<sub>BAT</sub> when the system load exceeds the input current limit. If V<sub>SYS</sub> drops to V<sub>BAT</sub> due to the current limit, the load switch turns on so the load is supported by the battery. If the system load continuously exceeds the input current limit the battery is not charged. This is useful for handling loads that are nominally below the input current limit but have high current peaks exceeding the input current limit. During these peaks, battery energy is used, but at all other times the battery charges. See [Figure 3](#).

The pin EXT can drive the gate of an external pMOS connected between SYS (source, bulk) and BAT (drain) in parallel to the internal one.

When V<sub>CHGIN</sub> < V<sub>BDET</sub> the EXT voltage is the buffered version of the internal gate command that controls the internal 80mΩ (typ) MOSFET.

**Note:** The body diode of an external pMOS connected between BAT and SYS remains present when the device is in off mode.

**Input Limiter**

The input limiter distributes power from the external adapter to the system load and battery charger. In addition to the input limiter’s primary function of passing power to the system load and charger, it performs several additional functions to optimize use of available power:

**Invalid CHGIN Voltage Protection:** If CHGIN is above the overvoltage threshold, the MAX14745 enters overvoltage lockout (OVL). OVL protects the MAX14745 and downstream circuitry from high-voltage stress up to 28V and down to -5.5V. During OVL, the internal circuit remains powered and an interrupt is sent to the host. During OVL, the charger turns off and the system load switch closes, allowing the battery to power SYS. CHGIN is also invalid if it is less than V<sub>BAT</sub>, or less than the USB undervoltage threshold. With an invalid input voltage, the SYS-to-BAT load switch closes and allows the battery to power SYS.

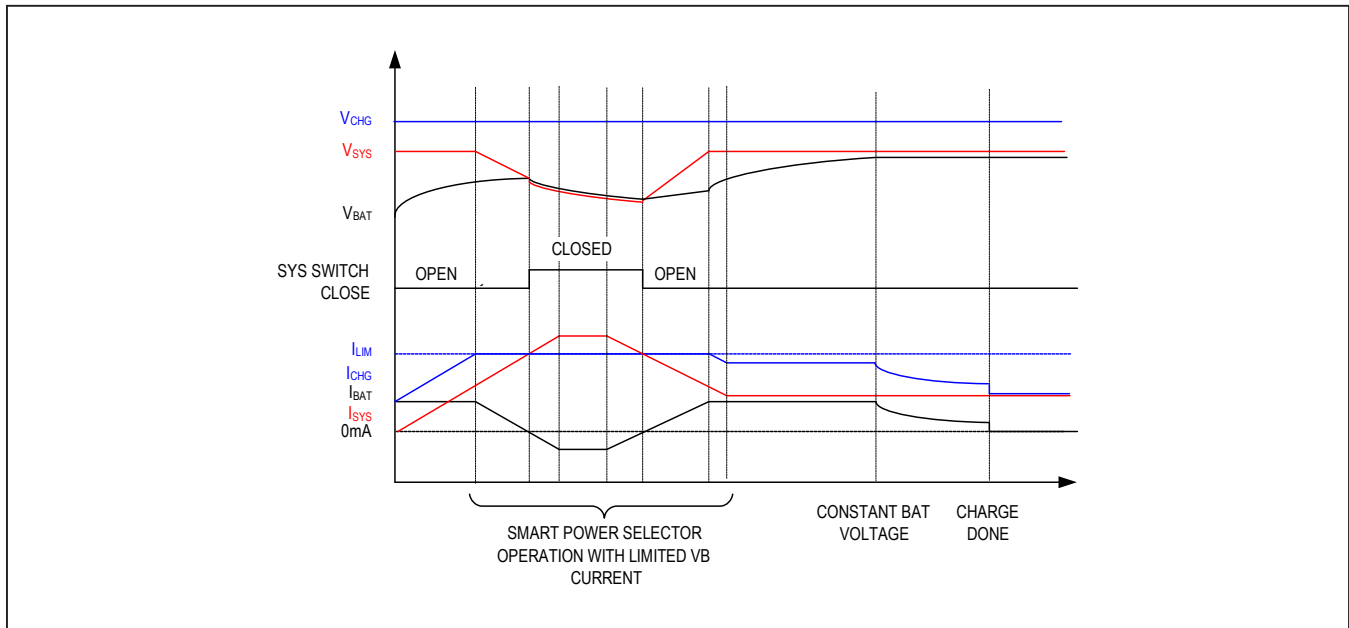


Figure 3. Smart Power Selector Current/Voltage Behavior



**CHGIN Adaptive Input Current Limit:** The CHGIN input current is limited to prevent input overload. The input current limit is controlled by I<sup>2</sup>C. However, if the voltage at CHGIN collapses because the source is not able to supply either the current programmed in I<sup>2</sup>C, or the total current required by the battery charger and system load, the input current limit will be adaptively reduced.

**Thermal Limiting:** In case the die temperature exceeds the normal limit (T<sub>CHG\_LIM</sub>), the MAX14745 attempts to limit temperature increase by reducing the input current from CHGIN. In this condition, the system load has priority over the charger current, so the input current is first reduced by lowering the charge current. If the junction temperature continues to rise and reaches the maximum operating limit (T<sub>CHGIN\_SHDN</sub>), no input current is drawn from CHGIN and the battery powers the entire system load.

**Adaptive Battery Charging:** While the system is powered from CHGIN, the charger draws power from SYS to charge the battery. If the total load exceeds the input current limit, an adaptive charger control loop reduces charge current to prevent V<sub>SYS</sub> from collapsing.

When the charge current is reduced below 50% due to I<sub>LIM</sub> or T<sub>DIE</sub>, the timer clock operates at half speed. When the charge current is reduced below 20% due to I<sub>LIM</sub> or T<sub>DIE</sub>, the timer clock is paused.

### Fast-Charge Current Setting

The MAX14745 uses an external resistor connected from SET to GND to set the fast-charge current. The pre-charge and charge-termination currents are programmed as a percentage of this value through I<sup>2</sup>C registers. The fast-charge current resistor can be calculated as:

$$R_{SET} = K_{SET} \times V_{SET} / I_{FChg}$$

where K<sub>SET</sub> has a typical value of 2000A/A and V<sub>SET</sub> has a typical value of 1V. The range of acceptable resistors for R<sub>SET</sub> is 4kΩ to 400kΩ

### Thermistor Monitoring with Charger Shutdown

The MAX14745 features three modes for controlling charger behavior based on battery-pack temperature: Thermistor Monitoring, JEITA Monitoring 1, and JEITA Monitoring 2. The divider formed by a pull-up resistor (RPU) to CAP, optional parallel resistor (RPA) from THM to ground, and NTC thermistor (RTHM) from THM to ground, provides a voltage at THM that is proportional to temperature as a fraction of the CAP voltage. Two sets of preconfigured default thresholds (0°C/10°C/45°C/60°C or 0°C/10°C/25°C/45°C as a %CAP) optimized for beta 3380 thermistors are available (see [Table 38](#)). The four default thresholds create five temperature zones, and the fractional CAP voltage measured at the THM pin is compared to the thresholds to determine the active temperature zone during operation.

The behavior in each temperature zone is determined by the configuration of bits in the I<sup>2</sup>C registers. The active monitoring mode is selected by ThermEn[1:0] in the ThrmCfrg register. In all modes, the T2IFchg[2:0] and T2T3IFchg[2:0], and T3T4IFchg[2:0] fields in the ThrmCfrg registers set the fast charge current in three temperature zones, T1\_T2, T2\_T3, and T3\_T4. In Thermistor Monitoring mode, charging is enabled only in T1\_T2 and T2\_T3 and the battery termination voltage is equal to V<sub>BATREG</sub>, as shown in [Figure 4a](#). In both JEITA Monitoring 1 and JEITA Monitoring 2 the charger is active in the T1\_T2, T2\_T3, and T3\_T4 zones. However, JEITA Monitoring 1 sets the battery termination voltage to V<sub>BATREG</sub> for all zones, while JEITA Monitoring 2 sets the battery termination voltage to V<sub>BATREG</sub> - 150mV for zones T1\_2 and T3\_T4, as shown in [Figure 4b](#). The behavior of all three modes is summarized in [Table 2](#).

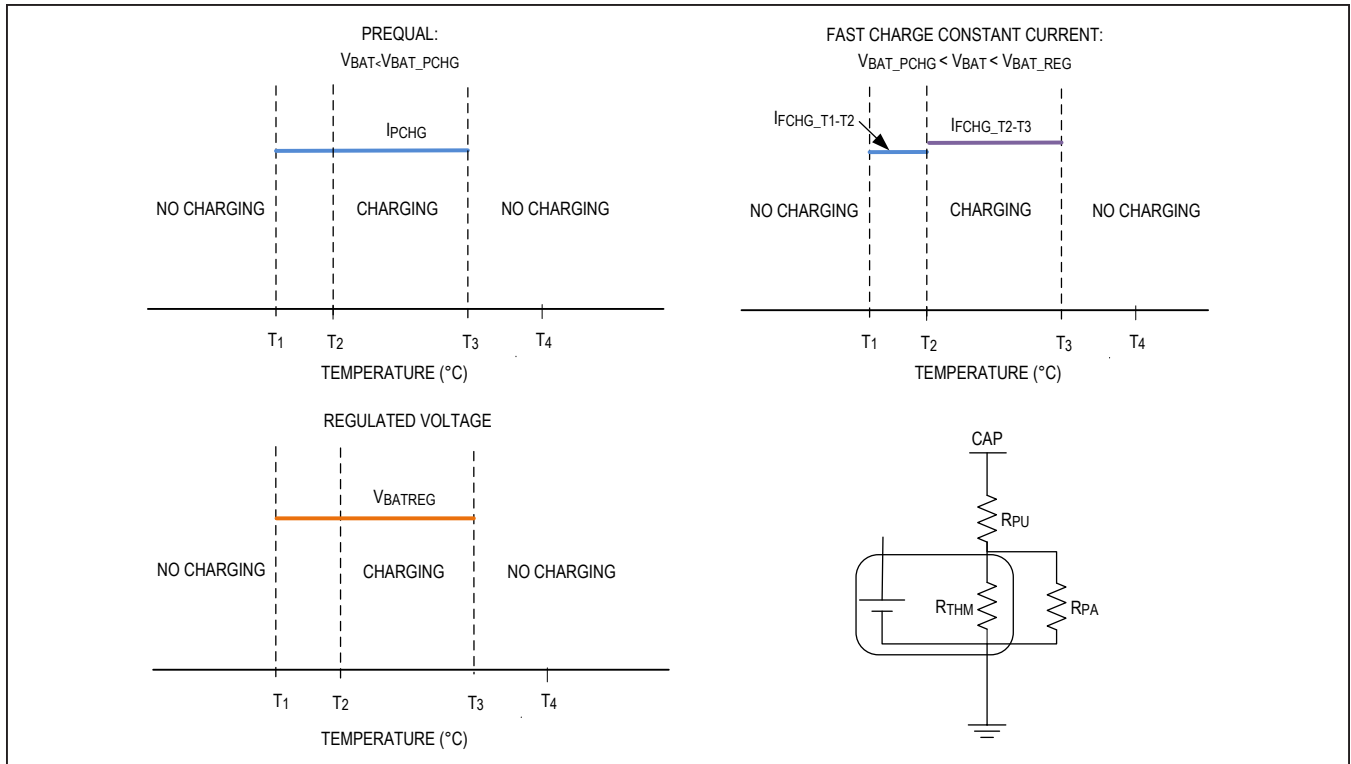


Figure 4a. Charging Behavior Using Thermistor Monitoring Mode

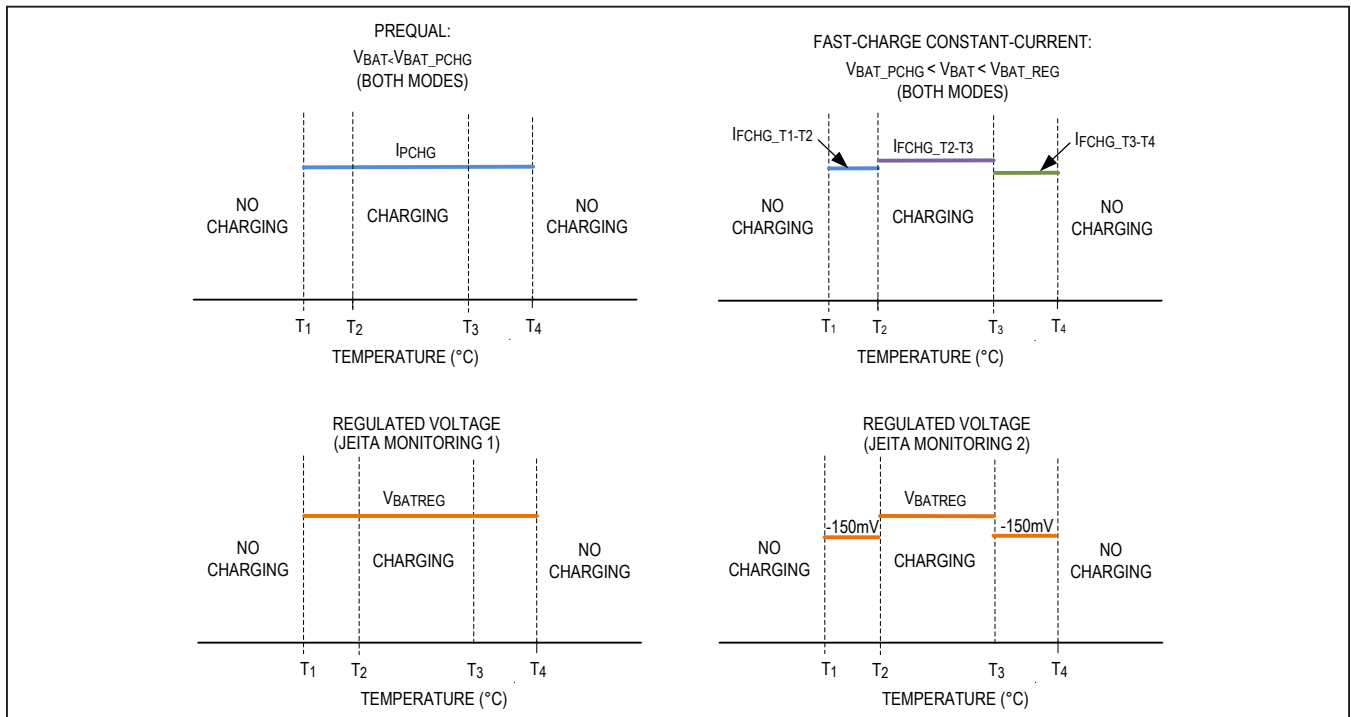


Figure 4b. Charging Behavior Using JEITA Monitoring 1 and 2 Modes

**Table 2. Thermistor Monitoring/JEITA Monitoring Enable Control**

| ThermEn[1:0] | DESCRIPTION                            | CHARGER MODE                     |  |  |  |        |
|--------------|--|----------------------------------|--|--|--|--------|
|              |  | T < T1                           | T1 < T < T2  | T2 < T < T3  | T3 < T < T4  | T > T4 |
| 00           | Thermistor/<br>JEITA<br>Monitoring OFF | As per I <sup>2</sup> C settings |  |  |  |        |
| 01           | Thermistor<br>Monitoring ON            | OFF                              | I <sub>PCHG</sub> = IPChg,<br>I <sub>FChg</sub> = T1T2IFchg,<br>Regulated Voltage =<br>V <sub>BATREG</sub>         | I <sub>PCHG</sub> = IPChg,<br>I <sub>FChg</sub> = T2T3IFchg,<br>Regulated Voltage =<br>V <sub>BATREG</sub> | OFF  | OFF    |
| 10           | JEITA<br>Monitoring 1 ON               | OFF                              | I <sub>PCHG</sub> = IPChg,<br>I <sub>FChg</sub> = T1T2IFchg,<br>Regulated Voltage =<br>V <sub>BATREG</sub>         | I <sub>PCHG</sub> = IPChg,<br>I <sub>FChg</sub> = T2T3IFchg<br>Regulated Voltage =<br>V <sub>BATREG</sub>  | I <sub>PCHG</sub> = IPChg,<br>I <sub>FChg</sub> = T3T4IFchg<br>Regulated Voltage =<br>V <sub>BATREG</sub>          | OFF    |
| 11           | JEITA<br>Monitoring 2 ON               | OFF                              | I <sub>PCHG</sub> = IPChg,<br>I <sub>FChg</sub> = T1T2IFchg,<br>Regulated Voltage =<br>V <sub>BATREG</sub> - 150mV | I <sub>PCHG</sub> = IPChg,<br>I <sub>FChg</sub> = T2T3IFchg,<br>Regulated Voltage =<br>V <sub>BATREG</sub> | I <sub>PCHG</sub> = IPChg,<br>I <sub>FChg</sub> = T3T4IFchg,<br>Regulated Voltage =<br>V <sub>BATREG</sub> - 150mV | OFF    |

**I<sup>2</sup>C Interface**

The device uses the two-wire I<sup>2</sup>C interface to communicate with the host microcontroller. The configuration settings and status information provided through this interface are detailed in the register descriptions.

**I<sup>2</sup>C Addresses**

The registers of the MAX14745 are accessed through the slave address of 0101000 (0x50 for writes/0x51 for reads).

Thermistor Monitoring with Charger Shutdown

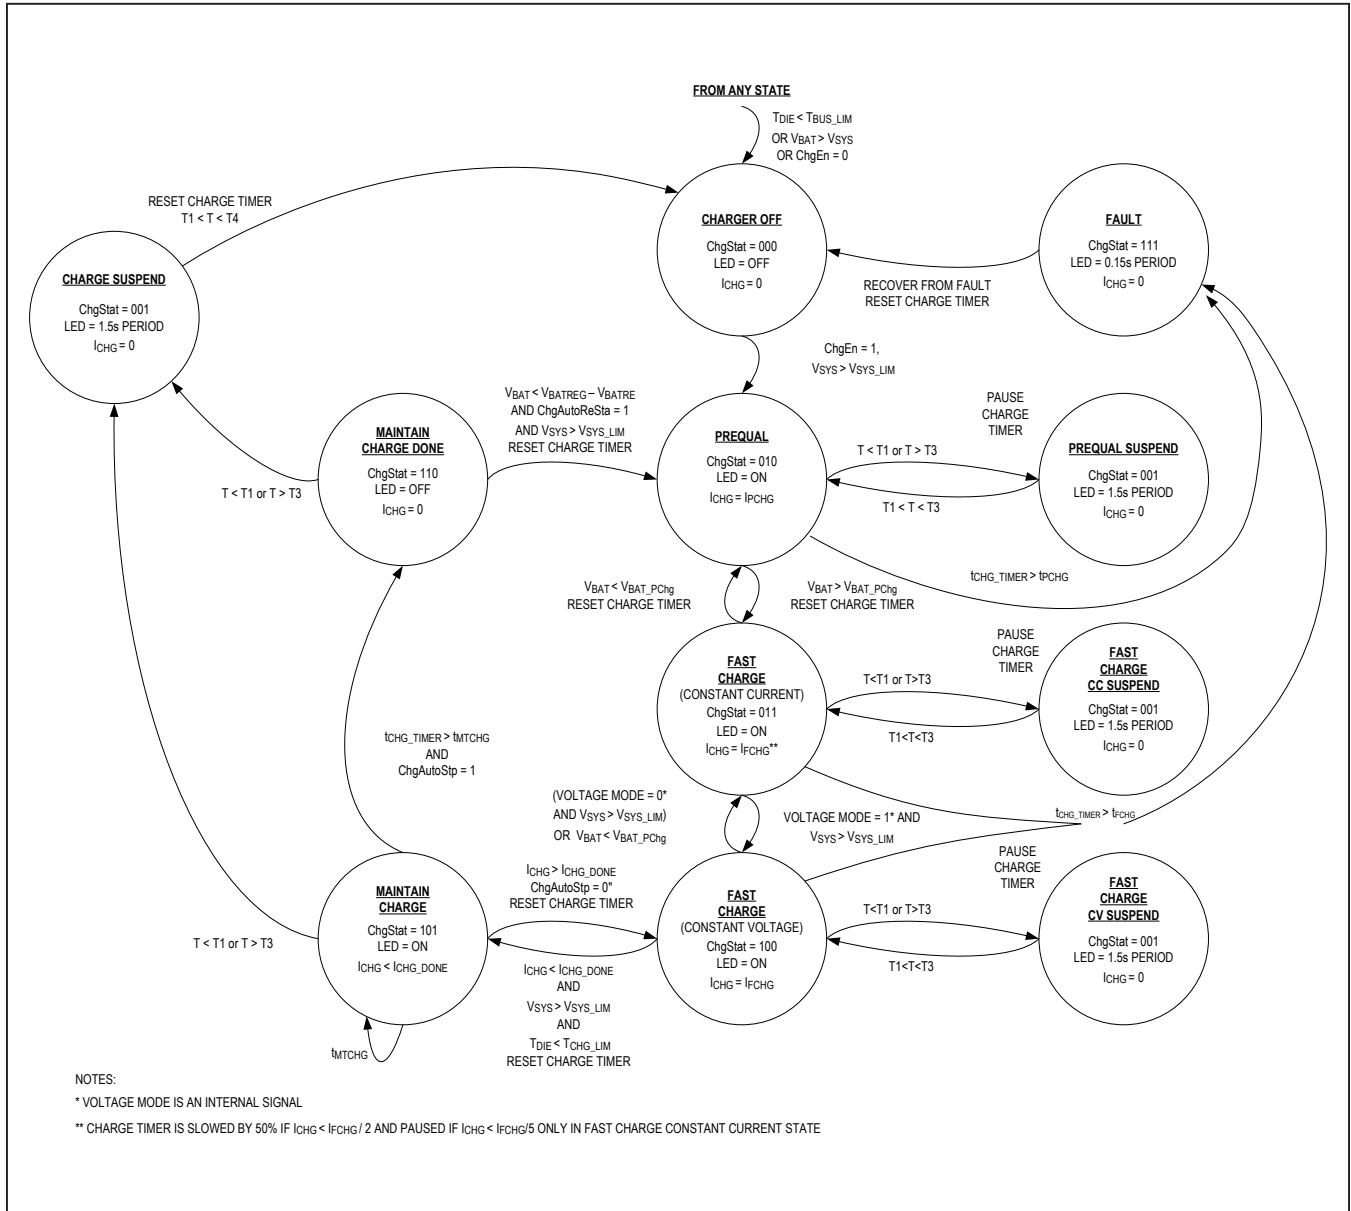


Figure 5a. Charger State Diagram (Thermistor Monitoring with Charger Shutdown)

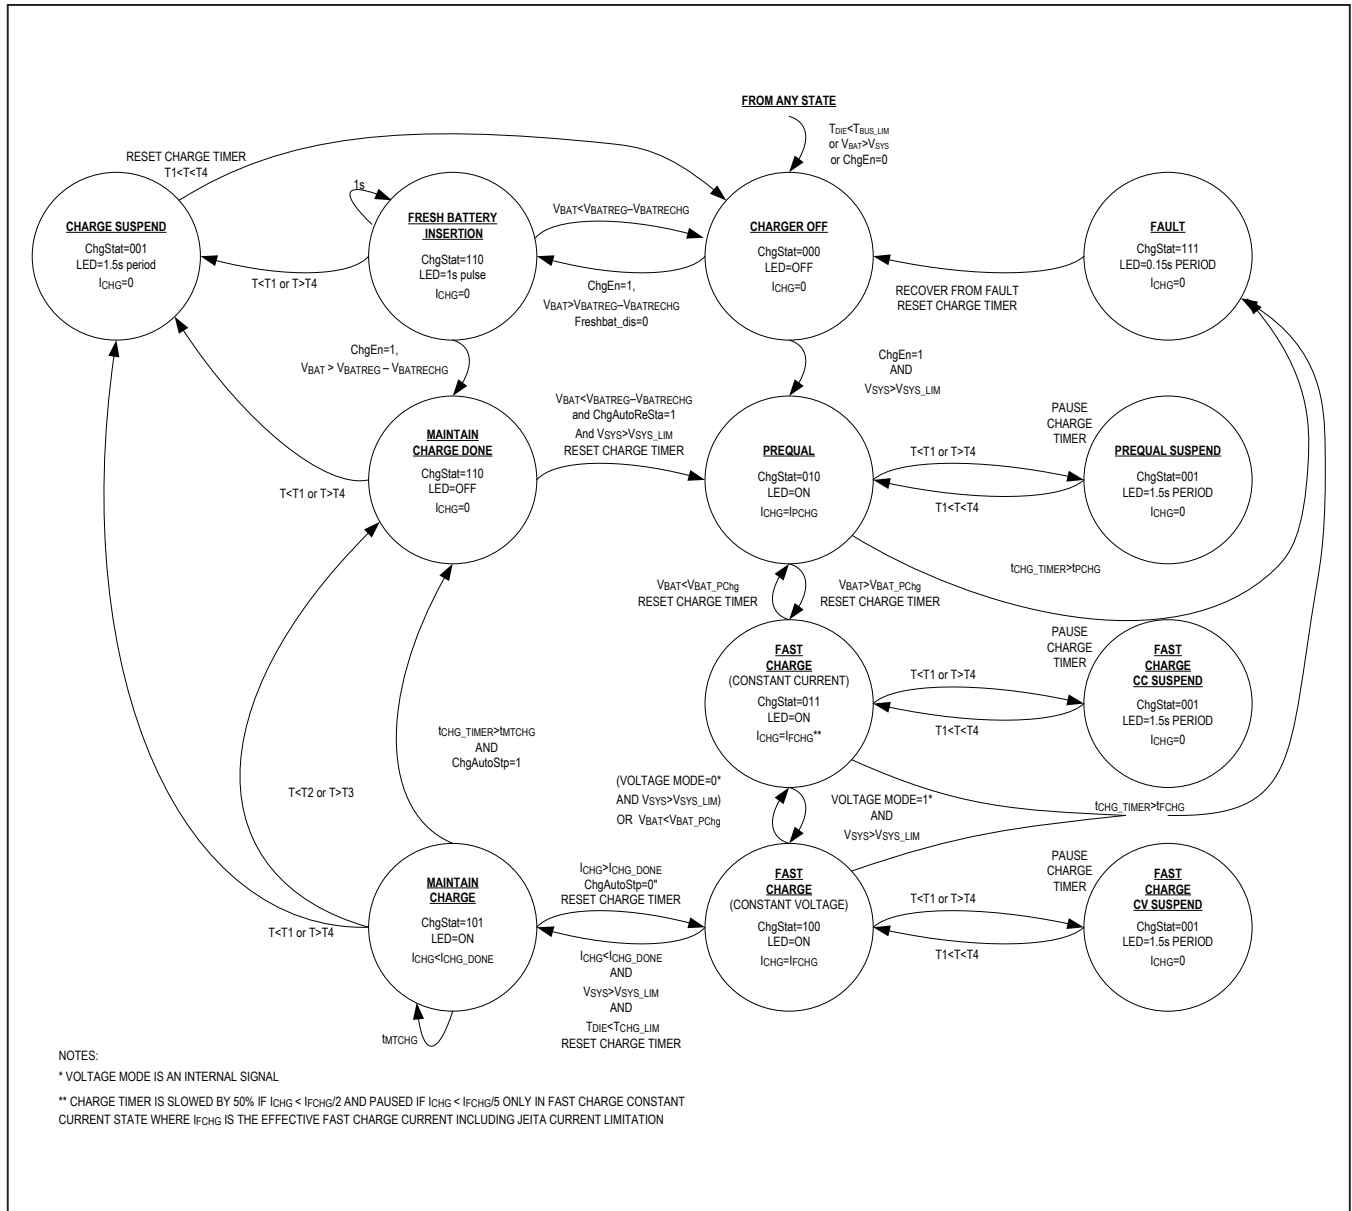


Figure 5b. Battery Charger State Diagram (JEITA Monitoring with Charger Shutdown)

### I<sup>2</sup>C Interface

The MAX14745 contain an I<sup>2</sup>C-compatible interface for data communication with a host controller (SCL and SDA). The interface supports a clock frequency of up to 400kHz. SCL and SDA require pullup resistors that are connected to a positive supply.

#### Start, Stop, And Repeated Start Conditions

When writing to the MAX14745 using I<sup>2</sup>C, the master sends a START condition (S) followed by the MAX14745 I<sup>2</sup>C address. After the address, the master sends the register address of the register that is to be programmed. The master then ends communication by issuing a STOP condition (P) to relinquish control of the bus, or a REPEATED START condition (Sr) to communicate to another I<sup>2</sup>C slave. See [Figure 6](#).

**Table 3. I<sup>2</sup>C Slave Addresses**

| ADDRESS FORMAT | HEX  | BINARY   |
|----------------|------|----------|
| 7-Bit Slave ID | 0x28 | 0101000  |
| Write Address  | 0x50 | 01010000 |
| Read Address   | 0x51 | 01010001 |

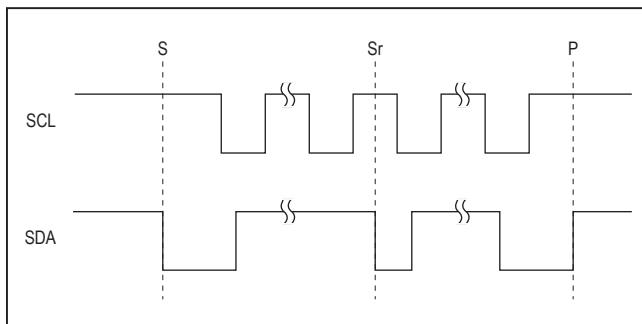


Figure 6. I<sup>2</sup>C START, STOP and REPEATED START Conditions

#### Slave Address

Set the Read/Write bit high to configure the MAX14745 to read mode ([Table 3](#)). Set the Read/Write bit low to configure the MAX14745 to write mode. The address is the first byte of information sent to the MAX14745 after the START condition.

#### Bit Transfer

One data bit is transferred on the rising edge of each SCL clock cycle. The data on SDA must remain stable during the high period of the SCL clock pulse. Changes in SDA while SCL is high and stable are considered control signals (see the [Start, Stop, And Repeated Start Conditions](#) section). Both SDA and SCL remain high when the bus is not active.

#### Single-Byte Write

In this operation, the master sends an address and two data bytes to the slave device ([Figure 7](#)). The following procedure describes the single byte write operation:

- 1) The master sends a START condition
- 2) The master sends the 7-bit slave address plus a write bit (low)
- 3) The addressed slave asserts an ACK on the data line
- 4) The master sends the 8-bit register address
- 5) The slave asserts an ACK on the data line only if the address is valid (NAK if not)
- 6) The master sends 8 data bits
- 7) The slave asserts an ACK on the data line
- 8) The master generates a STOP condition

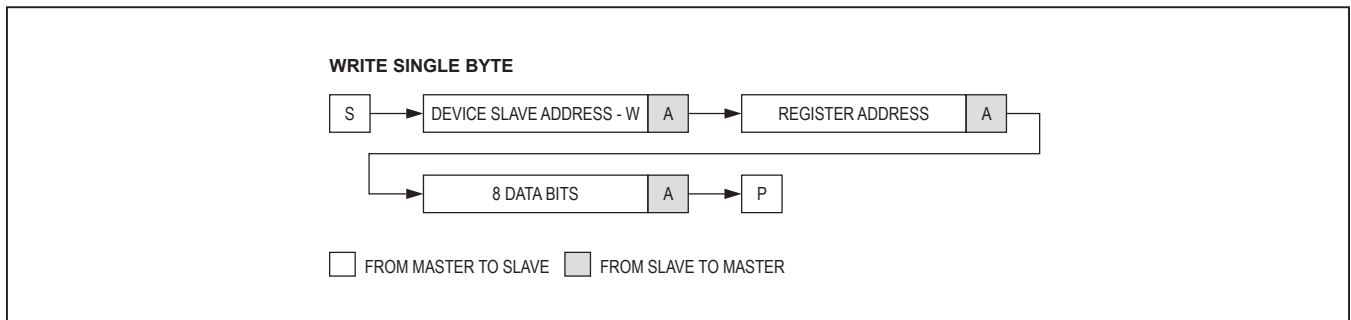


Figure 7. Write Byte Sequence

**Burst Write**

In this operation, the master sends an address and multiple data bytes to the slave device (Figure 8). The slave device automatically increments the register address after each data byte is sent. The following procedure describes the burst write operation:

- 1) The master sends a START condition
- 2) The master sends the 7-bit slave address plus a write bit (low)
- 3) The addressed slave asserts an ACK on the data line
- 4) The master sends the 8-bit register address
- 5) The slave asserts an ACK on the data line only if the address is valid (NAK if not)
- 6) The master sends eight data bits
- 7) The slave asserts an ACK on the data line
- 8) Repeat 6 and 7 N-1 times
- 9) The master generates a STOP condition

**Single Byte Read**

In this operation, the master sends an address plus two data bytes and receives one data byte from the slave device (Figure 9). The following procedure describes the single byte read operation:

- 1) The master sends a START condition
- 2) The master sends the 7-bit slave address plus a write bit (low)
- 3) The addressed slave asserts an ACK on the data line
- 4) The master sends the 8-bit register address
- 5) The slave asserts an ACK on the data line only if the address is valid (NAK if not)
- 6) The master sends a REPEATED START condition
- 7) The master sends the 7-bit slave address plus a read bit (high)
- 8) The addressed slave asserts an ACK on the data line
- 9) The slave sends eight data bits
- 10) The master asserts a NACK on the data line
- 11) The master generates a STOP condition

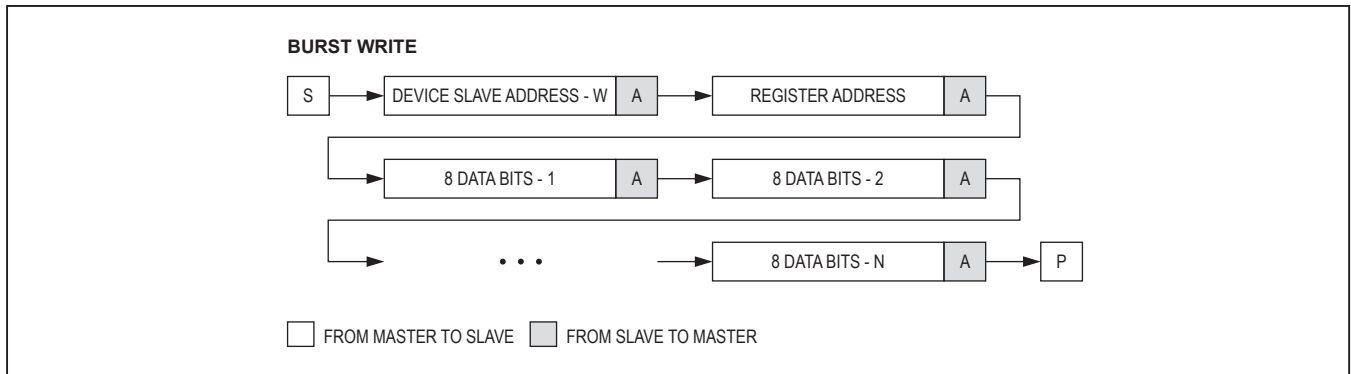


Figure 8. Burst Write Sequence

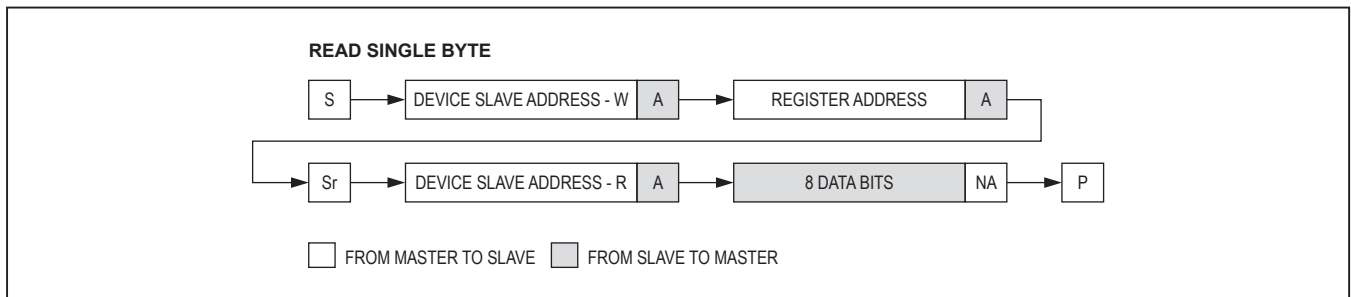


Figure 9. Read Byte Sequence

**Burst Read**

In this operation, the master sends an address plus two data bytes and receives multiple data bytes from the slave device (Figure 10). The following procedure describes the burst byte read operation:

- 1) The master sends a START condition
- 2) The master sends the 7-bit slave address plus a write bit (low)
- 3) The addressed slave asserts an ACK on the data line
- 4) The master sends the 8-bit register address
- 5) The slave asserts an ACK on the data line only if the address is valid (NAK if not)
- 6) The master sends a REPEATED START condition
- 7) The master sends the 7-bit slave address plus a read bit (high)
- 8) The slave asserts an ACK on the data line
- 9) The slave sends eight data bits
- 10) The master asserts an ACK on the data line
- 11) Repeat 9 and 10 N-2 times
- 12) The slave sends the last eight data bits
- 13) The master asserts a NACK on the data line
- 14) The master generates a STOP condition

**Acknowledge Bits**

Data transfers are acknowledged with an acknowledge bit (ACK) or a not-acknowledge bit (NACK). Both the master and the MAX14745 generate ACK bits. To generate an ACK, pull SDA low before the rising edge of the ninth clock pulse and hold it low during the high period of the ninth clock pulse (see Figure 11). To generate a NACK, leave SDA high before the rising edge of the ninth clock pulse and leave it high for the duration of the ninth clock pulse. Monitoring for NACK bits allows for detection of unsuccessful data transfers.

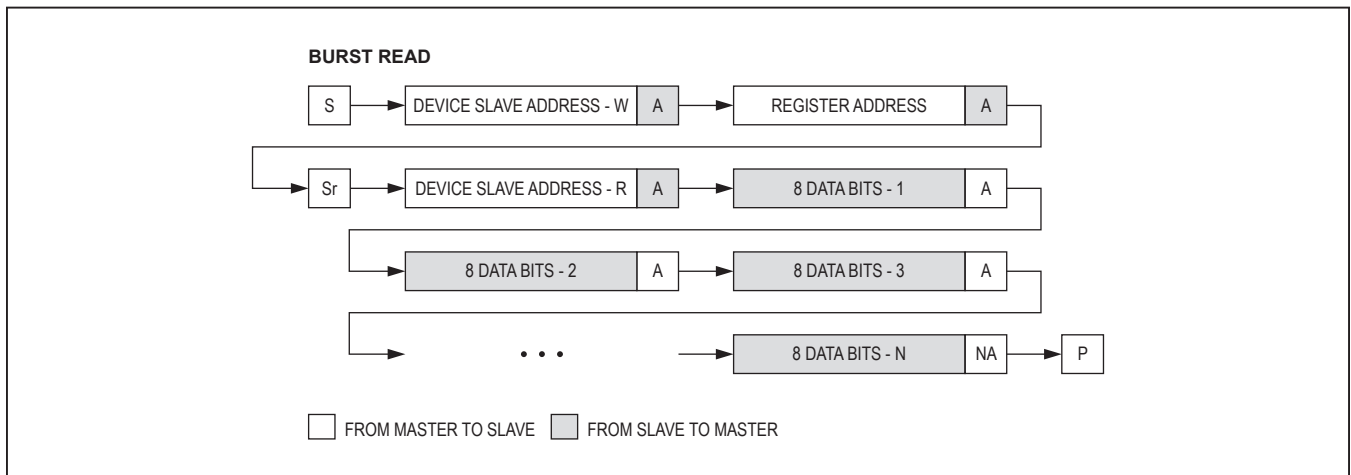


Figure 10. Burst Read Sequence

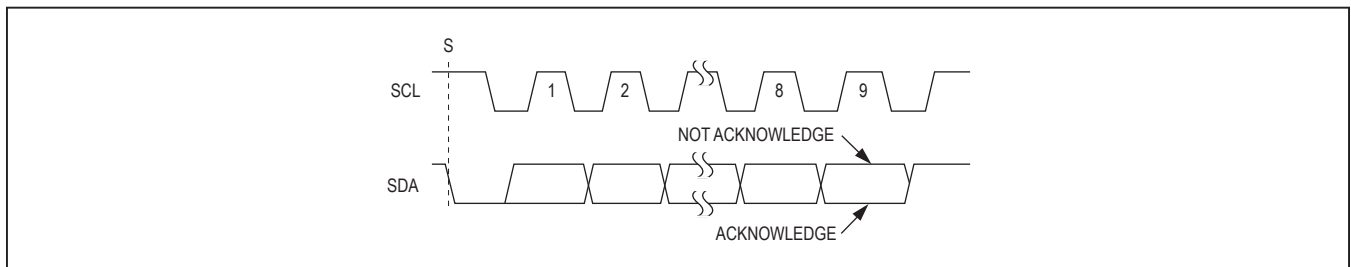


Figure 11. Acknowledge



I<sup>2</sup>C Register Map

| REGISTER ADDRESS | REGISTER NAME | R/W   | B7                         | B6             | B5            | B4             | B3          | B2            | B1             | B0           |
|------------------|---------------|-------|----------------------------|----------------|---------------|----------------|-------------|---------------|----------------|--------------|
| 0x00             | ChipId        | R     | Chip_Id[7:1:0] (Read-Only) |                |               |                |             |               |                |              |
| 0x01             | ChipRev       | R     | Chip_Rev[7:0] (Read-Only)  |                |               |                |             |               |                |              |
| 0x02             | StatusA       | R     | —                          | JeitaStat[2:0] |               | ChgStat[2:0]   |             |               |                |              |
| 0x03             | StatusB       | R     | UVLOLOD2                   | UVLOLOD3       | ILim          | UsbOVP         | UsbOk       | ThrmSd        | ChgThrmReg     | ChgTmo       |
| 0x04             | StatusC       | R     | —                          | SysBatLim      | ChgSysLim     | ThrmBk1        | ThrmBk2     | ThrmLDO1      | ThrmLDO2       | ThrmLDO3     |
| 0x05             | IntA          | COR   | ThermStatInt               | ChgStatInt     | ILimInt       | UsbOVPInt      | UsbOkInt    | ChgThrmSdInt  | ChgThrmRegInt  | ChgTmoInt    |
| 0x06             | IntB          | COR   | —                          | SysBatLimInt   | ChgSysLimInt  | ThrmBk1Int     | ThrmBk2Int  | ThrmLDO1Int   | ThrmLDO2Int    | ThrmLDO3Int  |
| 0x07             | IntMaskA      | R/W   | ThermStatIntM              | ChgStatIntM    | ILimIntM      | UsbOVPIntM     | UsbOkIntM   | ChgThrmSdIntM | ChgThrmRegIntM | ChgTmoIntM   |
| 0x08             | IntMaskB      | R/W   | —                          | SysBatLimIntM  | ChgSysLimIntM | ThrmBk1IntM    | ThrmBk2IntM | ThrmLDO1IntM  | ThrmLDO2IntM   | ThrmLDO3IntM |
| 0x09*            | ILimCntl      | R/W** | SysMin[2:0]                | SysMin[2:0]    | SysMin[2:0]   | —              | —           | —             | ILimCntl[1:0]  | —            |
| 0x0A*            | ChgCntlA      | R/W** | —                          | BatReChg[1:0]  | —             | BatReg[3:0]    | —           | —             | —              | ChgEn        |
| 0x0B*            | ChgCntlB      | R/W** | —                          | —              | VPChg[2:0]    | IPChg[1:0]     | —           | —             | ChgDone[1:0]   | —            |
| 0x0C*            | ChTmr         | R/W** | ChgAutoStp                 | ChgAutoReSta   | MtChgTmr[1:0] | FChgTmr[1:0]   | —           | —             | PChgTmr[1:0]   | —            |
| 0x0D             | Buck1Cfgr     | R/W   | Buck1Seq[2:0]              | Buck1Seq[2:0]  | Buck1En[1:0]  | —              | —           | —             | —              | Reserved     |
| 0x0E             | Buck1VSet     | R/W** | Buck1LowEMI                | —              | —             | Buck1VSet[5:0] | —           | —             | —              | Reserved     |
| 0x0F             | Buck2Cfgr     | R/W   | Buck2Seq[2:0]              | Buck2Seq[2:0]  | Buck2En[1:0]  | —              | —           | —             | —              | Reserved     |
| 0x10             | Buck2VSet     | R/W** | Buck2LowEMI                | —              | —             | Buck2VSet[5:0] | —           | —             | —              | Reserved     |
| 0x11             | Buck1/2ISet   | R/W   | Buck2ISet[3:0]             |                |               | Buck1ISet[3:0] |             |               | Buck1ISet[3:0] |              |
| 0x12             | LDO1Cfgr      | R/W   | LDO1Seq[2:0]               |                |               | LDO1En[1:0]    |             |               | LDO1Mode       |              |

I<sup>2</sup>C Register Map (continued)

| REGISTER ADDRESS | REGISTER NAME | R/W   | B7           | B6              | B5                | B4        | B3            | B2            | B1           | B0        |
|------------------|---------------|-------|--------------|-----------------|-------------------|-----------|---------------|---------------|--------------|-----------|
| 0x13             | LDO1VSet      | R/W** | —            | —               | —                 | —         | —             | LDO1VSet[4:0] |              |           |
| 0x14             | LDO2Cfgr      | R/W   | —            | LDO2Seq[2:0]    | —                 | —         | LDO2 ActDSC   | LDO2En[1:0]   |              | LDO2Mode  |
| 0x15             | LDO2VSet      | R/W** | —            | —               | —                 | —         | LDO2VSet[4:0] |               |              |           |
| 0x16             | LDO3Cfgr      | R/W   | —            | LDO3Seq[2:0]    | —                 | —         | LDO3 ActDSC   | LDO3En[1:0]   |              | LDO3Mode  |
| 0x17             | LDO3VSet      | R/W** | —            | —               | —                 | —         | LDO3VSet[4:0] |               |              |           |
| 0x18*            | ThrmCfgr      | R/W   | —            | T1T2Fchg[2:0]   | —                 | —         | T2T3Fchg[2:0] |               | ThermEn[1:0] |           |
| 0x19*            | ThrmCfgr      | R/W   | —            | —               | —                 | —         | —             | T3T4Fchg[2:0] |              | —         |
| 0x1A             | MONCfgr       | R/W   | —            | —               | MONRatioCfgr[1:0] | —         | MONHiZ        | MONCtr[2:0]   |              |           |
| 0x1B             | BootCfgr      | R/W   | —            | PwrRstCfgr[3:0] |                   |           | SftRstCfgr    | BootDly[1:0]  |              | ChgAlwTry |
| 0x1C             | PinStat       | R/W   | —            | ILim_T[2:0]     | —                 | —         | PFN1          | PFN2          | MPC1         | MPC0      |
| 0x1D             | Buck1/2Extra  | R/W   | Buck2AdptEnb | Buck2Fst        | Buck2 ActDsc      | Buck2FFET | Buck1AdptEnb  | Buck1Fst      | Buck1ActDSC  | Buck1FFET |
| 0x1E             | PwrCfgr       | R/W   | PFNxResEna   | —               | —                 | —         | —             | —             | —            | StayOn    |
| 0x1F             | PwrCmd        | R/W   | PWR_CMD      |                 |                   |           |               |               |              |           |

**Note:** COR = Clear-on-read

\*Register is reset to default value upon CHGIN rising edge.

\*\* R if WriteProtect enabled (Table 38).

All R/W registers are reset to default value when entering the off state.

Reserved bits must not be modified from their default states to ensure proper operation.

I<sup>2</sup>C Register Descriptions

Table 4. ChipId Register (0x00)

|              |   |   |   |   |   |   |   |   |
|--------------|---|---|---|---|---|---|---|---|
| ADDRESS:     | 0x00  |   |   |   |   |   |   |   |
| MODE:        | Read-Only   |   |   |   |   |   |   |   |
| BIT          | 7   | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| NAME         | Chip_Id[7:0]  |   |   |   |   |   |   |   |
| Chip_Id[7:0] | Chip_Id[7:0] bits show information about the version of the MAX14745. |   |   |   |   |   |   |   |

Table 5. ChipRev Register (0x01)

|               |   |   |   |   |   |   |   |   |
|---------------|---|---|---|---|---|---|---|---|
| ADDRESS:      | 0x01  |   |   |   |   |   |   |   |
| MODE:         | Read-Only   |   |   |   |   |   |   |   |
| BIT           | 7   | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
| NAME          | Chip_Rev[7:0]   |   |   |   |   |   |   |   |
| Chip_Rev[7:0] | Chip_Rev[7:0] bits show information about the revision of the MAX14745 silicon. |   |   |   |   |   |   |   |

Table 6. StatusA Register (0x02)

|                |  |   |                |   |   |              |   |   |
|----------------|--|---|----------------|---|---|--------------|---|---|
| ADDRESS:       | 0x02   |   |                |   |   |              |   |   |
| MODE:          | Read-Only  |   |                |   |   |              |   |   |
| BIT            | 7  | 6 | 5              | 4 | 3 | 2            | 1 | 0 |
| NAME           | —  | — | ThermStat[2:0] |   |   | ChgStat[2:0] |   |   |
| ThermStat[2:0] | <p>Status of Thermistor Monitoring</p> <p>000 = T &lt; T1</p> <p>001 = T1 &lt; T &lt; T2</p> <p>010 = T2 &lt; T &lt; T3</p> <p>011 = T3 &lt; T &lt; T4</p> <p>100 = T &gt; T4</p> <p>101 = No thermistor detected (THM high due to external pullup). Note that if a parallel resistor is used for thermistor monitoring, this mode may not function properly.</p> <p>110 = NTC input disabled through ThermEn[1:0]</p> <p>111 = Detection disabled due to CHGIN not present.</p> |   |                |   |   |              |   |   |
| ChgStat[2:0]   | <p>Status of Charger Mode</p> <p>000 = Charger off</p> <p>001 = Charging suspended due to temperature (see Figure 5a and Figure 5b)</p> <p>010 = Pre-charge in progress</p> <p>011, 100 = Fast charge in progress</p> <p>101 = Maintain charge in progress</p> <p>110 = Maintain charger timer done</p> <p>111 = Charger fault condition (see Figure 5a and Figure 5b)</p>   |   |                |   |   |              |   |   |

Table 7. StatusB Register (0x03)

|                   |  |          |          |          |          |               |                |          |
|-------------------|--|----------|----------|----------|----------|---------------|----------------|----------|
| <b>ADDRESS:</b>   | 0x03   |          |          |          |          |               |                |          |
| <b>MODE:</b>      | Read-Only  |          |          |          |          |               |                |          |
| <b>BIT</b>        | <b>7</b>   | <b>6</b> | <b>5</b> | <b>4</b> | <b>3</b> | <b>2</b>      | <b>1</b>       | <b>0</b> |
| <b>NAME</b>       | UVLLOD02   | UVLLOD03 | ILim     | UsbOVP   | UsbOk    | Chg<br>ThrmSd | Chg<br>ThrmReg | ChgTmo   |
| <b>UVLLOD02</b>   | Status of LDO2 UVLO<br>0 = LDO2 in normal operating mode<br>1 = Undervoltage-lockout on LDO2   |          |          |          |          |               |                |          |
| <b>UVLLOD03</b>   | Status of LDO3 UVLO<br>0 = LDO3 in normal operating mode<br>1 = Undervoltage-lockout on LDO3   |          |          |          |          |               |                |          |
| <b>ILim</b>       | CHGIN Input Current Limit<br>0 = CHGIN input current is within limit.<br>1 = CHGIN input is in current limit.  |          |          |          |          |               |                |          |
| <b>UsbOVP</b>     | Status of CHGIN OVP<br>0 = CHGIN OVP is not active.<br>1 = CHGIN OVP is active.  |          |          |          |          |               |                |          |
| <b>UsbOk</b>      | Status of CHGIN Input<br>0 = CHGIN Input is not present or outside of valid range.<br>1 = CHGIN Input is present and valid.  |          |          |          |          |               |                |          |
| <b>ChgThrmSd</b>  | Status of Thermal Shutdown<br>0 = Charger and input current limiter is in normal operating mode.<br>1 = Charger and input current limiter is in thermal shutdown.  |          |          |          |          |               |                |          |
| <b>ChgThrmReg</b> | Status of Thermal Regulation<br>0 = Charger is functioning normally, or disabled.<br>1 = Charger is running in thermal regulation mode and charging current is being actively reduced to prevent device overheating. |          |          |          |          |               |                |          |
| <b>ChgTmo</b>     | Status of Time-Out Condition<br>0 = Charger is running normally, or disabled.<br>1 = Charger has reached a time-out condition. ChgStat =1 11 in this condition (see Figure 5).                                       |          |          |          |          |               |                |          |

Table 8. StatusC Register (0x04)

| ADDRESS:         | 0x04   |         |      |           |           |          |          |          |
|------------------|--|---------|------|-----------|-----------|----------|----------|----------|
| MODE:            | Read-Only  |         |      |           |           |          |          |          |
| BIT              | 7  | 6       | 5    | 4         | 3         | 2        | 1        | 0        |
| NAME             | —  | SysBLim | VLim | ThrmBuck1 | ThrmBuck2 | ThrmLDO1 | ThrmLDO2 | ThrmLDO3 |
| <b>SysBLim</b>   | <p>Status of Minimum SYS-BAT Voltage Limit. While the system is powered from VBUS, the charger draws power from SYS to charge the battery. If the total load exceeds the input current limit, an adaptive charger control loop reduces charge current to prevent V<sub>SYS</sub> from collapsing. The regulation of the charge current starts when either one of the following two conditions is true: 1. V<sub>SYS</sub> - V<sub>BAT</sub> = 100mV (typ) OR 2. V<sub>SYS</sub> = V<sub>SYS_LIM</sub> (falling)</p> <p>0 = Charge Current is normal.<br/>1 = Charge Current is being actively reduced to prevent SYS collapse.</p> |         |      |           |           |          |          |          |
| <b>VLim</b>      | <p>Status of CHGIN-SYS Voltage Limit. This bit indicates if the input current limit is being actively reduced to maintain a 40mV drop between CHGIN-SYS. This adaptive input current limit prevents adapter collapse in the case that a power adapter with insufficient load capability, or a high resistance charging cable is used.</p> <p>0 = CHGIN input current limit is functioning normally.<br/>1 = CHGIN input current limit is being actively reduced to maintain 40mV drop between CHGIN-SYS.</p>   |         |      |           |           |          |          |          |
| <b>ThrmBuck1</b> | 0 = Buck1 NOT in Thermal Off mode<br>1 = Buck1 in Thermal Off Mode   |         |      |           |           |          |          |          |
| <b>ThrmBuck2</b> | 0 = Buck2 NOT in Thermal Off mode<br>1 = Buck2 in Thermal Off Mode   |         |      |           |           |          |          |          |
| <b>ThrmLDO1</b>  | 0 = LDO1 NOT in Thermal Off mode<br>1 = LDO1 in Thermal Off Mode   |         |      |           |           |          |          |          |
| <b>ThrmLDO2</b>  | 0 = LDO2 NOT in Thermal Off mode<br>1 = LDO2 in Thermal Off Mode   |         |      |           |           |          |          |          |
| <b>ThrmLDO3</b>  | 0 = LDO3 NOT in Thermal Off mode<br>1 = LDO3 in Thermal Off Mode   |         |      |           |           |          |          |          |

**Table 9. IntA Register (0x05)**

|                     |  |            |          |           |          |                  |                 |               |
|---------------------|--|------------|----------|-----------|----------|------------------|-----------------|---------------|
| <b>ADDRESS:</b>     | 0x05   |            |          |           |          |                  |                 |               |
| <b>MODE:</b>        | Clear On Read  |            |          |           |          |                  |                 |               |
| <b>BIT</b>          | <b>7</b>   | <b>6</b>   | <b>5</b> | <b>4</b>  | <b>3</b> | <b>2</b>         | <b>1</b>        | <b>0</b>      |
| <b>NAME</b>         | Therm<br>StatInt   | ChgStatInt | ILimInt  | UsbOVPInt | UsbOk    | Chg<br>ThrmSdInt | Therm<br>RegInt | Chg<br>Tmolnt |
| <b>ThermStatInt</b> | Change in ThermStat caused interrupt.                                      |            |          |           |          |                  |                 |               |
| <b>ChgStatInt</b>   | Change in ChgStat caused interrupt, or first detection complete after POR. |            |          |           |          |                  |                 |               |
| <b>ILimInt</b>      | Input current limit triggered caused interrupt.                            |            |          |           |          |                  |                 |               |
| <b>UsbOVPInt</b>    | Change in UsbOVP caused interrupt.   |            |          |           |          |                  |                 |               |
| <b>UsbOk</b>        | Change in UsbOk caused interrupt.  |            |          |           |          |                  |                 |               |
| <b>ChgThrmSdInt</b> | Change in ChgThrmSd caused interrupt.                                      |            |          |           |          |                  |                 |               |
| <b>ThermRegInt</b>  | Change in ChgThrmReg caused interrupt.                                     |            |          |           |          |                  |                 |               |
| <b>ChgTmolnt</b>    | Change in ChgTmo caused interrupt.   |            |          |           |          |                  |                 |               |

**Table 10. IntB Register (0x06)**

|                     |  |            |          |                  |                  |                 |                 |                 |
|---------------------|--|------------|----------|------------------|------------------|-----------------|-----------------|-----------------|
| <b>ADDRESS:</b>     | 0x06   |            |          |                  |                  |                 |                 |                 |
| <b>MODE:</b>        | Clear On Read                                  |            |          |                  |                  |                 |                 |                 |
| <b>BIT</b>          | <b>7</b>                                       | <b>6</b>   | <b>5</b> | <b>4</b>         | <b>3</b>         | <b>2</b>        | <b>1</b>        | <b>0</b>        |
| <b>NAME</b>         | —  | SysBLimInt | VLimInt  | Thrm<br>Buck1Int | Thrm<br>Buck2Int | Thrm<br>LDO1Int | Thrm<br>LDO2Int | Thrm<br>LDO3Int |
| <b>SysBLimInt</b>   | Minimum SYS-BAT voltage limit caused interrupt |            |          |                  |                  |                 |                 |                 |
| <b>VLimInt</b>      | Input Voltage Limit caused interrupt           |            |          |                  |                  |                 |                 |                 |
| <b>ThrmBuck1Int</b> | Change in ThrmBuck1 caused interrupt.          |            |          |                  |                  |                 |                 |                 |
| <b>ThrmBuck2Int</b> | Change in ThrmBuck2 caused interrupt.          |            |          |                  |                  |                 |                 |                 |
| <b>ThrmLDO1Int</b>  | Change in ThrmLDO1 caused interrupt.           |            |          |                  |                  |                 |                 |                 |
| <b>ThrmLDO2Int</b>  | Change in ThrmLDO2 caused interrupt.           |            |          |                  |                  |                 |                 |                 |
| <b>ThrmLDO3Int</b>  | Change in ThrmLDO3 caused interrupt.           |            |          |                  |                  |                 |                 |                 |

Table 11. IntMaskA Register (0x07)

|                           |   |                 |          |                |          |                   |                  |                |
|---------------------------|---|-----------------|----------|----------------|----------|-------------------|------------------|----------------|
| <b>ADDRESS:</b>           | 0x07  |                 |          |                |          |                   |                  |                |
| <b>MODE:</b>              | Read/Write  |                 |          |                |          |                   |                  |                |
| <b>BIT</b>                | <b>7</b>  | <b>6</b>        | <b>5</b> | <b>4</b>       | <b>3</b> | <b>2</b>          | <b>1</b>         | <b>0</b>       |
| <b>NAME</b>               | Therm<br>StatIntM   | Chg<br>StatIntM | ILimIntM | Usb<br>OVPIntM | UsbOkM   | ChgThrm<br>SdIntM | Therm<br>RegIntM | Chg<br>TmolntM |
| <b>ThermStatIntM</b>      | ThermStatIntM masks the ThermStatInt interrupt in the IntA register (0x05).<br>0 = Mask<br>1 = Not masked |                 |          |                |          |                   |                  |                |
| <b>ChgStatIntM</b>        | ChgStatIntM masks the ChgStatInt interrupt in the IntA register (0x05).<br>0 = Mask<br>1 = Not masked     |                 |          |                |          |                   |                  |                |
| <b>ILimIntM</b>           | ILimIntM masks the ILimInt interrupt in the IntB register (0x06).<br>0 = Mask<br>1 = Not masked           |                 |          |                |          |                   |                  |                |
| <b>UsbOVPIntM</b>         | UsbOVPIntM masks the UsbOVPInt interrupt in the IntA register (0x05).<br>0 = Mask<br>1 = Not masked       |                 |          |                |          |                   |                  |                |
| <b>UsbOkM</b>             | UsbOkM masks the UsbOk interrupt in the IntB register (0x06).<br>0 = Mask<br>1 = Not masked               |                 |          |                |          |                   |                  |                |
| <b>ChgThrm<br/>SdIntM</b> | ChgThrmSdIntM masks the ChgThrmSdInt interrupt in the IntB register (0x06).<br>0 = Mask<br>1 = Not masked |                 |          |                |          |                   |                  |                |
| <b>ThermRegIntM</b>       | ThermRegIntM masks the ThermRegInt interrupt in the IntA register (0x05).<br>0 = Mask<br>1 = Not masked   |                 |          |                |          |                   |                  |                |
| <b>ChgTmolntM</b>         | ChgTmolntM masks the ChgTmolnt interrupt in the IntA register (0x05).<br>0 = Mask<br>1 = Not masked       |                 |          |                |          |                   |                  |                |

Table 12. IntMaskB Register (0x08)

| ADDRESS:                  | 0x08  |                 |          |                   |                   |                  |                  |                  |
|---------------------------|---|-----------------|----------|-------------------|-------------------|------------------|------------------|------------------|
| MODE:                     | Read/Write  |                 |          |                   |                   |                  |                  |                  |
| BIT                       | 7   | 6               | 5        | 4                 | 3                 | 2                | 1                | 0                |
| NAME                      | —   | SysB<br>LimIntM | VLimIntM | Thrm<br>Buck1IntM | Thrm<br>Buck2IntM | Thrm<br>LDO1IntM | Thrm<br>LDO2IntM | Thrm<br>LDO3IntM |
| <b>SysBLimIntM</b>        | SysBLimIntM masks the SysBLimInt interrupt in the IntB register (0x06).<br>0 = Mask<br>1 = Not masked |                 |          |                   |                   |                  |                  |                  |
| <b>VLimIntM</b>           | VLimIntM masks the VLimInt interrupt in the IntB register (0x06).<br>0 = Mask<br>1 = Not masked       |                 |          |                   |                   |                  |                  |                  |
| <b>ThrmBuck1<br/>IntM</b> | 0 = Mask<br>1 = Not masked  |                 |          |                   |                   |                  |                  |                  |
| <b>ThrmBuck2<br/>IntM</b> | 0 = Mask<br>1 = Not masked  |                 |          |                   |                   |                  |                  |                  |
| <b>ThrmLDO1<br/>IntM</b>  | 0 = Mask<br>1 = Not masked  |                 |          |                   |                   |                  |                  |                  |
| <b>ThrmLDO2<br/>IntM</b>  | 0 = Mask<br>1 = Not masked  |                 |          |                   |                   |                  |                  |                  |
| <b>ThrmLDO3<br/>IntM</b>  | 0 = Mask<br>1 = Not masked  |                 |          |                   |                   |                  |                  |                  |

Table 13. ILimCntl Register (0x09)

| ADDRESS:             | 0x09  |   |   |   |   |   |   |                |  |
|----------------------|---|---|---|---|---|---|---|----------------|--|
| MODE:                | Read/Write* or Read-Only if Write-Protect Enabled (see Table 38)  |   |   |   |   |   |   |                |  |
| BIT                  | 7   | 6 | 5 | 4 | 3 | 2 | 1 | 0              |  |
| NAME                 | SysMin[2:0]   |   |   |   | — | — | — | ILimCntl [1:0] |  |
| <b>SysMin[2:0]</b>   | SysMin sets System Voltage Minimum Threshold. When SYS drops to this level, the charger current is reduced.<br>000 = 3.6V<br>001 = 3.7V<br>010 = 3.8V<br>011 = 3.9V<br>100 = 4.0V<br>101 = 4.1V<br>110 = 4.2V<br>111 = 4.3V |   |   |   |   |   |   |                |  |
| <b>ILimCntl[1:0]</b> | CHGIN Custom Input Current Limit<br>(see Electrical Characteristics table for details)<br>00 = 0mA<br>01 = 100mA<br>10 = 500mA<br>11 = 1000mA   |   |   |   |   |   |   |                |  |

\*Register is reset to default value upon CHGIN rising edge.



**Table 14. ChgCntlA Register (0x0A)**

|                      |   |               |   |             |   |   |   |       |
|----------------------|---|---------------|---|-------------|---|---|---|-------|
| <b>ADDRESS:</b>      | 0x0A  |               |   |             |   |   |   |       |
| <b>MODE:</b>         | Read/Write* or Ready-Only if Write-Protect Enabled (see Table 38)   |               |   |             |   |   |   |       |
| <b>BIT</b>           | 7   | 6             | 5 | 4           | 3 | 2 | 1 | 0     |
| <b>NAME</b>          |   | BatReChg[1:0] |   | BatReg[3:0] |   |   |   | ChgEn |
| <b>BatReChg[1:0]</b> | Recharge Threshold in Relation to BatReg<br>00 = BatReg - 70mV<br>01 = BatReg - 120mV<br>10 = BatReg - 170mV<br>11 = BatReg - 220mV   |               |   |             |   |   |   |       |
| <b>BatReg[3:0]</b>   | Setting the Battery Regulation Threshold<br>0000 = 4.05V<br>0001 = 4.10V<br>0010 = 4.15V<br>0011 = 4.20V<br>0100 = 4.25V<br>0101 = 4.30V<br>0110 = 4.35V<br>0111 = 4.4V<br>1000 = 4.45V<br>1001 = 4.5V<br>1010 = 4.55V<br>1011 = 4.6V<br>1100...1111 = Reserved |               |   |             |   |   |   |       |
| <b>ChgEn</b>         | On/Off Control for Charger (does not affect SYS node).<br>0 = Charger disabled.<br>1 = Charger enabled.   |               |   |             |   |   |   |       |

\*Register is reset to default value upon CHGIN rising edge.

Table 15. ChgCntlB Register (0x0B)

|                     |  |            |          |          |            |          |              |          |
|---------------------|--|------------|----------|----------|------------|----------|--------------|----------|
| <b>ADDRESS:</b>     | 0x0B   |            |          |          |            |          |              |          |
| <b>MODE:</b>        | Read/Write* or Ready-Only if Write-Protect Enabled (see Table 38)  |            |          |          |            |          |              |          |
| <b>BIT</b>          | <b>7</b>   | <b>6</b>   | <b>5</b> | <b>4</b> | <b>3</b>   | <b>2</b> | <b>1</b>     | <b>0</b> |
| <b>NAME</b>         | -  | VPChg[2:0] |          |          | IPChg[1:0] |          | ChgDone[1:0] |          |
| <b>VPChg[2:0]</b>   | Pre-charge voltage threshold setting<br>000 = 2.10V<br>001 = 2.25V<br>010 = 2.40V<br>111 = 2.55V<br>100 = 2.70V<br>101 = 2.85V<br>110 = 3.00V<br>111 = 3.15V   |            |          |          |            |          |              |          |
| <b>IPChg[1:0]</b>   | Pre-charge current setting<br>00 = 0.05 x I <sub>FChg</sub><br>01 = 0.1 x I <sub>FChg</sub><br>10 = 0.2 x I <sub>FChg</sub><br>11 = 0.3 x I <sub>FChg</sub>    |            |          |          |            |          |              |          |
| <b>ChgDone[1:0]</b> | Charge Done Threshold Setting<br>00 = 0.05 x I <sub>FChg</sub><br>01 = 0.1 x I <sub>FChg</sub><br>10 = 0.2 x I <sub>FChg</sub><br>11 = 0.3 x I <sub>FChg</sub> |            |          |          |            |          |              |          |

\*Register is reset to default value upon CHGIN rising edge.

Table 16. ChTmr Register (0x0C)

| ADDRESS:              | 0x0C  |   |              |   |               |   |              |   |
|-----------------------|---|---|--------------|---|---------------|---|--------------|---|
| MODE:                 | Read/Write* or Ready-Only if Write-Protect Enabled (see Table 38)   |   |              |   |               |   |              |   |
| BIT                   | 7   | 6 | 5            | 4 | 3             | 2 | 1            | 0 |
| NAME                  | ChgAutoStp  |   | ChpAutoReSta |   | MtChgTmr[1:0] |   | PChgTmr[1:0] |   |
| <b>ChgAutoStp</b>     | Charger Auto-Stop. Controls the transition from Maintain Charger to Maintain Charger Done.<br>0 = Auto-stop disabled.<br>1 = Auto-stop enabled.   |   |              |   |               |   |              |   |
| <b>ChgAutoReSta</b>   | Charger Auto-Restart Control<br>0 = Charger remains in maintain charge done even when VBAT is less than charge restart threshold (see Charger state diagram)<br>1 = Charger automatically restarts when VBAT drops below charge restart threshold |   |              |   |               |   |              |   |
| <b>MtChgTmr [1:0]</b> | Maintain Charge Timer Setting<br>00 = 0min<br>01 = 15min<br>10 = 30min<br>11 = 60min  |   |              |   |               |   |              |   |
| <b>FChgTmr[1:0]</b>   | Fast-Charge Timer Setting<br>00 = 75min<br>01 = 150min<br>10 = 300min<br>11 = 600min  |   |              |   |               |   |              |   |
| <b>PChgTmr[1:0]</b>   | Precharge Timer Setting<br>00 = 30min<br>01 = 60min<br>10 = 120min<br>11 = 240min   |   |              |   |               |   |              |   |

\*Register is reset to default value upon CHGIN rising edge.

Table 17. Buck1Cfg Register (0x0D)

| ADDRESS:             | 0x0D   |   |   |              |   |          |   |          |  |
|----------------------|--|---|---|--------------|---|----------|---|----------|--|
| MODE:                | Read/Write   |   |   |              |   |          |   |          |  |
| BIT                  | 7  | 6 | 5 | 4            | 3 | 2        | 1 | 0        |  |
| NAME                 | Buck1Seq[2:0] (Read-only)  |   |   | Buck1En[1:0] |   | Reserved |   | Reserved |  |
| <b>Buck1Seq[2:0]</b> | Buck1 Enable Configuration (Read-Only)<br>000 = Disabled<br>001 = Reserved<br>010 = Enabled at 0% of Boot/POR Process Delay Control<br>011 = Enabled at 25% of Boot/POR Process Delay Control<br>100 = Enabled at 50% of Boot/POR Process Delay Control<br>101 = Reserved<br>110 = Reserved<br>111 = Controlled by Buck1En[1:0] after 100% of Boot/POR Process Delay Control |   |   |              |   |          |   |          |  |
| <b>Buck1En[1:0]</b>  | Buck1 Enable Configuration (effective only when Buck1Seq = 111)<br>00 = Disabled (Buck1 OUT not actively discharged unless in Hard Reset/ShutDown/Off Mode)<br>01 = Enabled<br>10 = Enabled when MPC0 is high (regardless of MPC1)<br>11 = Enabled when MPC1 is high (regardless of MPC0)  |   |   |              |   |          |   |          |  |

**Table 18. Buck1VSet Register (0x0E)**

|                        |   |   |                |   |   |   |   |   |
|------------------------|---|---|----------------|---|---|---|---|---|
| <b>ADDRESS:</b>        | 0x0E  |   |                |   |   |   |   |   |
| <b>MODE:</b>           | Read/Write  |   |                |   |   |   |   |   |
| <b>BIT</b>             | 7   | 6 | 5              | 4 | 3 | 2 | 1 | 0 |
| <b>NAME</b>            | Buck1LowEMI   | — | Buck1VSet[5:0] |   |   |   |   |   |
| <b>Buck1LowEMI</b>     | Buck1 BLX Rising/Falling Slopes Setting<br>0 = Normal rising/falling slopes on BLX<br>1 = Reduce the rising/falling slopes on BLX by a factor of three. |   |                |   |   |   |   |   |
| <b>Buck1VSet [5:0]</b> | Buck1 Output Voltage Setting<br>Linear Scale from 0.8V to 2.375V in 25mV increments<br>000000 = 0.8V<br>000001 = 0.825V<br>...<br>111111 = 2.375V       |   |                |   |   |   |   |   |

Changes in output voltages are digitally ramped in 25mV increments every 80μs giving a maximum slew rates of 312.5V/s.

**Table 19. Buck2Cfg Register (0x0F)**

|                      |   |   |   |              |   |          |   |          |  |
|----------------------|---|---|---|--------------|---|----------|---|----------|--|
| <b>ADDRESS:</b>      | 0x0F  |   |   |              |   |          |   |          |  |
| <b>MODE:</b>         | Read/Write or Read-Only if Write-Protect Enabled (See Table 38)   |   |   |              |   |          |   |          |  |
| <b>BIT</b>           | 7   | 6 | 5 | 4            | 3 | 2        | 1 | 0        |  |
| <b>NAME</b>          | Buck2Seq[2:0] (Read-only)   |   |   | Buck2En[1:0] |   | Reserved |   | Reserved |  |
| <b>Buck2Seq[2:0]</b> | Buck2 Enable Configuration (Read-only)<br>000 = Disabled<br>001 = Reserved<br>010 = Enabled at 0% of Boot/POR Process Delay Control<br>011 = Enabled at 25% of Boot/POR Process Delay Control<br>100 = Enabled at 50% of Boot/POR Process Delay Control<br>101 = Reserved<br>110 = Reserved<br>111 = Controlled by Buck2En [1:0] after 100% of Boot/POR Process Delay Control |   |   |              |   |          |   |          |  |
| <b>Buck2En[1:0]</b>  | Buck2 Enable Configuration (effective only when Buck2Seq = 111)<br>00 = Disabled (Buck2 OUT not actively discharged unless in Hard Reset/ShutDown/Off Mode)<br>01 = Enabled<br>10 = Enabled when MPC0 is high (regardless of MPC1)<br>11 = Enabled when MPC1 is high (regardless of MPC0)   |   |   |              |   |          |   |          |  |

**Table 20. Buck2VSet Register (0x10)**

|                            |   |   |                |   |   |   |   |   |
|----------------------------|---|---|----------------|---|---|---|---|---|
| <b>ADDRESS:</b>            | 0x10  |   |                |   |   |   |   |   |
| <b>MODE:</b>               | Read/Write or Read-Only if WriteProtect Enabled (see Table 38)  |   |                |   |   |   |   |   |
| <b>BIT</b>                 | 7   | 6 | 5              | 4 | 3 | 2 | 1 | 0 |
| <b>NAME</b>                | Buck2LowEMI   | — | Buck2VSet[5:0] |   |   |   |   |   |
| <b>Buck2LowEMI</b>         | Buck1 BLX Rising/Falling Slopes Setting<br>0 = Normal rising/falling slopes on BLX<br>1 = Reduce the rising/falling slopes on BLX by a factor of three. |   |                |   |   |   |   |   |
| <b>Buck2VSet<br/>[5:0]</b> | Buck2 Output Voltage Setting<br>Linear Scale from 0.8V to 3.95V in 50mV increments<br>000000 = 0.80V<br>000001 = 0.85V<br>...<br>111111 = 3.95V         |   |                |   |   |   |   |   |

Changes in output voltages are digitally ramped in 50mV increments every 40μs giving a maximum slew rates of 1250V/s.

**Table 21. Buck1/2ISet Register (0x11)**

|                       |  |   |   |   |                |   |   |   |
|-----------------------|--|---|---|---|----------------|---|---|---|
| <b>ADDRESS:</b>       | 0x11   |   |   |   |                |   |   |   |
| <b>MODE:</b>          | Read/Write   |   |   |   |                |   |   |   |
| <b>BIT</b>            | 7  | 6 | 5 | 4 | 3              | 2 | 1 | 0 |
| <b>NAME</b>           | Buck2ISet[3:0]   |   |   |   | Buck1ISet[3:0] |   |   |   |
| <b>Buck2ISet[3:0]</b> | Buck2 Inductor Peak current setting. 25mA step<br>0000 = Reserved<br>0001 = Reserved<br>0010 = 50mA<br>...<br>1111 = 375mA |   |   |   |                |   |   |   |
| <b>Buck1ISet[3:0]</b> | Buck1 Inductor Peak Current Setting. 25mA step<br>0000 = Reserved<br>0001 = Reserved<br>0010 = 50mA<br>...<br>1111 = 375mA |   |   |   |                |   |   |   |

**Table 22. LDO1Cfg Register (0x12)**

| ADDRESS:            | 0x12   |   |   |   |                |             |   |          |
|---------------------|--|---|---|---|----------------|-------------|---|----------|
| MODE:               | Read/Write   |   |   |   |                |             |   |          |
| BIT                 | 7  | 6 | 5 | 4 | 3              | 2           | 1 | 0        |
| NAME                | LDO1Seq[2:0] (Read Only)   |   |   | — | LDO1Act<br>DSC | LDO1En[1:0] |   | LDO1Mode |
| <b>LDO1Seq[2:0]</b> | LDO1 Enable Configuration (Read-only)<br>000 = Disabled<br>001 = Enabled always when BAT/SYS is present<br>010 = Enabled at 0% of Boot/POR Process Delay Control<br>011 = Enabled at 25% of Boot/POR Process Delay Control<br>100 = Enabled at 50% of Boot/POR Process Delay Control<br>101 = Disabled<br>110 = Disabled<br>111 = Controlled by LDO1En[1:0] after 100% of Boot/POR Process Delay Control |   |   |   |                |             |   |          |
| <b>LDO1ActDSC</b>   | LDO1 Active Discharge Control<br>0: LDO1 output will be actively discharged only in HardReset mode<br>1: LDO1 output will be actively discharged in HardReset mode and also when its Enable goes Low. The active discharge circuit will continue to draw additional quiescent current as long as this bit is set to 1, even when the LDO is disabled. (See EC table.)                                    |   |   |   |                |             |   |          |
| <b>LDO1En[1:0]</b>  | LDO1 Enable Configuration (effective only when LDO1Seq = 111)<br>00 = Disabled<br>01 = Enabled<br>10 = Enabled when MPC0 is high (regardless of MPC1)<br>11 = Enabled when MPC1 is high (regardless of MPC0)   |   |   |   |                |             |   |          |
| <b>LDO1Mode</b>     | LDO1 Mode Control<br>0 = Normal LDO operating mode<br>1 = Load switch mode. FET is either fully ON or OFF depending on state of LDO1En. When FET is ON, the output is unregulated. This setting is internally latched and can change only when the LDO is disabled.  |   |   |   |                |             |   |          |

**Table 23. LDO1VSet Register (0x13)**

| ADDRESS:             | 0x13   |   |   |               |   |   |   |   |
|----------------------|--|---|---|---------------|---|---|---|---|
| MODE:                | Read/Write or Read-Only if WriteProtect Enabled (see Table 38)   |   |   |               |   |   |   |   |
| BIT                  | 7  | 6 | 5 | 4             | 3 | 2 | 1 | 0 |
| NAME                 | -  | - | - | LDO1Vset[4:0] |   |   |   |   |
| <b>LDO1VSet[4:0]</b> | LDO1 Output Voltage Setting<br>Linear Scale from 0.8V to 3.6V in 100mV increments<br>00000 = 0.8V<br>00001 = 0.9V<br>...<br>11100 = 3.6V<br>>11101 = N/A |   |   |               |   |   |   |   |

**Table 24. LDO2Cfg Register (0x14)**

| ADDRESS:            | 0x14   |   |   |   |                |             |   |              |
|---------------------|--|---|---|---|----------------|-------------|---|--------------|
| MODE:               | Read/Write or Read-Only if Write-Protect Enabled (See Table 38)  |   |   |   |                |             |   |              |
| BIT                 | 7  | 6 | 5 | 4 | 3              | 2           | 1 | 0            |
| NAME                | LDO2Seq[2:0] (Read Only)   |   |   | — | LDO2Act<br>DSC | LDO2En[1:0] |   | LDO2<br>Mode |
| <b>LDO2Seq[2:0]</b> | LDO2 Enable Configuration (Read only)<br>000 = Disabled<br>001 = Enabled always when BAT/SYS is present<br>010 = Enabled at 0% of Boot/POR Process Delay Control<br>011 = Enabled at 25% of Boot/POR Process Delay Control<br>100 = Enabled at 50% of Boot/POR Process Delay Control<br>101 = Disabled<br>110 = Disabled<br>111 = Controlled by LDO2En[1:0] after 100% of Boot/POR Process Delay Control |   |   |   |                |             |   |              |
| <b>LDO2ActDSC</b>   | LDO2 Active Discharge Control<br>0 = LDO2 output will be actively discharged only in HardReset mode<br>1 = LDO2 output will be actively discharged in HardReset mode and also when its Enable goes Low. The active discharge circuit will continue to draw additional quiescent current as long as this bit is set to 1, even when the LDO is disabled. (See <i>Electrical Characteristics</i> table.)   |   |   |   |                |             |   |              |
| <b>LDO2En[1:0]</b>  | LDO2 Enable Configuration (effective only when LDO2Seq = 111)<br>00 = Disabled – LDO's OUT not actively discharged unless HardReset/ShutDown/Off Mode<br>01 = Enabled<br>10 = Enabled when MPC0 is high (regardless of MPC1)<br>11 = Enabled when MPC1 is high (regardless of MPC0)  |   |   |   |                |             |   |              |
| <b>LDO2Mode</b>     | LDO2 Mode Control<br>0 = Normal LDO operating mode<br>1 = Load switch mode. FET is either fully ON or OFF depending on state of LDO2En. When FET is ON, the output is unregulated. This setting is internally latched and can change only when the LDO is disabled.  |   |   |   |                |             |   |              |

**Table 25. LDO2VSet Register (0x15)**

| ADDRESS:             | 0x15   |   |   |               |   |   |   |   |
|----------------------|--|---|---|---------------|---|---|---|---|
| MODE:                | Read/Write or Read-Only if WriteProtect Enabled (see Table 38)   |   |   |               |   |   |   |   |
| BIT                  | 7  | 6 | 5 | 4             | 3 | 2 | 1 | 0 |
| NAME                 | —  | — | — | LDO2Vset[4:0] |   |   |   |   |
| <b>LDO2VSet[4:0]</b> | LDO2 Output Voltage Setting<br>Linear Scale from 0.9V to 4.0V in 100mV increments<br>00000 = 0.9V<br>00001 = 1.0V<br>...<br>11111 = 4.0V |   |   |               |   |   |   |   |

**Table 26. LDO3Cfg Register (0x16)**

| ADDRESS:            | 0x16   |   |   |                |             |   |              |   |
|---------------------|--|---|---|----------------|-------------|---|--------------|---|
| MODE:               | Read/Write   |   |   |                |             |   |              |   |
| BIT                 | 7  | 6 | 5 | 4              | 3           | 2 | 1            | 0 |
| NAME                | LDO3Seq[2:0] (Read-Only)   |   | — | LDO3Act<br>DSC | LDO3En[1:0] |   | LDO3<br>Mode |   |
| <b>LDO3Seq[2:0]</b> | LDO3 Enable Configuration (Read only)<br>000 = Disabled<br>001 = Enabled always when BAT/SYS is present<br>010 = Enabled at 0% of Boot/POR Process Delay Control<br>011 = Enabled at 25% of Boot/POR Process Delay Control<br>100 = Enabled at 50% of Boot/POR Process Delay Control<br>101 = Disabled<br>110 = Disabled<br>111 = Controlled by LDO3En[1:0] after 100% of Boot/POR Process Delay Control |   |   |                |             |   |              |   |
| <b>LDO3ActDSC</b>   | LDO3 Active Discharge Control<br>0 = LDO3 output will be actively discharged only in HardReset mode<br>1 = LDO3 output will be actively discharged in HardReset modes and also when its Enable goes Low. The active discharge circuit will continue to draw additional quiescent current as long as this bit is set to 1, even when the LDO is disabled. (See EC table.)                                 |   |   |                |             |   |              |   |
| <b>LDO3En[1:0]</b>  | LDO3 Enable Configuration (effective only when LDO3Seq == 111)<br>00 = Disabled. LDO's OUT not actively discharged unless in HardReset/ShutDown/Off Mode<br>01 = Enabled<br>10 = Enabled when MPC0 is high (regardless of MPC1)<br>11 = Enabled when MPC1 is high (regardless of MPC0)   |   |   |                |             |   |              |   |
| <b>LDO3Mode</b>     | LDO3 Mode Control<br>0 = Normal LDO operating mode<br>1 = Load switch mode. FET is either fully ON or OFF depending on state of LDO3En. When FET is ON, the output is unregulated. This setting is internally latched and can change only when the LDO is disabled.  |   |   |                |             |   |              |   |

**Table 27. LDO3VSet Register (0x17)**

| ADDRESS:             | 0x17   |   |   |               |   |   |   |   |
|----------------------|--|---|---|---------------|---|---|---|---|
| MODE:                | Read/Write or Read-Only if WriteProtect Enabled (see Table 38)   |   |   |               |   |   |   |   |
| BIT                  | 7  | 6 | 5 | 4             | 3 | 2 | 1 | 0 |
| NAME                 | —  | — | — | LDO3Vset[4:0] |   |   |   |   |
| <b>LDO3VSet[4:0]</b> | LDO3 Output Voltage Setting<br>Linear Scale from 0.9V to 4.0V in 100mV increments<br>00000 = 0.9V<br>00001 = 1.0V<br>...<br>11111 = 4.0V |   |   |               |   |   |   |   |



**Table 28. ThrmCfg Register (0x18)**

| ADDRESS:              | 0x18   |   |   |                |   |   |              |   |
|-----------------------|--|---|---|----------------|---|---|--------------|---|
| MODE:                 | Read/Write* or Read-Only if WriteProtect Enabled (see Table 38)  |   |   |                |   |   |              |   |
| BIT                   | 7  | 6 | 5 | 4              | 3 | 2 | 1            | 0 |
| NAME                  | T1T2IFchg[2:0]   |   |   | T2T3IFchg[2:0] |   |   | ThermEn[1:0] |   |
| <b>T1T2IFchg[2:0]</b> | Fast Charge Current for T1-T2 Temperature Zone<br>000 = 0.2 x I <sub>FChg</sub><br>001 = 0.3 x I <sub>FChg</sub><br>010 = 0.4 x I <sub>FChg</sub><br>011 = 0.5 x I <sub>FChg</sub><br>100 = 0.6 x I <sub>FChg</sub><br>101 = 0.7 x I <sub>FChg</sub><br>110 = 0.8 x I <sub>FChg</sub><br>111 = 1 x I <sub>FChg</sub> |   |   |                |   |   |              |   |
| <b>T2T3IFchg[2:0]</b> | Fast Charge Current for T2-T3 Temperature Zone<br>000 = 0.2 x I <sub>FChg</sub><br>001 = 0.3 x I <sub>FChg</sub><br>010 = 0.4 x I <sub>FChg</sub><br>011 = 0.5 x I <sub>FChg</sub><br>100 = 0.6 x I <sub>FChg</sub><br>101 = 0.7 x I <sub>FChg</sub><br>110 = 0.8 x I <sub>FChg</sub><br>111 = 1 x I <sub>FChg</sub> |   |   |                |   |   |              |   |
| <b>ThermEn[1:0]</b>   | Thermistor Monitoring Mode<br>00 = Thermistor Monitoring Disabled<br>01 = Charging enabled between T1 and T3<br>10 = Charging enabled between T1 and T4<br>11 = Charging enabled between T1 and T4, Voltage reduced below T2 and above T3  |   |   |                |   |   |              |   |

\*Register is reset to default value upon CHGIN rising edge.

**Table 29. ThrmCfg Register (0x19)**

|                       |  |   |   |   |   |                |   |   |
|-----------------------|--|---|---|---|---|----------------|---|---|
| <b>ADDRESS:</b>       | 0x19   |   |   |   |   |                |   |   |
| <b>MODE:</b>          | Read/Write* or Read-Only if WriteProtect Enabled (see Table 38)  |   |   |   |   |                |   |   |
| <b>BIT</b>            | 7  | 6 | 5 | 4 | 3 | 2              | 1 | 0 |
| <b>NAME</b>           | —  | — | — | — | — | T3T4IFchg[2:0] |   |   |
| <b>T3T4IFchg[2:0]</b> | Fast Charge Current for T3-T4 Temperature Zone<br>000 = 0.2 x I <sub>FChg</sub><br>001 = 0.3 x I <sub>FChg</sub><br>010 = 0.4 x I <sub>FChg</sub><br>011 = 0.5 x I <sub>FChg</sub><br>100 = 0.6 x I <sub>FChg</sub><br>101 = 0.7 x I <sub>FChg</sub><br>110 = 0.8 x I <sub>FChg</sub><br>111 = 1 x I <sub>FChg</sub> |   |   |   |   |                |   |   |

\*Register is reset to default value upon CHGIN rising edge.

**Table 30. MONCfg Register (0x1A)**

|                    |  |   |                  |   |        |             |   |   |
|--------------------|--|---|------------------|---|--------|-------------|---|---|
| <b>ADDRESS:</b>    | 0x1A   |   |                  |   |        |             |   |   |
| <b>MODE:</b>       | Read/Write   |   |                  |   |        |             |   |   |
| <b>BIT</b>         | 7  | 6 | 5                | 4 | 3      | 2           | 1 | 0 |
| <b>NAME</b>        | —  | — | MONRatioCfg[1:0] |   | MONHiZ | MONCtr[2:0] |   |   |
| <b>MONRatioCfg</b> | MON Resistive Partition Selector<br>00 = 4:1<br>01 = 3:1<br>10 = 2:1<br>11 = 1:1   |   |                  |   |        |             |   |   |
| <b>MONHiZ</b>      | MON OFF MODE condition<br>0 = Pulled LOW by 100k pull-down resistor<br>1 = Hi-Z  |   |                  |   |        |             |   |   |
| <b>MONCtr[2:0]</b> | MON Pin Source selection (40μs BBM after any change of MONCtr)<br>000 = MON is not connected to any internal node and its state depends on MONHiZ<br>001 = MON connected to a resistive partition of BATT<br>010 = MON connected to a resistive partition of SYS<br>011 = MON connected to a resistive partition of BUCK1 OUT<br>100 = MON connected to a resistive partition of BUCK2 OUT<br>101 = MON connected to a resistive partition of LDO1 OUT<br>110 = MON connected to a resistive partition of LDO2 OUT<br>111 = MON connected to a resistive partition of LDO3 OUT |   |                  |   |        |             |   |   |

**Table 31. BootCfg Register (0x1B)**

| ADDRESS:               | 0x1B  |   |   |   |           |              |   |           |
|------------------------|---|---|---|---|-----------|--------------|---|-----------|
| MODE:                  | Read-Only   |   |   |   |           |              |   |           |
| BIT                    | 7   | 6 | 5 | 4 | 3         | 2            | 1 | 0         |
| NAME                   | PwrRstCfg[3:0]  |   |   |   | SftRstCfg | BootDly[1:0] |   | ChgAlwTry |
| <b>PwrRstCfg [3:0]</b> | See Table 1   |   |   |   |           |              |   |           |
| <b>SftRstCfg</b>       | Soft Reset Register Default<br>0 = Registers do not reset to default values on soft reset<br>1 = Registers reset to default values on soft reset                      |   |   |   |           |              |   |           |
| <b>BootDly[1:0]</b>    | Reset Delay Control (see Figure 2a, 2b)<br>00 = 80ms<br>01 = 120ms<br>10 = 220ms<br>11 = 420ms  |   |   |   |           |              |   |           |
| <b>ChgAlwTry</b>       | UVLO Automatic Retry<br>If SYS UVLO condition occurs during boot process:<br>0 = Part latches off until CHGIN is removed and replaced<br>1 = Part retries after delay |   |   |   |           |              |   |           |

**Table 32. PinStat Register (0x1C)**

| ADDRESS:           | 0x1C  |   |   |   |   |      |      |      |      |
|--------------------|---|---|---|---|---|------|------|------|------|
| MODE:              | Read Only   |   |   |   |   |      |      |      |      |
| BIT                | 7   | 6 | 5 | 4 | 3 | 2    | 1    | 0    |      |
| NAME               | ILim_T[2:0]   |   |   |   | - | PFN1 | PFN2 | MPC1 | MPC0 |
| <b>ILim_T[2:0]</b> | Monitor of The Input limiter Current Setting<br>000 = Input Limiter Off<br>001 = 100mA<br>010 = 500mA<br>100 = 1A |   |   |   |   |      |      |      |      |
| <b>PFN1</b>        | PFN1 Input State<br>0 = pin low<br>1 = pin high   |   |   |   |   |      |      |      |      |
| <b>PFN2</b>        | PFN2 In/Out State<br>0 = pin low<br>1 = pin high  |   |   |   |   |      |      |      |      |
| <b>MPC1</b>        | MPC1 Input State<br>0 = pin low<br>1 = pin high   |   |   |   |   |      |      |      |      |
| <b>MPC0</b>        | MPC0 Input State<br>0 = pin low<br>1 = pin high   |   |   |   |   |      |      |      |      |

**Table 33. Buck1/2Extra Control Register (0x1D)**

|                      |  |          |                 |               |               |          |                 |               |
|----------------------|--|----------|-----------------|---------------|---------------|----------|-----------------|---------------|
| <b>ADDRESS:</b>      | 0x1D   |          |                 |               |               |          |                 |               |
| <b>MODE:</b>         | Read/Write   |          |                 |               |               |          |                 |               |
| <b>BIT</b>           | <b>7</b>   | <b>6</b> | <b>5</b>        | <b>4</b>      | <b>3</b>      | <b>2</b> | <b>1</b>        | <b>0</b>      |
| <b>NAME</b>          | Buck2IAdptEnb  | Buck2Fst | Buck2<br>ActDSC | Buck2<br>FFET | Buck1IAdptEnb | Buck1Fst | Buck1<br>ActDSC | Buck1<br>FFET |
| <b>Buck2IAdptEnb</b> | Buck 2 Peak Current<br>0 = Enable adaptive peak current<br>1 = Peak current set by Buck2ISet[3:0]  |          |                 |               |               |          |                 |               |
| <b>Buck2Fst</b>      | Buck2 Fast Start<br>0 = Normal startup current limit<br>1 = Double the startup current to reduce the startup time by half  |          |                 |               |               |          |                 |               |
| <b>Buck2ActDSC</b>   | Buck2 Active Discharge Control<br>0 = Buck2 output will be actively discharged only in HardReset mode<br>1 = Buck2 output will be actively discharged in HardReset mode and also when its Enable goes Low. Note, when BuckActDSC=1, the active discharge circuit will remain active and draw additional quiescent current even when Buck2 is disabled. |          |                 |               |               |          |                 |               |
| <b>Buck2FFET</b>     | Buck2 Force FET scaling (reduces active FET size by 50% and increases efficiency for loads <100mA.)<br>0 = FET Scaling disabled<br>1 = FET Scaling enabled   |          |                 |               |               |          |                 |               |
| <b>Buck1IAdptEnb</b> | Buck 1 Peak Current<br>0 = Enable adaptive peak current<br>1 = Peak current set by Buck1ISet[3:0]  |          |                 |               |               |          |                 |               |
| <b>Buck1Fst</b>      | Buck1 Fast Start<br>0 = Normal startup current limit<br>1 = Double the startup current to reduce the startup time by half  |          |                 |               |               |          |                 |               |
| <b>Buck1ActDSC</b>   | Buck1 Active Discharge Control<br>0 = Buck1 output will be actively discharged only in HardReset mode<br>1 = Buck1 output will be actively discharged in HardReset mode and also when its Enable goes Low. Note, when BuckActDSC=1, the active discharge circuit will remain active and draw additional quiescent current even when Buck2 is disabled. |          |                 |               |               |          |                 |               |
| <b>Buck1FFET</b>     | Buck1 Force FET Scaling (reduces active FET size by 50% and increases efficiency for loads <100mA.)<br>0 = FET Scaling only enabled during the Buck1 Turn-On Sequence<br>1 = FET Scaling enabled during the Buck1 Turn-On Sequence and also in the Buck1 Steady ON state   |          |                 |               |               |          |                 |               |

**Table 34. PwrCfg Register (0x1E)**

|                   |   |          |          |          |          |          |          |          |
|-------------------|---|----------|----------|----------|----------|----------|----------|----------|
| <b>ADDRESS:</b>   | 0x1E  |          |          |          |          |          |          |          |
| <b>MODE:</b>      | Read/Write  |          |          |          |          |          |          |          |
| <b>BIT</b>        | <b>7</b>  | <b>6</b> | <b>5</b> | <b>4</b> | <b>3</b> | <b>2</b> | <b>1</b> | <b>0</b> |
| <b>NAME</b>       | PFNx<br>ResEna  | –        | –        | –        | –        | –        | –        | StayOn   |
| <b>PFNxResEna</b> | PFN_ PFNx Automatic Internal Pull-Up/Pull-Down Enable<br>0 = No internal pullup/pulldown<br>1 = Automatic internal pullup/pulldown as per Table 1   |          |          |          |          |          |          |          |
| <b>StayOn</b>     | This bit is used to ensure that the processor booted correctly. This bit must be set within 5s of power-on to prevent the part from shutting down and returning to the power-off condition. This bit has no effect after being set.<br>0 = Shut down 5s after power-on<br>1 = Stay on |          |          |          |          |          |          |          |

**Table 35. PwrCmd Register (0x1F)**

|                          |  |          |          |          |          |          |          |          |
|--------------------------|--|----------|----------|----------|----------|----------|----------|----------|
| <b>ADDRESS:</b>          | 0x1F   |          |          |          |          |          |          |          |
| <b>MODE:</b>             | Read/Write   |          |          |          |          |          |          |          |
| <b>BIT</b>               | <b>7</b>   | <b>6</b> | <b>5</b> | <b>4</b> | <b>3</b> | <b>2</b> | <b>1</b> | <b>0</b> |
| <b>NAME</b>              | PWR_CMD[7:0]   |          |          |          |          |          |          |          |
| <b>PWR_CMD<br/>[7:0]</b> | Power Command Register<br>Writing the following values issues the command listed:<br>0xB2 = places the part in off mode<br>0xC3 = issues a hard reset (power cycle)<br>0xD4 = issues a soft reset (reset pulse only)<br><br>After the written value has been validated by the internal logic, this register is cleared automatically. Any other commands will be ignored. See Table 1 for the available PwrCmd for each PwrRstCfg value. |          |          |          |          |          |          |          |

## Applications Information

The buck converters of the MAX14745 are optimized for use with a tiny inductor and small ceramic capacitors. The correct selection of external components ensures high efficiency, low output ripple, and fast transient response.

### Inductor Selection

A 2.2μH inductor is recommended for use with the MAX14745 buck converters. [Table 36](#) lists recommended inductors for use depending on whether a given application requires highest efficiency, or a compromise between high efficiency and small size.

### Output Capacitor Selection

The output capacitors of the MAX14745 buck converters are required to keep the output voltage ripple small and to ensure regulation loop stability. A 10μF output capacitor with Buck\_ISet[3:0] = 150mA and Buck\_IAdptEnb = 0 is suggested to cover all the possible output voltage/load current cases. If a lower output cap are needed, please refer to [Table 37](#) for the minimum allowed capacitor size). Ceramic capacitors are recommended due to their small size and low ESR and care should be taken to ensure that the selected capacitor maintains its capacitance over temperature and voltage bias. Capacitors with X5R or X7R temperature characteristics perform well in most applications.

## Input Capacitor Selection

The input capacitors of the buck converters reduce the current peaks drawn from the battery or input power source and reduces switching noise in the IC. The impedance of the input capacitors at the switching frequency should be kept very low. Ceramic capacitors are recommended due to their small size and low ESR. Make sure the capacitor maintains its capacitance over temperature and DC bias. Capacitors with X5R or X7R temperature characteristics perform well in most applications.

## PCB Layout and Routing

High switching frequencies and large peak currents make PCB layout a very important part of design. Good design minimizes excessive EMI on the feedback paths and voltage gradients in the ground plane, both of which can result in instability or regulation errors. Connect the inductor, input capacitor, and output capacitor as close together as possible, and keep their traces short, direct, and wide. Connect the two GND pins under the IC and directly to the grounds of the input and output capacitors. Keep noisy traces, such as the LX node, as short as possible.

**Table 36. Suggested Inductors**

| MANUFACTURER | SERIES    | INDUCTANCE (μH) | DC RESISTANCE (mΩ) | CURRENT RATING (mA) | DIMENSIONS L x W x H (mm) | NOTES                            |
|--------------|-----------|-----------------|--------------------|---------------------|---------------------------|----------------------------------|
| BOURNS       | SRP2010   | 2.2             | 168                | 2200                | 2.0 x 1.6 x 1.0           | Optimized for highest efficiency |
| MURATA       | MFD160810 | 2.2             | 310                | 1400                | 1.6 x 0.8 x 1.0           | Optimized for smallest size      |

**Table 37. Output Capacitor Values\***

| BUCK_ISET[3:0] | OUTPUT VOLTAGE (V) | OUTPUT CAPACITOR MINIMUM VALUES (μF) |
|----------------|--------------------|--------------------------------------|
| <150mA         | >1.4V              | 2.2                                  |
| <200mA         | >1.2V              | 4.7                                  |
| <175mA         | >0.8               | 10                                   |

\*Minimum Output Capacitor Values are given for L = 2.2μH

Table 38. Register Bit Default Values

| REGISTER BITS    | MAX14745A    | MAX14745C    | MAX14745D    | MAX14745E    | MAX14745F    | MAX14745G    | MAX14745H    | MAX14745I    | MAX14745J    | MAX14745K    | MAX14745L    | MAX14745M    | MAX14745O    | MAX14745P    | MAX14745Q    | MAX14745R    | MAX14745S    | MAX14745U    |
|------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Buck1ZC Set[1:0] | 20mA         | 30mA         | 20mA         | 20mA         | 20mA         | 30mA         | 10mA         | 30mA         | 20mA         | 20mA         | 20mA         | 20mA         | 30mA         | 10mA         | 20mA         | 30mA         | 30mA         | 30mA         |
| Buck1VSet [5:0]  | 1.2V         | 1.95V        | 1.8V         | 1.2V         | 1.2V         | 1.8V         | 0.95V        | 2.375V       | 1.2V         | 1.25V        | 1.125V       | 1.1V         | 1.95V        | 0.95V        | 1.1V         | 1.95V        | 1.8V         | 1.8V         |
| Buck1ISet [3:0]  | 125mA        | 150mA        | 125mA        | 150mA        | 125mA        | 125mA        | 150mA        | 150mA        | 150mA        | 150mA        | 150mA        | 150mA        | 175mA        | 150mA        | 150mA        | 225mA        | 125mA        | 150mA        |
| Buck1En [1:0]    | Disabled     | Disabled     | Disabled     | Enabled      | Disabled     | Disabled     | Disabled     | Enabled      | Disabled     | Disabled     | Enabled      | Enabled      | Enabled      | Disabled     | Enabled      | Enabled      | Disabled     | Enabled      |
| Buck1Seq [2:0]   | Buck1En      | 0% Boot      | Buck1En      | 25% Boot     | Buck1En      | 0% Boot      | Buck1En      | Buck1En      | Buck1En      | Buck1En      | Buck1En      | 50% Boot     | 0% Boot      | Buck1En      | 50% Boot     | 0% Boot      | 0% Boot      | 0% Boot      |
| Buck2ZC Set[1:0] | 20mA         | 40mA         | 30mA         | 30mA         | 20mA         | 20mA         | 30mA         | 30mA         | 30mA         | 30mA         | 40mA         | 30mA         | 40mA         | 30mA         | 30mA         | 40mA         | 20mA         | 40mA         |
| Buck2VSet [5:0]  | 1.8V         | 3.3V         | 3V           | 1.8V         | 1.8V         | 1.2V         | 2.6V         | 2.7V         | 2.85V        | 1.8V         | 3.3V         | 1.9V         | 3.4V         | 2.6V         | 1.9V         | 3.4V         | 1.2V         | 3V           |
| Buck2ISet [3:0]  | 125mA        | 150mA        | 300mA        | 150mA        | 125mA        | 125mA        | 150mA        | 150mA        | 150mA        | 150mA        | 150mA        | 150mA        | 175mA        | 150mA        | 150mA        | 375mA        | 125mA        | 150mA        |
| Buck2En [1:0]    | Disabled     | Disabled     | Disabled     | Enabled      | Disabled     | Disabled     | Enabled      | Disabled     | Enabled      | Enabled      | Enabled      | Enabled      | Disabled     | Enabled      | Enabled      | Enabled      | Disabled     | Disabled     |
| Buck2Seq [2:0]   | 0% Boot      | 50% Boot     | 50% Boot     | 25% Boot     | 0% Boot      | 0% Boot      | 25% boot     | Buck2En      | Buck2En      | Buck2En      | Buck2En      | 50% Boot     | Buck2En      | 25% Boot     | 50% Boot     | Buck2En      | 0% Boot      | Buck2En      |
| LDO1Mode         | LDO          | LDO          | Switch       | LDO          | LDO          | LDO          | LDO          | switch       | LDO          | LDO          | LDO          | LDO          | LDO          | LDO          | LDO          | LDO          | LDO          | LDO          |
| LDO1VSet [4:0]   | 3V           | 1.8V         | 1.8V         | 1.8V         | 3V           | 3V           | 3.1V         | 0.8V         | 1.8V         | 1.8V         | 3V           | 2.9V         | 1.8V         | 3.1V         | 2.9V         | 1.8V         | 3.3V         | 1.8V         |
| LDO1En [1:0]     | Disabled     | Enabled      | Disabled     | Enabled      | Disabled     | Disabled     | Disabled     | Disabled     | Disabled     | Enabled      | Enabled      | MPC1         | Disabled     | Disabled     | Disabled     | Enabled      | Disabled     | Enabled      |
| LDO1Seq [2:0]    | LDO1En       | 25% Boot     | LDO1En       | Always On    | LDO1En       | LDO1En       | LDO1En       | LDO1En       | LDO1En       | LDO1En       | LDO1En       | LDO1En       | LDO1En       | LDO1En       | LDO1En       | LDO1En       | LDO1En       | LDO1En       |
| LDO2Mode         | Switch       | LDO          | Switch       | LDO          | Switch       | Switch       | LDO          | LDO          | LDO          | LDO          | LDO          | Switch       | LDO          | LDO          | Switch       | LDO          | LDO          | LDO          |
| LDO2VSet [4:0]   | 3.5V         | 1.8V         | 1.8V         | 2.8V         | 3.5V         | 3.5V         | 1.8V         | 3.2V         | 1.2V         | 3V           | 3V           | 1.9V         | 1.8V         | 1.8V         | 1.9V         | 1.8V         | 1.8V         | 3.1V         |
| LDO2En [1:0]     | Disabled     | Enabled      | Disabled     | Enabled      | Disabled     | Disabled     | Disabled     | Disabled     | Disabled     | Disabled     | Enabled      | MPC0         | Disabled     | Disabled     | Disabled     | Enabled      | Disabled     | Disabled     |
| LDO2Seq [2:0]    | LDO2En       | 25% Boot     | LDO2En       | 50% Boot     | LDO2En       | LDO2En       | LDO2En       | LDO2En       | LDO2En       | LDO2En       | LDO2En       | LDO2En       | LDO2En       | LDO2En       | LDO2En       | LDO2En       | LDO2En       | LDO2En       |
| LDO3Mode         | Switch       | LDO          | Switch       | LDO          | Switch       | Switch       | LDO          | LDO          | LDO          | LDO          | LDO          | Switch       | LDO          | LDO          | Switch       | LDO          | LDO          | LDO          |
| LDO3VSet [4:0]   | 3.5V         | 1.8V         | 1.8V         | 3.3V         | 3.5V         | 3.5V         | 1.8V         | 2V           | 3V           | 3V           | 3V           | 1.9V         | 1.8V         | 1.8V         | 1.9V         | 1.8V         | 2.8V         | 3.1V         |
| LDO3En [1:0]     | Disabled     | Enabled      | Disabled     | Enabled      | Disabled     | Disabled     | Disabled     | Disabled     | Disabled     | Enabled      | Enabled      | Disabled     | Disabled     | Disabled     | Disabled     | Enabled      | Disabled     | Enabled      |
| LDO3Seq [2:0]    | LDO3En       | 25% Boot     | LDO3En       | LDO3En       | LDO3En       | LDO3En       | LDO3En       | LDO3En       | LDO3En       | LDO3En       | LDO3En       | LDO3En       | LDO3En       | LDO3En       | LDO3En       | LDO3En       | LDO3En       | LDO3En       |
| VPEng[2:0]       | 2.85V        | 3.00V        | 2.85V        | 3.00V        | 2.85V        | 2.85V        | 3.00V        | 3.00V        | 3.00V        | 3.00V        | 3.00V        | 3.00V        | 3.00V        | 3.00V        | 3.00V        | 3.00V        | 2.85V        | 3.15V        |
| IPChg[1:0]       | 0.10 x IFCng | 0.10 x IFCng | 0.20 x IFCng | 0.20 x IFCng | 0.10 x IFCng | 0.10 x IFCng | 0.10 x IFCng | 0.10 x IFCng | 0.10 x IFCng | 0.10 x IFCng | 0.10 x IFCng | 0.05 x IFCng | 0.10 x IFCng | 0.10 x IFCng | 0.05 x IFCng | 0.10 x IFCng | 0.10 x IFCng | 0.05 x IFCng |

Table 38. Register Bit Default Values (continued)

| REGISTER BITS    | MAX14745A       | MAX14745C       | MAX14745D       | MAX14745E       | MAX14745F       | MAX14745G       | MAX14745H       | MAX14745I       | MAX14745J       | MAX14745K       | MAX14745L       | MAX14745M       | MAX14745O       | MAX14745P       | MAX14745Q       | MAX14745R       | MAX14745S       | MAX14745U       |
|------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| PChgTmr [1:0]    | 30min           | 120min          | 30min           | 30min           | 30min           | 30min           | 60min           | 30min           | 30min           | 30min           | 30min           | 30min           | 60min           | 60min           | 30min           | 120min          | 30min           | 30min           |
| FChgTmr [1:0]    | 300min          | 150min          | 600min          | 300min          | 300min          | 300min          | 600min          | 150min          | 150min          | 300min          | 300min          | 150min          | 300min          | 300min          | 150min          | 300min          | 300min          | 300min          |
| MChgTmr [1:0]    | 60min           | 15min           | 0min            | 30min           | 60min           | 60min           | 0min            | 15min           | 0min            | 30min           | 0min            | 0min            | 0min            | 0min            | 0min            | 60min           | 60min           | 0min            |
| BatReg [3:0]     | 4.20V           | 4.40V           | 4.35V           | 4.20V           | 4.20V           | 4.20V           | 4.15V           | 4.20V           | 4.20V           | 4.35V           | 4.35V           | 4.20V           | 4.35V           | 4.25V           | 4.35V           | 4.35V           | 4.20V           | 4.35V           |
| BatReChg [1:0]   | -120mV          | -220mV          | -120mV          | -100mV          | -120mV          | -120mV          | -170mV          | -120mV          | -170mV          | -120mV          | -220mV          | -220mV          | -220mV          | -220mV          | -70mV           | -220mV          | -120mV          | -100mV          |
| ChgEn            | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Disabled        | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         |
| ChgDone [1:0]    | 0.05 x IFCChg   | 0.10 x IFCChg   | 0.05 x IFCChg   | 0.20 x IFCChg   | 0.05 x IFCChg   | 0.05 x IFCChg   | 0.1 x IFCChg    | 0.20 x IFCChg   | 0.05 x IFCChg   | 0.10 x IFCChg   | 0.10 x IFCChg   | 0.10 x IFCChg   | 0.10 x IFCChg   | 0.10 x IFCChg   | 0.10 x IFCChg   | 0.10 x IFCChg   | 0.05 x IFCChg   | 0.05 x IFCChg   |
| ChgAutoSlp       | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         |
| ChgAutoStia      | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         |
| FreshBatDis      | Done            | Charge          | Charge          | Charge          | Done            | Done            | Charge          | Charge          | Charge          | Charge          | Done            | Charge          | Charge          | Charge          | Charge          | Charge          | Done            | Charge          |
| ThermEn [1:0]    | Thermistor      | JEITA 1         | Thermistor      | Thermistor      | JEITA 1         | JEITA 1         | JEITA 2         | Thermistor      | Thermistor      | JEITA 1         | JEITA 2         | JEITA 2         | JEITA 1         | JEITA 2         | JEITA 2         | JEITA 1         | JEITA 1         | JEITA 1         |
| T1_T2_IFChg[2:0] | 1.0 x IFCChg    | 0.5 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 0.2 x IFCChg    | 0.2 x IFCChg    | 0.4 x IFCChg    | 0.5 x IFCChg    | 0.5 x IFCChg    | 1.0 x IFCChg    | 0.5 x IFCChg    | 0.5 x IFCChg    | 0.2 x IFCChg    | 0.3 x IFCChg    |
| T2_T3_IFChg[2:0] | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 0.8 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 0.2 x IFCChg    | 1.0 x IFCChg    |
| T3_T4_IFChg[2:0] | 1.0 x IFCChg    | 0.5 x IFCChg    | 0.2 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 0.2 x IFCChg    | 0.2 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 0.5 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    | 0.5 x IFCChg    | 1.0 x IFCChg    | 1.0 x IFCChg    |
| ChgAwTry         | Retry           | Latch Off       | Latch Off       | Retry           | Retry           | Retry           | Latch Off       | Retry           | Retry           | Retry           | Retry           | Latch Off       | Latch Off       | Latch Off       | Latch Off       | Latch Off       | Retry           | Retry           |
| ILimCtrl [1:0]   | 500mA           | 500mA           | 500mA           | 500mA           | 500mA           | 500mA           | 500mA           | 500mA           | 100mA           | 500mA           | 500mA           | 500mA           | 1000mA          | 500mA           | 500mA           | 1000mA          | 500mA           | 500mA           |
| PwrRstCf [3:0]   | KIN (0110)      | CR Low (0101)   | On/Off (0000)   | KIN (0110)      | KIN (0110)      | KIN (0110)      | Custom1 (0111)  | Custom2 (1000)  | Custom2 (1000)  | Custom1 (0111)  | KIN (0110)      | Rst Rise(0010)  | Custom2 (1000)  | Custom1 (0111)  | Rst Rise (0010) | On/Off (0000)   | Custom1 (0111)  | KIN (0110)      |
| PFNRstEna        | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         | Enabled         |
| BootDly [1:0]    | (120 + 34)ms    | (120 + 34)ms    | (420 + 34)ms    | (420 + 34)ms    | (120 + 34)ms    | (120 + 34)ms    | (120 + 34)ms    | (80 + 34)ms     | (120 + 34)ms    | (80 + 34)ms     | (120 + 34)ms    | (80 + 34)ms     | (80 + 34)ms     | (120 + 34)ms    | (80 + 34)ms     | (120 + 34)ms    | (120 + 34)ms    | (80 + 34)ms     |
| SRstCf [3:0]     | Hold            | Reset           | Reset           | Reset           | Hold            | Hold            | Reset           | Reset           | Reset           | Reset           | Reset           | Reset           | Reset           | Reset           | Reset           | Reset           | Hold            | Reset           |
| SysMin[2:0]      | 3.6V            | 3.6V            | 3.6V            | 3.6V            | 3.6V            | 3.6V            | 3.6V            | 3.6V            | 3.8V            | 3.6V            | 3.6V            | 3.6V            | 3.6V            | 3.6V            | 3.6V            | 3.6V            | 3.6V            | 3.6V            |
| Write-Protect    | Writable        | Writable        | Writable        | Writable        | Writable        | Writable        | Writable        | Writable        | Writable        | Writable        | Writable        | Writable        | Writable        | Writable        | Writable        | Writable        | Writable        | Writable        |
| StayOn           | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         | Stay On         |
| T1, T2, T3, T4   | 0, 10, 25, 45°C | 0, 10, 25, 45°C | 0, 10, 45, 60°C | 0, 10, 45, 60°C | 0, 10, 25, 45°C | 0, 10, 25, 45°C | 0, 10, 45, 60°C | 0, 10, 45, 60°C | 0, 10, 45, 60°C | 0, 10, 45, 60°C | 0, 10, 25, 45°C | 0, 10, 45, 60°C | 0, 10, 25, 45°C | 0, 10, 45, 60°C | 0, 10, 45, 60°C | 0, 10, 25, 45°C | 0, 10, 25, 45°C | 0, 10, 25, 45°C |



Table 39. Register Default Values

| REGISTER ADDRESS | REGISTER NAME | MAX14745A | MAX14745C | MAX14745D | MAX14745E | MAX14745F | MAX14745G | MAX14745H | MAX14745I | MAX14745J | MAX14745K | MAX14745L | MAX14745M | MAX14745O | MAX14745P | MAX14745Q | MAX14745R | MAX14745S | MAX14745U |
|------------------|---------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| 0x00             | ChipId        | 0x02      | 0x02      | 0x02      | 0x02      | 0x02      | 0x02      | 0x02      | 0x02      | 0x02      | 0x02      | 0x02      | 0x02      | 0x00      | 0x02      | 0x02      | 0x02      | 0x02      | 0x02      |
| 0x01             | ChipRev       | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      |
| 0x07             | IntMaskA      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      |
| 0x08             | IntMaskB      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      |
| 0x09             | LimCntl       | 0x02      | 0x02      | 0x02      | 0x02      | 0x02      | 0x02      | 0x02      | 0x02      | 0x41      | 0x02      | 0x02      | 0x02      | 0x00      | 0x02      | 0x02      | 0x03      | 0x02      | 0x02      |
| 0x0A             | ChgCntlA      | 0x27      | 0x6F      | 0x2D      | 0x27      | 0x27      | 0x45      | 0x45      | 0x27      | 0x46      | 0x2D      | 0x6D      | 0x67      | 0x00      | 0x69      | 0x0D      | 0x6D      | 0x27      | 0x2D      |
| 0x0B             | ChgCntlB      | 0x54      | 0x65      | 0x58      | 0x6A      | 0x54      | 0x64      | 0x65      | 0x66      | 0x64      | 0x69      | 0x65      | 0x61      | 0x00      | 0x65      | 0x61      | 0x65      | 0x54      | 0x70      |
| 0x0C             | ChTmr         | 0xF8      | 0xD6      | 0xCC      | 0xE8      | 0xF8      | 0xCD      | 0xCD      | 0xD4      | 0xC4      | 0xE8      | 0xC8      | 0xC4      | 0x00      | 0xC9      | 0xC4      | 0xFA      | 0xF8      | 0xC8      |
| 0x0D             | Buck1Cfg      | 0xE1      | 0x42      | 0xE1      | 0x69      | 0xE1      | 0x42      | 0xE0      | 0xEA      | 0xE1      | 0xE1      | 0xE9      | 0x89      | 0x00      | 0xE0      | 0x89      | 0x4A      | 0x42      | 0x4A      |
| 0x0E             | Buck1VSet     | 0x10      | 0x2E      | 0x28      | 0x10      | 0x10      | 0x28      | 0x06      | 0x3F      | 0x10      | 0x12      | 0x0D      | 0x0C      | 0x00      | 0x06      | 0x0C      | 0x2E      | 0x28      | 0x28      |
| 0x0F             | Buck2Cfg      | 0x41      | 0x83      | 0x82      | 0x6A      | 0x41      | 0x6A      | 0x6A      | 0xE2      | 0x6A      | 0x4A      | 0xEB      | 0x8A      | 0x00      | 0x6A      | 0x8A      | 0xEB      | 0x41      | 0xE3      |
| 0x10             | Buck2VSet     | 0x14      | 0x32      | 0x2C      | 0x14      | 0x14      | 0x08      | 0x24      | 0x26      | 0x29      | 0x14      | 0x32      | 0x16      | 0x00      | 0x24      | 0x16      | 0x34      | 0x08      | 0x2C      |
| 0x11             | BuckSet       | 0x55      | 0x66      | 0xC5      | 0x66      | 0x55      | 0x66      | 0x66      | 0x66      | 0x66      | 0x66      | 0x66      | 0x66      | 0x00      | 0x66      | 0x66      | 0xF9      | 0x55      | 0x66      |
| 0x12             | LDO1Cfg       | 0xE0      | 0x62      | 0xE1      | 0x22      | 0xE0      | 0xE0      | 0xE0      | 0xE1      | 0xE0      | 0xE0      | 0xE2      | 0xE6      | 0x00      | 0xE0      | 0xE0      | 0xE2      | 0xE0      | 0x42      |
| 0x13             | LDO1VSet      | 0x16      | 0x0A      | 0x0A      | 0x0A      | 0x16      | 0x16      | 0x17      | 0x00      | 0x0A      | 0x0A      | 0x16      | 0x15      | 0x00      | 0x17      | 0x15      | 0x0A      | 0x19      | 0x0A      |
| 0x14             | LDO2Cfg       | 0xE1      | 0x62      | 0xE1      | 0x82      | 0xE1      | 0xE1      | 0xE0      | 0xE0      | 0xE0      | 0xE0      | 0xE2      | 0xE5      | 0x00      | 0xE0      | 0xE1      | 0xE2      | 0xE0      | 0xE0      |
| 0x15             | LDO2VSet      | 0x1A      | 0x09      | 0x09      | 0x13      | 0x1A      | 0x1A      | 0x09      | 0x17      | 0x03      | 0x15      | 0x15      | 0x0A      | 0x00      | 0x09      | 0x0A      | 0x09      | 0x09      | 0x16      |
| 0x16             | LDO3Cfg       | 0xE1      | 0x62      | 0xE1      | 0xE2      | 0xE1      | 0xE1      | 0xE0      | 0xE0      | 0xE0      | 0xE0      | 0xE2      | 0xE1      | 0x00      | 0xE0      | 0xE1      | 0xE2      | 0xE0      | 0x42      |
| 0x17             | LDO3VSet      | 0x1A      | 0x09      | 0x09      | 0x18      | 0x1A      | 0x1A      | 0x09      | 0x0B      | 0x15      | 0x15      | 0x15      | 0x0A      | 0x00      | 0x09      | 0x0A      | 0x09      | 0x13      | 0x16      |
| 0x18             | THRMCF A      | 0xFD      | 0x7E      | 0x7D      | 0xFD      | 0xFE      | 0xFE      | 0xFF      | 0xFD      | 0x1D      | 0x1E      | 0x5B      | 0x7F      | 0x00      | 0xFF      | 0x7F      | 0x7E      | 0x02      | 0x3E      |
| 0x19             | THRMCF B      | 0x07      | 0x03      | 0x00      | 0x07      | 0x07      | 0x07      | 0x07      | 0x07      | 0x00      | 0x00      | 0x07      | 0x07      | 0x00      | 0x07      | 0x07      | 0x03      | 0x07      | 0x07      |
| 0x1A             | MONCFG        | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      |
| 0x1B             | BOOTCFG       | 0x63      | 0x5A      | 0x0E      | 0x2F      | 0x63      | 0x63      | 0x7A      | 0x89      | 0x8B      | 0x79      | 0x6B      | 0x28      | 0x00      | 0x7A      | 0x28      | 0x0A      | 0x73      | 0x69      |
| 0x1D             | Buck1/2 Extra | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      |
| 0x1E             | PwrCfg        | 0x81      | 0x81      | 0x81      | 0x81      | 0x81      | 0x81      | 0x81      | 0x81      | 0x81      | 0x81      | 0x81      | 0x81      | 0x00      | 0x81      | 0x81      | 0x81      | 0x81      | 0x81      |
| 0x1F             | PwrCmd        | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      | 0x00      |

## Ordering Information

| PART                  | TEMP RANGE     | PIN-PACKAGE |
|-----------------------|----------------|-------------|
| <b>MAX14745AEWX+</b>  | -40°C to +85°C | 36 WLP      |
| MAX14745AEWX+T        | -40°C to +85°C | 36 WLP      |
| <b>MAX14745BEWX+*</b> | -40°C to +85°C | 36 WLP      |
| MAX14745BEWX+T*       | -40°C to +85°C | 36 WLP      |
| <b>MAX14745CEWX+</b>  | -40°C to +85°C | 36 WLP      |
| MAX14745CEWX+T        | -40°C to +85°C | 36 WLP      |
| <b>MAX14745DEWX+</b>  | -40°C to +85°C | 36 WLP      |
| MAX14745DEWX+T        | -40°C to +85°C | 36 WLP      |
| <b>MAX14745EEWX+</b>  | -40°C to +85°C | 36 WLP      |
| MAX14745EEWX+T        | -40°C to +85°C | 36 WLP      |
| <b>MAX14745FEWX+</b>  | -40°C to +85°C | 36 WLP      |
| MAX14745FEWX+T        | -40°C to +85°C | 36 WLP      |
| <b>MAX14745GEWX+</b>  | -40°C to +85°C | 36 WLP      |
| MAX14745GEWX+T        | -40°C to +85°C | 36 WLP      |
| <b>MAX14745HEWX+</b>  | -40°C to +85°C | 36 WLP      |
| MAX14745HEWX+T        | -40°C to +85°C | 36 WLP      |
| <b>MAX14745IEWX+</b>  | -40°C to +85°C | 36 WLP      |
| MAX14745IEWX+T        | -40°C to +85°C | 36 WLP      |
| <b>MAX14745JEWX+</b>  | -40°C to +85°C | 36 WLP      |
| MAX14745JEWX+T        | -40°C to +85°C | 36 WLP      |
| <b>MAX14745KEWX+</b>  | -40°C to +85°C | 36 WLP      |

| PART                 | TEMP RANGE     | PIN-PACKAGE |
|----------------------|----------------|-------------|
| MAX14745KEWX+T       | -40°C to +85°C | 36 WLP      |
| <b>MAX14745LEWX+</b> | -40°C to +85°C | 36 WLP      |
| MAX14745LEWX+T       | -40°C to +85°C | 36 WLP      |
| <b>MAX14745MEWX+</b> | -40°C to +85°C | 36 WLP      |
| MAX14745MEWX+T       | -40°C to +85°C | 36 WLP      |
| <b>MAX14745OEWX+</b> | -40°C to +85°C | 36 WLP      |
| MAX14745OEWX+T       | -40°C to +85°C | 36 WLP      |
| MAX14745PEWX+        | -40°C to +85°C | 36 WLP      |
| MAX14745PEWX+T       | -40°C to +85°C | 36 WLP      |
| MAX14745QEWX+        | -40°C to +85°C | 36 WLP      |
| MAX14745QEWX+T       | -40°C to +85°C | 36 WLP      |
| MAX14745REWX+        | -40°C to +85°C | 36 WLP      |
| MAX14745REWX+T       | -40°C to +85°C | 36 WLP      |
| MAX14745SEWX+        | -40°C to +85°C | 36 WLP      |
| MAX14745SEWX+T       | -40°C to +85°C | 36 WLP      |
| MAX14745UEWX+        | -40°C to +85°C | 36 WLP      |
| MAX14745UEWX+T       | -40°C to +85°C | 36 WLP      |

+Denotes a lead(Pb)-free package/RoHS-compliant package.  
T = Tape and reel.

\*Future Product—contact factory for availability.

See [Table 38](#) and [Table 39](#) for the device differences.

## Chip Information

PROCESS: BiCMOS