


Monitoring Relays

Current Transformer, 1-Phase AC

Types MI 5, MI 20, MI 100, MI 500

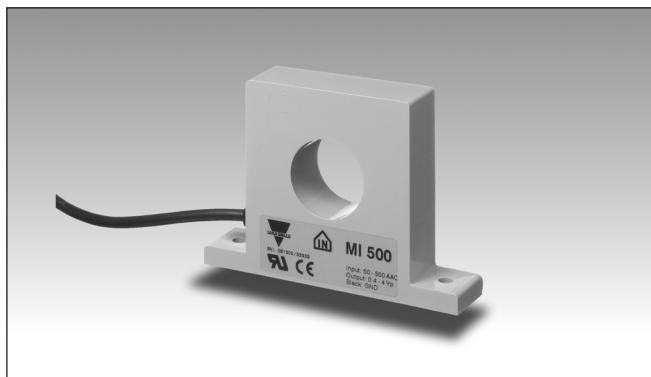

- 1-phase current metering transformer for use with control relays types:
DUA01, PUA01, DIB02, PIB02, DIC01, PIC01, DWA01, PWA01, DWB01, PWB01, DWB02, PWB02, DWB03, PWB03, S 180, H 479
- Measuring ranges:
MI 5: 0.5 - 5 AAC
MI 20: 2 - 20 AAC
MI 100: 10 - 100 AAC
MI 500: 50 - 500 AAC

Product Description

AC current transformers for voltage (0.4 - 4 V_p) is proportional to measured current.
5, 20, 100, 500 AAC. Output

Ordering Key

MI 500

Type _____
Input current _____

Type Selection

| Input current | Type no. |
|---------------|----------|
| 5 AAC | MI 5 |
| 20 AAC | MI 20 |
| 100 AAC | MI 100 |
| 500 AAC | MI 500 |

Input Specifications

| | MI 5 | MI 20 | MI 100 | MI 500 |
|---|-------------------------|-------------------------|-------------------------|-------------------------|
| Current range | 0.5 - 5 AAC | 2 - 20 AAC | 10 - 100 AAC | 50 - 500 AAC |
| Max. current (continuously) | 20 AAC | 50 AAC | 250 AAC | 750 AAC |
| Max. overload current (t = 30 s) | 40 AAC | 85 AAC | 325 AAC | 1000 AAC |
| Frequency range | 40 Hz-1 kHz | 40 Hz-1 kHz | 40 Hz-1 kHz | 40 Hz-1 kHz |
| Rated insulation voltage | | | | |
| Input-output | 1000 VAC _{rms} | 1000 VAC _{rms} | 1000 VAC _{rms} | 1000 VAC _{rms} |
| Oversupply category | IV (IEC 60664) | IV (IEC 60664) | IV (IEC 60664) | IV (IEC 60664) |
| Dielectric strength | | | | |
| Dielectric voltage | 6 kVAC _{rms} | 6 kVAC _{rms} | 6 kVAC _{rms} | 6 kVAC _{rms} |
| Rated impulse withstand volt. | 12 kV (1.2/50 µs) |
| Power consumption | < 100 mW/5 A | < 100 mW/20 A | < 0.5 W/100 A | < 6 W/500 A |

Output Specifications

| | MI 5 | MI 20 | MI 100 | MI 500 |
|---|------------------------|------------------------|------------------------|------------------------|
| Output Voltage (T _A = 20°C, R _L = 9.5 kΩ) | 0.4 - 4 V _p |
| Output impedance | < 700 Ω | < 200 Ω | < 40 Ω | < 10 Ω |
| Tolerance of output voltage @ rated input current | ± 5% | ± 5% | ± 5% | ± 5% |
| Temperature variation | ± 0.1% per °C |
| Rated insulation voltage (cable) | 250 VAC _{rms} | 250 VAC _{rms} | 250 VAC _{rms} | 250 VAC _{rms} |

General Specifications

| | |
|----------------------------|---|
| Pollution degree | 3 (IEC 60664) |
| Ambient temperature | - 20° to + 60°C (- 4° to + 140°F) |
| Housing | |
| Dimensions | MI 5, MI 20 MI 100, MI 500 |
| Material | 52 x 45 x 16 mm 95 x 67.5 x 20 mm ABS |
| Weight | MI 5, MI 20 MI 100, MI 500 |
| | 70 g 270 g |
| Connection cable | |
| MI 5, MI 20 | 1 m, 2 x 0.25 mm ² |
| MI 100, MI 500 | 2 m, 2 x 0.25 mm ² |
| Approval | UL |
| CE-marking | Yes |

Mode of Operation

The metered conductor is drawn through the central hole of the current metering transformer. Drawing the conductor through the hole several times makes it possible to meter currents below the nominal range.


the current in the conductor is 10 A.

In amplitude and phase the output voltage is proportional to the phase current metered.

4 V_p will then be equal to the rms-value of the nominal phase current.


If the conductor is drawn through the central hole e.g. 5 times, the metering transformer will register 50 A when

Wiring Diagrams

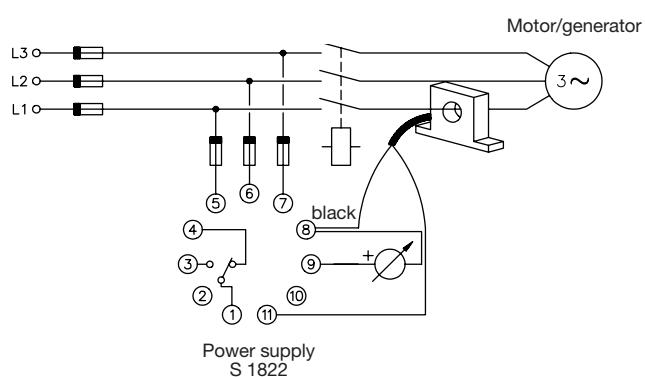

Dimensions

MI 5, MI 20

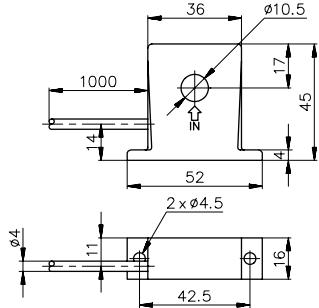

MI 100, MI 500

