




# 8x8 G click™


## 1. Introduction

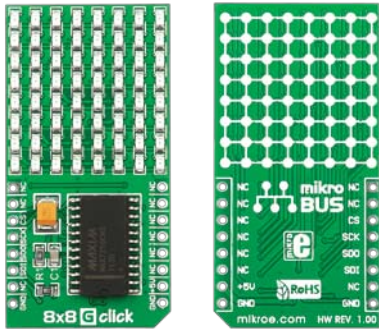

8x8 G Click™ is an accessory board in **mikroBUS™** form factor. It's a compact and easy solution for adding 8x8 **GREEN** LED matrix to your design. It features **MAX7219** 8-digit LED display driver module as well as 64 **GREEN** LED diodes. 8x8 G Click™ communicates with target board microcontroller via four **mikroBUS™** SPI lines (DIN, DOUT, CLK and CS). The board is designed to use 5V power supply only, but it can be used with 3.3V MCUs as well.


## 2. Soldering the headers

Before using your click board™, make sure to solder 1x8 male headers to both left and right side of the board. Two 1x8 male headers are included with the board in the package.

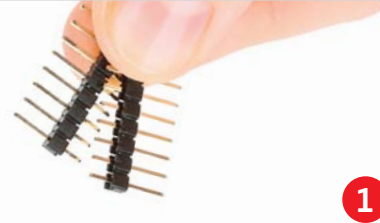


1

2

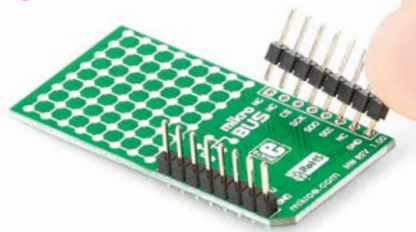


Turn the board upside down so that bottom side is facing you upwards. Place shorter parts of the header pins in both soldering pad locations.

3

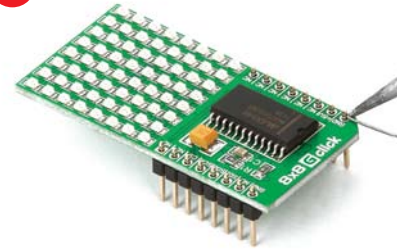


Turn the board upward again. Make sure to align the headers so that they are perpendicular to the board, then solder the pins carefully.

## 3. Plugging the board in

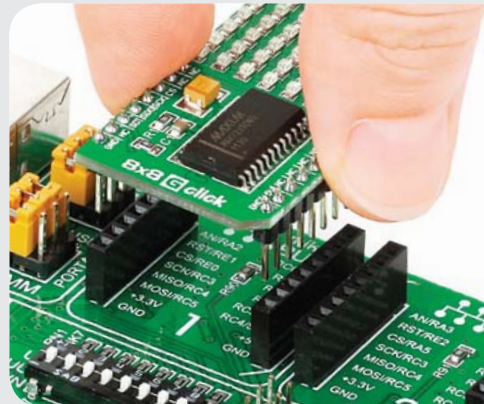

Once you have soldered the headers your board is ready to be placed into desired mikroBUS™ socket. Make sure to align the cut in the lower-right part of the board with the markings on the silkscreen at the mikroBUS™ socket. If all of the pins are aligned correctly, push the board all the way into the socket.

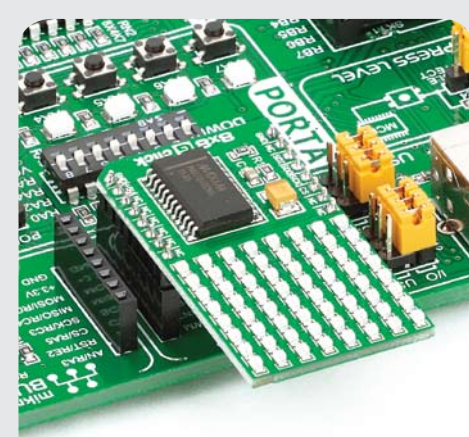

## 4. Essential features

8x8 G Click™ with its **MAX7219** IC gives additional 8x8 **GREEN** LED matrix to your design. The **MAX7219** is serial input/output common-cathode display driver with SPI interface. It has BCD code-B decoder, analog and digital brightness control, 8x8 static RAM and several useful registers.

click™  
BOARD  
[www.mikroe.com](http://www.mikroe.com)

8x8 G click Manual  
ver. 1.00



0 100000 022153

