


# OnBoard 868 MHz - EVB



**PRO-EB-472**

Request Samples



Check Inventory





120.0 x 50.0 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Description


The PRO-EB-472 Evaluation board is designed to provide a means to facilitate engineering evaluation of the OnBoard antenna: PRO-OB-471 for 868 MHz operation. With a typical operating frequency range of 860 ~ 870 MHz, the antenna can be used for LPWA/LoRA/SigFox/ISM applications.


To evaluate the performance of the antenna, calibrate the Vector Network analyzer (VNA) for the testing frequency band and connect the evaluation board to the calibrated port using the given SMA connector on the board.

## Product Image

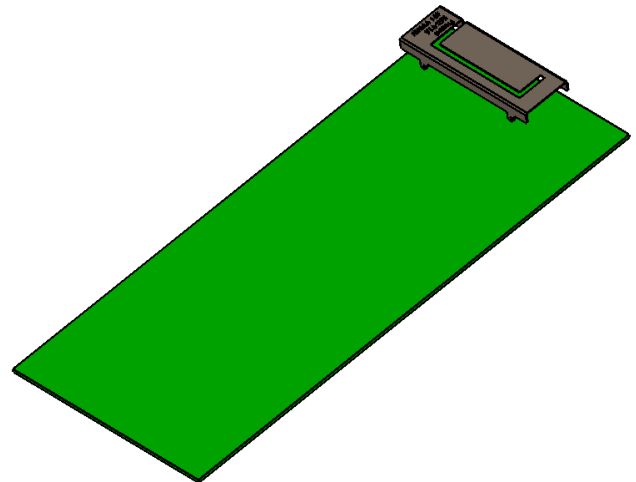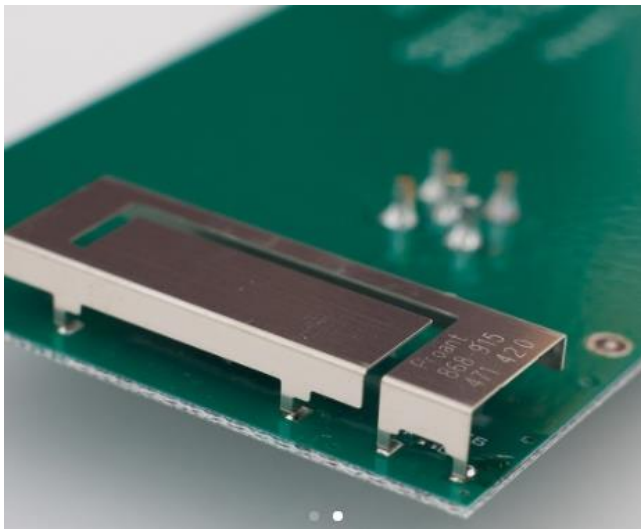

## Antenna Image

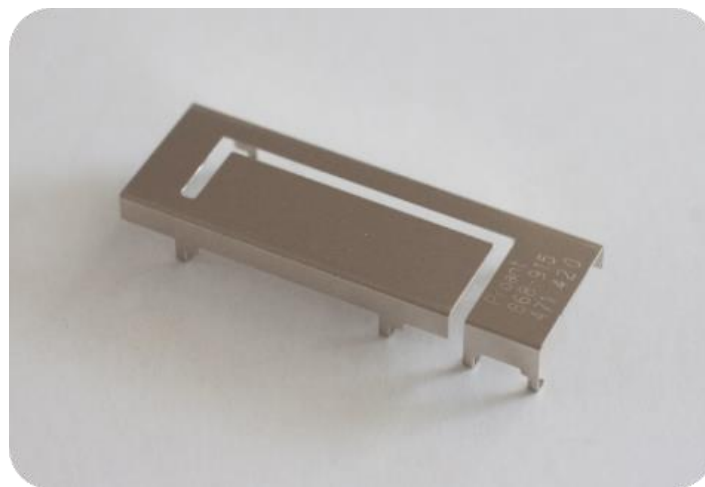



PRO-EB-472

Request Samples



Check Inventory



120.0 x 50.0 mm  
RoHS/RoHS II Compliant  
MSL Level = 1


## Electrical Specification

Parameter	Specification	Unit
Operating Frequency	860 - 870	MHz
Center Frequency	865	
Return Loss	< -9.9	dB
Polarization	Mixed Linear	
Peak Gain	1.7	dB <sub>i</sub>
Efficiency	> 63	%
Impedance	50	Ω

*Note: All measurements were conducted on the evaluation board in free space. Performance will vary depending on the ground plane, application, and environment.*

## Mechanical Specification

Parameter	Specification
Evaluation board Dimension	120 x 50 mm



PRO-EB-472

Request Samples




Check Inventory




120.0 x 50.0 mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Antenna Dimension

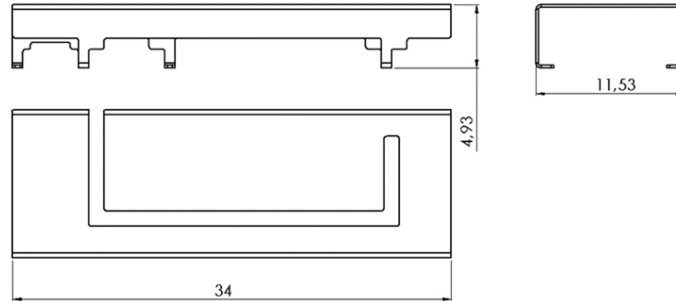


Unit : mm

## Antenna pins and keep-out block

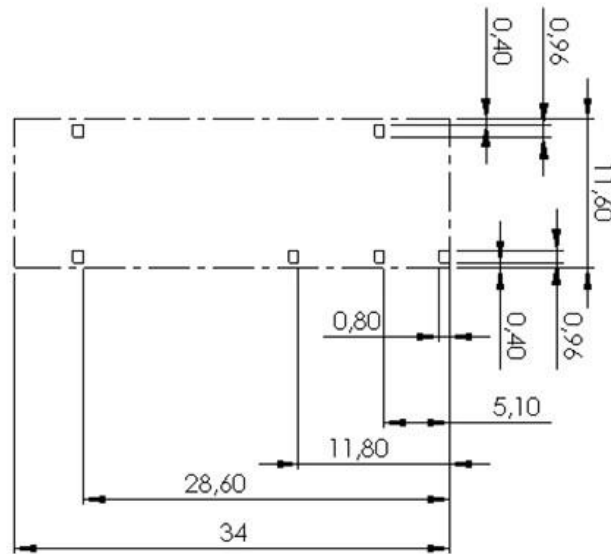

Unit : mm



**PRO-EB-472**

Request Samples




Check Inventory



**120.0 x 50.0 mm**  
**RoHS/RoHS II Compliant**  
**MSL Level = 1**

## PCB layout and antenna pin numbering



The antenna uses PIFA technology and should thus be mounted on a ground plane. If there are several layers in the PCB, there is an advantage to add vias for smooth interconnection of the ground areas to avoid splits in the ground plane. It is also important that there is a ground clearance around the NC pads and the RF feed pad, through all layers of the PCB. It is recommended to implement a matching network to optimize the antenna impedance in your application. The components can be positioned under the antenna. See recommendations in the figures below.

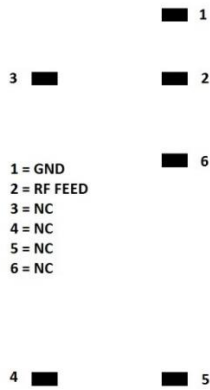

Pin configuration



PCB Layout (from evaluation board)

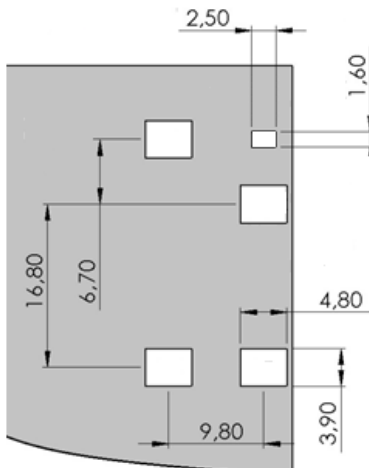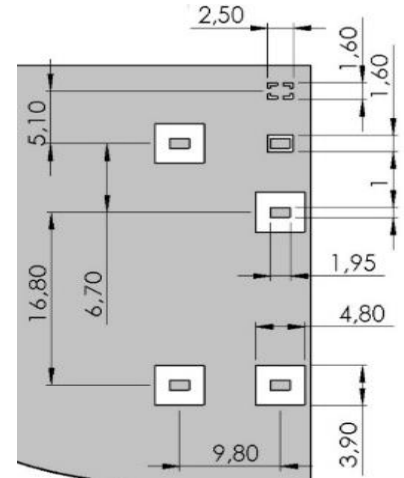

Clearance through all layers

Unit: mm



**PRO-EB-472**

Request Samples



Check Inventory




120.0 x 50.0 mm


RoHS/RoHS II Compliant

MSL Level = 1

## Measurement Setup

The antenna measurements were done with the OnBoard SMD 868 MHz evaluation board (PRO-EB-472, 120 x 50 mm) - measured in free space.

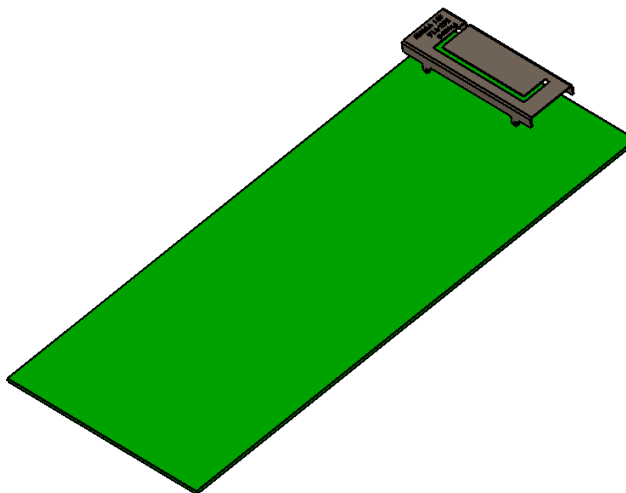



PRO-EB-472

Request Samples




Check Inventory




120.0 x 50.0 mm  
RoHS/RoHS II Compliant  
MSL Level = 1


## Reflection Characteristics – Return Loss

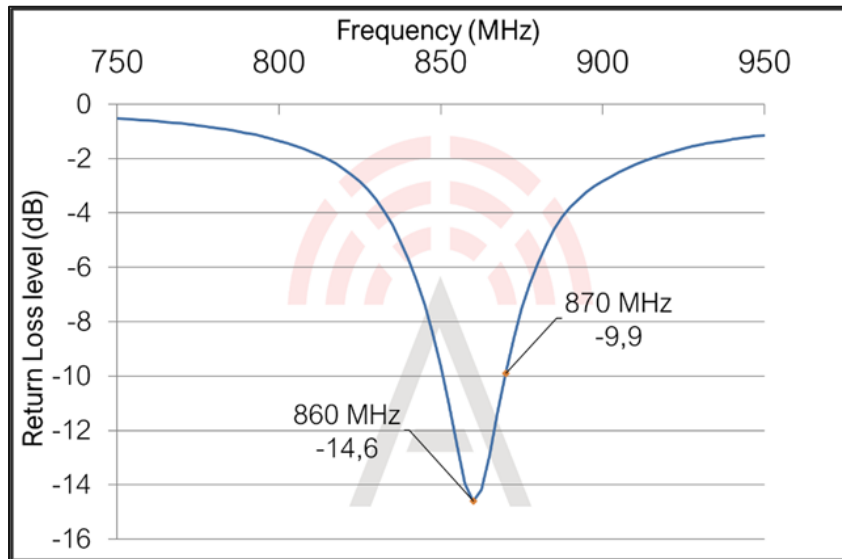


## Total Radiation Efficiency

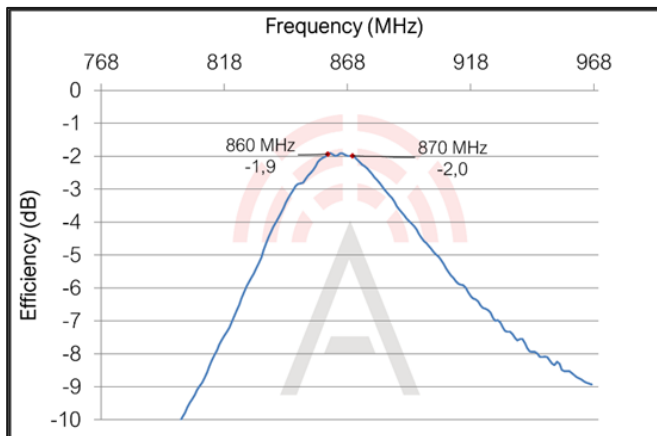

## Maximum Radiation Gain

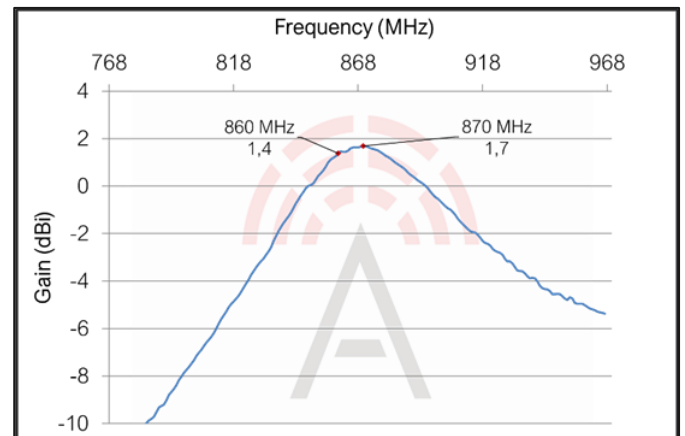



**PRO-EB-472**

Request Samples






Check Inventory



120.0 x 50.0 mm  
 RoHS/RoHS II Compliant  
 MSL Level = 1

## Radiation Characteristics – 2D Pattern (868 MHz)

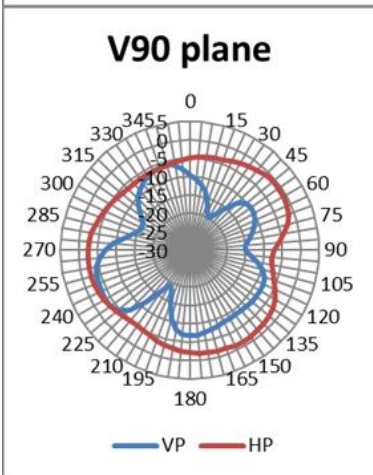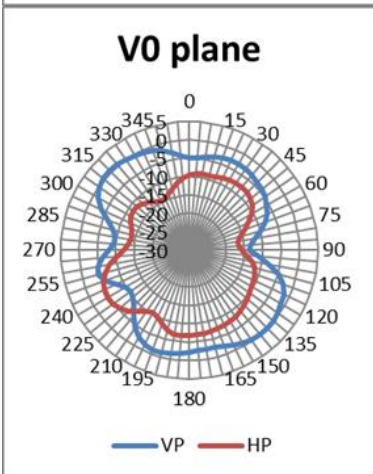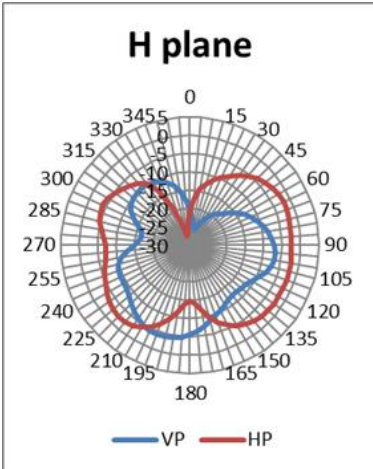

VP: Vertical Polarization  
 HP: Horizontal Polarization

Unit: dBi





**PRO-EB-472**

Request Samples



Check Inventory




120.0 x 50.0 mm

RoHS/RoHS II Compliant

MSL Level = 1



## Evaluation Board Outline & Matching Circuit

The evaluation board is developed to simplify antenna (PRO-OB-471) testing and evaluation. It has an arbitrary size of 120 x 50 mm and includes an SMA connector. The purpose is to give a reference design for an optimal antenna implementation. The evaluation board can also be used to test other implementations by cutting and soldering the PCB into any device.

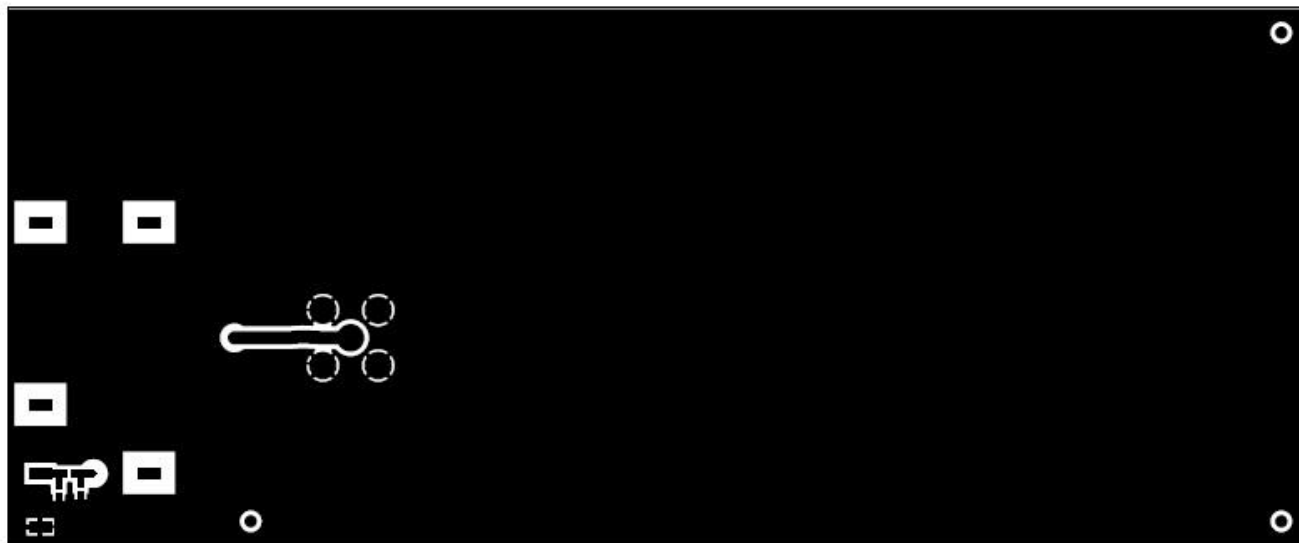

### Evaluation board outline

The evaluation board has a matching circuit implemented next to the antenna. This is aimed to enable optimization possibilities for the user. The component positions are sized for 0402 (1005 metric) SMD components.

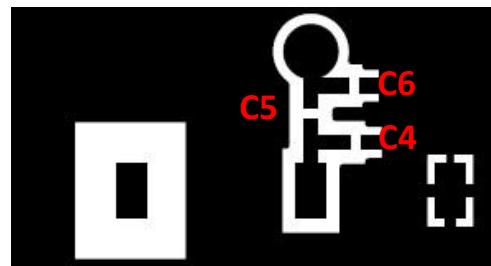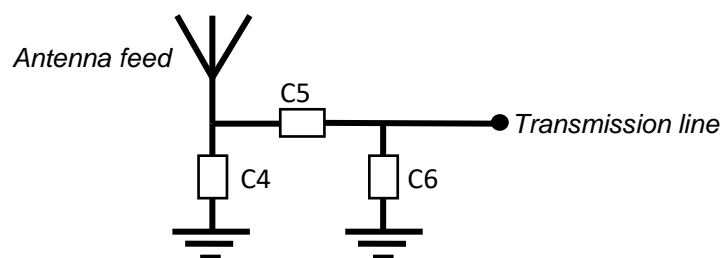

### Matching circuit

The antenna needs a matching circuit to adjust the resonant frequency balance. When delivered, the evaluation board is tuned for optimum balance for 860 ~ 870 MHz operation using the following (can be replaced by equivalent):

C4 = N/A

C5 = 5.6 pF (Murata GJM1555C1H5R6WB01)

C6 = 2.2 pF (Murata GJM1555C1H2R2WB01)

However, it is common that the resonant frequency will shift during implementation in an arbitrary device. Therefore, this matching may be changed with other values/components/brands for compensation of such effects. This is further described in General Implementation Guidelines section below.