

RTKA211820DE0010BU

The RTKA211820DE0010BU board demonstrates and quickly evaluates the [RAA211820](#) (HTSSOP version), a DC/DC synchronous step-down regulator with programmable switching frequency.

The RAA211820 supports a wide input voltage range (from 4.5V to 75V) and adjustable output voltage. It delivers up to a continuous 2A output current with premium load regulation and line regulation performance.

**Features**

- Simple and flexible design
- 4.5V to 75V  $V_{IN}$  range
- Convenient power conversion

**Specifications**

The following are the design specifications for the RTKA211820DE0010BU:

- Input voltage ( $V_{IN}$ ): 4.5V to 75V
- Output voltage ( $V_{OUT}$ ): 3.3V
- Maximum output current: 2A

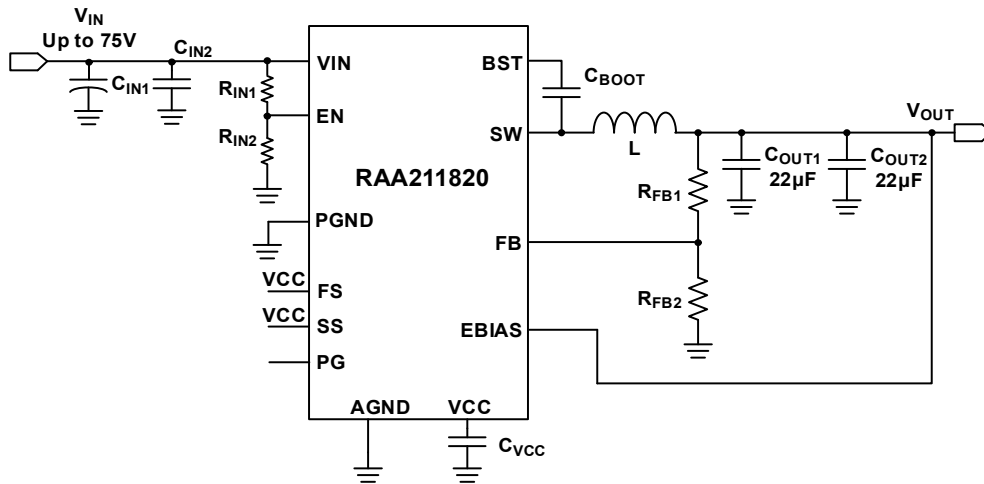


Figure 1. Block Diagram

## Contents

<b>1. Functional Description</b>	<b>3</b>
1.1 Operational Characteristics	3
1.2 Setup and Configuration	3
<b>2. Board Design</b>	<b>4</b>
2.1 Layout Guidelines	4
2.2 Schematic Diagram	5
2.3 Bill of Materials	6
2.4 Board Layout	7
<b>3. Typical Performance Graphs</b>	<b>9</b>
<b>4. Ordering Information</b>	<b>10</b>
<b>5. Revision History</b>	<b>10</b>

# 1. Functional Description

The RAA211820 (HTSSOP version) is an easy-to-use synchronous Buck switching regulator with an integrated 215mΩ/115mΩ high-side/low-side MOSFETs. The RTKA211820DE0010BU board demonstrates the operations of RAA211820 (HTSSOP version). The board allows you to evaluate the performance of the part with different application circuits, and it provides you with a reference for a board layout.

## 1.1 Operational Characteristics

The board input voltage range is from 4.5V to 75V. The output voltage is set to 3.3V by default and can be changed by R<sub>9</sub> and R<sub>10</sub>, as shown in Equation 1:

$$(EQ. 1) \quad R_9 = R_{10} \cdot \frac{V_{OUT} - 0.8}{0.8}$$

It is recommended to use a 20kΩ resistor for R<sub>10</sub> and choose R<sub>9</sub> based on Equation 1.

## 1.2 Setup and Configuration

1. Populate a jumper on JP1(VIN shorted to EN).
2. Connect the power supply to the input terminals VIN(T1) and GND(T2). Connect the load to the output terminals VOUT(T3) and GND(T4). Make sure the setup is correctly connected before applying any power or load to the board.
3. Turn on the power supply and the part should start operating.
4. Verify that the output voltage is 3.3V and phase node waveforms can be monitored at J1.

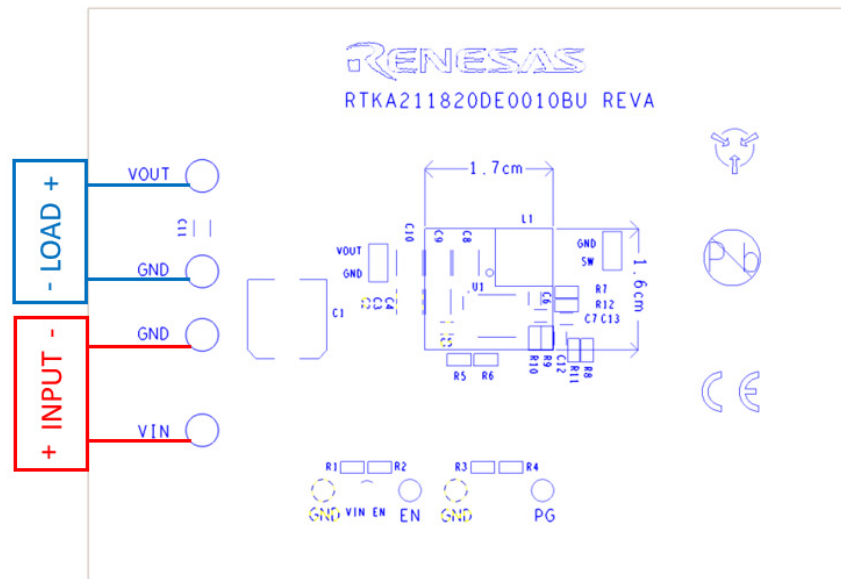


Figure 2. RTKA211820DE0010BU Board Setup

## 2. Board Design

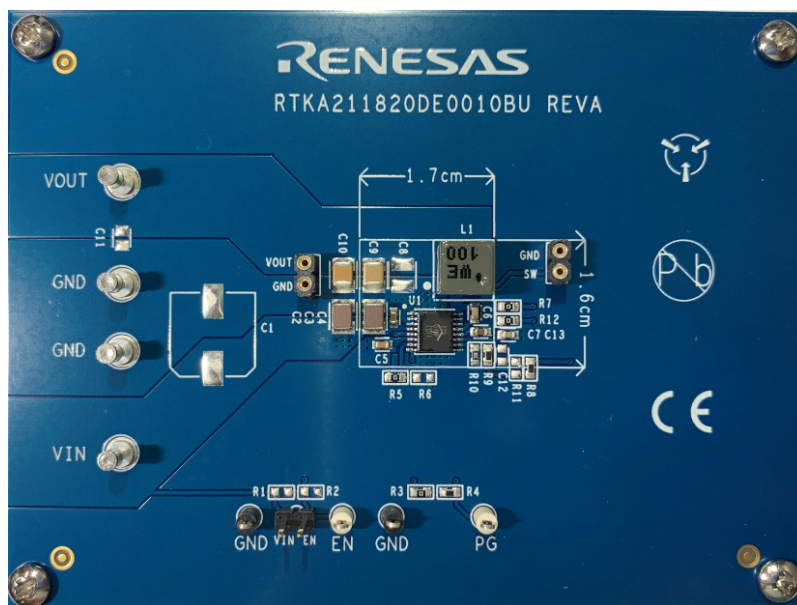


Figure 3. RTKA211820DE0010BU Evaluation Board (Top)

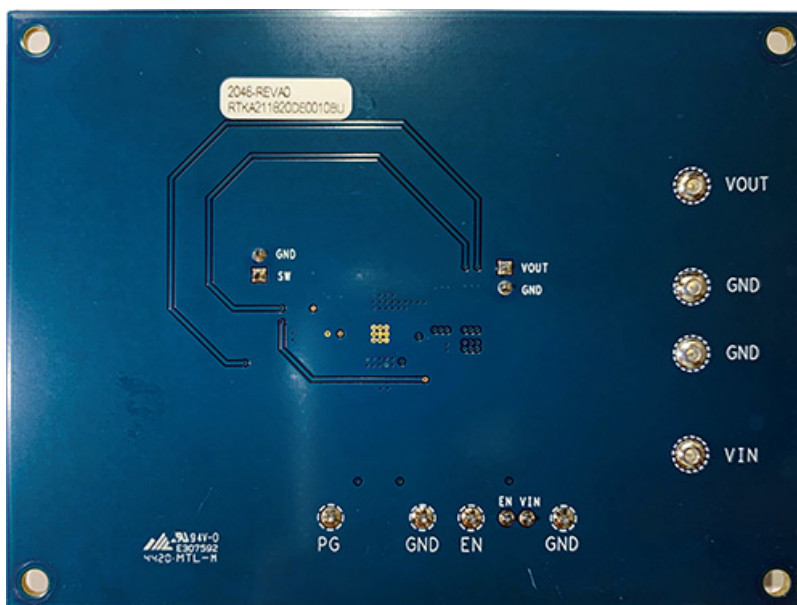


Figure 4. RTKA211820DE0010BU Evaluation Board (Bottom)

### 2.1 Layout Guidelines

For detailed layout guidelines, reference the Layout Guidelines section in the *RAA211820 Datasheet*.

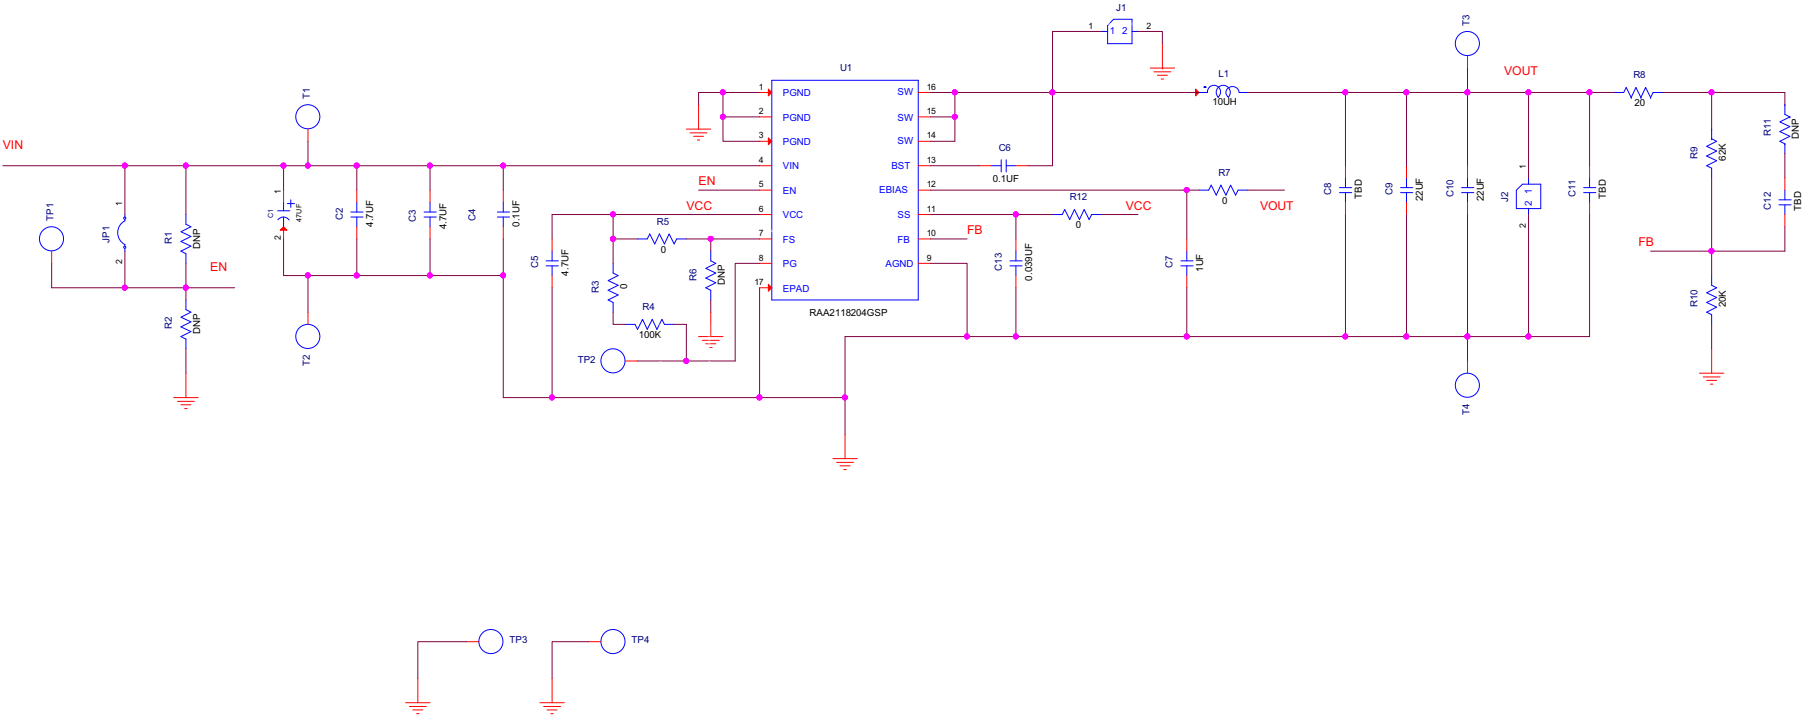


Figure 5. RTKA211820DE0010BU Schematic

## 2.2 Schematic Diagram

## 2.3 Bill of Materials

Qty	Reference Designator	Description	Manufacturer	Manufacturer Part Number
1	C13	CAP, SMD, 0603, 39000pF, 25V, 10%, X7R, RoHS	Panasonic	ECJ-1VB1E393K
2	C9, C10	CAP, SMD, 1210, 22 $\mu$ F, 16V, 10%, X7R, RoHS	Murata	GRM32ER71C226KE18L
1	C7	CAP, SMD, 0603, 1.0 $\mu$ F, 16V, 10%, X7R, RoHS	TDK	C1608X7R1C105K
1	C6	CAP, SMD, 0603, 0.1 $\mu$ F, 16V, 10%, X7R, RoHS	Murata	GCM188R71C104KA37D
1	C5	CAP, SMD, 0603, 4.7 $\mu$ F, 10V, 10%, X7S, RoHS	Murata	GRM188C71A475KE11D
1	C4	CAP, SMD, 0603, 0.1 $\mu$ F, 100V, 10%, X7R, RoHS	Murata	GRM188R72A104KA35J
2	C2, C3	CAP-AEC-Q200, SMD, 1210, 4.7 $\mu$ F, 100V, 10%, X7R, RoHS	TDK	CNA6P1X7R2A475K250AE
1	L1	COIL-PWR INDUCTOR, SMD, 6.6 $\times$ 6.4mm, 10 $\mu$ H, 20%, 7.6A, RoHS	Würth Electronics	74439346100
4	T1, T2, T3, T4	CONN-DBL TURRET, TH, 0.218 $\times$ 0.078 PCB MNT, TIN/BRASS, RoHS	Keystone	1502-1
2	J1, J2	CONN-BRD-BRD, 1 $\times$ 2, TH, SOCKET, 1 $\times$ 64 STRIP, 2.54mm, ST	Mill-Max	310-43-164-41-001000
2	TP3, TP4	CONN-MINI TEST PT, VERTICAL, BLK, RoHS	Keystone	5001
2	TP1, TP2	CONN-MINI TEST POINT, VERTICAL, WHITE, RoHS	Keystone	5002
1	JP1	CONN-HEADER, 1 $\times$ 2, RETENTIVE, 2.54mm, 0.230 $\times$ 0.120, RoHS	BERG/FCI	69190-202HLF
1	R10	RES, SMD, 0603, 20k $\Omega$ , 1/10W, 1%, TF, RoHS	Various	Various
1	R9	RES-AEC-Q200, SMD, 0603, 62K, 1/10W, 1%, RoHS	Panasonic	ERJ-3EKF6202V
1	R8	RES-AEC-Q200, SMD, 0603, 20 $\Omega$ , 1/10W, 1%, TF, RoHS	Panasonic	ERJ-3EKF20R0V
4	R3, R5, R7, R12	RES, SMD, 0603, 0 $\Omega$ , 1/10W, TF, RoHS	Various	Various
1	R4	RES, SMD, 0603, 100k $\Omega$ , 1/10W, 1%, TF, RoHS	Various	Various
1	U1	IC-80V 2A PWM SWITCHING REGULATOR, 16P, HTSSOP, RoHS	Renesas	RAA211820GNP#HA0
0	C1	CAP, SMD, 12 $\times$ 10, 47 $\mu$ F, 100V, 20%, ALUM.ELEC., RoHS	Vishay	MAL214699904E3
0	C8, C11, C12, R1, R2, R6, R11	Do Not Populate	N/A	N/A

## 2.4 Board Layout

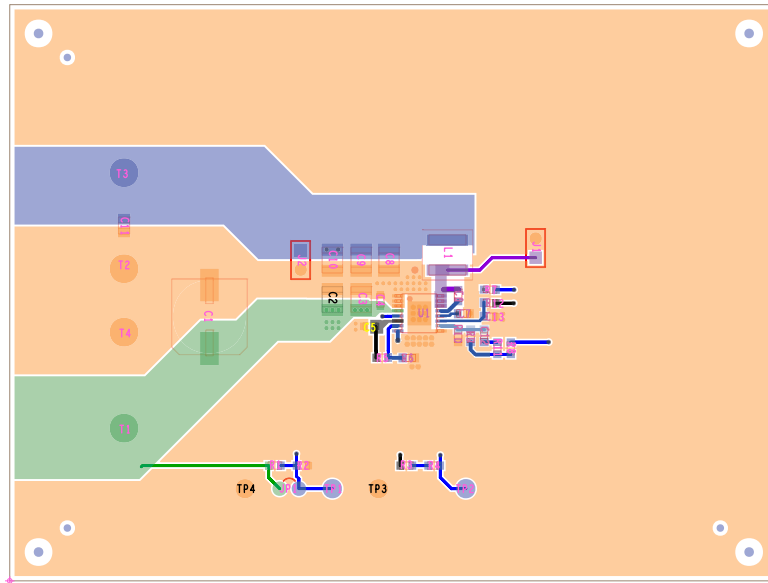


Figure 6. Top Layer

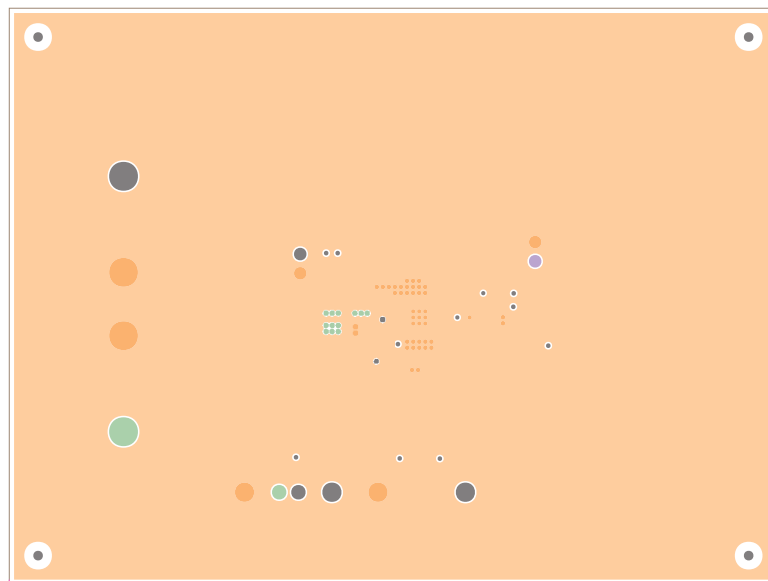


Figure 7. Second Layer

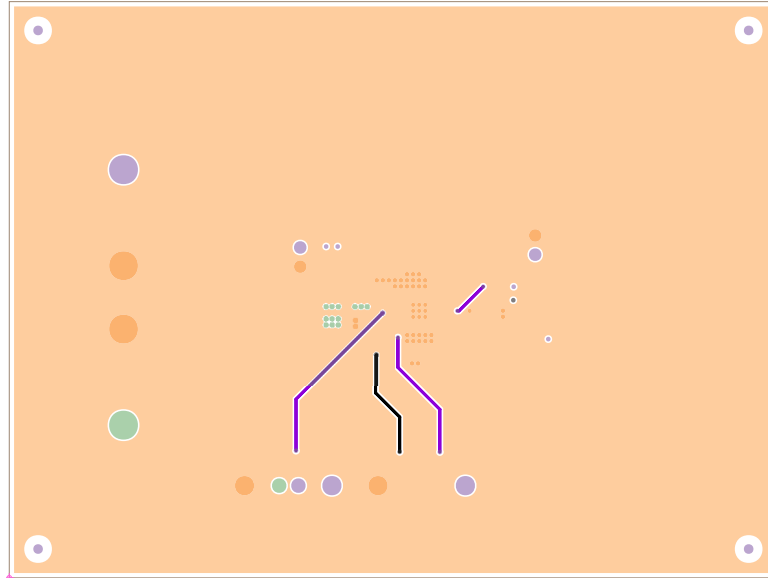


Figure 8. Third Layer

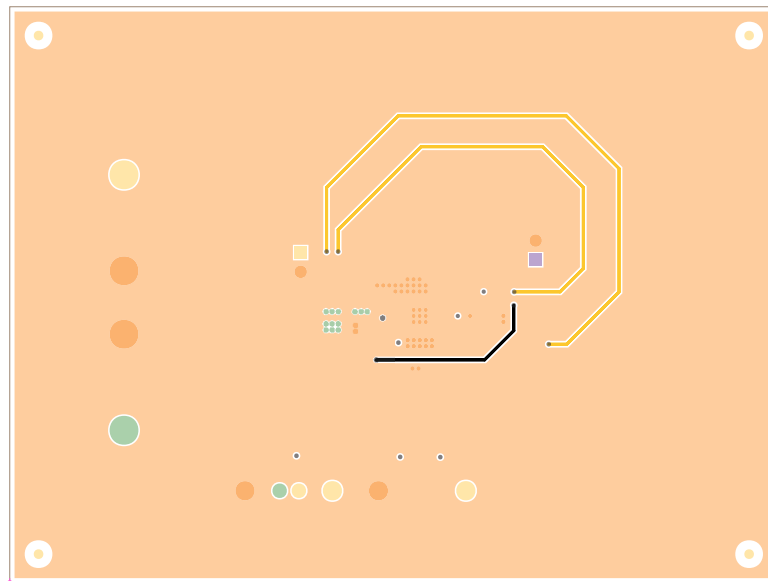


Figure 9. Fourth Layer



### 3. Typical Performance Graphs

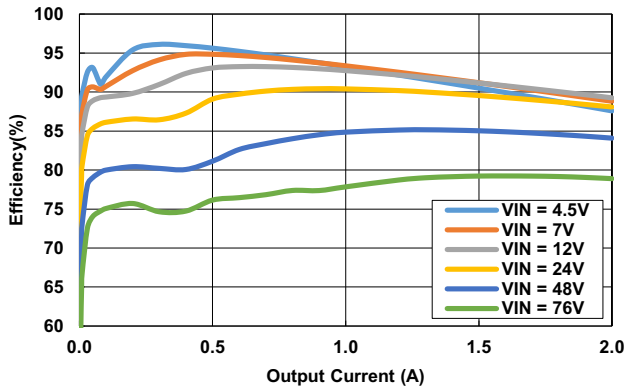


Figure 10. Efficiency vs Load

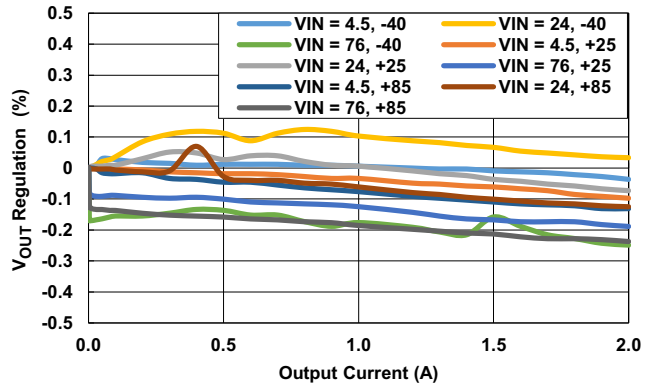


Figure 11. Load Regulation

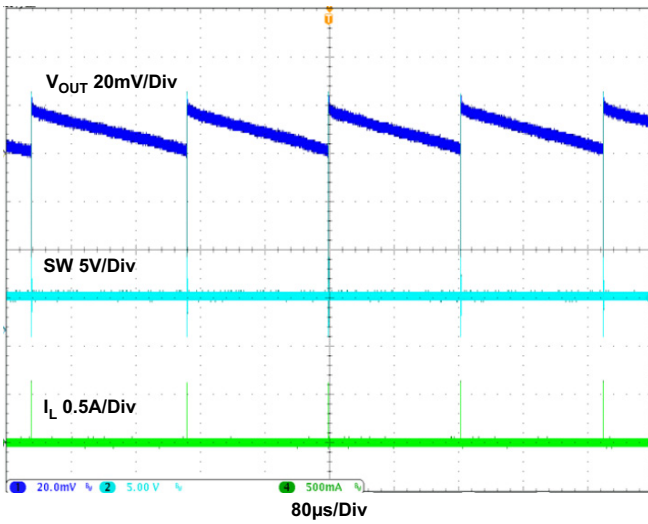


Figure 12. Output Ripple at No Load

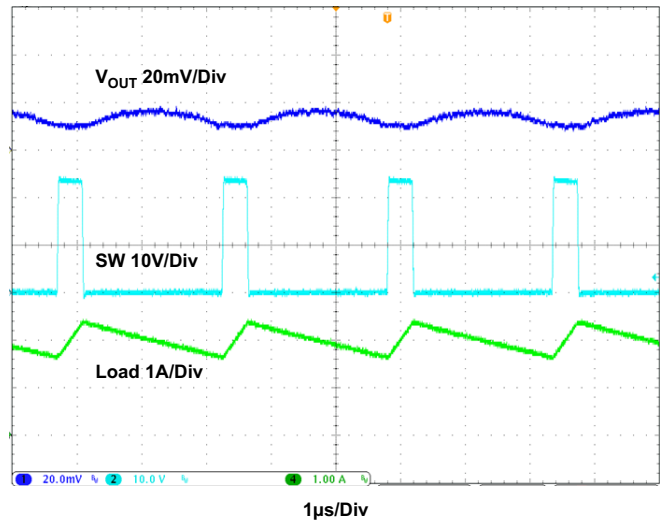


Figure 13. Output Ripple at 2A Load

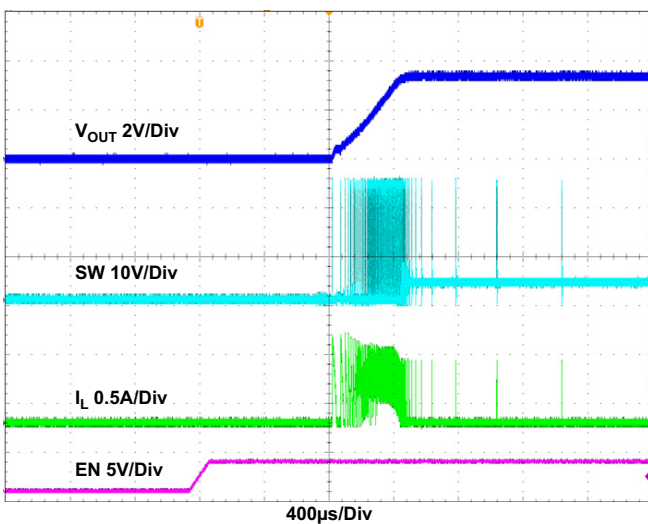


Figure 14. Start up by EN with No Load

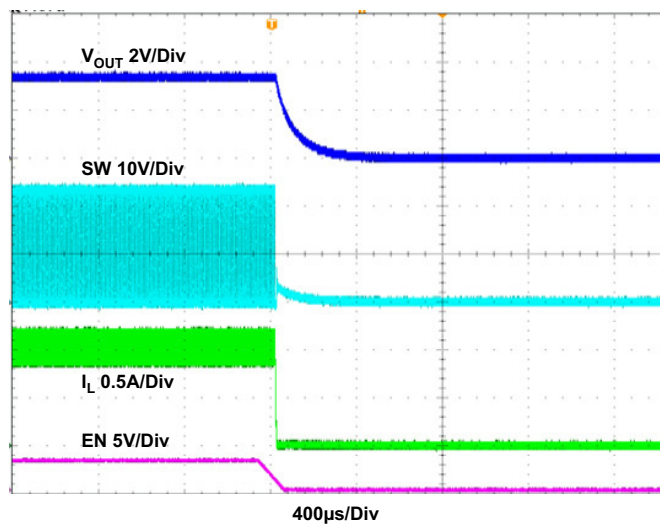


Figure 15. Shutdown by EN with 2A Load

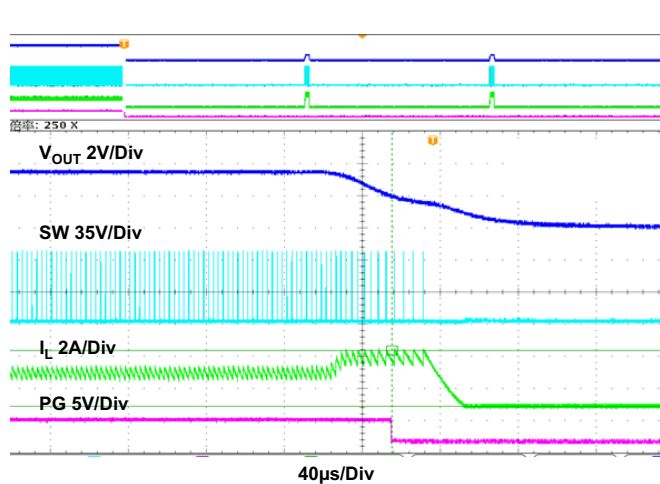


Figure 16. Overcurrent Protection

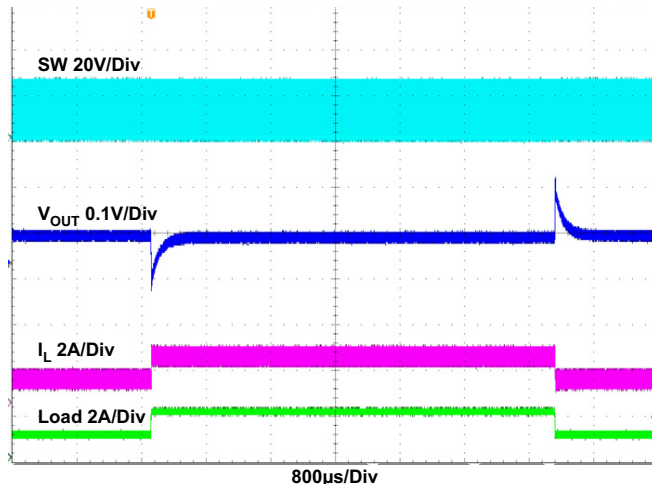


Figure 17. Load Transient 1A to 2A to 1A

## 4. Ordering Information

Part Number	Description
RTKA211820DE0010BU	RAA211820 (HTSSOP version) evaluation board

## 5. Revision History

Revision	Date	Description
1.00	Jul 1, 2022	Initial release