Two vertical bars on the left side of the page: a yellow one on top and a green one below it.

# VisionSOM-8Mmini Datasheet and Pinout

Rev. 20211129125426


Source URL: [http://wiki.somlabs.com/index.php/VisionSOM-8Mmini\\_Datasheet\\_and\\_Pinout](http://wiki.somlabs.com/index.php/VisionSOM-8Mmini_Datasheet_and_Pinout)

## Table of Contents

|                                       |    |
|---------------------------------------|----|
| <b>General description</b> .....      | 1  |
| Applications .....                    | 1  |
| <b>Features</b> .....                 | 3  |
| <b>Pictures of SOM versions</b> ..... | 4  |
| <b>Ordering info</b> .....            | 5  |
| <b>Block Diagram</b> .....            | 6  |
| <b>Operating ranges</b> .....         | 7  |
| <b>Electrical parameters</b> .....    | 8  |
| <b>SoM pinout</b> .....               | 9  |
| <b>Dimensions</b> .....               | 15 |

# VisionSOM-8Mmini Datasheet and Pinout

## General description

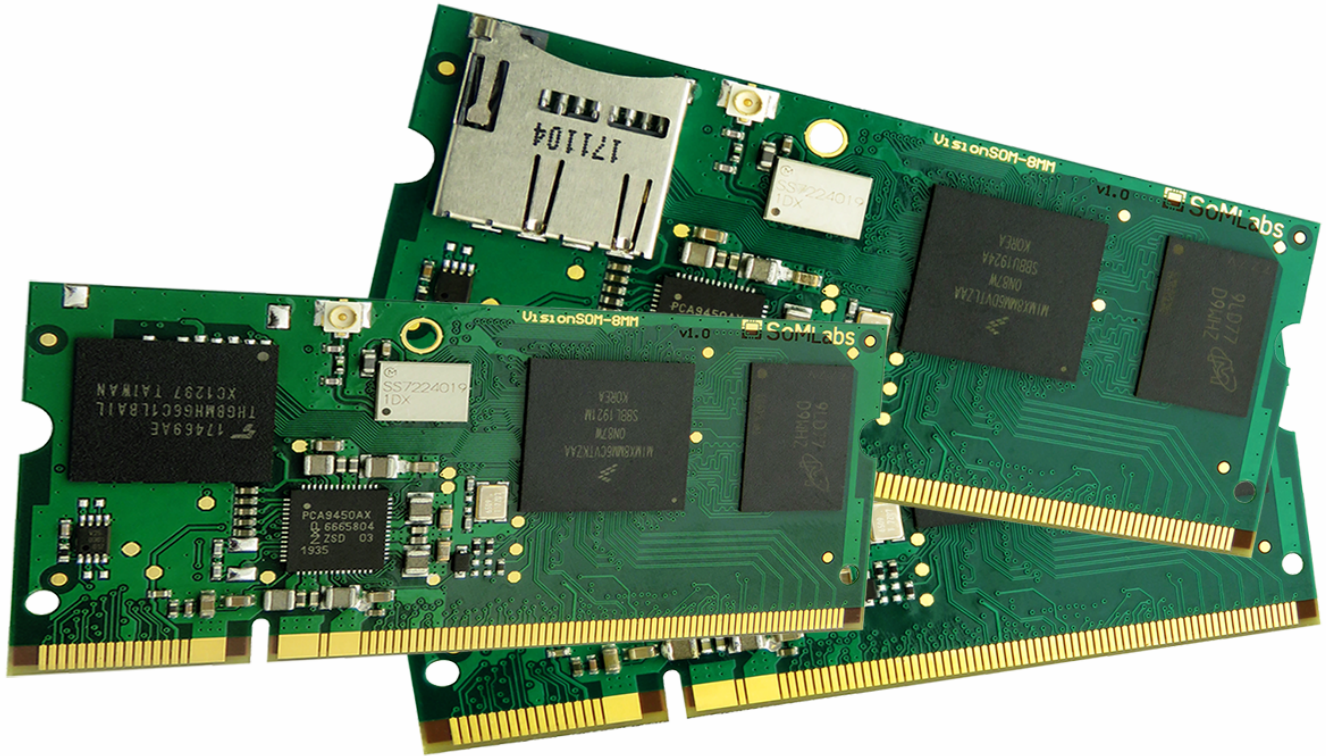

The VisionSOM-8Mmini family is a SODIMM-sized SoM based on the NXP quad core i.MX8M mini application processor which features an advanced implementation of a single or four ARM Cortex-A53 cores (at speed up to 1,8GHz) and ARM Cortex-M4 core (at speed up to 400MHz) as well as a 2D (HD1080p60) and 3D Graphics Processing Unit (GPU) Open GL 2.0 ES compatible and Video Processing Unit (VPU) with D1080p60 H.264 and HD1080p60 H.265 capabilities.

The VisionSOM-8Mmini is a multimedia and video oriented, highly integrated SoM (System on Module) featuring high computation power and 802.11b/g/n Wi-Fi and Bluetooth v5.1 connectivity. The option of integrated, fully certified Wi-Fi and Bluetooth module simplifies the carrier board design and is ideally suited for wireless application. The VisionSOM-8Mmini provides a variety memory configuration including flexible range of LPDDR4, eMMC and SD memory card that meets our customers requirements.

The SoM supports connections to a variety of interfaces: two high-speed USB on-the-go with PHY, single Ethernet 1Gbit, audio, display with touch panel and MIPI-DSI interface and serial communication interfaces. In addition, the system supports industrial grade embedded applications.

SoMLabs also provides a complete hardware and software development board for the SoM in the form of a carrier board and optional TFT display and touch panel.

## Applications



- Human-machine Interfaces (HMI)
- IP Cameras

- Video Stream Servers
- Home Appliances
- Home Automation - Smart Home
- Machine vision equipment
- Robotics
- IoT gateways
- Residential gateways
- Industrial embedded Linux computer
- Smart grid infrastructure
- Point-of-sales (POS) terminals
- Cash Register
- Fitness/outdoor equipment

## Features

- Powered by quad core NXP i.MX8Mmini application processor
- Quad ARM Cortex-A53 core at speed up to 1,8GHz
- ARM Cortex-M4 core at speed up to 400MHz
- Up to 4GB DRAM LPDDR4
- Up to 32GB eMMC memory or uSD memory card
- Optional Murata 802.11b/g/n Wi-Fi and Bluetooth v5.1
- Power-efficient and cost-optimized solution
- Ideal for industrial IoT and embedded applications
- Integrated security features

## Pictures of SOM versions
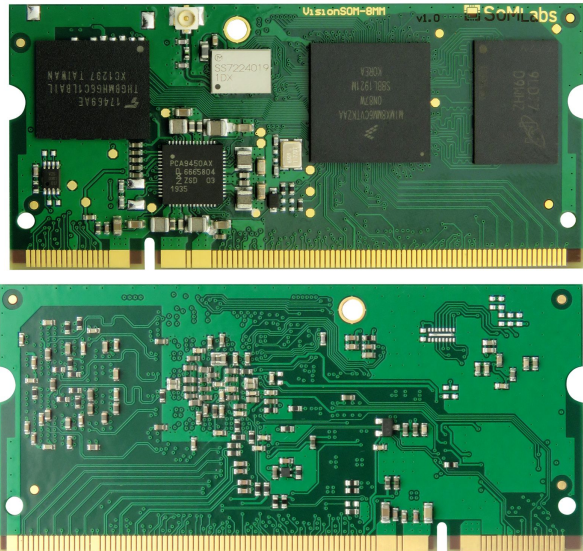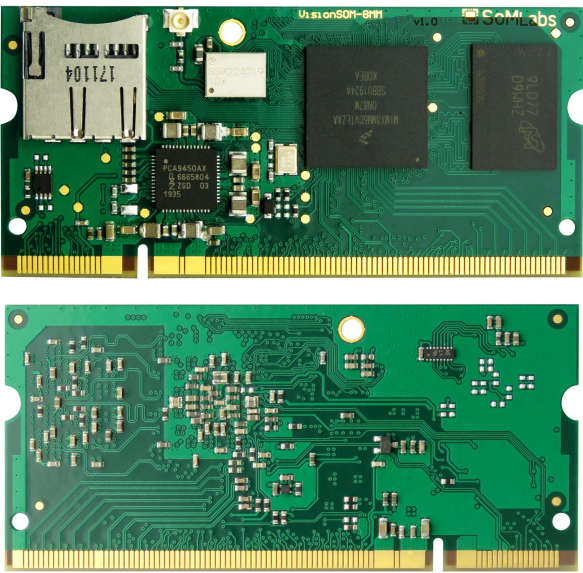
| Version  | Photo  |
|----------|--|
| eMMC     |   |
| micro-SD |  |


WiFi/BT module is available for all memory variants configurations.

## Ordering info

### SLSNNCpuType\_Clock\_RamSize\_FlashSize\_SF\_TEMP

|           |  |
|-----------|--|
| SLS       | Product type<br>SLS - System on Module   |
| N         | SOM Name<br>2 - High Performance VisionSOM SODIMM200 module  |
| N         | CPU Family<br>3 - i.MX 8M mini   |
| CpuType   | CPU Type<br>X8MMQC - i.MX 8M mini Quad Core  |
| Clock     | CPU Clock Speed<br>1600C - 1.6GHz (Industrial temperature range)<br>1800C - 1.8GHz (Commercial temperature range)            |
| RamSize   | LPDDR4 RAM Size<br>01GR - 1024MB<br>02GR - 2048MB<br>08GR - 4096MB   |
| FlashSize | eMMC Memory Size<br>04GE - 4GB eMMC<br>08GE - 8GB eMMC<br>16GE - 16GB eMMC<br>32GE - 32GB eMMC                               |
| SF        | Special Features<br>0SF - No Special Features<br>1WB - Built-in 802.11b/g/n Wi-Fi and Bluetooth v5.1+EDR Module              |
| TEMP      | Operating Temperature<br>C - Consumer: 0 to +70 C<br>E - Industrial with Wi-Fi: -25 to +70 C<br>I - Industrial: -40 to +85 C |

## Block Diagram

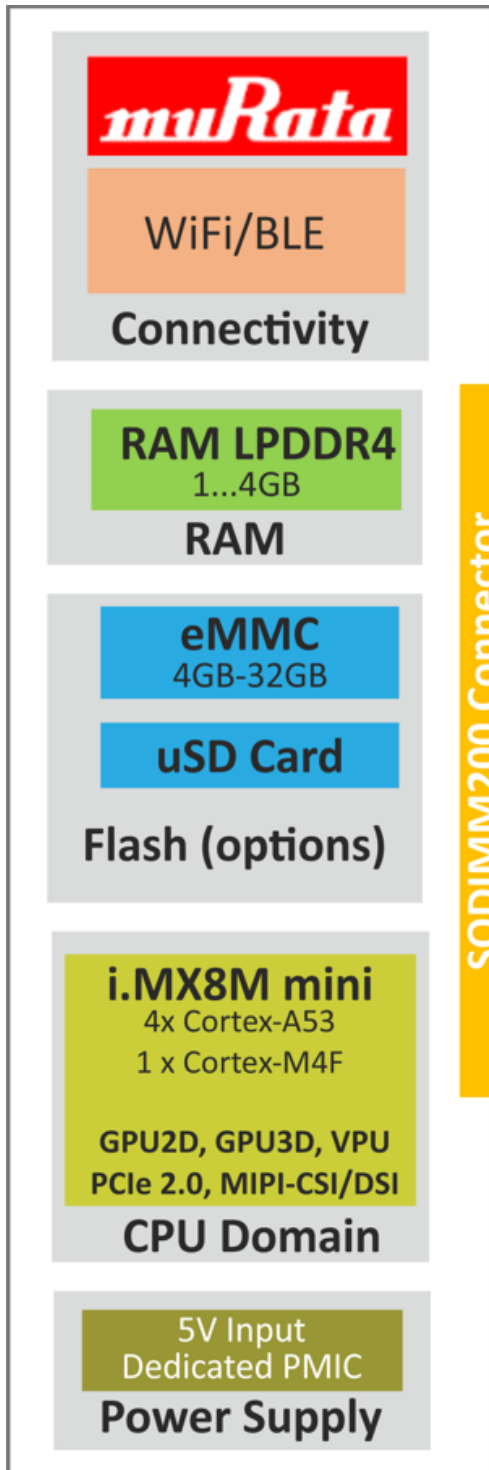



## Operating ranges

| Parameter                            | Value     | Unit | Comment                           |
|--------------------------------------|-----------|------|-----------------------------------|
| Power Supply                         | 5.0       | V    | Connected to VDD 5V SODIMM pins   |
| Max. input GPIO voltage              | 1.8/3.3   | V    | -                                 |
| Environment temperature <sup>1</sup> | -40...+85 | °C   | Industrial range w/o WiFi module  |
|                                      | -30...+70 |      | Industrial range with WiFi module |
|                                      | 0...+70   |      | Consumer range                    |

Note:

1. Maximum MPU junction temperature is +105°C.
2. Junction temperature determines MPU lifetime. Details: NXP Application Note [i.MX8MMINI Product Lifetime Usage, Rev. 0, June 2019](#) or newer.

## Electrical parameters

| SOM signal name  | Parameter   | Value |      |      | Unit |
|------------------|---|-------|------|------|------|
|                  |   | Min.  | Typ. | Max. |      |
| VDD-5V           | Supply Voltage (Input)                            | 3.9   | 5.0  | 5.5  | V    |
| VDD-1V8          | Output powers supply for external 1.8V accesories | -     | -    | 0.5  | A    |
| VDD-3V3          | Output powers supply for external 3.3V accesories | -     | -    | 0.5  | A    |
| VDD-3V3-SW       | Switched power supply output voltage              | -     | 3.3  | -    | V    |
| $I_{VDD-3V3-SW}$ | Switched power supply output current              | -     | -    | 0.25 | A    |
| VGPI0 @1V8       | GPIO Input Voltage                                | 0     | -    | 2.15 | V    |
| VGPI0 @3V3       | GPIO Input Voltage                                | 0     | -    | 3.6  | V    |
| $V_{USB\_VBUS}$  | USB VBUS Input Voltage                            | 0     | -    | 3.6  | V    |

### Notes:

1. Excluding external load connected to +3.3VOUT lines.
2. Applying the maximum voltage 3.6V results in shorten lifetime. Recommended value is smaller than 3.45V.

## SoM pinout

### Important notes

1. Detail pin configurations description you can find, edit and arrange in dedicated MEX file (with free "iMX PinTool" configurational tool).

| SOM pin number | Default function | GPIO       | Ball number FCBGA486 | Notes  |
|----------------|------------------|------------|----------------------|--|
| 1              | GND              | -          | -                    | -  |
| 2              | GND              | -          | -                    | -  |
| 3              | SD1-DQS          | GPIO2_IO11 | R24                  | 1.8/3.3V IO voltage standard (controlled by SDIO-VSELECT)                      |
| 4              | JTAG-TRST        | -          | C27                  | JTAG interface<br>3.3V IO voltage standard                                     |
| 5              | SD1-WP           | GPIO2_IO10 | R23                  | 1.8/3.3V IO voltage standard (controlled by SDIO-VSELECT)                      |
| 6              | JTAG-TDO         | -          | E26                  | JTAG interface<br>3.3V IO voltage standard                                     |
| 7              | SD1-DATA7        | GPIO2_IO09 | W26                  | 1.8/3.3V IO voltage standard (controlled by SDIO-VSELECT)                      |
| 8              | JTAG-TDI         | -          | E27                  | JTAG interface<br>3.3V IO voltage standard                                     |
| 9              | SD1-DATA6        | GPIO2_IO08 | W27                  | 1.8/3.3V IO voltage standard (controlled by SDIO-VSELECT)                      |
| 10             | JTAG-TMS         | -          | F27                  | JTAG interface<br>3.3V IO voltage standard                                     |
| 11             | SD1-DATA5        | GPIO2_IO07 | U26                  | 1.8/3.3V IO voltage standard (controlled by SDIO-VSELECT)                      |
| 12             | JTAG-TCK         | -          | F26                  | JTAG interface, by default pulled down with 10kOhm<br>3.3V IO voltage standard |
| 13             | SD1-DATA4        | GPIO2_IO06 | U27                  | 1.8/3.3V IO voltage standard (controlled by SDIO-VSELECT)                      |
| 14             | BOOT-RECOVERY    | -          |                      | System, single line for setting BOOT0/BOOT1 to 1/0<br>3.3V IO voltage standard |
| 15             | SD1-DATA1        | GPIO2_IO03 | Y26                  | 1.8/3.3V IO voltage standard (controlled by SDIO-VSELECT)                      |
| 16             | POR-B            | -          | B24                  | System<br>3.3V IO voltage standard   |
| 17             | SD1-DATA0        | GPIO2_IO02 | Y27                  | 1.8/3.3V IO voltage standard (controlled by SDIO-VSELECT)                      |
| 18             | PWR-ON           | -          | A25                  | System<br>3.3V IO voltage standard   |
| 19             | GND              | -          | -                    | -  |
| 20             | RESET-IN         | -          | -                    | System, connected to PMIC reset circuit<br>3.3V IO voltage standard            |
| 21             | SD1-CLK          | GPIO2_IO00 | V26                  | Internal Flash/SD<br>1.8/3.3 IO voltage standard (controlled by SDIO-VSELECT)  |
| 22             | GND              | -          | -                    | -  |

|    |               |            |     |   |
|----|---------------|------------|-----|---|
| 23 | SD1-CMD       | GPIO2_IO01 | V27 | Internal Flash/SD<br>1.8/3.3 IO voltage standard (controlled by SDIO-VSELECT) |
| 24 | NVCC-SNVS-1V8 | -          | -   | -   |
| 25 | SD1-DATA3     | GPIO2_IO05 | T26 | Internal Flash/SD<br>1.8/3.3 IO voltage standard (controlled by SDIO-VSELECT) |
| 26 | GND           | -          | -   | -   |
| 27 | SD1-DATA2     | GPIO2_IO04 | T27 | Internal Flash/SD<br>1.8/3.3 IO voltage standard (controlled by SDIO-VSELECT) |
| 28 | -             | -          | -   | -   |
| 29 | NVCC-SDIO     | -          | V20 | Power supply of SDIO interface 1.8/3.3V (controlled by SDIO-VSELECT)          |
| 30 | -             | -          | -   | -   |
| 31 | -             | -          | -   | -   |
| 32 | -             | -          | -   | -   |
| 33 | VDD-1V8       | -          | -   | 1.8V Output for external accesories   |
| 34 | VDD-1V8       | -          | -   | 1.8V Output for external accesories   |
| 35 | VDD-1V8       | -          | -   | 1.8V Output for external accesories   |
| 36 | VDD-1V8       | -          | -   | 1.8V Output for external accesories   |
| 37 | VDD-1V8       | -          | -   | 1.8V Output for external accesories   |
| 38 | VDD-1V8       | -          | -   | 1.8V Output for external accesories   |
| 39 | VDD-1V8       | -          | -   | 1.8V Output for external accesories   |
| 40 | VDD-1V8       | -          | -   | 1.8V Output for external accesories   |
| 41 | VDD-5V        | -          | -   | External 5V input   |
| 42 | VDD-5V        | -          | -   | External 5V input   |
| 43 | VDD-5V        | -          | -   | External 5V input   |
| 44 | VDD-5V        | -          | -   | External 5V input   |
| 45 | VDD-5V        | -          | -   | External 5V input   |
| 46 | VDD-5V        | -          | -   | External 5V input   |
| 47 | VDD-5V        | -          | -   | External 5V input   |
| 48 | VDD-5V        | -          | -   | External 5V input   |
| 49 | VDD-5V        | -          | -   | External 5V input   |
| 50 | VDD-5V        | -          | -   | External 5V input   |
| 51 | -             | -          | -   | -   |
| 52 | -             | -          | -   | -   |
| 53 | VDD-3V3       | -          | -   | 3.3V Output for external accesories   |
| 54 | VDD-3V3       | -          | -   | 3.3V Output for external accesories   |
| 55 | VDD-3V3       | -          | -   | 3.3V Output for external accesories   |
| 56 | VDD-3V3       | -          | -   | 3.3V Output for external accesories   |
| 57 | VDD-3V3       | -          | -   | 3.3V Output for external accesories   |
| 58 | VDD-3V3       | -          | -   | 3.3V Output for external accesories   |
| 59 | VDD-3V3       | -          | -   | 3.3V Output for external accesories   |
| 60 | VDD-3V3       | -          | -   | 3.3V Output for external accesories   |
| 61 | -             | -          | -   | -   |
| 62 | -             | -          | -   | -   |
| 63 | UART4-TXD     | GPIO5_IO29 | F18 | 3.3V IO voltage standard  |

|     |                |            |      |   |
|-----|----------------|------------|------|---|
| 64  | VDD-3V3-SW     | -          | -    | Switched power supply output for external accesories<br>Internally controlled by GPIO1_IO05 |
| 65  | UART4-RXD      | GPIO5_IO28 | F19  | 3.3V IO voltage standard  |
| 66  | -              | -          | -    | -   |
| 67  | GND            | -          | -    | -   |
| 68  | SYS-LED        | GPIO1_IO04 | AG12 | 3.3V IO voltage standard  |
| 69  | ENET-CLK-25MHz | GPIO1_IO00 | AG14 | 1.8V IO voltage standard  |
| 70  | GND            | -          | -    | -   |
| 71  | ENET-INT       | GPIO1_IO08 | AG10 | 1.8V IO voltage standard  |
| 72  | GPIO4-IO04     | GPIO4_IO04 | AG17 | 3.3V IO voltage standard  |
| 73  | GND            | -          | -    | -   |
| 74  | GPIO4-IO05     | GPIO4_IO05 | AF17 | 3.3V IO voltage standard  |
| 75  | ENET1-MDIO     | GPIO1_IO17 | AB27 | 1.8V IO voltage standard  |
| 76  | GPIO4-IO00     | GPIO4_IO00 | AG16 | 3.3V IO voltage standard  |
| 77  | ENET1-MDC      | GPIO1_IO16 | AC27 | 1.8V IO voltage standard  |
| 78  | GPIO4-IO01     | GPIO4_IO01 | AF16 | 3.3V IO voltage standard  |
| 79  | GND            | -          | -    | -   |
| 80  | GPIO4-IO02     | GPIO4_IO02 | AG15 | 3.3V IO voltage standard  |
| 81  | ENET1-RXC      | GPIO1_IO25 | AE26 | 1.8V IO voltage standard  |
| 82  | GPIO4-IO03     | GPIO4_IO03 | AF15 | 3.3V IO voltage standard  |
| 83  | ENET1-RX-CTL   | GPIO1_IO24 | AF27 | 1.8V IO voltage standard  |
| 84  | GPIO4-IO07     | GPIO4_IO07 | AF18 | 3.3V IO voltage standard  |
| 85  | ENET1-RXD0     | GPIO1_IO26 | AE27 | 1.8V IO voltage standard  |
| 86  | GPIO4-IO06     | GPIO4_IO06 | AG18 | 3.3V IO voltage standard  |
| 87  | ENET1-RXD1     | GPIO1_IO27 | AD27 | 1.8V IO voltage standard  |
| 88  | GPIO4-IO09     | GPIO4_IO09 | AF19 | 3.3V IO voltage standard  |
| 89  | ENET1-RXD2     | GPIO1_IO28 | AD26 | 1.8V IO voltage standard  |
| 90  | GPIO4-IO08     | GPIO4_IO08 | AG19 | 3.3V IO voltage standard  |
| 91  | ENET1-RXD3     | GPIO1_IO29 | AC26 | 1.8V IO voltage standard  |
| 92  | GPIO4-IO15     | GPIO4_IO15 | AF21 | 3.3V IO voltage standard  |
| 93  | GND            | -          | -    | -   |
| 94  | GPIO4-IO16     | GPIO4_IO16 | AG22 | 3.3V IO voltage standard  |
| 95  | ENET1-TX-CTL   | GPIO1_IO22 | AF24 | 1.8V IO voltage standard  |
| 96  | GPIO4-IO18     | GPIO4_IO18 | AG23 | 3.3V IO voltage standard  |
| 97  | ENET1-TXC      | GPIO1_IO23 | AG24 | 1.8V IO voltage standard  |
| 98  | GPIO4-IO19     | GPIO4_IO19 | AF23 | 3.3V IO voltage standard  |
| 99  | ENET1-TXD3     | GPIO1_IO18 | AF25 | 1.8V IO voltage standard  |
| 100 | GPIO4-IO17     | GPIO4_IO17 | AF22 | 3.3V IO voltage standard  |
| 101 | ENET1-TXD2     | GPIO1_IO19 | AG25 | 1.8V IO voltage standard  |
| 102 | GPIO4-IO14     | GPIO4_IO14 | AG21 | 3.3V IO voltage standard  |
| 103 | ENET1-TXD1     | GPIO1_IO20 | AF26 | 1.8V IO voltage standard  |
| 104 | GPIO4-IO13     | GPIO4_IO13 | AF20 | 3.3V IO voltage standard  |
| 105 | ENET1-TXD0     | GPIO1_IO21 | AG26 | 1.8V IO voltage standard  |
| 106 | GPIO4-IO12     | GPIO4_IO12 | AG20 | 3.3V IO voltage standard  |
| 107 | GND            | -          | -    | -   |
| 108 | GPIO4-IO11     | GPIO4_IO11 | AC18 | 3.3V IO voltage standard  |

|     |            |            |      |                           |
|-----|------------|------------|------|---------------------------|
| 109 | USB2-ID    | -          | D23  | -                         |
| 110 | GPIO4-IO20 | GPIO4_IO20 | AB18 | 3.3V IO voltage standard  |
| 111 | USB2-Dp    | -          | B23  | Analog USB interface line |
| 112 | GPIO4-IO10 | GPIO4_IO10 | AB19 | 3.3V IO voltage standard  |
| 113 | USB2-Dn    | -          | A23  | Analog USB interface line |
| 114 | GND        | -          | -    | -                         |
| 115 | USB2-VBUS  | -          | F23  | Analog USB interface line |
| 116 | GPIO5-IO22 | GPIO5_IO22 | E14  | -                         |
| 117 | USB2-OC    | GPIO1_IO15 | AB9  | 1.8V IO voltage standard  |
| 118 | GPIO5-IO23 | GPIO5_IO23 | F13  | -                         |
| 119 | USB2-EN    | GPIO1_IO14 | AC9  | 1.8V IO voltage standard  |
| 120 | I2C3-SDA   | GPIO5_IO19 | F10  | -                         |
| 121 | GND        | -          | -    | -                         |
| 122 | I2C3-SCL   | GPIO5_IO18 | E10  | -                         |
| 123 | USB1-OC    | GPIO1_IO13 | AD9  | 1.8V IO voltage standard  |
| 124 | I2C2-SDA   | GPIO5_IO17 | D9   | -                         |
| 125 | USB1-EN    | GPIO1_IO12 | AB10 | 1.8V IO voltage standard  |
| 126 | I2C2-SCL   | GPIO5_IO16 | D10  | -                         |
| 127 | USB1-ID    | -          | D22  | -                         |
| 128 | I2C1-SDA   | GPIO5_IO15 | F9   | -                         |
| 129 | USB1-Dp    | -          | B22  | Analog USB interface line |
| 130 | I2C1-SCL   | GPIO5_IO14 | E9   | -                         |
| 131 | USB1-Dn    | -          | A22  | Analog USB interface line |
| 132 | GND        | -          | -    | -                         |
| 133 | USB1-VBUS  | -          | F22  | Analog USB interface line |
| 134 | SPI2_SS0   | GPIO5_IO13 | A6   | -                         |
| 135 | GND        | -          | -    | -                         |
| 136 | SPI2_MOSI  | GPIO5_IO11 | B8   | -                         |
| 137 | SPDIF-CLK  | GPIO5_IO05 | AF8  | -                         |
| 138 | SPI2_MISO  | GPIO5_IO12 | A8   | -                         |
| 139 | SPDIF-RX   | GPIO5_IO04 | AG9  | -                         |
| 140 | SPI2_CLK   | GPIO5_IO10 | E6   | -                         |
| 141 | SPDIF-TX   | GPIO5_IO03 | AF9  | -                         |
| 142 | SPI1_SS0   | GPIO5_IO09 | B6   | -                         |
| 143 | SAI3-MCLK  | GPIO5_IO02 | AD6  | -                         |
| 144 | SPI1_MOSI  | GPIO5_IO07 | B7   | -                         |
| 145 | SAI3-RXFS  | GPIO4_IO28 | AG8  | -                         |
| 146 | SPI1_MISO  | GPIO5_IO08 | A7   | -                         |
| 147 | SAI3-TXD   | GPIO5_IO01 | AF6  | -                         |
| 148 | SPI1_CLK   | GPIO5_IO06 | D6   | -                         |
| 149 | GND        | -          | -    | -                         |
| 150 | GND        | -          | -    | -                         |
| 151 | UART3-TXD  | GPIO5_IO27 | D18  | -                         |
| 152 | PCIE-CLK_N | -          | A21  | Capacitor separated line  |
| 153 | UART3-RXD  | GPIO5_IO26 | E18  | -                         |
| 154 | PCIE-CLK_P | -          | B21  | Capacitor separated line  |

|     |             |            |     |                          |
|-----|-------------|------------|-----|--------------------------|
| 155 | SAI3-TXC    | GPIO5_IO00 | AG6 | -                        |
| 156 | GND         | -          | -   | -                        |
| 157 | SAI3-TXFS   | GPIO4_IO31 | AC6 | -                        |
| 158 | PCIE-TXN_N  | -          | A20 | Capacitor separated line |
| 159 | GND         | -          | -   | -                        |
| 160 | PCIE-TXN_P  | -          | B20 | Capacitor separated line |
| 161 | UART2-TXD   | GPIO5_IO25 | E15 | -                        |
| 162 | GND         | -          | -   | -                        |
| 163 | UART2-RXD   | GPIO5_IO24 | F15 | -                        |
| 164 | PCIE-RXN_N  | -          | A19 | 100Ohm in series         |
| 165 | UART2-RTS   | GPIO4_IO30 | AF7 | -                        |
| 166 | PCIE-RXN_P  | -          | B19 | 100Ohm in series         |
| 167 | UART2-CTS   | GPIO4_IO29 | AG7 | -                        |
| 168 | GND         | -          | -   | -                        |
| 169 | GND         | -          | -   | -                        |
| 170 | GND         | -          | -   | -                        |
| 171 | DSI-DATA3_P | -          | B13 | Dedicated MIPI-DSI line  |
| 172 | CSI-DATA3_N | -          | A18 | Dedicated MIPI-CSI line  |
| 173 | DSI-DATA3_N | -          | A13 | Dedicated MIPI-DSI line  |
| 174 | CSI-DATA3_P | -          | B18 | Dedicated MIPI-CSI line  |
| 175 | GND         | -          | -   | -                        |
| 176 | GND         | -          | -   | -                        |
| 177 | DSI-DATA2_P | -          | B12 | Dedicated MIPI-DSI line  |
| 178 | CSI-DATA2_N | -          | A17 | Dedicated MIPI-CSI line  |
| 179 | DSI-DATA2_N | -          | A12 | Dedicated MIPI-DSI line  |
| 180 | CSI-DATA2_P | -          | B17 | Dedicated MIPI-CSI line  |
| 181 | GND         | -          | -   | -                        |
| 182 | GND         | -          | -   | -                        |
| 183 | DSI-CLK_P   | -          | B11 | Dedicated MIPI-DSI line  |
| 184 | CSI-CLK_N   | -          | A16 | Dedicated MIPI-CSI line  |
| 185 | DSI-CLK_N   | -          | A11 | Dedicated MIPI-DSI line  |
| 186 | CSI-CLK_P   | -          | B16 | Dedicated MIPI-CSI line  |
| 187 | GND         | -          | -   | -                        |
| 188 | GND         | -          | -   | -                        |
| 189 | DSI-DATA1_P | -          | B10 | Dedicated MIPI-DSI line  |
| 190 | CSI-DATA1_N | -          | A15 | Dedicated MIPI-CSI line  |
| 191 | DSI-DATA1_N | -          | A10 | Dedicated MIPI-DSI line  |
| 192 | CSI-DATA1_P | -          | B15 | Dedicated MIPI-CSI line  |
| 193 | GND         | -          | -   | -                        |
| 194 | GND         | -          | -   | -                        |
| 195 | DSI-DATA0_P | -          | B9  | Dedicated MIPI-DSI line  |
| 196 | CSI-DATA0_N | -          | A14 | Dedicated MIPI-CSI line  |
| 197 | DSI-DATA0_N | -          | A9  | Dedicated MIPI-DSI line  |
| 198 | CSI-DATA0_P | -          | B14 | Dedicated MIPI-CSI line  |
| 199 | GND         | -          | -   | -                        |
| 200 | GND         | -          | -   | -                        |

|   |              |            |      |   |
|---|--------------|------------|------|---|
| - | I2C4-SCL     | GPIO5_IO20 | D13  | Used to internal PMIC configuration                       |
| - | I2C4-SDA     | GPIO5_IO21 | E13  | Used to internal PMIC configuration                       |
| - | PMIC-INT     | GPIO1_IO01 | AF14 | Interrupt input from internal PMIC                        |
| - | WDOG-B       | GPIO1_IO02 | AG13 | Watchdog input in internal PMIC                           |
| - | SDIO-VSELECT | GPIO1_IO03 | AF13 | GPIO1_IO03/NVCC-SDIO voltage selection ("1"=1.8/"0"=3.3V) |
|   | VDD-3V3-EN   | GPIO1_IO05 | AF12 | GPIO1_IO05/On and off of VDD-3V3-SW                       |
|   | SD3-DATA0    | GPIO3_IO10 | M26  | Internal SD card/eMMC Flash data line (NAND_DATA04)       |
|   | SD3-DATA1    | GPIO3_IO11 | L26  | Internal SD card/eMMC Flash data line (NAND_DATA05)       |
|   | SD3-DATA2    | GPIO3_IO12 | K26  | Internal SD card/eMMC Flash data line (NAND_DATA06)       |
|   | SD3-DATA3    | GPIO3_IO13 | N26  | Internal SD card/eMMC Flash data line (NAND_DATA07)       |
|   | SD3-DATA4    | GPIO3_IO15 | N27  | Internal eMMC Flash data line (NAND_RE_B)                 |
|   | SD3-DATA5    | GPIO3_IO03 | M27  | Internal eMMC Flash data line (NAND_CE2_B)                |
|   | SD3-DATA6    | GPIO3_IO04 | L27  | Internal eMMC Flash data line (NAND_CE3_B)                |
|   | SD3-DATA7    | GPIO3_IO05 | K27  | Internal eMMC Flash data line (NAND_CLE)                  |
|   | SD3-CLK      | GPIO3_IO17 | R26  | Internal SD card/eMMC Flash data line (NAND_WE_B)         |
|   | SD3-CMD      | GPIO3_IO18 | R27  | Internal SD card/eMMC Flash data line (NAND_WP_B)         |
|   | SD3-DQS      | GPIO3_IO02 | P27  | Internal eMMC Flash data line (NAND_CE1_B)                |
|   | WLAN-ENABLE  | GPIO2_IO20 | AA27 | 1DX WiFi module line (GPIO2-IO20)                         |
|   | WLAN-H-WAKE  | GPIO2_IO12 | AA26 | 1DX WiFi module line (GPIO2-IO12)                         |
|   | SD2-CLK      | GPIO2_IO13 | W23  | 1DX WiFi module line                                      |
|   | SD2-CMD      | GPIO2_IO14 | W24  | 1DX WiFi module line                                      |
|   | SD2-DATA0    | GPIO2_IO15 | AB23 | 1DX WiFi module line                                      |
|   | SD2-DATA1    | GPIO2_IO16 | AB24 | 1DX WiFi module line                                      |
|   | SD2-DATA2    | GPIO2_IO17 | V24  | 1DX WiFi module line                                      |
|   | SD2-DATA3    | GPIO2_IO18 | V23  | 1DX WiFi module line                                      |
|   | BT-RTS       | GPIO4_IO24 | AD23 | 1DX Bluetooth module line                                 |
|   | BT-TXD       | GPIO4_IO21 | AC19 | 1DX Bluetooth module line                                 |
|   | BT-RXD       | GPIO4_IO22 | AB22 | 1DX Bluetooth module line                                 |
|   | BT-CTS       | GPIO4_IO23 | AC24 | 1DX Bluetooth module line                                 |
|   | BT-DEV-WAKE  | GPIO4_IO27 | AD19 | 1DX Bluetooth module line                                 |
|   | BT-HOST-WAKE | GPIO4_IO25 | AD22 | 1DX Bluetooth module line                                 |
|   | BT-REG-ON    | GPIO4_IO26 | AC22 | 1DX Bluetooth module line                                 |
|   | BT-PCM-OUT   | GPIO3_IO21 | AD18 | 1DX Bluetooth module line                                 |
|   | BT-PCM-CLK   | GPIO3_IO20 | AC15 | 1DX Bluetooth module line                                 |
|   | BT-PCM-IN    | GPIO3_IO24 | AC13 | 1DX Bluetooth module line                                 |
|   | BT-PCM-SYNC  | GPIO3_IO19 | AB15 | 1DX Bluetooth module line                                 |



## Dimensions

