

DATASHEET

Allani

SR4L069 • lamiiANT[®]



Features

- Antenna for 3G, 4G and 5G cellular applications
- High performance: DFI (Designed For Integration)
- Suitable for high volume manufacturing
- Supports Band 71 (617-698MHz)
- High Efficiency (which assists with PTCRB certification)

Contents

1.	Description	2
2.	Applications	2
3.	General data	2
4.	Part number	3
5.	RF characteristics	3
6.	RF performance	4
6.1.	Return loss	4
6.2.	VSWR	4
6.3.	Efficiency	5
6.4.	Antenna pattern	6
6.5.	Optimising antenna efficiency	13
7.	Antenna dimensions	14
8.	Schematic symbol and pin definition	15
9.	Host PCB footprint	15
10.	Electrical interface	16
10.1.	Transmission line	16
10.2.	Matching circuit	16
11.	Antenna integration guide	17
11.1.	Antenna placement	17
11.2.	Host PCB layout	18
11.3.	Host PCB clearance	18
12.	Reference board	19
12.1.	Reference board matching circuit	19
13.	Soldering	20
14.	Hazardous material regulation conformance	20
15.	Packaging	20
15.1.	Optimal storage conditions	20
15.2.	Tape characteristics	21
15.3.	Reel dimensions	22
15.4.	Box dimensions	22
15.5.	Bag properties	23
15.6.	Reel label information	23

1. Description

A SMD antenna for fitting onto a PCB. The antenna covers the most common 4G and 5G bands: B71 (617- 698MHz), LTE 700, GSM850, GSM900, DCS1800, PCS1900, WCDMA2100, LTE B7 (2500-2690MHz), LTE B40 (2300 – 2400MHz) and 5G B78 (3300-3800MHz).

2. Applications


- Telematics
- Network devices such as cellular routers
- Pico base-stations
- Remote monitoring
- POS (Point of Sale) terminals
- M2M (Machine to Machine)
- IoT (Internet of Things)
- CCTV (Closed Circuit TV) over cellular
- Drone communications

3. General data

FREQUENCY	617-824MHz 824-960MHz 1710-2170MHz 2300-2400MHz 2500-2690MHz 3300-3800MHz
POLARIZATION	Linear
OPERATING TEMPERATURE	-40°C to 140°C
ENVIRONMENTAL CONDITION TEST	ISO16750-4 5.1.1.1/5.1.2.1/5.3.2
IMPEDANCE WITH MATCHING	50 Ω
WEIGHT	<3.2g
ANTENNA TYPE	SMD
DIMENSIONS	45.0 x 10.0 x 3.3 (mm)

4. Part number

ALLANI
SR4L069

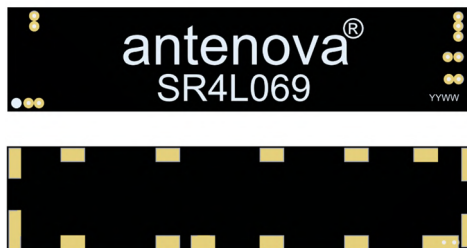

5. RF characteristics


	617-824MHZ	824-960MHZ	1710-2170MHZ
PEAK GAIN	-0.2dBi	1.6dB	4.1dBi
AVERAGE GAIN (LINEAR)	-3.5dBi	-2.6dBi	-1.8dBi
AVERAGE EFFICIENCY	45%	55%	66%
MAXIMUM RETURN LOSS	-5.0dB	-5.5dB	-8.0dB
MAXIMUM VSWR	3.6:1	3.3:1	2.3:1

	2300-2400MHZ	2500-2690MHZ	3300-3800MHZ
PEAK GAIN	3.4dBi	5.1dBi	5.4dBi
AVERAGE GAIN (LINEAR)	-2.4dBi	-1.9dBi	-2.5dBi
AVERAGE EFFICIENCY	57%	63%	55%
MAXIMUM RETURN LOSS	-8.5dB	-7.7dB	-8.0dB
MAXIMUM VSWR	2.2:1	2.4:1	2.3:1


All data measured on Antenna's evaluation PCB Part
No. SR4L069-EVB-2

6. RF performance


6.1. Return loss

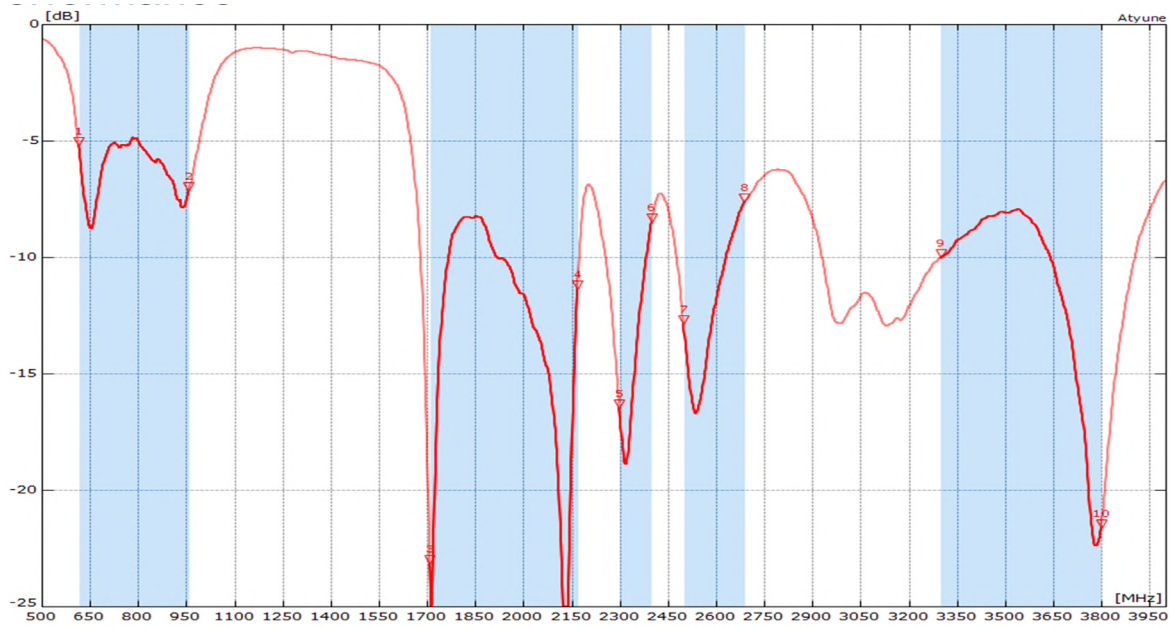

6.2. VSWR

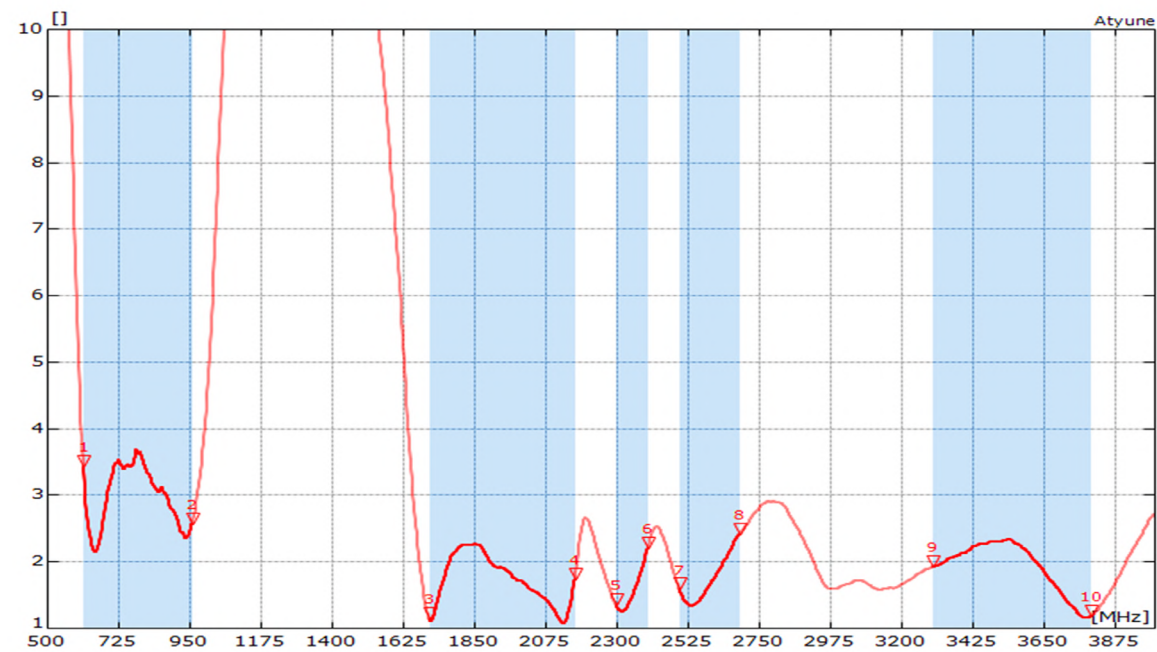


6.3. Efficiency

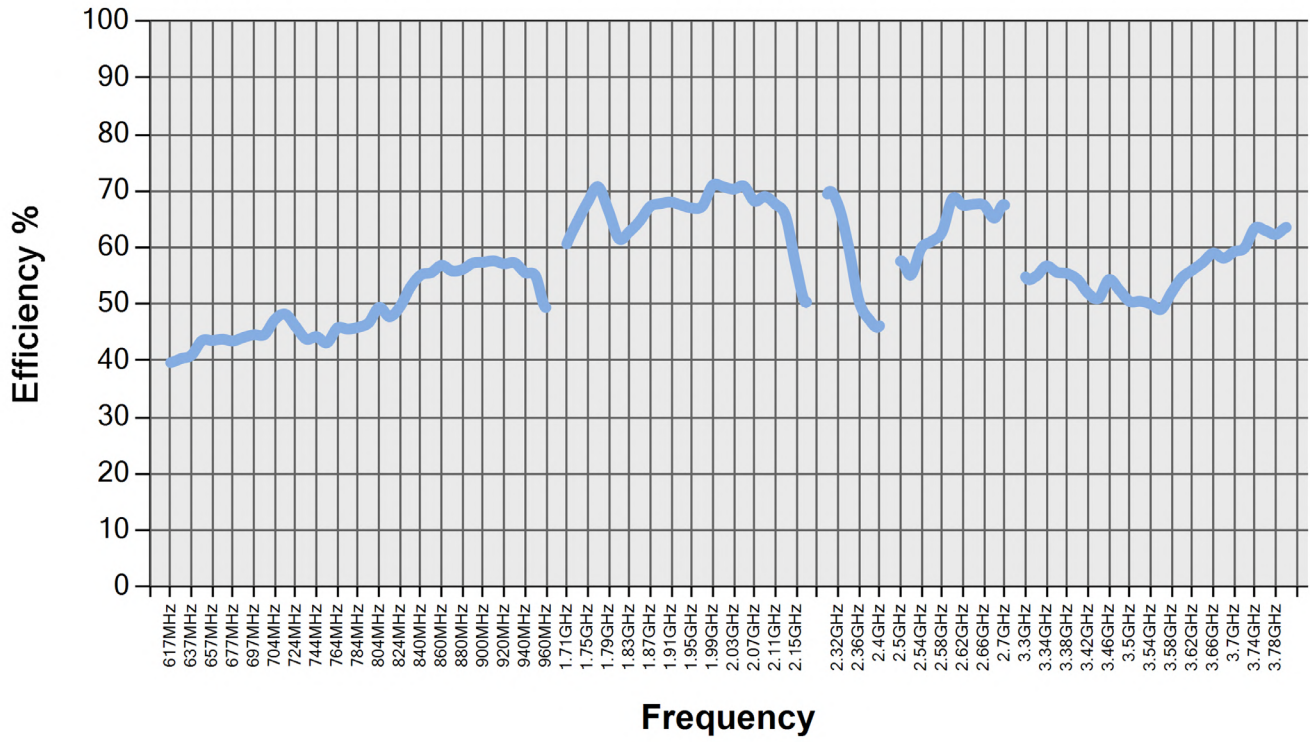


6.4. Antenna pattern

6.4.1. 617 MHz – 698 MHz


3D pattern at 657MHz

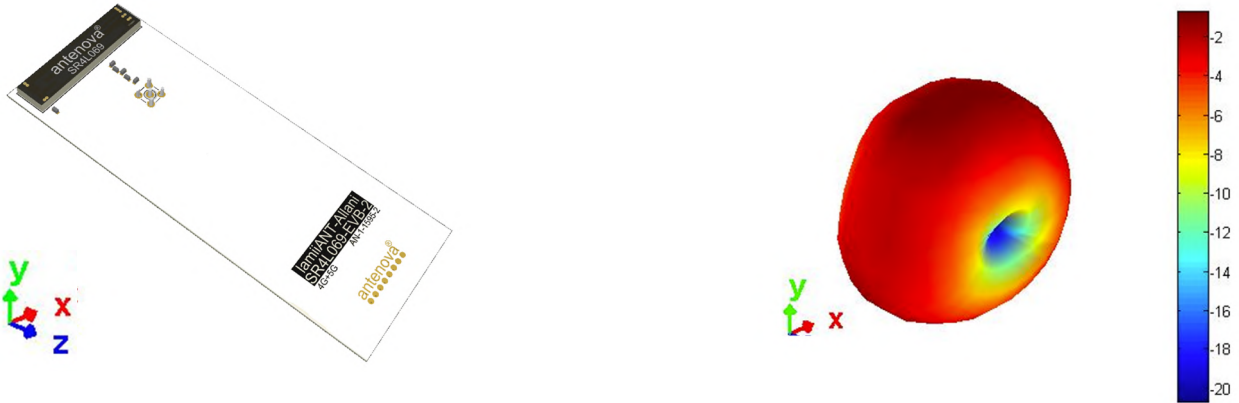


XY



XZ




YZ




— 657MHz

6.4.2. 698 MHz – 824 MHz


3D pattern at 734MHz

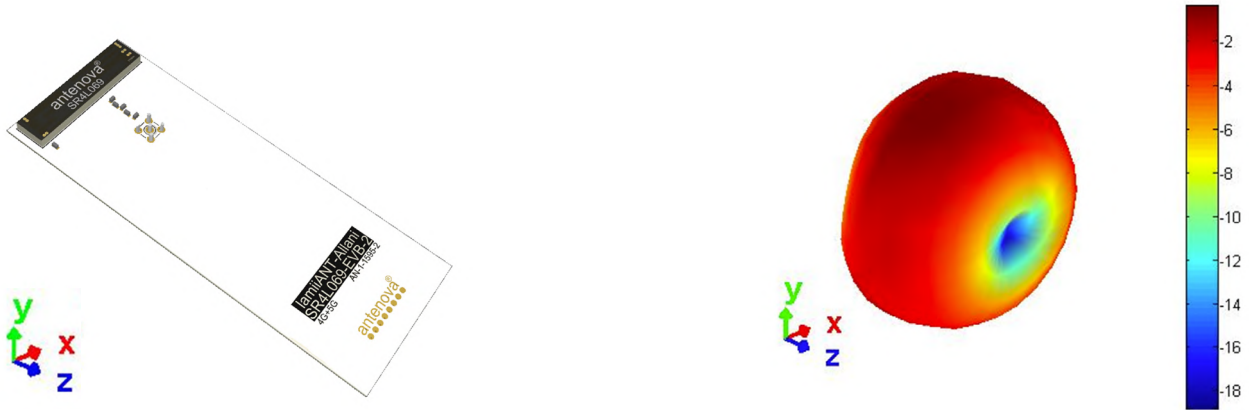


XY



XZ




YZ




— 734MHz

6.4.3. 824 MHz – 960 MHz


3D pattern at 900MHz

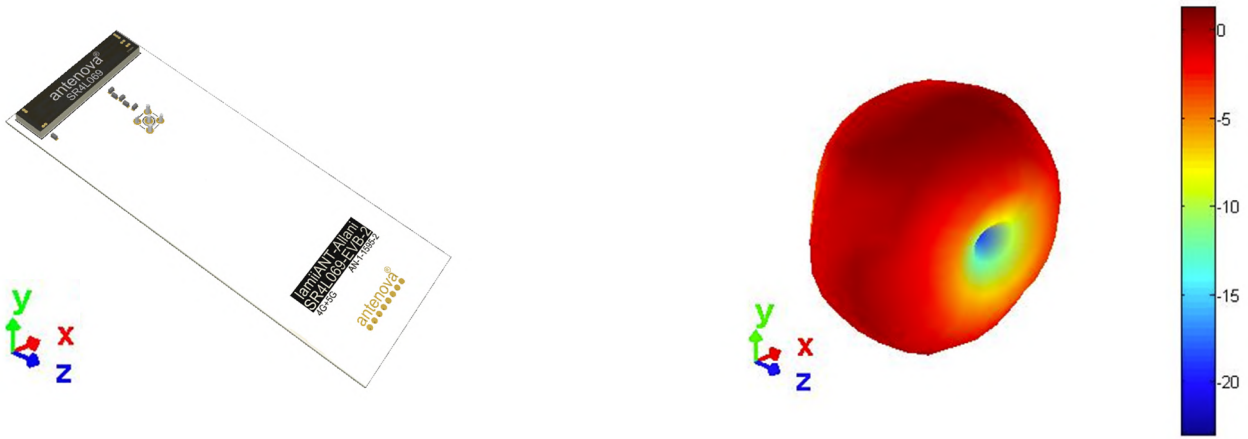


XY



XZ




YZ




— 900MHz

6.4.4. 1710 MHz – 2170 MHz


3D pattern at 1930MHz

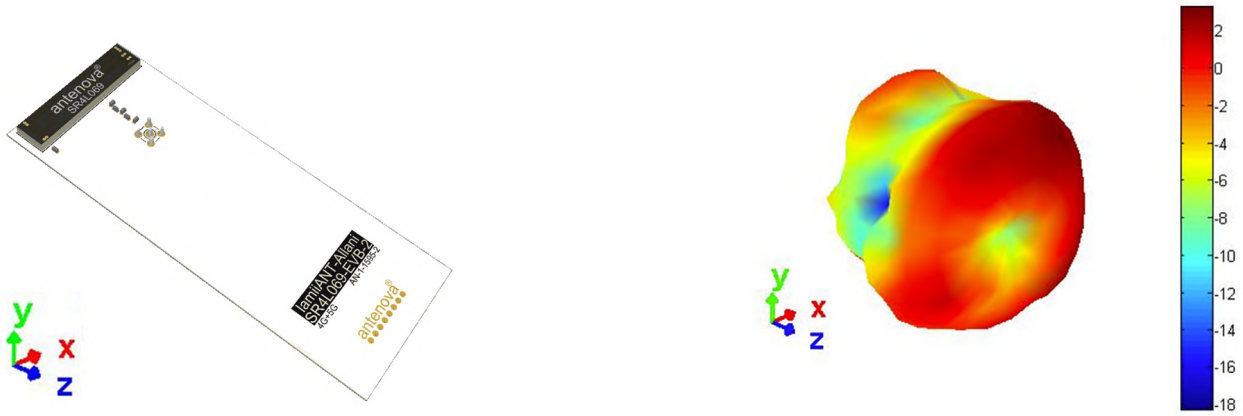


XY



XZ




YZ




— 1.93GHz

6.4.5. 2300 MHz – 2400 MHz


3D pattern at 2340MHz

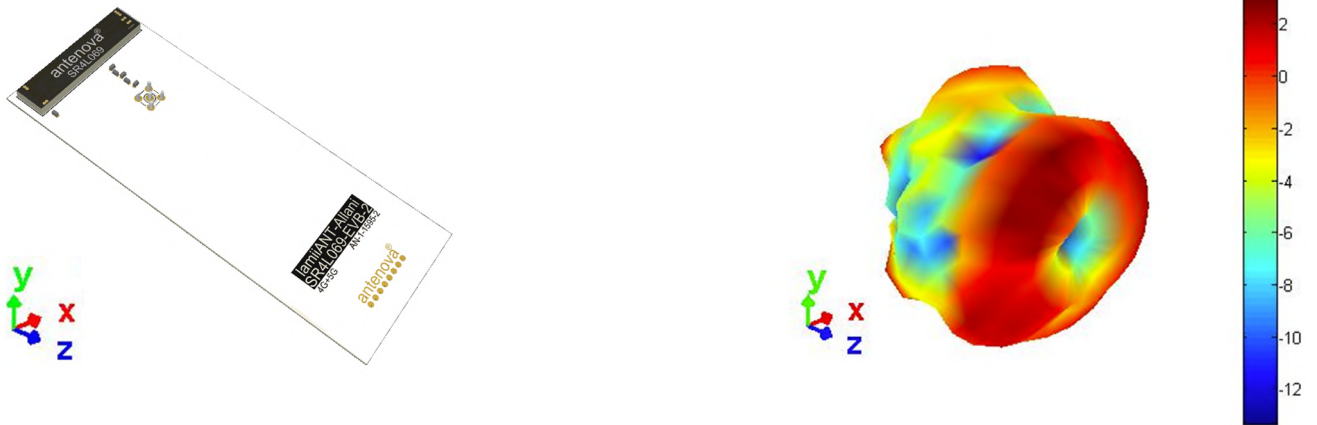


XY



XZ




YZ




— 2.34GHz

6.4.6. 2500 MHz – 2690 MHz


3D pattern at 2600MHz

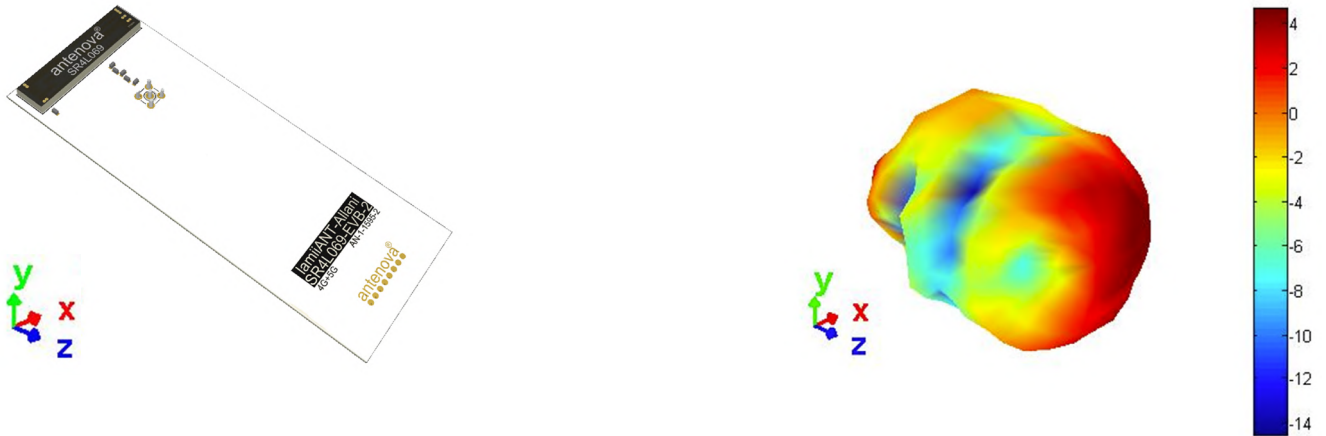


XY



XZ




YZ




— 2.6GHz

6.4.7. 3300 MHz – 3800 MHz


3D pattern at 3540MHz

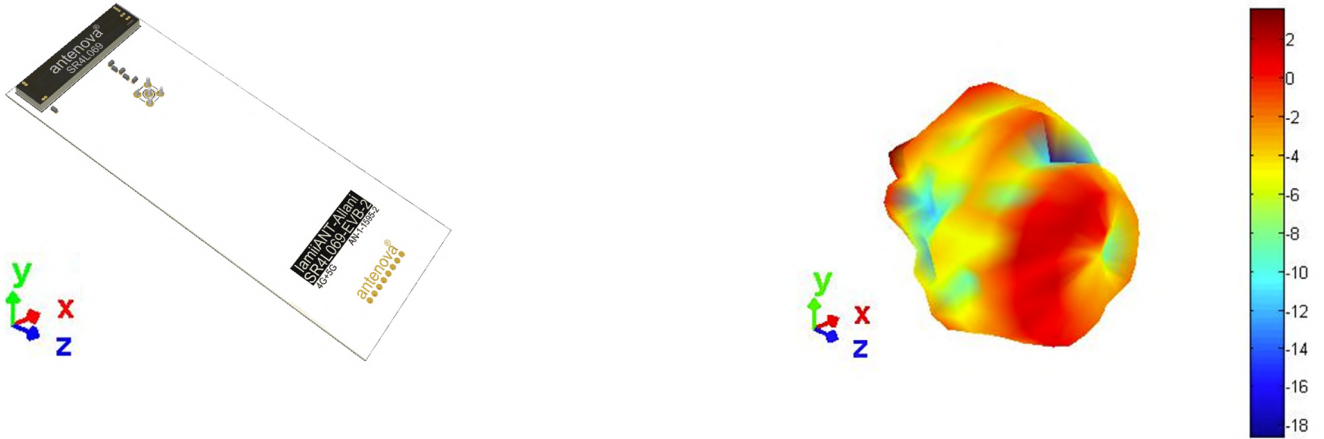


XY



XZ



YZ



— 3.54GHz


6.5. Optimising antenna efficiency

All SMD cellular antennas require a ground plane on the host PCB for best radiation efficiency, especially in the sub-GHz bands. On an ideal PCB the antenna needs the ground plane length to be greater than a quarter wavelength of the lowest frequency used. If the ground plane is less than this, the efficiency will be reduced. E.g. to calculate the wavelength of 617MHz:


$$\lambda = \frac{c}{f} = \frac{3 \times 10^8}{617 \times 10^6} = 486 \text{mm}$$

$$\frac{1}{4} \lambda = 122 \text{mm}$$

In practise, the optimum PCB length will be slightly greater than $\frac{1}{4}$ wavelength + antenna + clearance area, for Allani that optimum PCB length is 130mm.

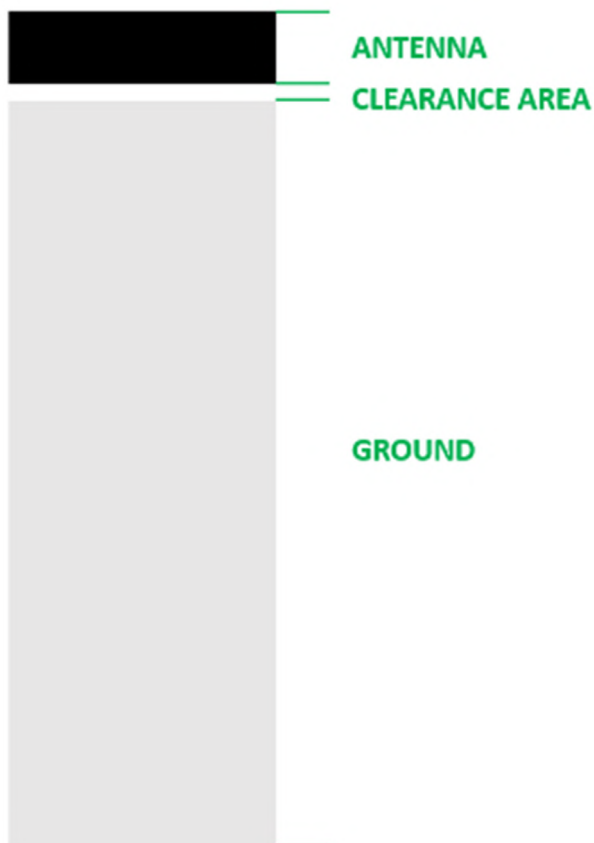

7. Antenna dimensions

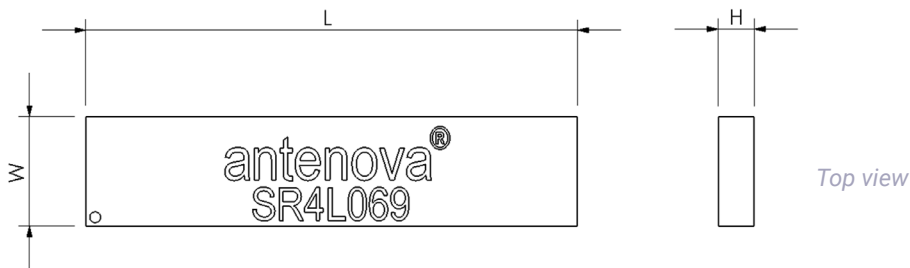

L	W	H
Length	Width	Height
45.0 ±0.1	10.0 ±0.1	3.3 ±0.1

All dimensions in (mm)




Bottom view

8. Schematic symbol and pin definition


The circuit symbol for the antenna is shown below. The antenna has 19 pins with only 2 as functional. All other pins are for mechanical strength.

PIN	DESCRIPTION
5	Feed (Transceiver port)
2	Return/GND
1, 3, 4, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15	NC (Not used, mechanical only)

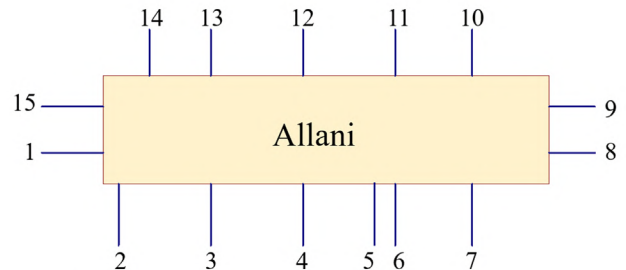

9. Host PCB footprint

The recommended host PCB footprint is below.

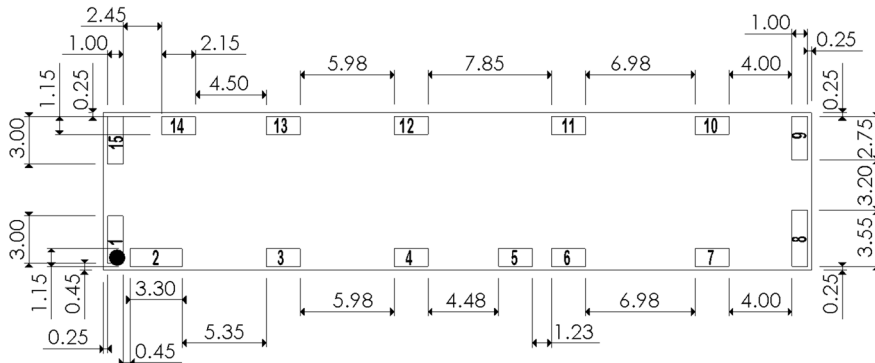

Pads 3, 4, 5, 6, 7, 10, 11, 12, 13, 14 = 2.15 x 1.15 (mm)

Pads 1, 15 = 1.00 x 3.00 (mm)

Pads 2 = 3.30 x 1.15 (mm)

Pads 8 = 1.00 x 3.55 (mm)

Pads 9 = 1.00 x 2.75 (mm)

10. Electrical interface

10.1. Transmission line

All transmission lines should be designed to have a characteristic impedance of 50Ω.

- The length of each transmission line should be kept to a minimum
- All other parts of the RF system like transceivers, power amplifiers, etc, should also be designed to have a 50 Ω impedance


A co-planar transmission line can be designed using an online transmission line calculator tool, such as:

<https://blog.antenova.com/rf-transmission-line-calculator>

The PCB thickness, copper thickness and substrate dielectric constant are entered, then the tool calculates the transmission line width and gaps on either side of the track to give a 50 Ω impedance.

10.2. Matching circuit

The antenna requires a matching circuit that must be optimized for each product. The matching circuit will require up to six components and the following circuit should be designed into the host PCB. Not all components may be required but should be included as a precaution. The matching network should be placed close to the antenna feed to ensure it is optionally effective in tuning the antenna.

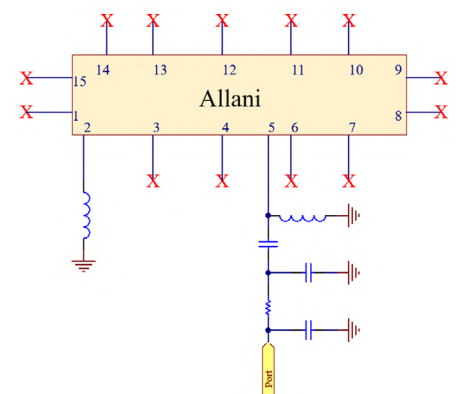


11. Antenna integration guide

We recommend the following during the design phase to maximise antenna performance and minimize noise:

- Minimum 4 layer PCB
- Route signals and power internally where possible
- Flood all layers with ground
- Knit ground on all layers together with plenty of vias

Follow placement guidance carefully, in addition Antenova provide technical support to help you through all stages of your design. Register for an account on <https://ask.antenova.com/> to access technical support.

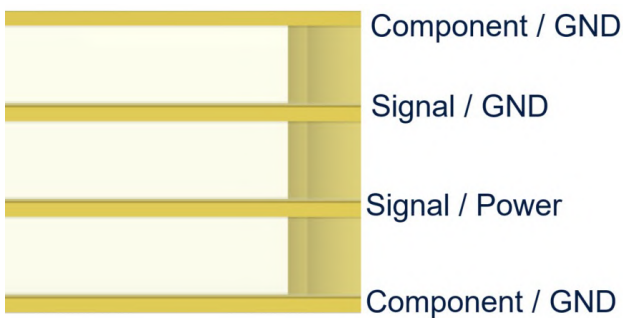

11.1. Antenna placement


The best position for the antenna is in the corner of the short side of the PCB. This allows the longer side of the PCB to be a ground plane, a long ground plane improves the antenna's efficiency. The antenna requires clearance ideally in 5 spatial directions as shown below. Where this cannot be achieved you should keep as many clear as possible to a minimum of 3. Please note performance will degrade with fewer clearances.

The Antenova placement tool can be used to advise on antenna placement, see: <https://blog.antenova.com/intelligent-antenna-selection-and-placement-tool-antenova>

Correct




Incorrect

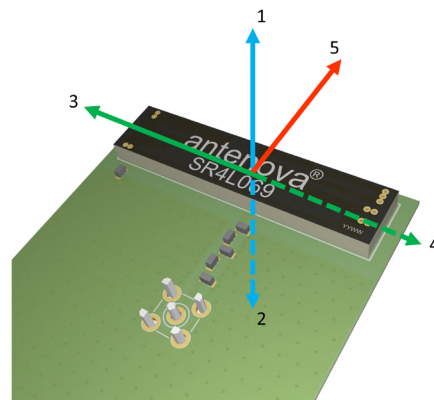

11.2. Host PCB layout

The host PCB must be designed using the PCB footprint shown with the correct clearances. An example of the PCB layout shows the antenna footprint. Please note this clearance area is critical to the performance of the antenna and must be applied through all layers of the PCB.


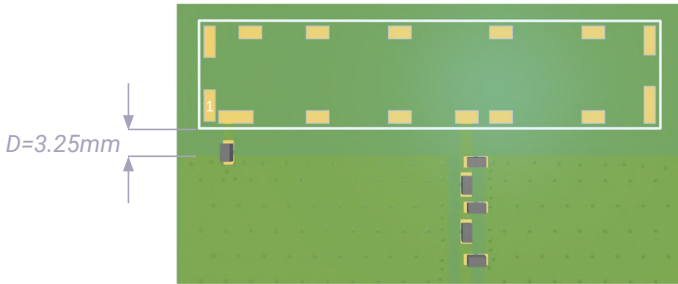


All dimensions in (mm)

11.3. Host PCB clearance

The diagram below shows the antenna footprint and clearance through all layers on the PCB. Only the antenna pads and connections to feed and GND are present within this clearance area.


Placement of components and GND with traces adjacent to the antenna should maintain a minimum clearance of 15mm from either side. The antenna should therefore be placed in the corner to only have one side affected.

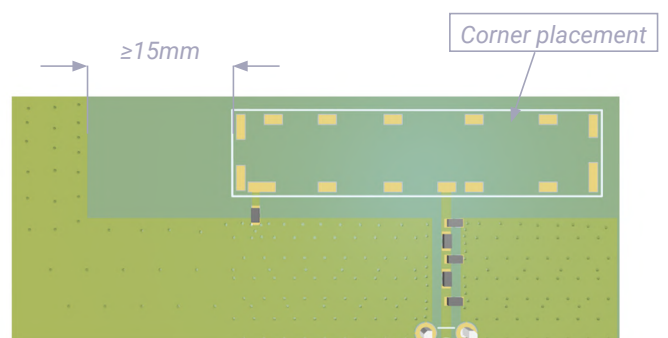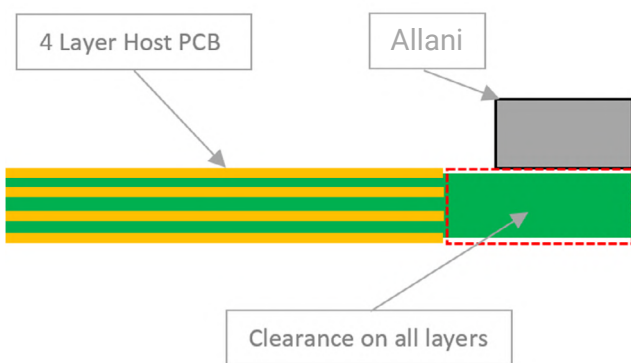

12. Reference board


A reference board is used for evaluating the antenna SR4L069 and it includes a SMA female connector. (Part number: SR4L069-EVB-2)

To order a reference board please see antenova.com

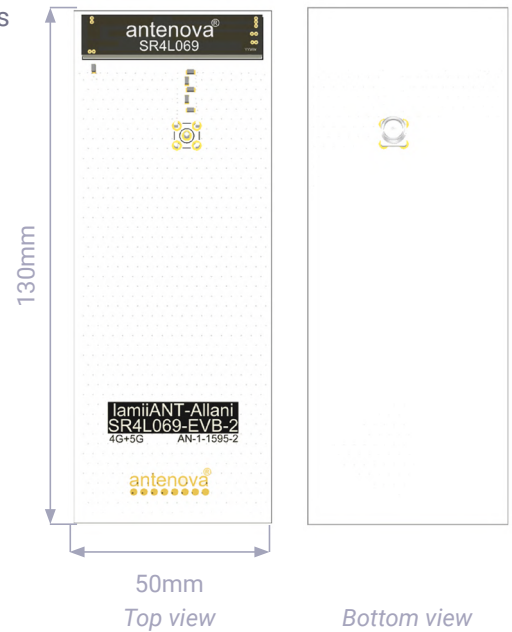

12.1. Reference board matching circuit

DESIGNATOR	TYPE	VALUE	DESCRIPTION
L1	Inductor	27nH	Murata LQG15HN series
RETL	Inductor	5.1nH	Murata LQG15HN series
C1	Capacitor	3.3pF	Murata GJM15 series
C2	NA	DNP	Not Fitted
C3	NA	DNP	Not Fitted
R1	Resistor	0ohm	Non-specific

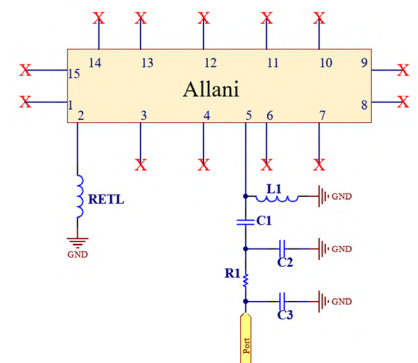

13. Soldering

This antenna is suitable for lead free soldering. The reflow profile should be adjusted to suit the device, oven and solder paste, while observing the following conditions:

- For leaded soldering, the maximum temperature should not exceed 240 °C.
- For lead free soldering, a maximum temperature of 255 °C for no more than 20 seconds is permitted.
- The antenna should not be exposed to temperatures exceeding 120 °C more than 3 times during the soldering process.

14. Hazardous material regulation conformance

The antenna has been tested to conform to RoHS and REACH requirements. A certificate of conformance is available from Antenova's website.

15. Packaging


15.1. Optimal storage conditions

TEMPERATURE	-10°C to 40°C
HUMIDITY	Less than 75% RH
SHELF LIFE	24 Months
STORAGE PLACE	Away from corrosive gas and direct sunlight
PACKAGING	Reels should be stored in unopened sealed manufacturer's plastic packaging.
MSL LEVEL	1

Note: Storage of open reels of antennas is not recommended due to possible oxidization of pads on antennas. If short term storage is necessary, then it is highly recommended that the bag containing the antenna reel is re-sealed and stored in conditions as described in the table above.

The shelf life of the antenna is 2 years provided the factory seal on the package has not been broken.

15.2. Tape characteristics

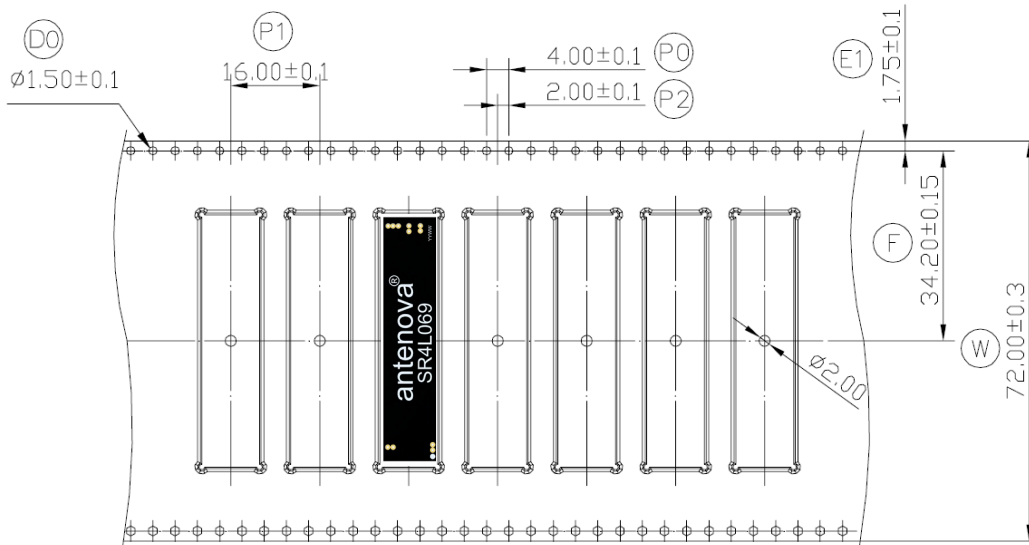


P0	P1	P2	D0
4.00 ± 0.1	16.00 ± 0.1	2.00 ± 0.1	1.50 ± 0.1

E	F	W
1.75 ± 0.1	34.20 ± 0.15	72.00 ± 0.3

All dimensions in (mm)

QUANTITY	LEADING SPACE	TRAILING SPACE
500 pcs / reel	25 blank antenna holders	25 blank antenna holders


15.3. Reel dimensions

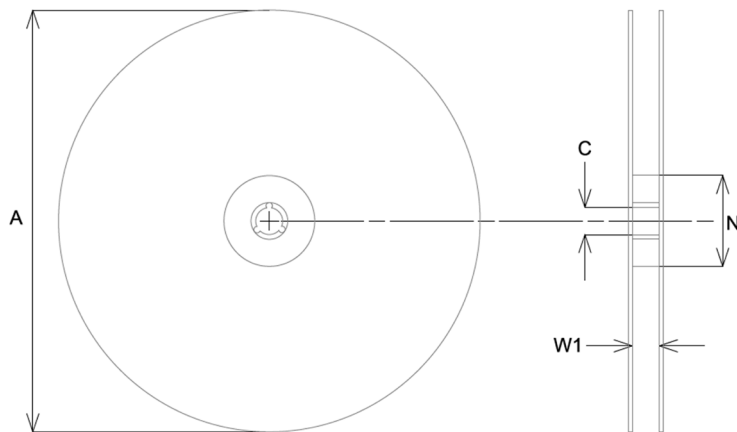

A	C	N	W1
329.0 ± 1.5	13.3 ± 0.5	178.0 ± 1.5	73 ± 0.3

All dimensions in (mm)

15.4. Box dimensions

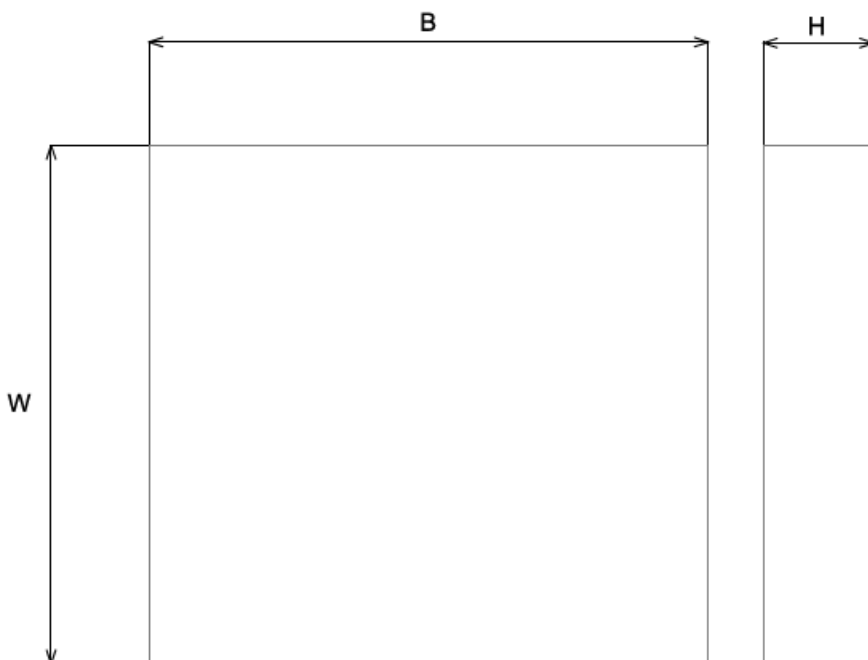

WIDTH (W)	BREADTH (B)	HEIGHT (H)
351mm	349mm	75mm

15.5. Bag properties

Reels are supplied in protective plastic packaging.

15.6. Reel label information



Quality statements

Antenova’s products conform to REACH and RoHS legislation. For our statements regarding these and other quality standards, please see antenova.com.



Antenova reserves all rights to the contents of this document. Antenova gives no warranties based solely on the accuracy or completeness of the contents of this document and reserves the right to make changes to the specifications of the products described herein at any time and without notice.

Datasheet version

1.01 released Nov 29th 2021

1.02 released Apr 20th 2022