

**K-No.: 25033**
**100 A Current Sensor**
**Date: 06.11.2007**

For the electronic measurement of currents:  
DC, AC, pulsed, mixed ..., with a galvanic  
Isolation between the primary circuit  
(high power) and the secondary circuit  
(electronic circuit)

**Customer: Standard type**
**Customers Part no.:**
**Page 1 of 2**
**Description**

- Closed loop (compensation)  
Current Sensor with magnetic field probe
- Printed circuit board mounting
- Casing and materials UL-listed

**Characteristics**

- Excellent accuracy
- Very low offset current
- Very low temperature dependency and offset current drift
- Very low hysteresis of offset current
- Short response time
- Wide frequency bandwidth
- Compact design
- Reduced offset ripple

**Applications**

Mainly used for stationary operation in industrial applications:

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Switched Mode Power Supplies (SMPS)
- Power Supplies for welding applications
- Uninterruptable Power Supplies (UPS)

**Electrical data – Ratings**

$I_{PN}$	Primary nominal r.m.s. current	100	A
$R_M$	Measuring resistance $V_C = \pm 12V$	10 ... 200	$\Omega$
	$V_C = \pm 15V$	40 ... 400	$\Omega$
$I_{SN}$	Secondary nominal r.m.s. current	100	mA
$K_N$	Turns ratio	1: 1000	

**Accuracy – Dynamic performance data**

		min.	typ.	max.	Unit
$I_{P,max}$	Max. measuring range				
	@ $V_C = \pm 12V$ , $R_M = 10 \Omega$ ( $t_{max} = 10sec$ )	$\pm 230$			A
	@ $V_C = \pm 15V$ , $R_M = 40 \Omega$ ( $t_{max} = 10sec$ )	$\pm 180$			A
X	Accuracy @ $I_{PN}$ , $T_A = 25^\circ C$		0.1	0.5	%
$\epsilon_L$	Linearity			0.1	%
$I_0$	Offset current @ $I_P = 0$ , $T_A = 25^\circ C$		0.04	0.1	mA
$t_r$	Response time		1		$\mu s$
$\Delta t (I_{P,max})$	Delay time at $di/dt = 100 A/\mu s$		200		ns
f	Frequency bandwidth	DC...200			kHz

**General data**

		min.	typ.	max.	Unit
$T_A$	Ambient operating temperature	-40		+85	$^\circ C$
$T_S$	Ambient storage temperature	-40		+90	$^\circ C$
m	Mass		14		g
$V_C$	Supply voltage	$\pm 11.4$	$\pm 12$ or $\pm 15$	$\pm 15.75$	V
$I_C$	Current consumption		18		mA
	Constructed and manufactured and tested in accordance with EN 61800-5-1 (primary vs. secondary) Reinforced insulation, Insulation material group 1, Pollution degree 2				
$S_{clear}$	Clearance (component without solder pad)	12			mm
$S_{creep}$	Creepage (component without solder pad)	12			mm
$V_{sys}$	System voltage overvoltage category 3	RMS		600	V
$V_{work}$	Working voltage (table 7 acc. to EN61800-5-1) over voltage category 2	RMS		1000	V
$U_{PD}$	Rated discharge voltage	peak value		1225	V

**Maximal continuous and peak currents at defined temperatures**

 Supply voltage  $\pm 12V$ :

 Supply voltage  $\pm 15V$ :

$T_A$	85 $^\circ C$	85 $^\circ C$	70 $^\circ C$	55 $^\circ C$
$I_P$	60 A	100 A	80 A	100 A
$I_{P,max}$	235 A	149 A	241 A	246 A
$R_M$	10 $\Omega$	36 $\Omega$	10 $\Omega$	10 $\Omega$

$T_A$	85 $^\circ C$	85 $^\circ C$	70 $^\circ C$	55 $^\circ C$
$I_P$	50 A	75 A	70 A	100 A
$I_{P,max}$	182 A	130 A	184 A	186 A
$R_M$	40 $\Omega$	70 $\Omega$	40 $\Omega$	40 $\Omega$

Date	Name	Issue	Amendment
		81	

 Hrsg.: KB-E  
editor

 Bearb.: Le  
designer

 KB-PM IA: Sn.  
check

 freig.: Heu.  
released



K-No.: 25033

**100 A Current Sensor**

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit

Date: 06.11.2007

Customer:

Customers Part No.:

Page 1 of 3

**Electrical Data (investigate by a type checking)**

		min.	typ.	max.	Unit
$V_{Ctot}$	Maximum supply voltage (without function) $\pm 15.75$ to $\pm 18$ V: for 1s per hour			$\pm 18$	V
$R_S$	Secondary coil resistance @ $T_A=85^\circ\text{C}$			38.5	$\Omega$
$X_{Ti}$	Temperature drift of X @ $T_A = -40 \dots +85^\circ\text{C}$			0.1	%
$I_{0ges}$	Offset current (including $I_0, I_{0t}, I_{0T}$ )			0.14	mA
$I_{0t}$	Long term drift Offset current $I_0$		0.05		mA
$I_{0T}$	Offset current temperature drift $I_0$ @ $T_A = -40 \dots +85^\circ\text{C}$		0.05		mA
$I_{0H}$	Hysteresis current @ $I_P=0$ (caused by primary current $10 \times I_{PN}$ )		0.05	0.1	mA
$\Delta I_0/\Delta V_C$	Supply voltage rejection ratio			0.01	mA/V
$i_{loss}$	Offset ripple (with 1 MHz- filter first order)			0.2	mA
$i_{loss}$	Offset ripple (with 100 kHz- filter first order)		0.04	0.075	mA
$i_{loss}$	Offset ripple (with 20 kHz- filter first order)		0.015	0.025	mA
$C_k$	Maximum possible coupling capacity (primary – secondary)		6		pF

**Inspection** (Measurement after temperature balance of the samples at room temperature)

$K_N(N_1/N_2)$	(V)	M3011/6	Transformation ratio ( $I_P=100\text{A}$ , 40-80 Hz)	$1 : 1000 \pm 0,5 \%$	
$I_0$	(V)	M3226	Offset current	< 0.1	mA
$V_d$	(V)	M3014:	Test voltage, rms, 1 s pin 1 – 3 vs. hole	1.8	kV
$V_e$	(AQL 1/S4)		Partial discharge voltage acc.M3024 (RMS) with $V_{vor}$ (RMS)	1300 1625	V V

**Type Testing** (Pin 1 - 3 to hole)

$V_W$			HV transient test according to M3064 (1,2 $\mu\text{s}$ / 50 $\mu\text{s}$ -wave form)	8	kV
$V_d$			Testing voltage to M3014	(5 s)	3,6 kV
$V_e$			Partial discharge voltage acc.M3024 (RMS) with $V_{vor}$ (RMS)	1300 1625	V V

Datum	Name	Index	Änderung			
		81				
Hrsg.: KB-E editor	Bearb.: Le designer			KB-PM IA: Sn. check		freig.: Heu. released

K-No.: 25033

**100 A Current Sensor**

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit

Date: 06.11.2007


Customer:

Customers Part No.:

Page 2 of 3


**Limit curve of measurable current  $\hat{I}_P(R_M)$**

@ ambient temperature  $\leq 85^\circ\text{C}$

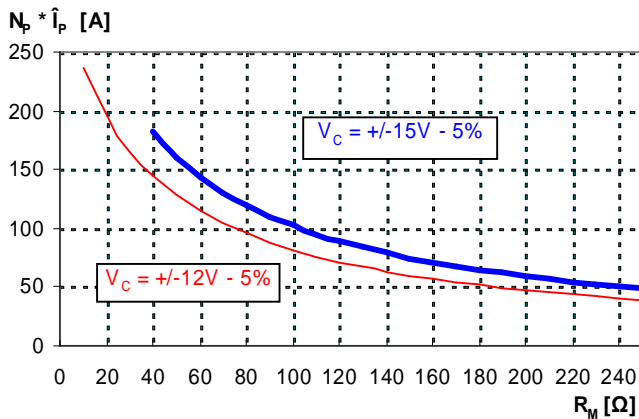

**Maximum measuring range (μs-range)**

Output current behaviour of a 3kA current pulse  
@  $V_C = \pm 15\text{V}$  und  $R_M = 100\Omega$

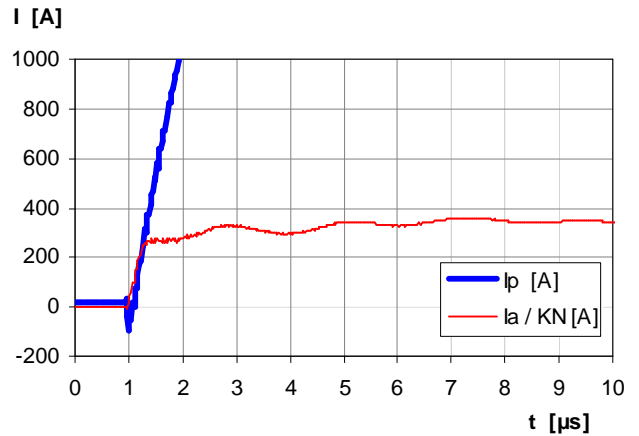

Fast increasing currents (higher than the specified  $I_{p,max}$ ), e.g. in case of a short circuit, can be transmitted because the currents are transformed directly and be limited by diodes only.

The offset ripple can be reduced by an external low pass. Simplest solution is a passive low pass filter of 1st order with

$$f_g = \frac{1}{2p \cdot R_M \cdot C_a}$$

In this case the response time is enlarged.

It is calculated from:

$$t'_r \leq t_r + 2,5R_M C_a$$

**Applicable documents**

Current direction: A positive output current appears at point  $I_s$ , by primary current in direction of the arrow.

Housing and bobbin material UL-listed: Flammability class 94V-0.

Hrsg.: KB-E  
editor

Bearb.: Le  
designer

KB-PM IA: Sn.  
check

freig.: Heu.  
released