

SPECIFICATION

Part No. : **TI.18.3113**

Product Name : 3dBi 868MHz ISM Band Dipole Terminal
Antenna, SMA(M) Hinged Connector

Feature : High efficiency dipole terminal antenna
ROHS compliant



1. Introduction

TI.18 is high performance 868MHz ISM band dipole omni-directional antenna. The SMA connector is for general purpose used and the hinged design enables the antenna to be positioned at its most suitable angle.


For a lot of antenna applications, such as Wi-Fi Hotspot or cellular Pico-cell, the antenna of the operator's device and the antenna of the user's remote device are not on the same horizontal level. So rather than having the usual dipole antenna with dumbbell shape radiation pattern in the E-plane cross-section, we have designed this antenna with butterfly shape radiation pattern. This way, the best radiation direction of TI.18 will be more pointed to the remote user.

2. Specification


ELECTRICAL	
Frequency	868 ~ 870MHz
Peak Gain (bend)	3.2dBi
Peak Gain (straight)	3.2dBi
Average Gain (bend)	-0.3dBi
Average Gain (straight)	-0.3dBi
Efficiency (bend)	92%
Efficiency (straight)	93%
Impedance	50Ω
VSWR	< 1.9 : 1
Polarization	Linear
Radiation Pattern	Omni
Input Power	10 W
MECHANICAL	
Antenna Length	389 ± 5 mm
Antenna Diameter	13 ± 0.5 mm
Casing	TPU
Connector	SMA Male
ENVIRONMENTAL	
Temperature Range	-40°C to 85°C
Humidity	Non-condensing 65°C 95% RH

3. Antenna S11 Properties

3.1 Return Loss

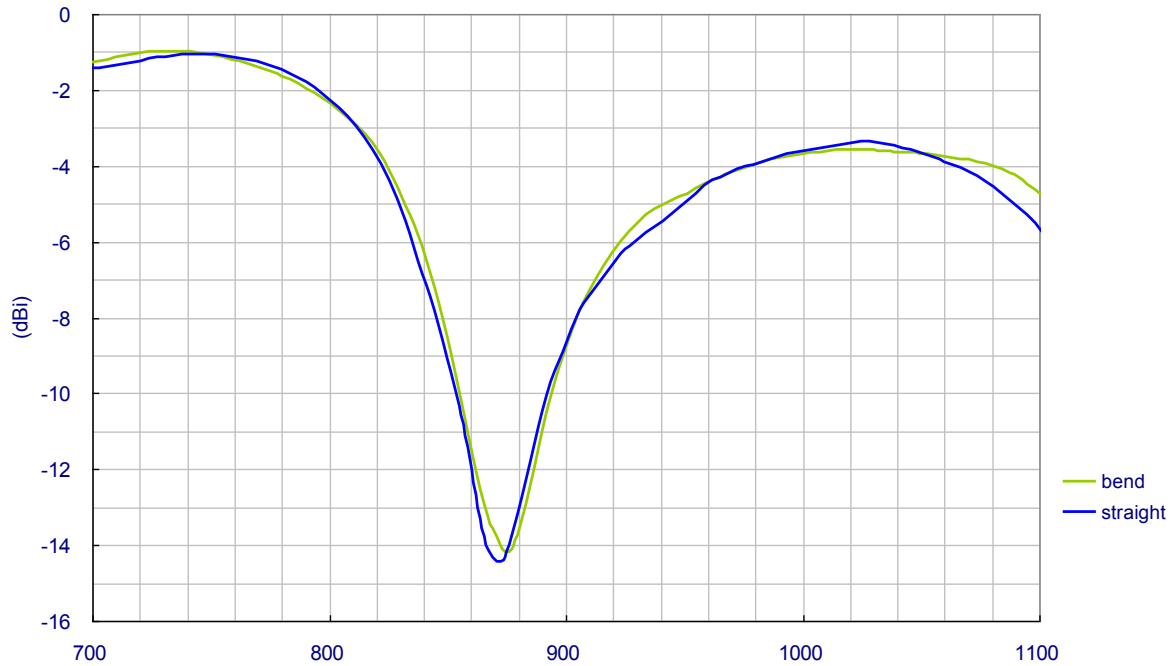


3.2 VSWR

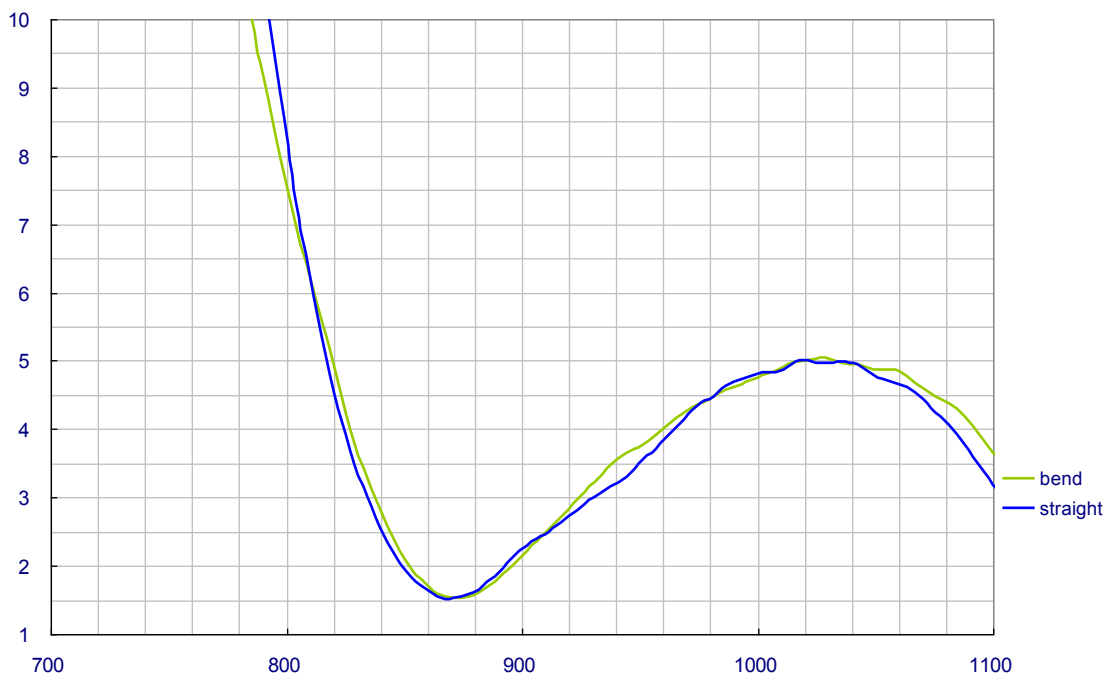


4. Antenna Free Space Radiation Properties


4.1. 3D Radiation Efficiency

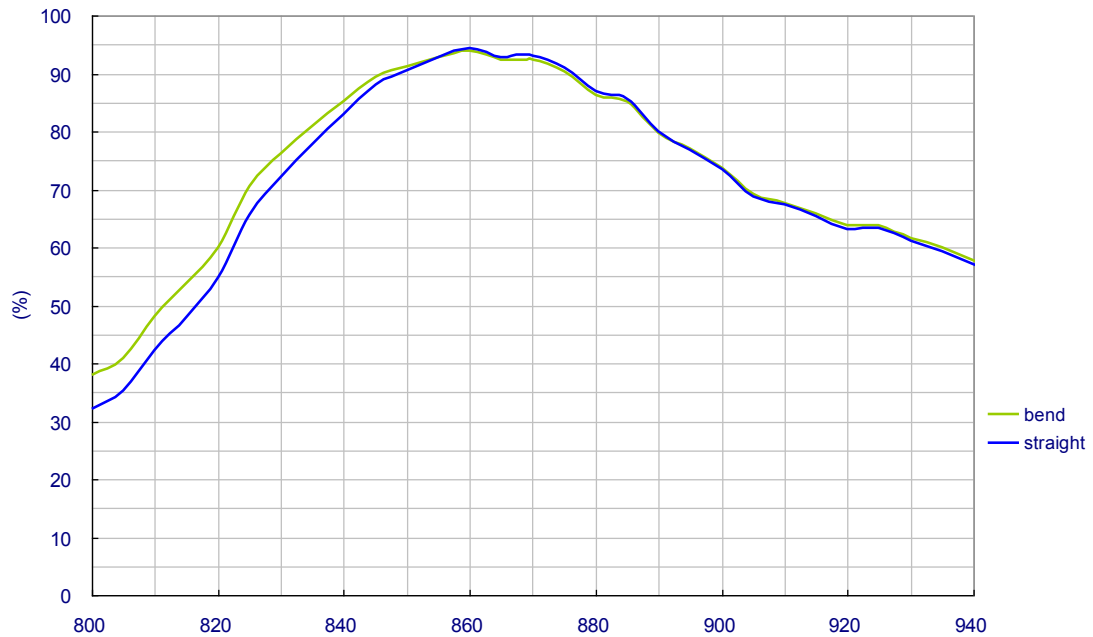


4.2. Peak Gain

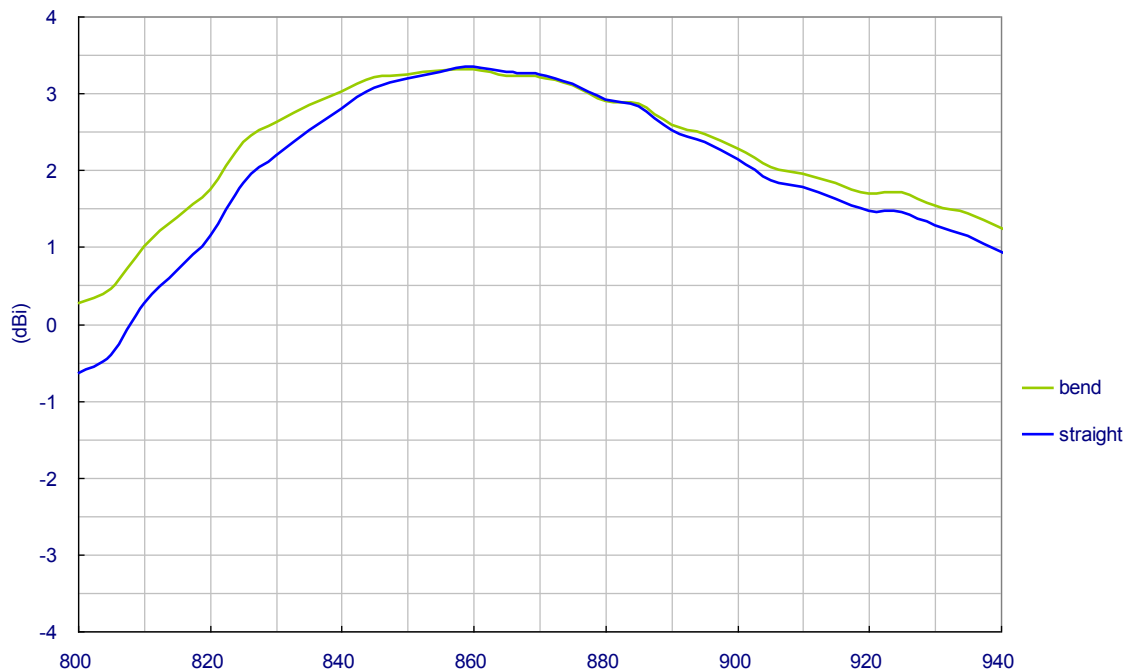


4.3. Average Gain

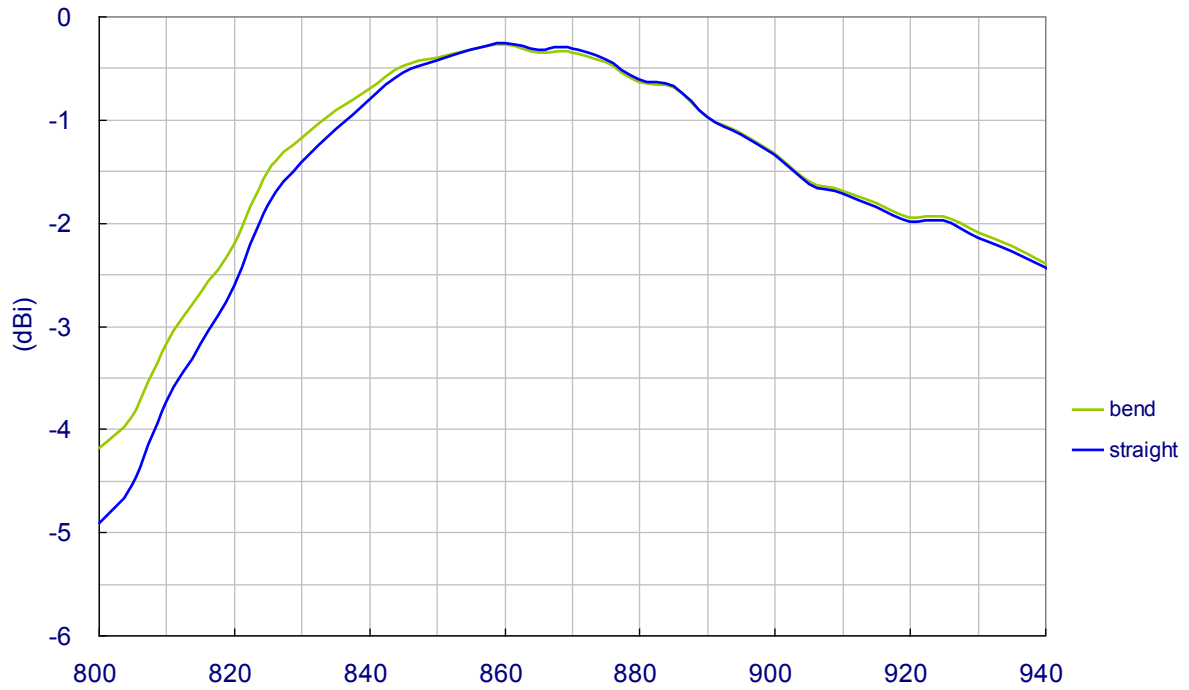


4.4. Radiation Pattern of 90 Degree Bend Position

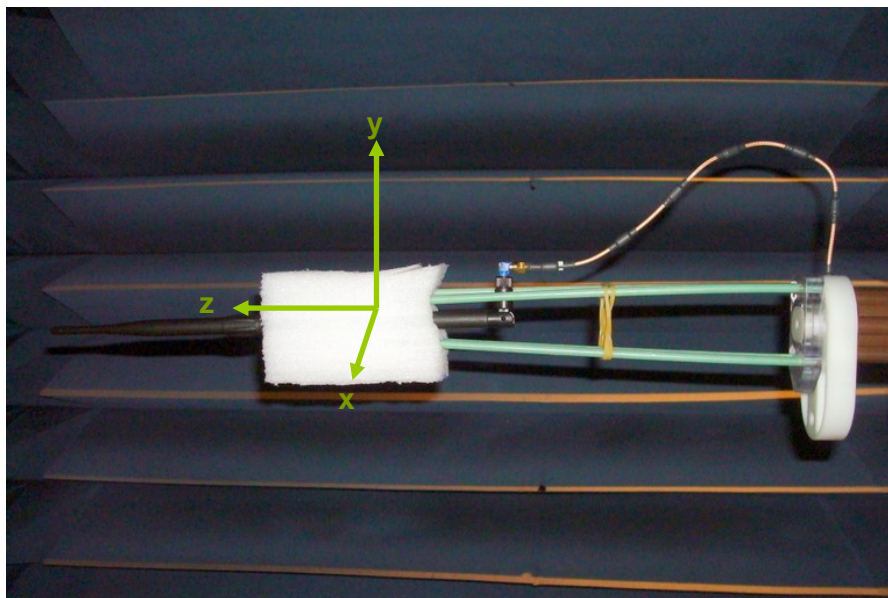


4.4.1 3D Radiation Pattern

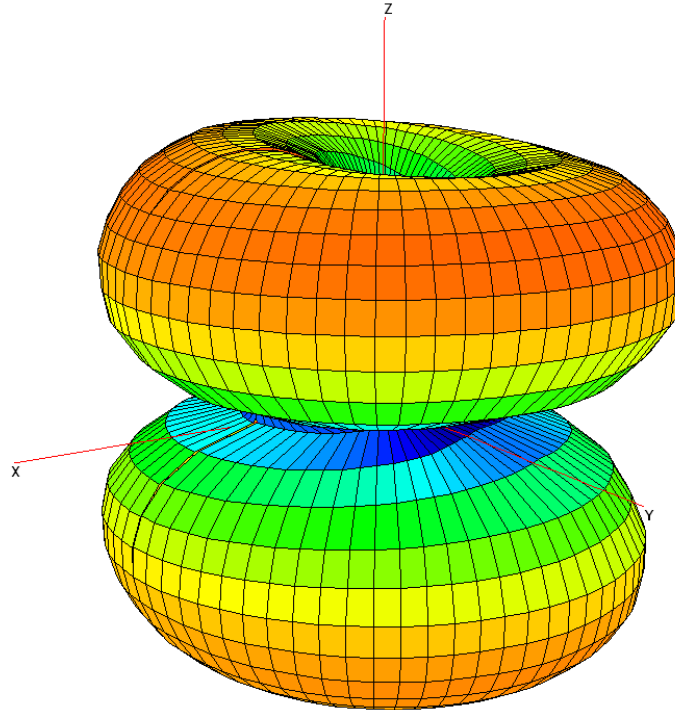


XZ Plane Radiation

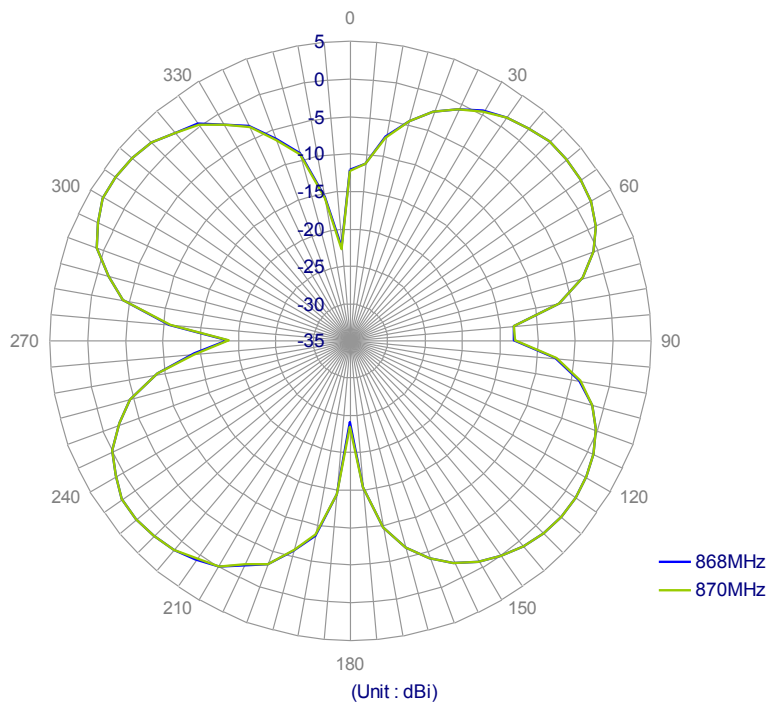


XY Plane Radiation

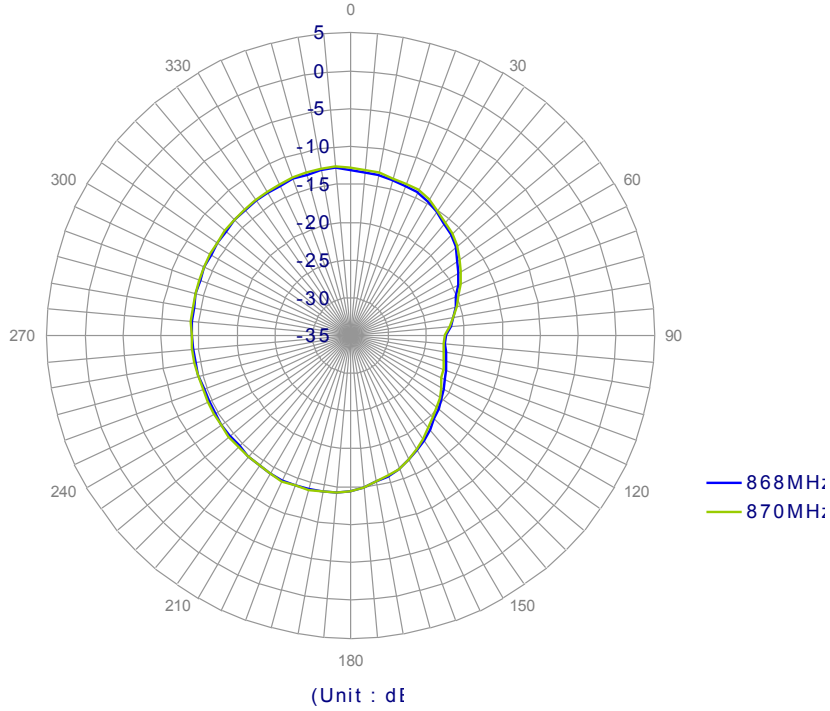


4.4.4 Radiation at 45 Degree from XY Plane

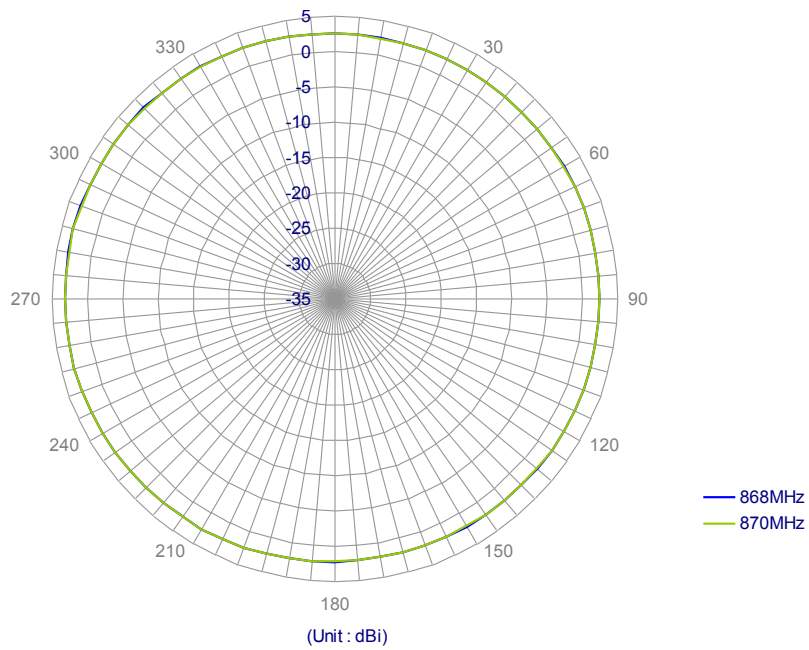

4.5. Radiation Pattern of 180 Degree Straight Position

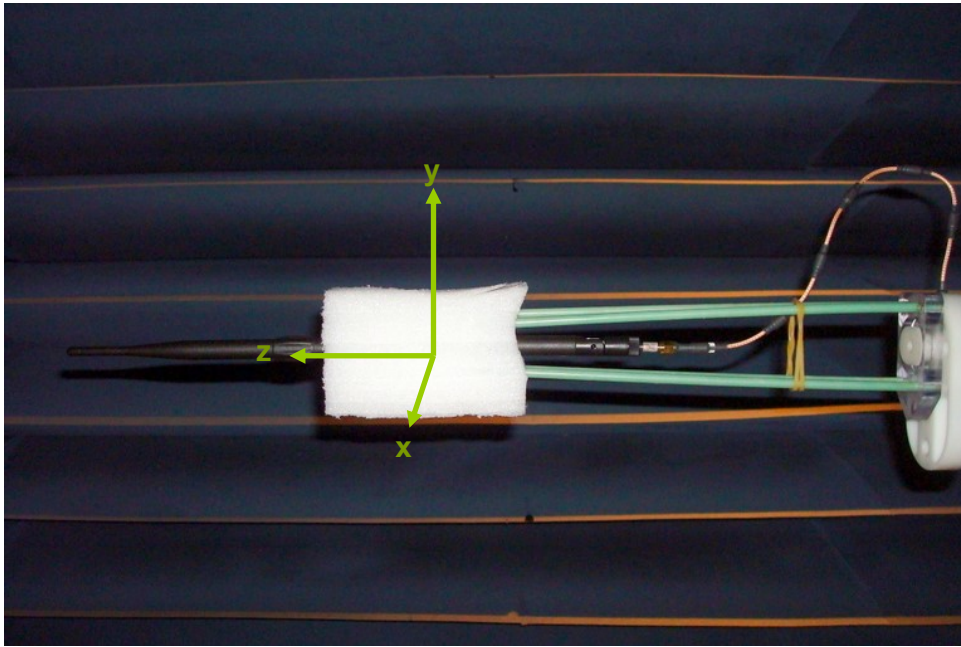


4.5.1 3D Radiation Pattern

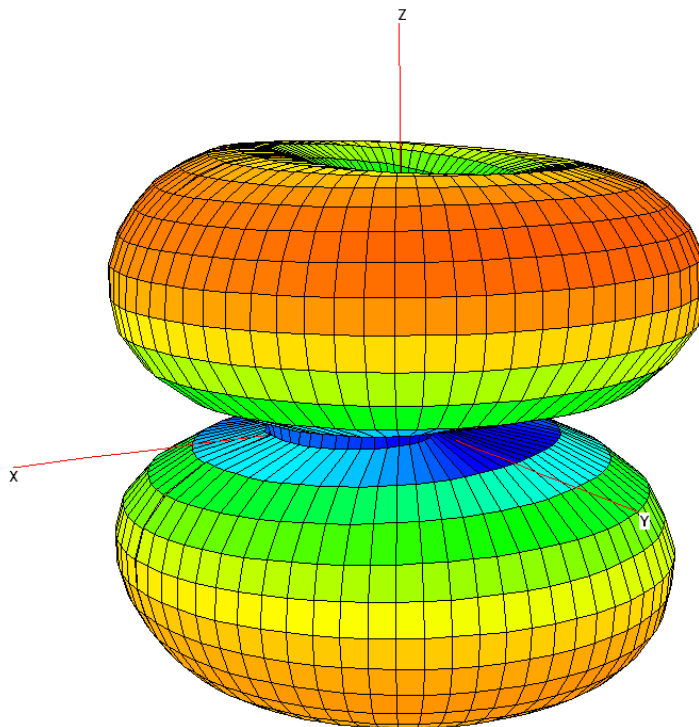





XZ Plane Radiation

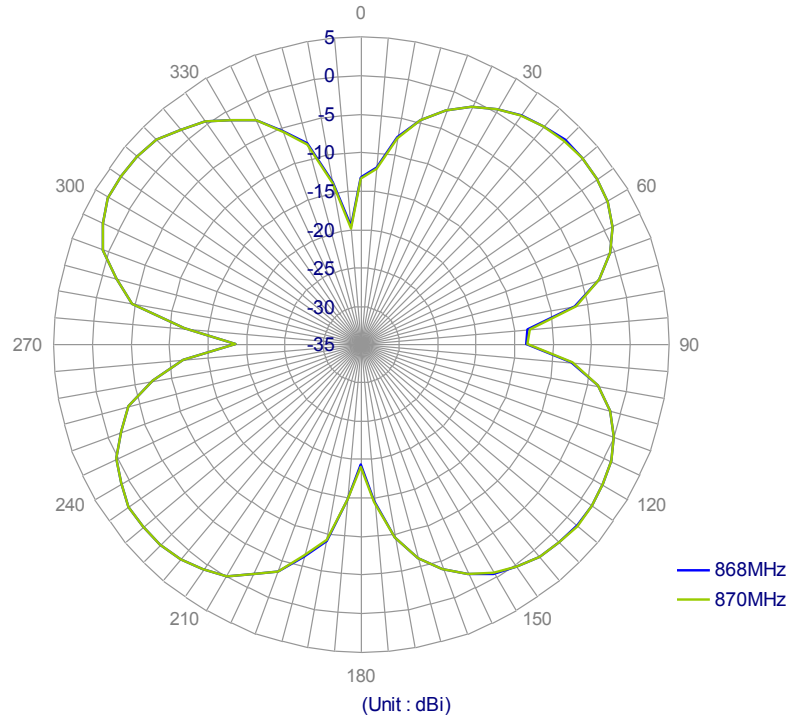

XY Plane Radiation

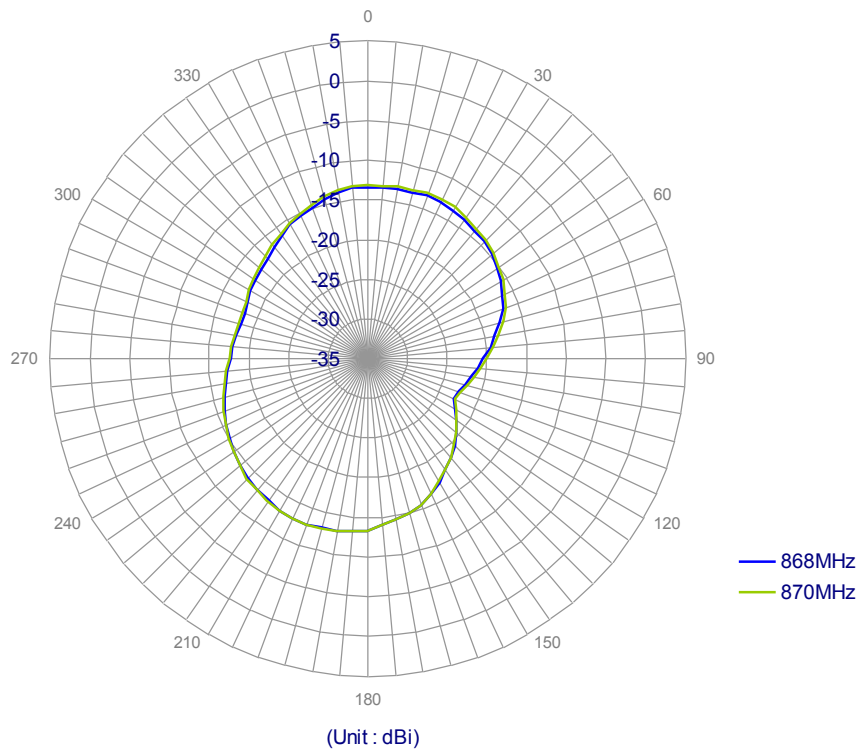

4.5.2 Radiation at 45 Degree from XY Plane

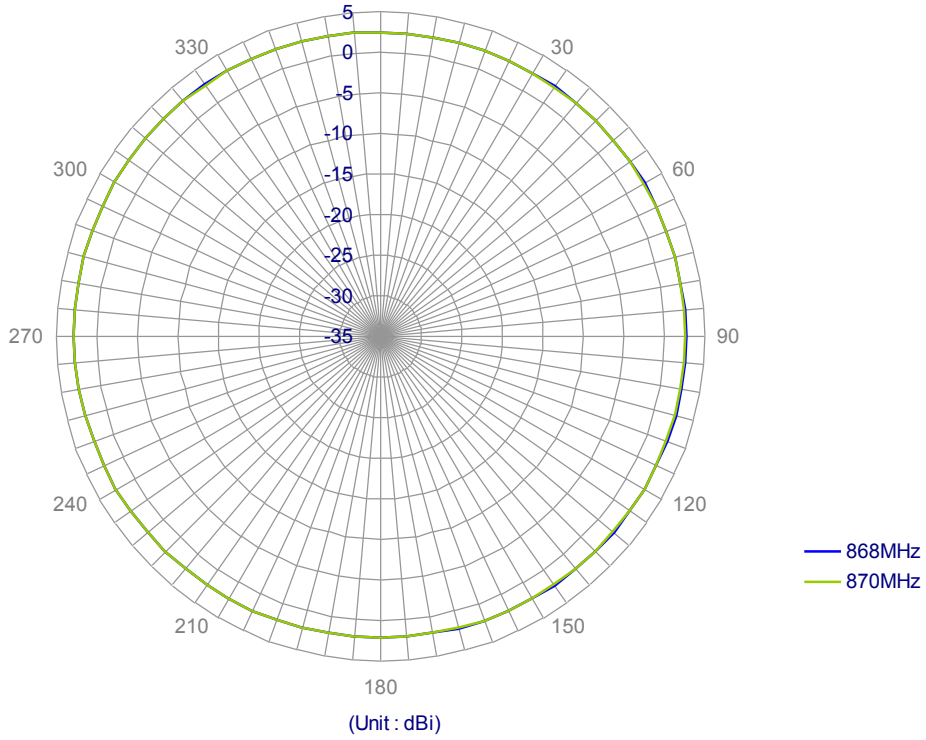


5. Ground Plane Effect

Three ground setups are used to see the affect of positioning TI.18 close to ground -


1. Small Ground (15 x 9cm) – common size of CPE devices. TI.18 is mounted at the longer edge for testing.
2. Big Ground Edge (45 x 30cm) – simulate the effect of mounting antenna on a base station device. TI.18 is mounted at the centre of the longer edge.
3. Big Ground Centre (45 x 30cm) – simulate the effect of mounting antenna in a centre of a big ground plane, such as vehicle top.

5.1. S11 Return Loss

Bent

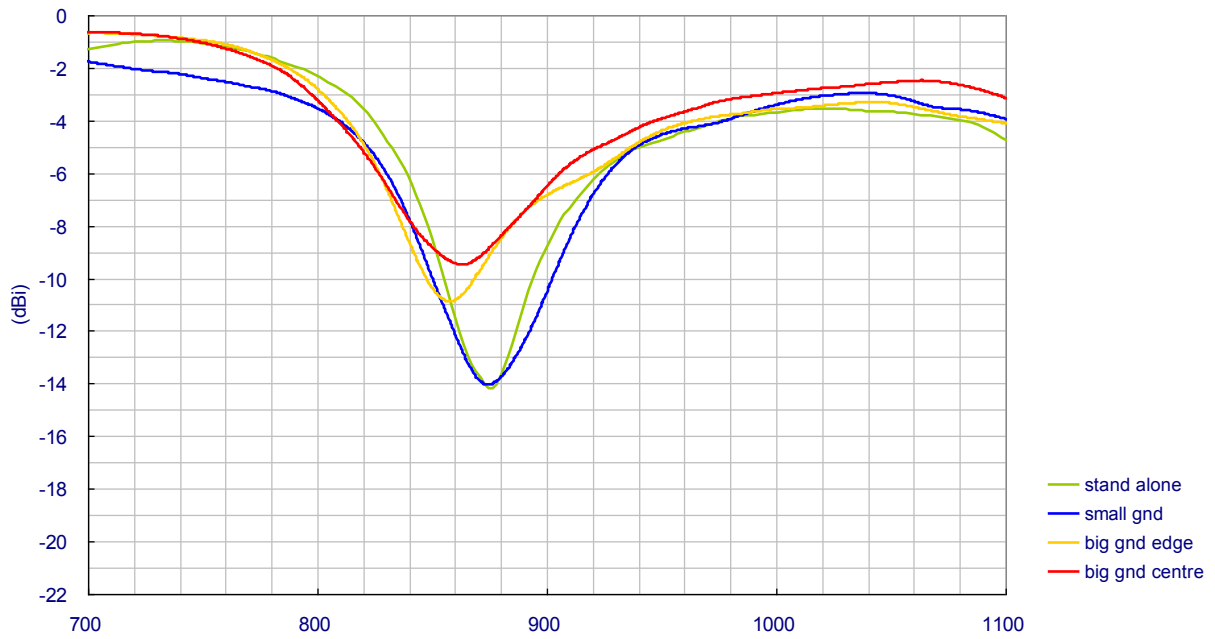


Straight

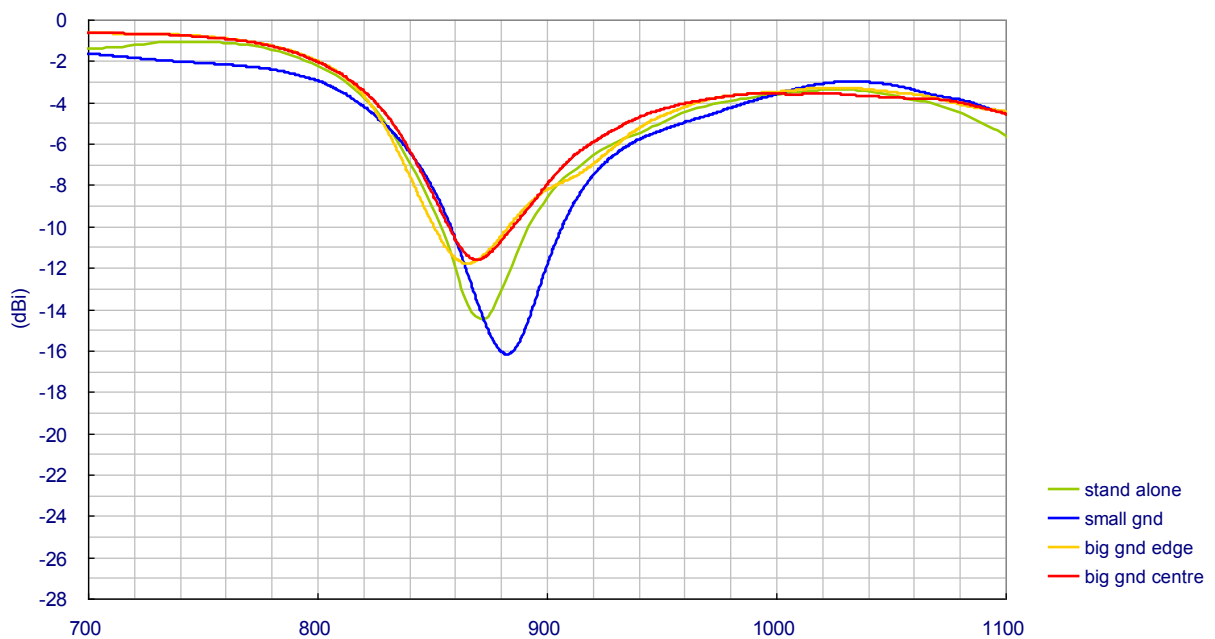


5.2. VSWR

Bent

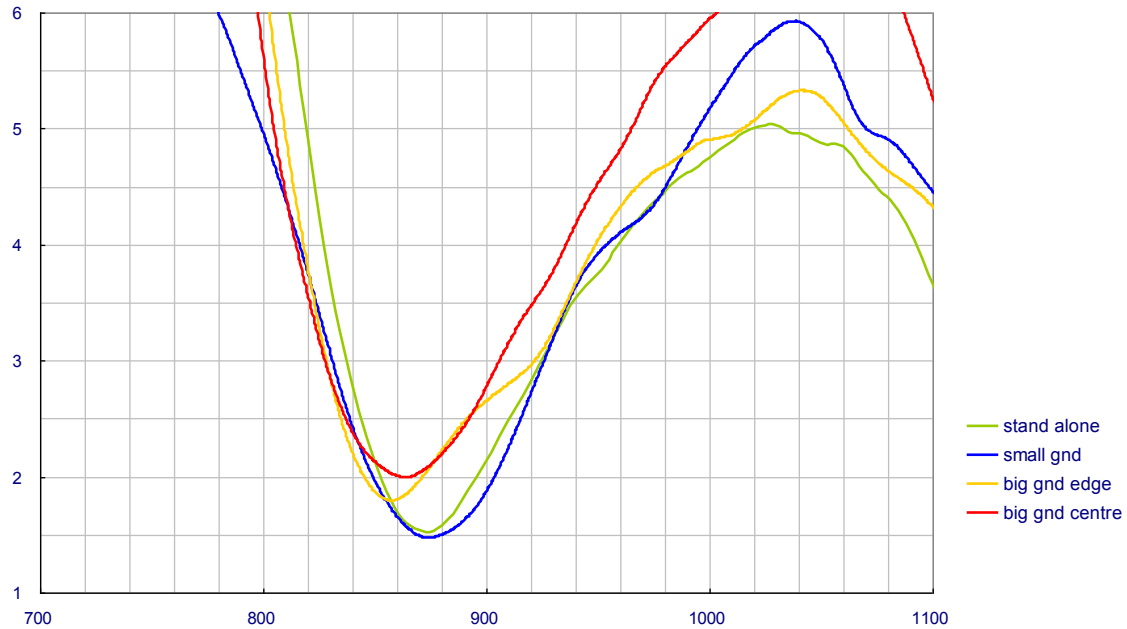


Straight

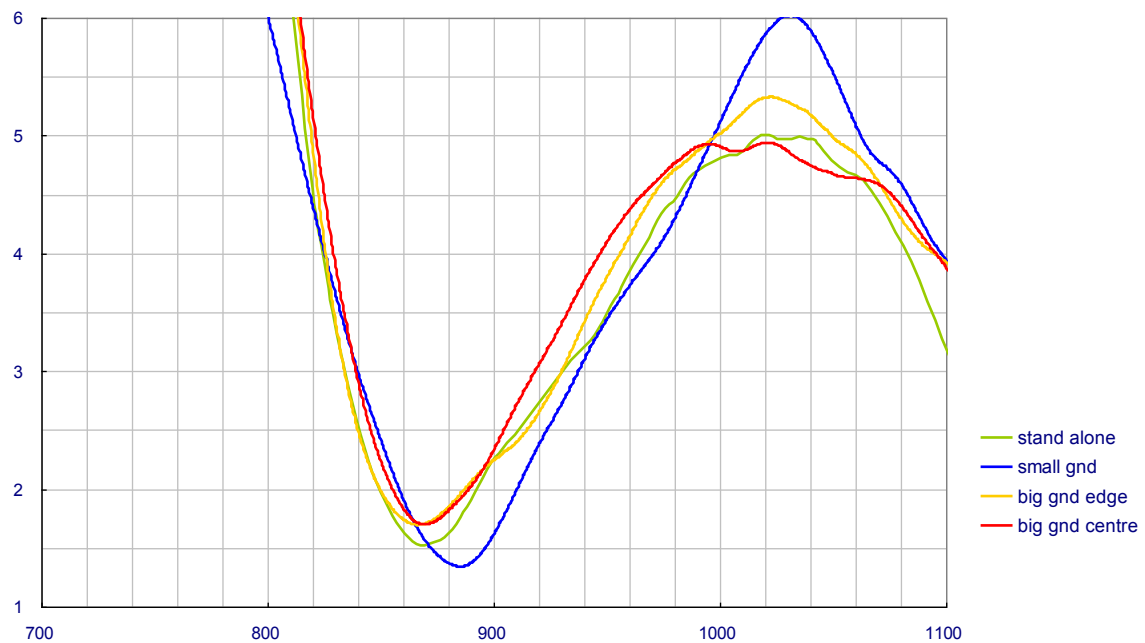


5.3. Radiation Efficiency

Bent

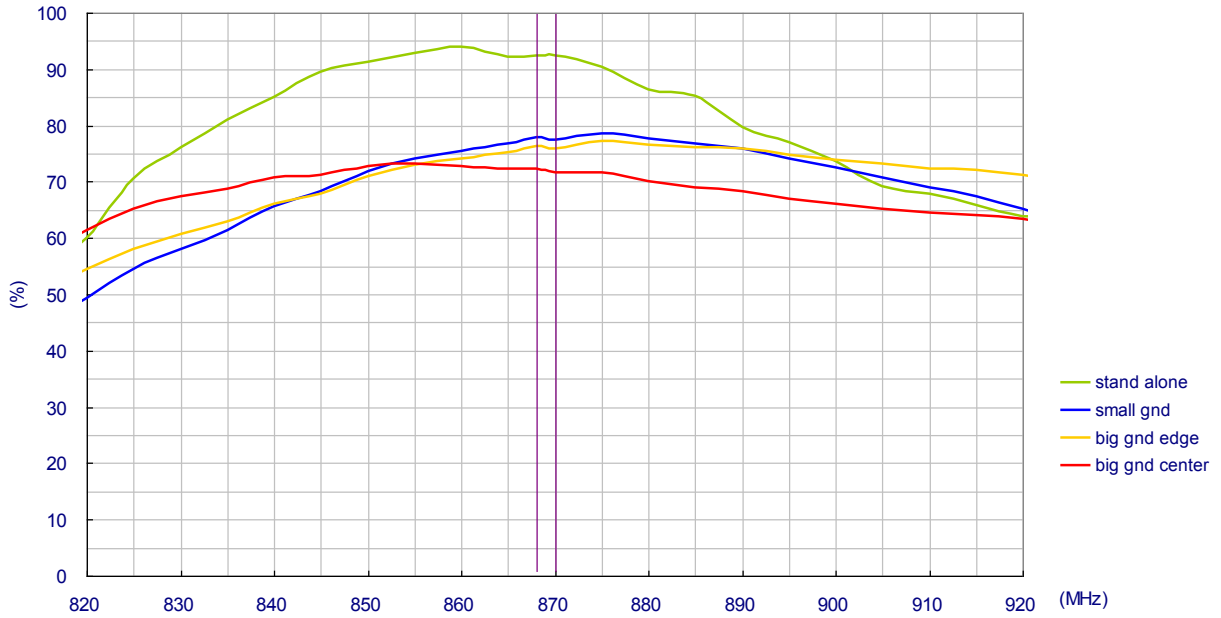


Straight

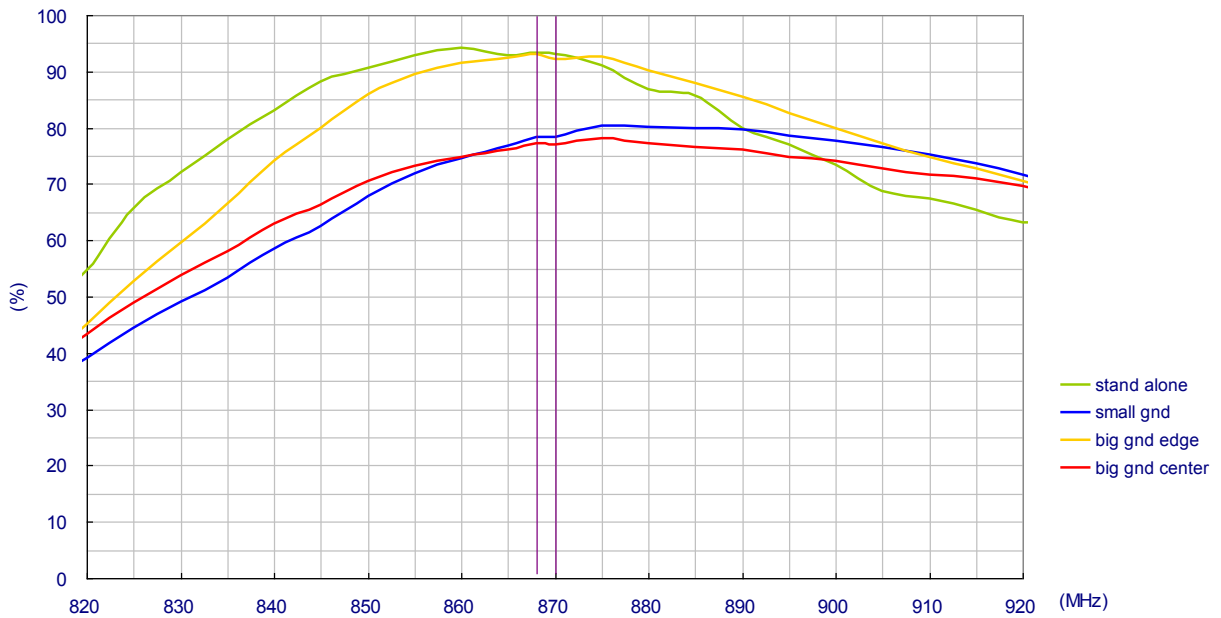


5.4. Average Gain


Bent

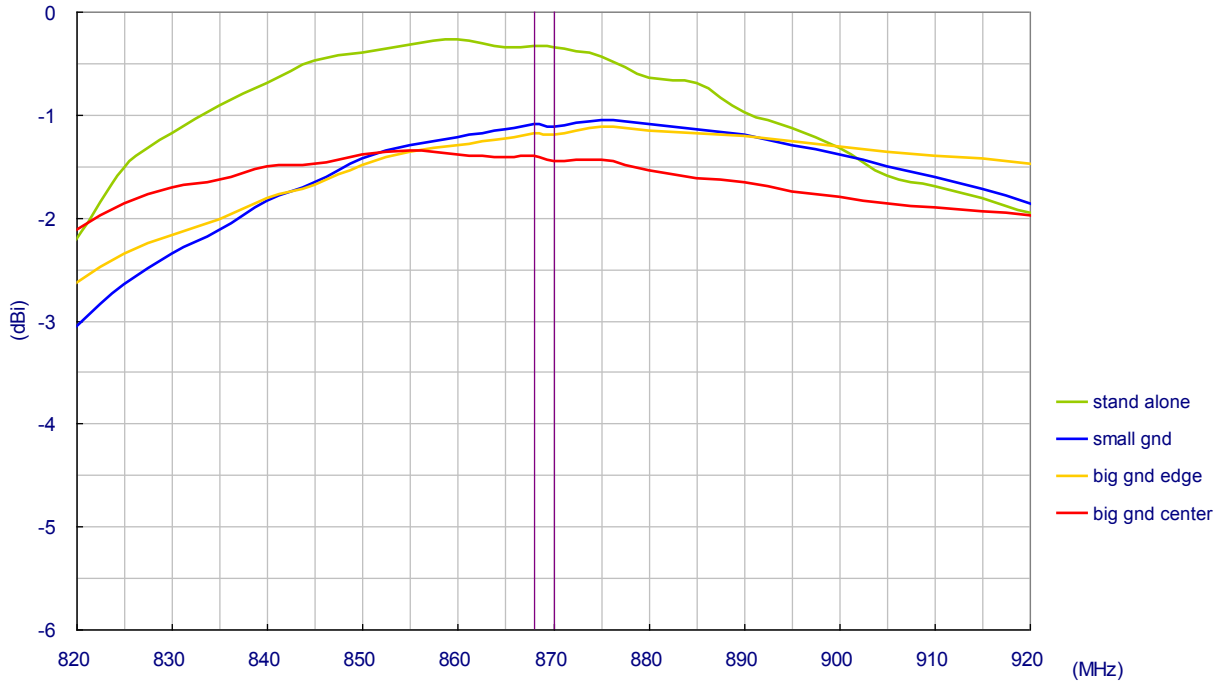


Straight

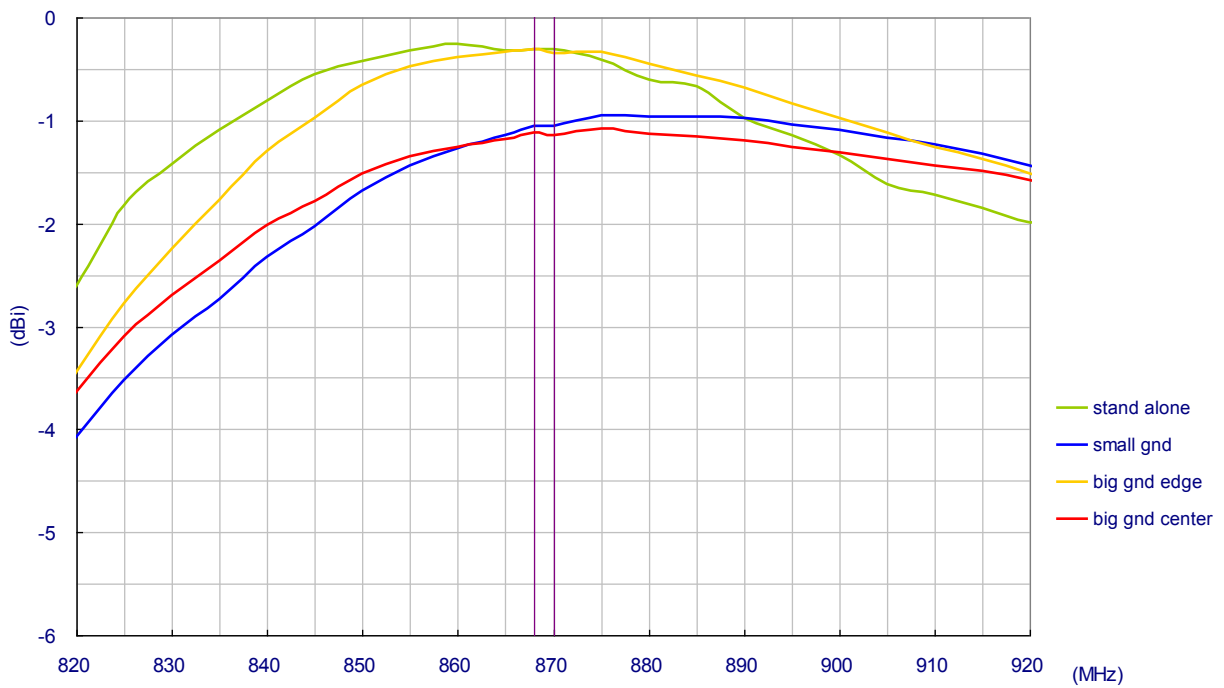

5.5. Peak Gain Bent

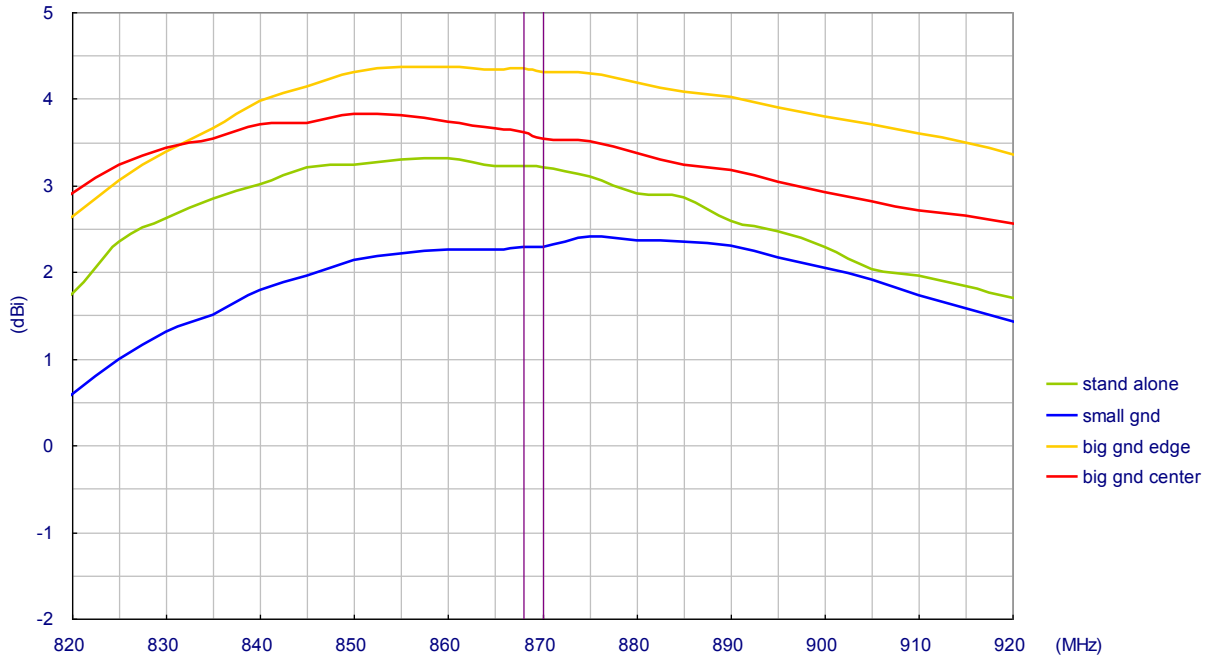


Straight

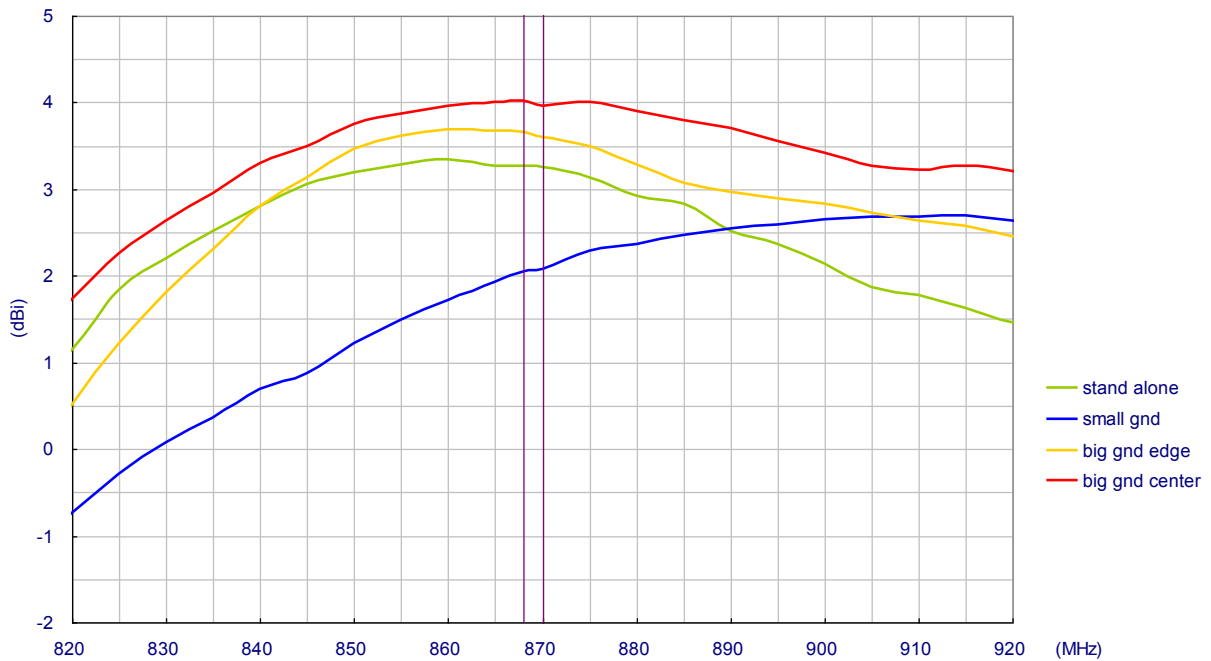


5.6. Radiation Pattern of 90 Degree Bend Position


XZ Plane Radiation

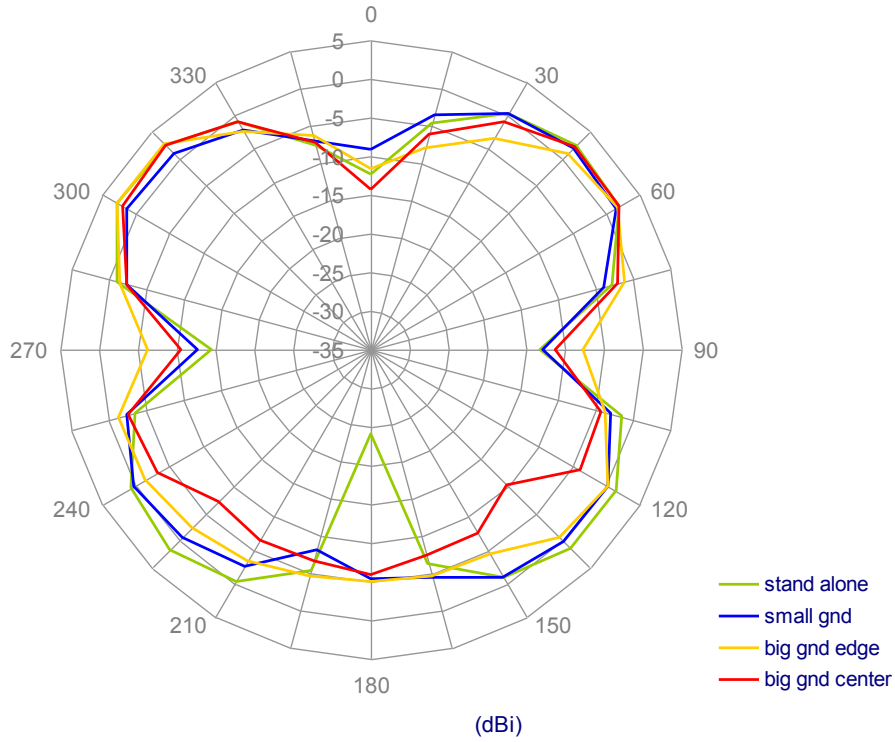

XY Plane Radiation

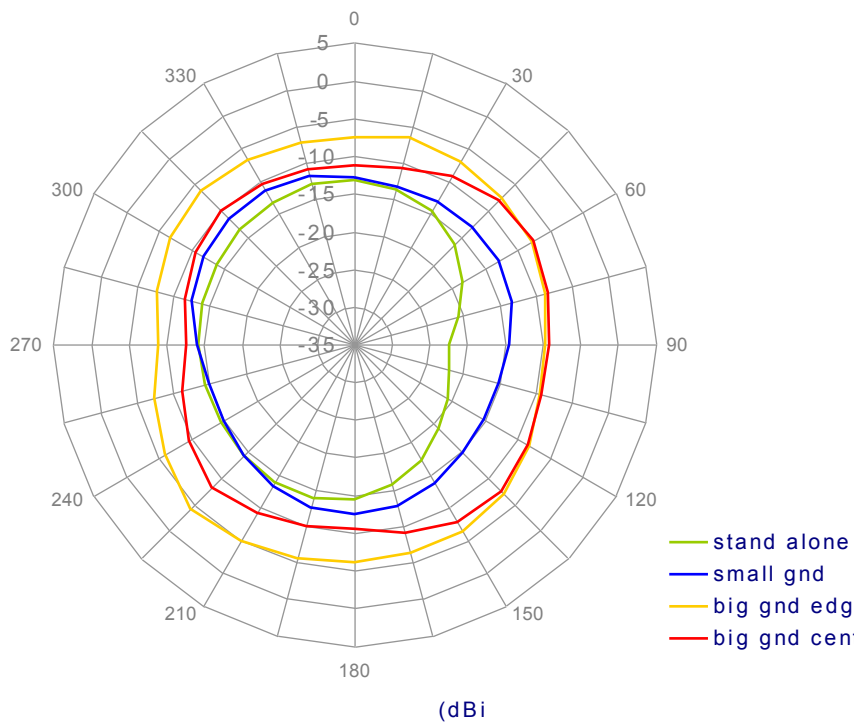


5.6.3 Radiation at 45 Degree from XY Plane

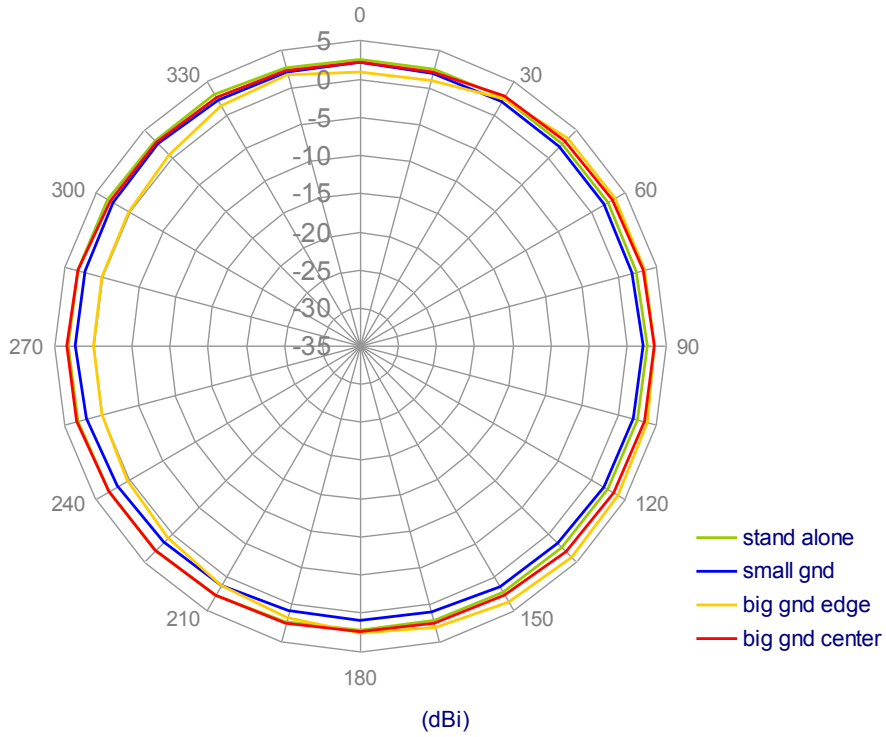


5.7. Radiation Pattern of 180 Degree Straight Position


XZ Plane Radiation

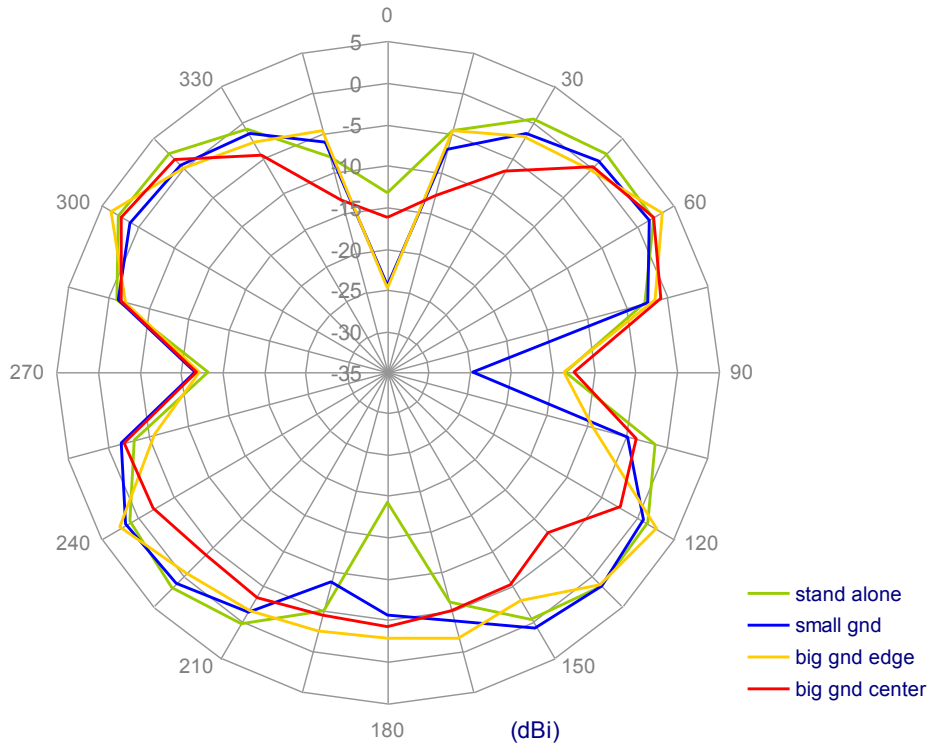


XY Plane Radiation

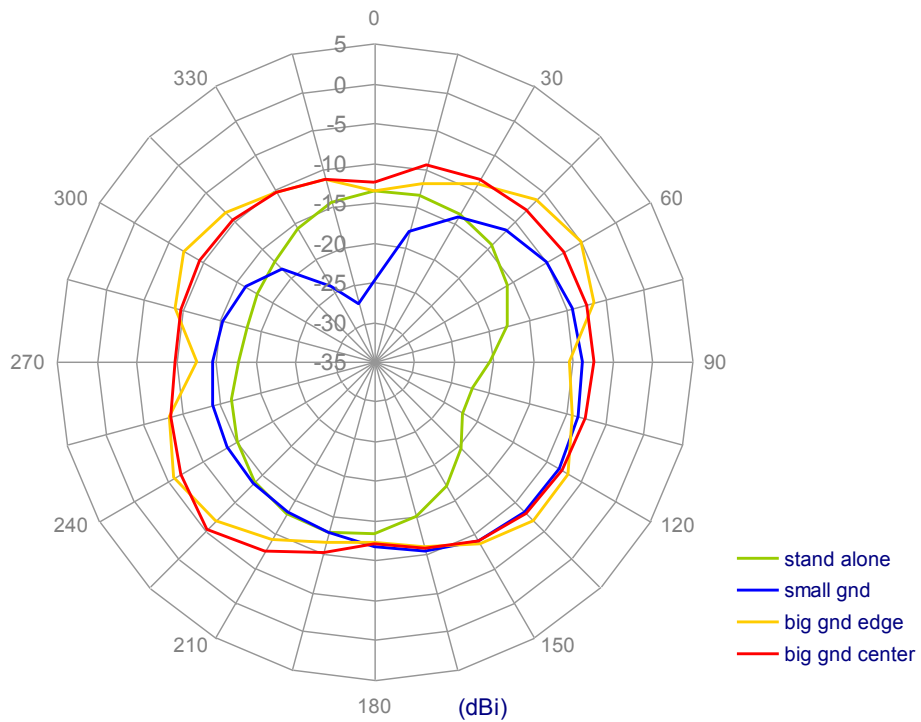

5.7.1 Radiation at 45 Degree from XY Plane

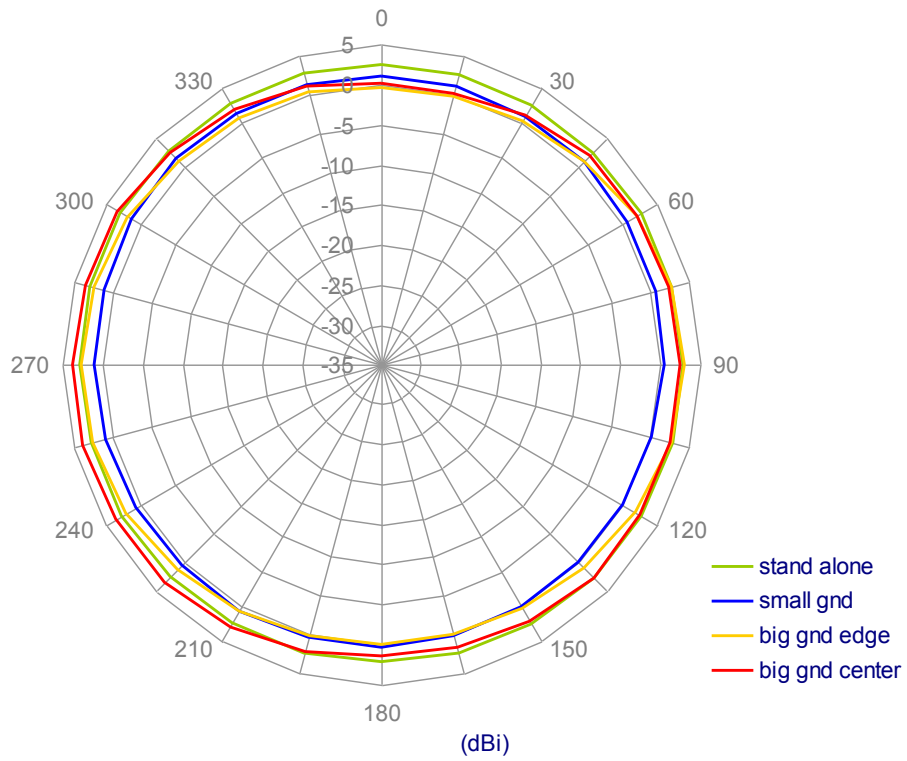

6. Mechanical Drawing (Unit: mm)

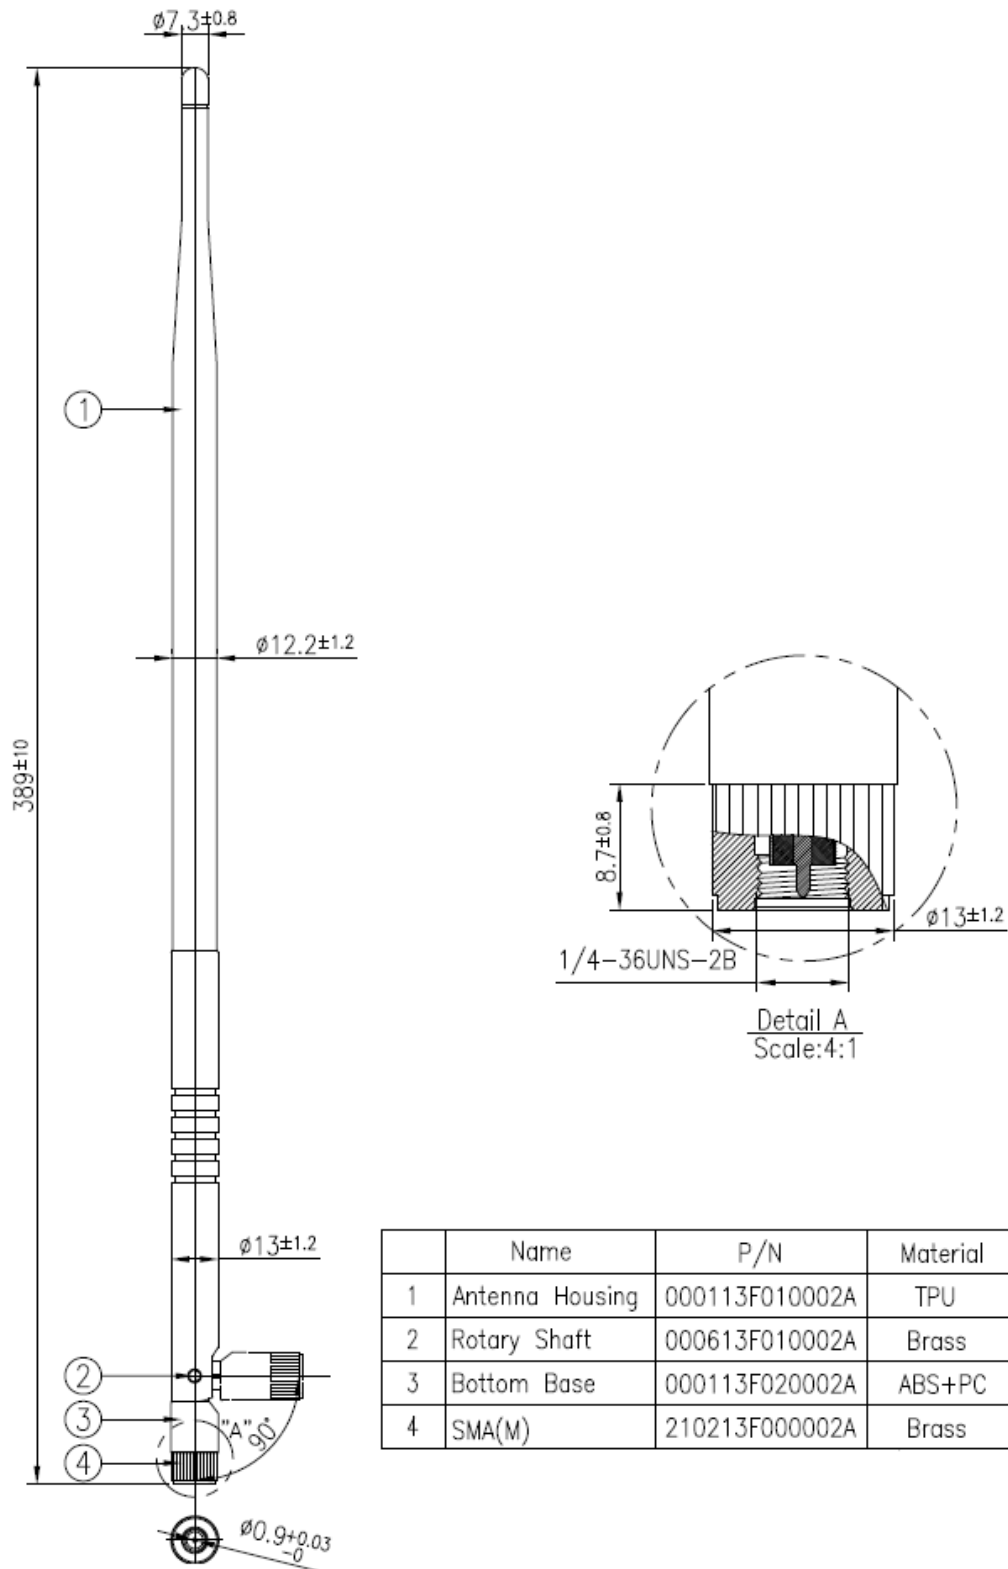

	Name	P/N	Material	Finish	QTY
1	Antenna Housing	000113F010002A	TPU	Black	1
2	Rotary Shaft	000613F010002A	Brass	Black	1
3	Bottom Base	000113F020002A	ABS+PC	Black	1
4	SMA(M)	210213F000002A	Brass	Black	1