


Features

- Single SPDT relay
- Double-sided adhesive tape
- Mounting screws
- Five 10" flying leads 18 AWG
- 5 wire-nuts

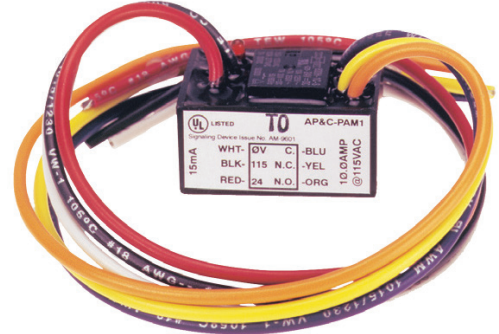

Description

The PAM-4 Relay provides 10.0 A form “C” contacts. The relay may be energized across a wide voltage range from 12VDC to 40VDC, making it ideal for 12VDC and 24VDC EOL circuits. The 20mA operating current is constant across the operating range. The input voltages are polarity-sensitive and diode-protected.


The PAM-4 may be mounted by using the double-sided adhesive tape, the self-drilling screw, or loosely placed in an electrical box.

PAM Relays are ideal for applications where remote relays are required for fire alarm control or status feedback. They are only suitable for use within UL864 applications and installed in accordance with NFPA 70[®] and NFPA 72[®].

Technical Specifications

Ambient Temperature	32°F to 120°F (0°C to 49°C)
Dimensions	1.50" (38mm) H x 1.20" (31mm) W x 0.77" (20mm) D 12" (254mm) 18ga. wire leads
Contact Rating	10A at 120 VAC 7A at 24VDC 250 Microamps at 5VDC
Power Requirements	20mA @ 12VDC, 24VDC, 32VDC
Relay	UL recognized SPDT

Installation

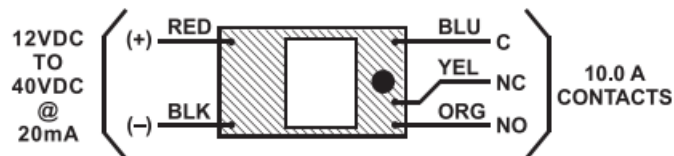

Ordering Information

Model	Description	Stock No.
PAM-4	Multi-Voltage Relay Module	1000268