


TITLE	PART No.	REV	PAGE
32 AWG, 100 Ohm, Twinax Cable	1000560065	B	1 of 1

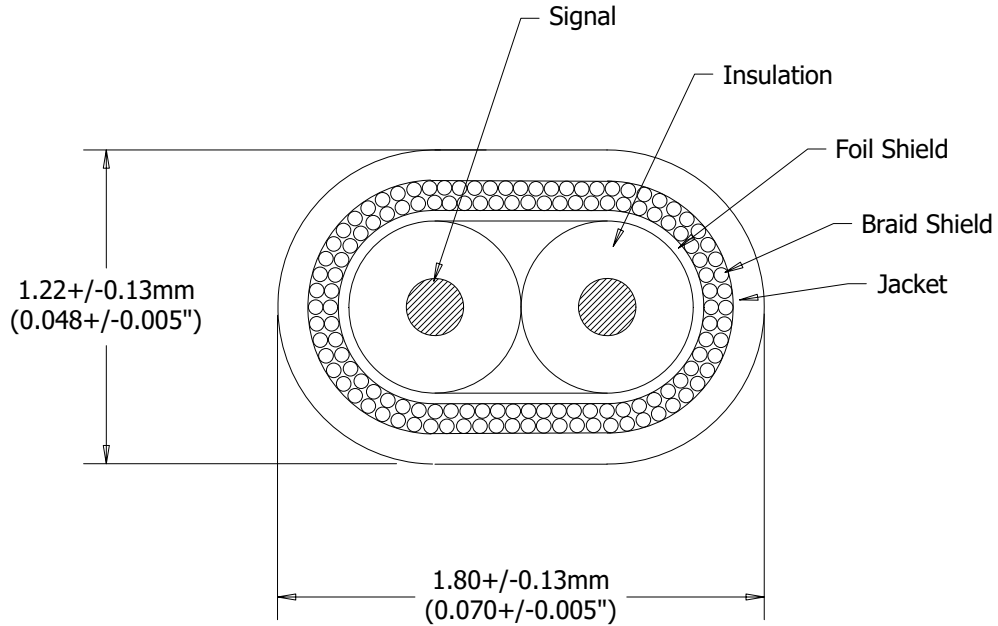

NOTES

Signal: 32 AWG, Solid Silver Plated Copper

Insulation: FEP, 0.023" +/- 0.001"

Color: One Blue, One Green

Shield: Aluminum/Polyester Tape Wrap (Aluminum Side Out)

Braid Shield: 44 AWG Tin Plated Copper, >90% Coverage

Jacket: Polyurethane, 0.006" Wall Thickness, Black

Differential Impedance: 100 +/- 5 Ohms

Capacitance: 14.5 pF/ft Ref.

Propagation Delay: 1.45 +/- 0.01 ns/ft

Within Pair Skew: 5ps/ft Max.

This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission.	Rev	DCR	Description	App'd	Date
	A	5888	Updated PN from 1000680065 to 1000560065.	KP	3/28/22
	B	5897	Updated Prop Delay.	KP	6/3/22