




## SUSPENDED SUBSTRATE STRIPLINE

# Filters and Multiplexers

50Ω DC to 40 GHz

### THE BIG DEAL

- Low Insertion Loss
- Ultra-Wide Passband Width
- Fast Roll-Off With Wide Stopband
- Good Power Handling and Temperature Stability
- Passband Up to 40 GHz
- Stopband Up to 40 GHz

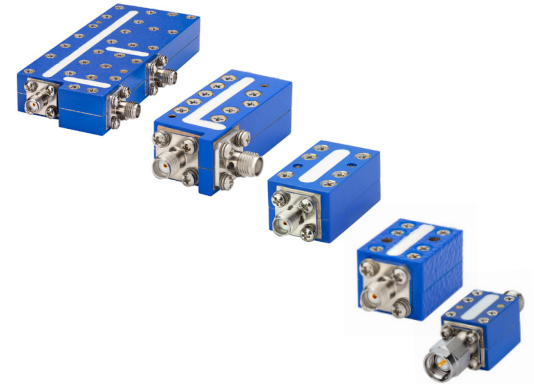

### PRODUCT OVERVIEW

Mini-Circuits' Suspended Substrate Stripline filters offer low insertion loss by implementing printed circuit board suspended between two parallel ground planes, providing high Q. Low insertion loss combined with wide stopband makes them an excellent choice for wideband instruments and systems like ECM, ECCM, ELINT and ultra-broadband receivers.

Low pass, high pass, band pass, band stop, diplexer and multiplexer designs can be realized with this technology. Advanced filter design and construction can help achieve stopband width greater than 6x the center frequency, and temperature stability will be better than other printed circuit realizations because the fields are mainly in the air rather than in a dielectric. The inside walls of the housing hold the circuit and prevent movement that could be caused by vibration or mechanical shock, making these designs excellent candidates for harsh operating environments.

Suspended substrate stripline filters can be realized in small form factors with high-quality, precise machining for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

### KEY FEATURES

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in receiver front end and better power delivery to antenna in transmitters
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stopband	Wide, spur-free stop band results in better receiver sensitivity
High power handling	Well suited for transmitter applications
Excellent temperature stability	Ensures minimal variation in electrical performance across temperature





## SUSPENDED SUBSTRATE STRIPLINE

# Low Pass Filter

# ZLSS-3R2G-S+

Mini-Circuits

50Ω DC to 3200 MHz SMA-Female

### FEATURES

- Low Insertion Loss, 0.6dB Typ.
- High Rejection of 90dB Typ.
- Wider Stopband Up to 20 GHz
- Connectorized Package
- Small Size, 22.86 x 17.78 x 15.24 mm

### APPLICATIONS

- Test and Measurement Equipment
- Radar, EW, and ECM Defense Systems



Generic photo used for illustration purposes only

Model No.	ZLSS-3R2G-S+
Case Style	RA2456
Connectors	SMA-FEMALE

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

### ELECTRICAL SPECIFICATIONS AT 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Units
Passband	DC-F1	DC - 3200	—	0.6	2.0	dB
	DC-F1	DC - 3200	—	15.5	—	dB
Stop Band	F2-F3	4800 - 5800	20	40	—	dB
	F3-F4	5800 - 7400	40	60	—	
	F4-F5	7400 - 12000	60	80	—	
	F5-F6	12000 - 20000	—	90	—	

### ABSOLUTE MAXIMUM RATINGS


Parameter	Ratings
Operating temperature	-40°C to +85°C
Storage temperature	-55°C to +100°C
RF Power Input at Passband	10W max. at 25°C

Permanent damage may occur if any of these limits are exceeded

### TYPICAL FREQUENCY RESPONSE

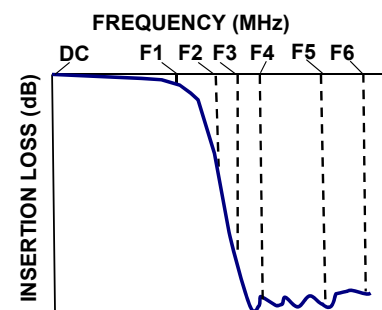

### FUNCTIONAL DIAGRAM

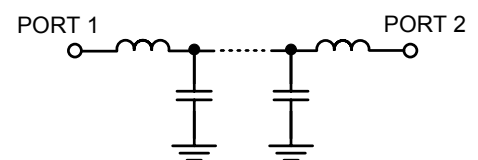


Mini-Circuits



### COAXIAL CONNECTIONS

PORT 1	SMA-Female
PORT 2	SMA-Female

### OUTLINE DRAWING

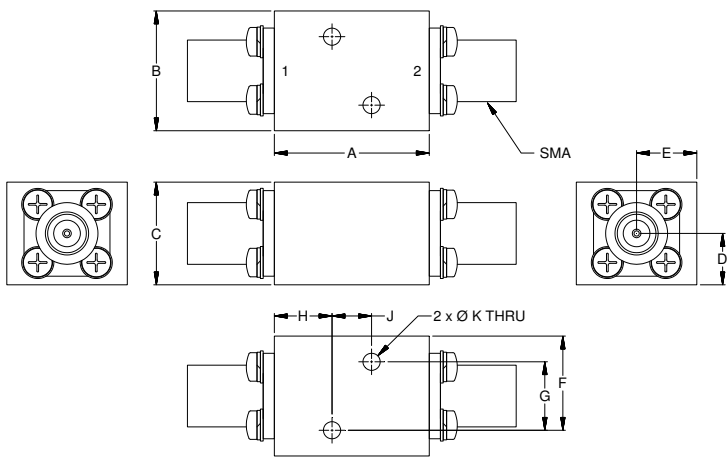

### OUTLINE DIMENSIONS (Inches/mm)

A	B	C	D	E	F	G	H	J	K	Wt.
.90	.70	.60	.30	.35	.55	.400	.34	.230	.100	grams
22.86	17.78	15.24	7.62	8.89	13.97	10.16	8.51	5.84	2.54	55

Note. Please refer to case style drawing for details