

Cavity Bandpass Filters

50Ω DC to 27.125 GHz



The Big Deal

- Very low insertion loss with excellent power handling
- Very fast roll-off with wide stopband
- Passbands up to 27.125 GHz
- Stopbands up to 37 GHz

Product Overview

Mini-Circuits' cavity filters are designed by implementing resonant structures with very high Q and are ideal for narrow-band, high-selectivity applications. These designs can provide bandwidths as narrow as 1% with very high selectivity and excellent low noise floor. Low insertion loss combined with excellent power handling makes them well-suited for transmitter and receiver front end. Advanced filter design and construction enables stopband width greater than 3x the center frequency.

Mini-Circuits' cavity filters feature a special protective assembly to prevent accidental de-tuning that would otherwise require expensive replacement or return to factory for re-tuning. Precise machining allows realization of cavity filters with small form factors for applications where size is critical. Excellent repeatability across units is achieved through precise tuning and process control.

Key Features

Feature	Advantages
Low insertion loss	Low signal loss results in better SNR in receiver front end and better power delivery to antenna in transmitter
Fast roll-off	Higher selectivity results in better adjacent channel rejection and dynamic range
Wide stopband	Wide spur free band results in better receiver sensitivity
High power handling	Well suited for transmitter application
Protective assembly	Prevents accidental de-tuning of precisely tuned resonant circuit

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Bandpass Filter

ZVBP-9500-S+

50Ω 9495 to 9505 MHz



Generic photo used for illustration purposes only

CASE STYLE: WB3291
Connectors Model
SMA-F ZVBP-9500-S+

Features

- Low Insertion loss, 1.7dB typ.
- Narrow bandwidth, 0.1%
- Good Return loss, 20dB typ.
- High rejection, 62dB typ.


Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	-	-	9500	-	MHz	
	3 dB Bandwidth	-	10	-	-	MHz	
	Insertion Loss	F1	9500	-	1.7	2.5	dB
	VSWR	F1	9500	-	1.2	1.5	:1
Stop Band, Lower	Insertion Loss	F2	9400	55	63	-	dB
Stop Band, Upper	Insertion Loss	F3	9600	55	62	-	dB

Applications

- Satellite
- Radar

Functional Schematic

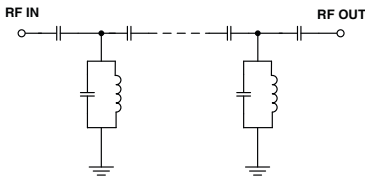

Maximum Ratings


Operating Temperature	+15°C to 35°C
Storage Temperature	-55°C to 100°C
RF Power Input	10 W max. @ 25°C

Permanent damage may occur if any of these limits are exceeded.

Typical Performance Data at 25°C





Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
9400	62.34	84.69	9495.0	36.33
9420	56.43	83.95	9495.5	35.35
9440	48.81	79.89	9496.0	34.52
9450	44.01	74.45	9496.5	33.87
9460	38.12	67.23	9497.0	33.37
9470	30.50	53.57	9497.5	32.99
9480	19.73	28.89	9498.0	32.75
9491	3.36	2.07	9498.5	32.55
9495	1.91	1.19	9499.0	32.49
9498	1.71	1.19	9499.5	32.40
9500	1.65	1.09	9500.0	32.38
9502	1.66	1.16	9500.5	32.35
9505	1.76	1.13	9501.0	32.40
9509	3.09	2.06	9501.5	32.45
9520	19.56	27.39	9502.0	32.58
9530	30.26	49.52	9502.5	32.74
9550	43.63	68.64	9503.0	33.00
9560	48.36	73.28	9503.5	33.37
9580	55.75	78.77	9504.0	33.90
9600	61.62	81.28	9505.0	35.44

Typical Frequency Response



+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

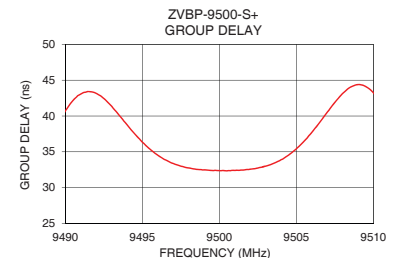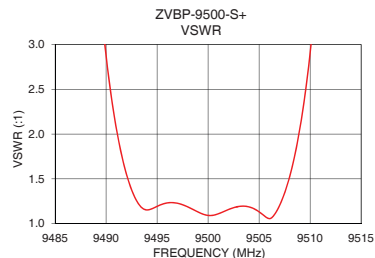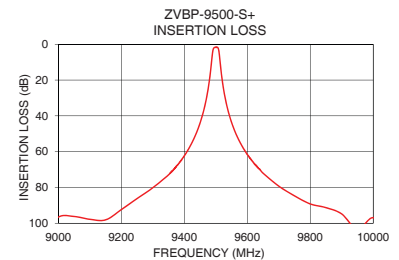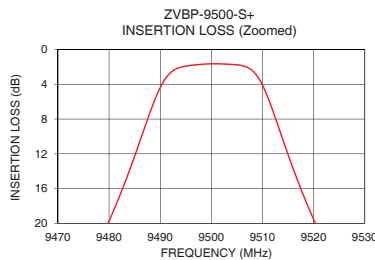

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

