



## THE BIG DEAL

- Wideband frequency coverage, DC to 18 GHz
- Low Loss, 2.0 dB at 18 GHz
- Excellent Return Loss, 23 dB at 18 GHz
- Hand formable to almost any custom shape without special bending tools
- 8mm bend radius for tight installations
- Anti-torque nut prevents cable stress during installation
- Insulated outer jacket standard
- Ideal for interconnect of assembled systems

*Generic photo used for illustration purposes only*

|                   |           |
|-------------------|-----------|
| <b>Model No.</b>  | 141-36SM+ |
| <b>Case Style</b> | KQ1506-36 |
| <b>Connectors</b> | SMA-Male  |

### +RoHS Compliant

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

## APPLICATIONS

- Replacement for custom bent 0.141" semi-rigid cables
- Communication receivers and transmitters
- Military and aerospace system
- Environmental and test chambers

## PRODUCT OVERVIEW

The 141 Series Hand-Flex™ Coaxial Cables are ideal for interconnection of coaxial components or sub-systems. The construction includes a silver-plated copper-clad steel center conductor which maintains the shape after bending. The outer shield is copper braid, tin soaked, which minimizes signal leakage and at the same time flexible for easy bend. Dielectric is low loss PTFE. Connectors have passivated stainless-steel coupling nut over a gold plated connector body and Silver Plated Copper Clad Steel.

## KEY FEATURES

| Features   | Advantages  |
|--|---|
| Hand-Formable RF Cables  | The 141 Series Hand-Flex™ cables are hand formable making them ideal for use integrating coaxial components and sub-assemblies without the need for special cable-bending tools and alleviating the risk of damage during the bending process typical of semi-rigid coaxial cable assemblies. |
| Tight Bend Radius  | Capable of only 8mm bend radius, the 141 Hand-Flex™ series is able to make connections in tight spaces making these cables ideal for dense system integration   |
| Excellent Return Loss  | Supporting typical return loss of 30 dB to 6 GHz and 21 dB to 18 GHz, the 141 Series Hand-Flex Cables are ideally suited for interconnecting a wide variety of RF components while minimizing VSWR ripple contribution due to mating cables & connectors.                                     |
| Good Power Handling Capability: <ul style="list-style-type: none"> <li>• 546W at 0.5 GHz</li> <li>• 90W at 18 GHz</li> </ul> | Mini-Circuits 141 Cable series can support medium to high RF power levels enabling these cables to be used in the transmit path. NOTE: power rating is at sea-level altitudes.  |
| Built-in Anti-torque nut   | Mini-Circuits' 141 Series Hand-Flex™ cables include an anti-torque feature to support the connector body during installation alleviating risk of stress to the connector/cable interface.   |
| Jacketed and Unjacketed options  | Standard 141 Series cables include a blue FEP insulator jacket reducing the risk of accidental shorting of DC power lines or active pins during installation and operation. Un-jacketed versions are available upon request.  |



# Coaxial Cable

### ELECTRICAL SPECIFICATIONS AT +25°C

| Parameter           | Condition (GHz) | Min. | Typ. | Max. | Units  |
|---------------------|-----------------|------|------|------|--------|
| Frequency Range     |                 | DC   |      | 18   | GHz    |
| Length <sup>2</sup> |                 |      | 36   |      | inches |
| Insertion Loss      | DC - 2          | —    | 0.33 | 0.67 | dB     |
|                     | 2 - 6           | —    | 0.64 | 1.26 |        |
|                     | 6 - 10          | —    | 1.10 | 1.72 |        |
|                     | 10 - 18         | —    | 1.51 | 2.48 |        |
| Return Loss         | DC - 2          | 23   | 43   | —    | dB     |
|                     | 2 - 6           | 23   | 41   | —    |        |
|                     | 6 - 10          | 17   | 37   | —    |        |
|                     | 10 - 18         | 17   | 29   | —    |        |

1. Unjacketed cable also available upon request.
2. Custom sizes available, consult factory.

### ABSOLUTE MAXIMUM RATINGS

| Parameter                         | Ratings   |
|-----------------------------------|---|
| Operating Temperature             | -55°C to +105°C   |
| Storage Temperature               | -55°C to +105°C   |
| Power Handling at 25°C, Sea Level | 546W at 0.5 GHz<br>387W at 1 GHz<br>273W at 2 GHz<br>156W at 6 GHz<br>121W at 10 GHz<br>90W at 18 GHz |



**HAND FLEX™**

# Coaxial Cable

**141-36SM+**

Mini-Circuits

50Ω 36 inch DC to 18 GHz SMA-Male


## CABLE CONSTRUCTION



- Center Conductor: Silver Plated Copper Clad Steel
- Dielectric: Solid PTFE
- Outer Shield: Copper Braid, Tin Soaked
- Jacket: FEP, Blue (Unjacketed cable also available upon request)

- Connectors:
- Coupling Nut: Stainless Steel Passivated
  - Body: Stainless Steel Gold Plated
  - Center Pin: Silver Plated Copper Clad Steel

## OUTLINE DRAWING

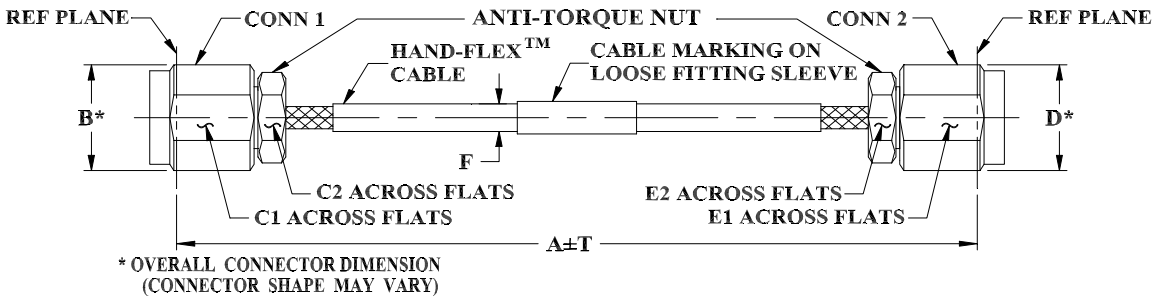

## OUTLINE DIMENSIONS (Inch/mm)

| A      | B    | C1   | C2   | D    | E1   | E2   | F    | T    | wt<br>grams |
|--------|------|------|------|------|------|------|------|------|-------------|
| 36.0   | .36  | .315 | .250 | .36  | .315 | .250 | .163 | .20  | 45.47       |
| 914.40 | 9.14 | 8.00 | 6.35 | 9.14 | 8.00 | 6.35 | 4.14 | 5.08 |             |

Mini-Circuits



HAND FLEX™

# Coaxial Cable

## 141-36SM+

Mini-Circuits

50Ω 36 inch DC to 18 GHz SMA-Male

### TYPICAL PERFORMANCE DATA AND CHARTS

| Frequency (MHz) | Insertion Loss (dB) | Return Loss (dB) |          |
|-----------------|---------------------|------------------|----------|
|                 |                     | SMA-Male         | SMA-Male |
| 100.0           | 0.11                | 48.7             | 47.2     |
| 633.3           | 0.29                | 39.6             | 39.5     |
| 1166.7          | 0.40                | 42.1             | 41.2     |
| 2000.0          | 0.53                | 44.0             | 42.2     |
| 4105.7          | 0.80                | 51.4             | 41.7     |
| 6000.0          | 1.00                | 37.4             | 44.0     |
| 6000.0          | 1.00                | 37.4             | 44.0     |
| 6842.9          | 1.08                | 32.3             | 36.3     |
| 7965.4          | 1.18                | 29.9             | 29.2     |
| 10000.0         | 1.35                | 33.6             | 40.0     |
| 10000.0         | 1.35                | 33.6             | 40.0     |
| 11380.1         | 1.47                | 33.0             | 29.1     |
| 13586.8         | 1.65                | 34.8             | 28.9     |
| 15793.4         | 1.73                | 30.6             | 24.4     |
| 18000.0         | 1.96                | 23.7             | 20.6     |

