Hex inverter with open-drain outputs Rev. 1 — 9 July 2012

Product data sheet

General description 1.

The 74HC05-Q100 is a high-speed Si-gate CMOS device that complies with JEDEC standard no. 7A.

The 74HC05-Q100 contains six inverters. The outputs of the 74HC05-Q100 are open-drain and can be connected to other open-drain outputs to implement active-LOW wired-OR or active-HIGH wired-AND functions. The open-drain outputs require pull-up resistors to perform correctly.

This product has been qualified to the Automotive Electronics Council (AEC) standard Q100 (Grade 1) and is suitable for use in automotive applications.

Features and benefits 2.


- Automotive product qualification in accordance with AEC-Q100 (Grade 1)
 - Specified from –40 °C to +85 °C and from –40 °C to +125 °C
- Wide operating voltage 2.0 V to 6.0 V
- Input levels:
 - For 74HC05-Q100: CMOS level
- Latch-up performance exceeds 100 mA per JESD 78 Class II level A
- ESD protection:
 - MIL-STD-883, method 3015 exceeds 2000 V
 - HBM JESD22-A114F exceeds 2000 V
 - MM JESD22-A115-A exceeds 200 V (C = 200 pf, R = 0 Ω)
- Multiple package options



3. Ordering information


Table 1. Orderii	ng information						
Type number	Package						
	Temperature range	Name	Description	Version			
74HC05D-Q100	–40 °C to +125 °C	SO14	plastic small outline package; 14 leads; body width 3.9 mm	SOT108-1			
74HC05PW-Q100	–40 °C to +125 °C	TSSOP14	plastic thin shrink small outline package; 14 leads; body width 4.4 mm	SOT402-1			
74HC05BQ-Q100	–40 °C to +125 °C	DHVQFN14	plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 14 terminals; body $2.5 \times 3 \times 0.85$ mm	SOT762-1			


4. Functional diagram

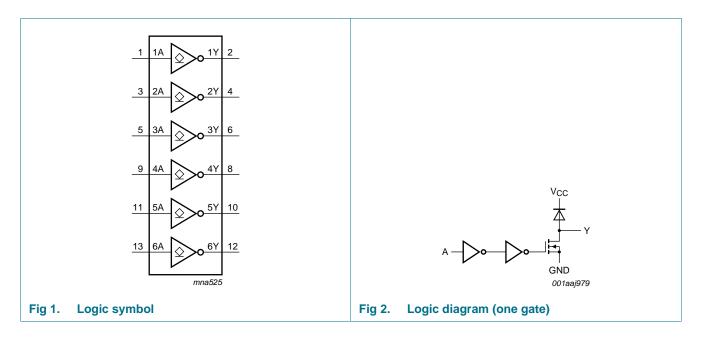

5. Pinning information

5.1 Pinning

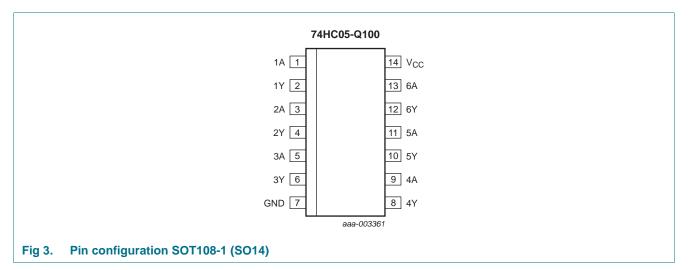

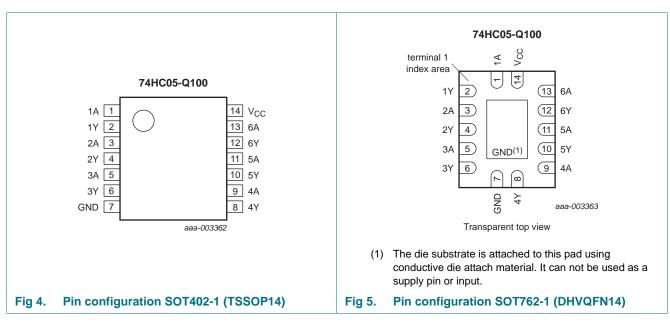

5.2 Pin description

Table 2.	Pin description	
Symbol	Pin	Description
1A to 6A	1, 3, 5, 9, 11, 13	data input
1Y to 6Y	2, 4, 6, 8, 10, 12	data output
GND	7	ground (0 V)
V _{CC}	14	supply voltage

74HC05_Q100 Product data sheet © Nexperia B.V. 2017. All rights reserved

Functional description 6.

Table 3.	Function table ^[1]	
Input		Output
nA		nY
L		Z
Н		L

[1] H = HIGH voltage level; L = LOW voltage level; Z = high-impedance OFF-state.

Limiting values 7.

Table 4. **Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Max	Unit
V _{CC}	supply voltage		-0.5	+7	V
I _{IK}	input clamping current	$V_{\rm I}$ < –0.5 V or $V_{\rm I}$ > $V_{\rm CC}$ + 0.5 V	<u>[1]</u> -	±20	mA
I _{OK}	output clamping current	$V_{\rm O}$ < –0.5 V or $V_{\rm O}$ > $V_{\rm CC}$ + 0.5 V	<u>[1]</u> -	±20	mA
Vo	output voltage		<u>[1]</u> –0.5	V _{CC} + 0.5 V	V
lo	output current	$V_{\rm O} < V_{\rm CC} + 0.5 \ V$	-	25	mA
I _{CC}	supply current		-	50	mA
I _{GND}	ground current		-50	-	mA
T _{stg}	storage temperature		-65	+150	°C
P _{tot}	total power dissipation		[2] _	500	mW

[1] The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] For SO14 package: Ptot derates linearly with 8 mW/K above 70 °C.

For TSSOP14 packages: Ptot derates linearly with 5.5 mW/K above 60 °C. For DHVQFN14 packages: Ptot derates linearly with 4.5 mW/K above 60 °C.

Recommended operating conditions 8.

Table 5. **Recommended operating conditions**

Voltages are referenced to GND (ground = 0 V) Symbol Parameter Conditions Min Typ Max Unit 2.0 V_{CC} supply voltage 5.0 6.0 V Vı input voltage 0 V_{CC} V output voltage 0 V Vo -V_{CC} ambient temperature -40 +125 °C Tamb - $\Delta t / \Delta V$ input transition rise and fall rate $V_{CC} = 2.0 V$ 625 ns/V _ - $V_{CC} = 4.5 V$ -1.67 139 ns/V $V_{CC} = 6.0 V$ 83 ns/V --

74HC05 Q100

4 of 15

Hex inverter with open-drain outputs

9. Static characteristics

Table 6. Static characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		25 °C		-40 °C t	to +85 °C	-40 °C to	o +125 ℃	Unit
			Min	Тур	Max	Min	Max	Min	Max	
V _{IH}	HIGH-level	V _{CC} = 2.0 V	1.5	1.2	-	1.5	-	1.5	-	V
	input voltage	$V_{CC} = 4.5 V$	3.15	2.4	-	3.15	-	3.15	-	V
		$V_{CC} = 6.0 V$	4.2	3.2	-	4.2	-	4.2	-	V
V _{IL}	LOW-level	$V_{CC} = 2.0 V$	-	0.8	0.5	-	0.5	-	0.5	V
	input voltage	$V_{CC} = 4.5 V$	-	2.1	1.35	-	1.35	-	1.35	V
		$V_{CC} = 6.0 V$	-	2.8	1.8	-	1.8	-	1.8	V
V _{OL}	LOW-level	$V_I = V_{IH} \text{ or } V_{IL}$								
	output voltage	$I_{O} = 20 \ \mu A; V_{CC} = 2.0 \ V$	-	0	0.1	-	0.1	-	0.1	V
		$I_O = 20 \ \mu\text{A}; \ V_{CC} = 4.5 \ \text{V}$	-	0	0.1	-	0.1	-	0.1	V
		$I_{O} = 20 \ \mu A; V_{CC} = 6.0 \ V$	-	0	0.1	-	0.1	-	0.1	V
		I_{O} = 4.0 mA; V_{CC} = 4.5 V	-	0.15	0.26	-	0.33	-	0.4	V
		I_{O} = 5.2 mA; V_{CC} = 6.0 V	-	0.16	0.26	-	0.33	-	0.4	V
l _l	input leakage current	$V_I = V_{CC}$ or GND; $V_{CC} = 6.0 V$	-	-	±0.1	-	±1	-	±1	μA
I _{OZ}	OFF-state output current	per input pin; $V_I = V_{IL}$; $V_O = V_{CC}$ or GND; other inputs at V_{CC} or GND; $V_{CC} = 6.0 \text{ V}$; $I_O = 0 \text{ A}$	-	-	±0.5	-	±5.0	-	±10	μA
I _{CC}	supply current		-	-	2.0	-	20	-	40	μA
CI	input capacitance		-	3.5	-	-	-	-	-	pF

Hex inverter with open-drain outputs

10. Dynamic characteristics

Table 7. Dynamic characteristics

GND = 0 V; for test circuit see <u>Figure 7</u>.

Symbol	Parameter	Conditions			25 °C		-40 °C to	o +125 ℃	Unit
			_	Min	Тур	Max	Мах (85 °С)	Max (125 °C)	
t _{PLZ}	LOW to OFF-state	nA to nY; see Figure 6							
	propagation delay	$V_{CC} = 2.0 V$		-	20	90	115	135	ns
		$V_{CC} = 4.5 V$		-	11	18	23	27	ns
		$V_{CC} = 6.0 V$		-	10	15	20	23	ns
t _{PZL} OFF-state to LOW		nA to nY; see <u>Figure 6</u>							
	propagation delay	$V_{CC} = 2.0 V$		-	22	90	115	135	ns
		$V_{CC} = 4.5 V$		-	9	18	23	27	ns
		$V_{CC} = 6.0 V$		-	8	15	20	23	ns
t _{THL}	HIGH to LOW	see Figure 6							
	output transition	$V_{CC} = 2.0 V$		-	18	75	95	110	ns
time	$V_{CC} = 4.5 V$		-	6	15	19	22	ns	
		$V_{CC} = 6.0 V$		-	5	13	16	19	ns
C _{PD}	power dissipation capacitance	per inverter; V _I = GND to V _{CC} ; V _{CC} = 5.0 V	<u>[1]</u>	-	4	-	-	-	pF

[1] C_{PD} is used to determine the dynamic power dissipation (P_D in μ W).

 $P_{D} = C_{PD} \times V_{CC}^{2} \times f_{i} \times N + \Sigma (0.5 \times C_{L} \times V_{O}^{2} \times f_{o}) \text{ where:}$

 $f_i = input frequency in MHz;$

 $f_o = output frequency in MHz;$

 V_O = output voltage in V (output HIGH);

 V_{CC} = supply voltage in V;

N = number of inputs switching;

 R_L = load resistance in M Ω ;

 C_L = load capacitance in pF;

Hex inverter with open-drain outputs

11. Waveforms

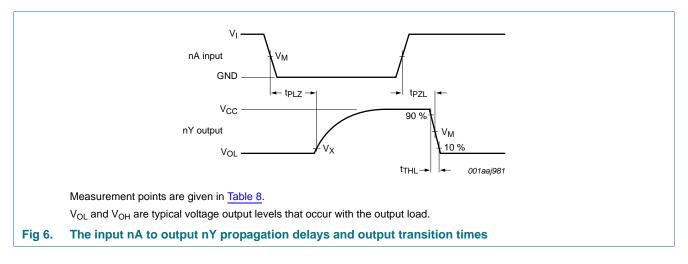


Table 8. Measurement points

Input	Output	
V _M	V _M	V _X
0.5V _{CC}	0.5V _{CC}	0.1V _{CC}

Nexperia

74HC05-Q100

Hex inverter with open-drain outputs

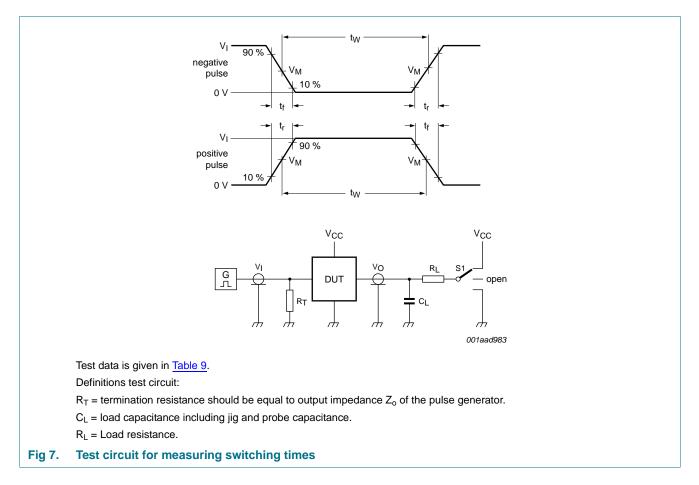


Table 9. Test data

Input		Load		S1 position
VI	t _r , t _f	CL	RL	t _{PZL} , t _{PLZ}
V _{CC}	6 ns	50 pF	1 kΩ	V _{CC}

12. Package outline


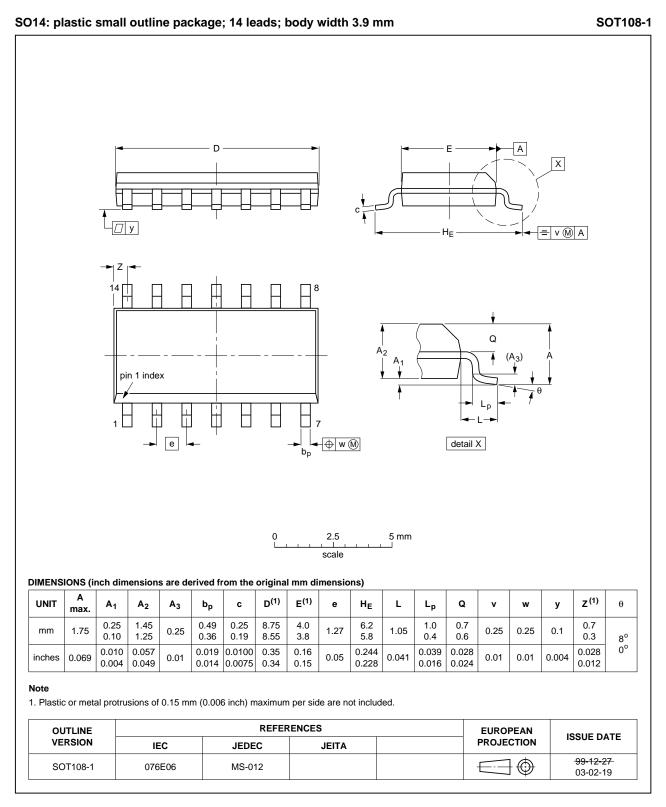


Fig 8. Package outline SOT108-1 (SO14)

All information provided in this document is subject to legal disclaimers.

74HC05 Q100


Hex inverter with open-drain outputs

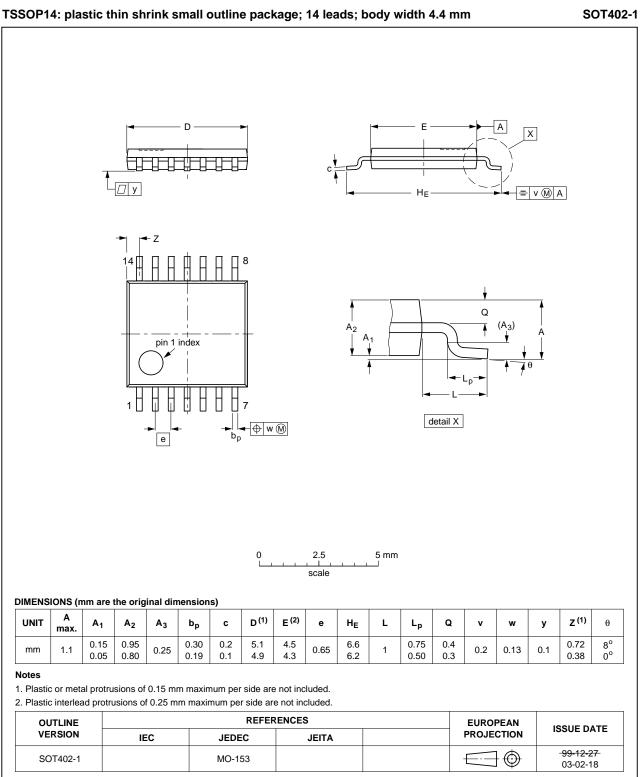

Package outline SOT402-1 (TSSOP14) Fig 9.

All information provided in this document is subject to legal disclaimers.

74HC05 Q100

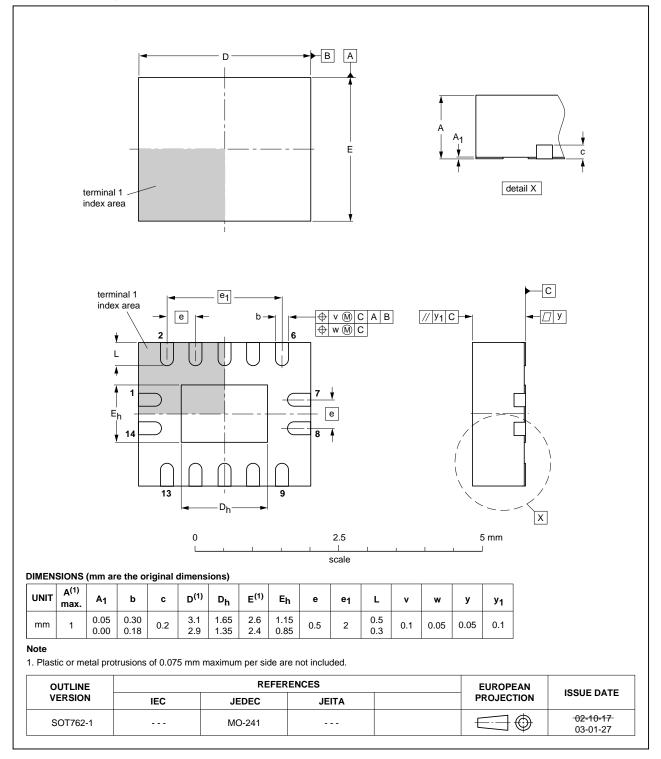

DHVQFN14: plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 14 terminals; body 2.5 x 3 x 0.85 mm SOT762-1

Fig 10. Package outline SOT762-1 (DHVQFN14)

All information provided in this document is subject to legal disclaimers.

74HC05_Q100

13. Abbreviations

Acronym CDM CMOS DUT	Description Charged Device Model Complementary Matel Ovide Complementary
CMOS	
	Complementary Matel Ovide Comisenductor
DUT	Complementary Metal-Oxide Semiconductor
201	Device Under Test
ESD	ElectroStatic Discharge
HBM	Human Body Model

14. Revision history

Table 11. Revision h	istory			
Document ID	Release date	Data sheet status	Change notice	Supersedes
74HC05_Q100_1	20120709	Product data sheet	-	-

Hex inverter with open-drain outputs

15. Legal information

15.1 Data sheet status

Document status[1][2]	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

15.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any

representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and

customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

15.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications — This Nexperia product has been qualified for use in automotive

applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale - Nexperia

products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

Hex inverter with open-drain outputs

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

16. Contact information

For more information, please visit: http://www.nexperia.com

For sales office addresses, please send an email to: salesaddresses@nexperia.com