



ADP-BNCM-BNCF-T

BNC Plug to BNC Jack Adapter

The ADP-BNCM-BNCF-T is a BNC plug to BNC T jack adapter. Operating from 0 Hz to 6.5 GHz, the ADP-BNCM-BNCF-T combines superior performance, compact size, and a convenient bayonet-style mating interface to provide a reliable, easy-to-use adapter. Additionally, all Linx BNC adapters meet RoHS lead free standards and are tested to meet requirements for corrosion resistance, vibration, mechanical and thermal shock.

FEATURES

- 0 to 6.5 GHz operation
- BNC plug (male pin) connection
 - Nickel plated zinc body
 - Gold plated brass center contact
- BNC T jack (female socket) connections
 - Nickel plated zinc body
 - Gold plated brass center contact

APPLICATIONS

- Audio/Video
- Broadcasting
- Test Equipment
- Surveillance Systems
- Ethernet
- Industrial, Commercial, Enterprise

ORDERING INFORMATION

Part Number	Description
ADP-BNCM-BNCF-T	BNC plug (male pin) to BNC T jack (female socket) adapter

Available from Linx Technologies and select distributors and representatives.

TABLE 1. ELECTRICAL SPECIFICATIONS

Parameter	Value	
Impedance	50 Ω	
Frequency Range	0 Hz to 6.5 GHz	
Contact Resistance	Center: $\leq 3.0 \text{ m}\Omega$ Outer: $\leq 2.0 \text{ m}\Omega$	
Port-to-Port	Port 2 to Port 1	Port 2 to Port 3
Insertion Loss (dB max.)	5.0	5.2
VSWR (max.)	2.3	2.1

PRODUCT DIMENSIONS

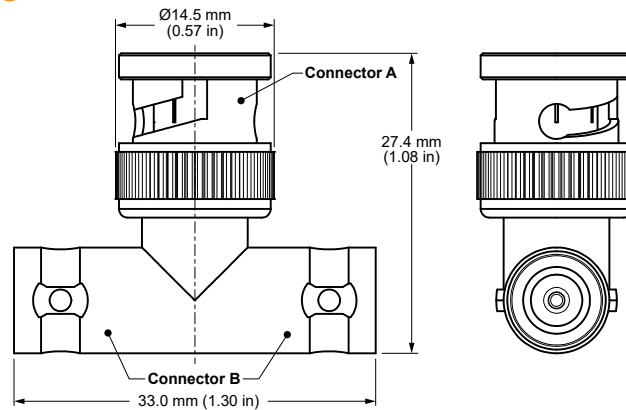


Figure 1. Product Dimensions for the ADP-BNCF-BNCF-T Adapter

TABLE 2. ADAPTER COMPONENTS

ADP-BNCF-BNCF-T	Connector A BNC plug (male pin)		Connector B BNC jack (female socket)	
	Material	Finish	Material	Finish
Connector Part	Brass	Nickel	Brass	Nickel
Body	Brass	Gold	Brass	Gold
Center Contact	POM	-	POM	-
Insulator				

TABLE 3. MECHANICAL SPECIFICATIONS

ADP-BNCF-BNCF-T-2	Connector A BNC plug (male pin)	Connector B BNC jack (female socket)
Mounting Type	Inline, Free-hanging	
Fastening Type	Bayonet-style Coupling (Push/Twist)	Bayonet-style Coupling (Push/Twist)
Interface in Accordance with	MIL-STD-348B	MIL-STD-348B
Durability	50 cycles min.	50 cycles min.
Weight	13.7 g (0.48 oz)	

TABLE 4. ENVIRONMENTAL SPECIFICATIONS

MIL-STD, Method, Test Condition	
Corrosion (Salt spray)	MIL-STD-202 Method 101 test condition B
Thermal Shock	MIL-STD-202 Method 107 test condition C
Vibration	MIL-STD-202 Method 204 test condition B
Mechanical Shock	MIL-STD-202 Method 213 test condition B
Moisture Resistance	MIL-STD-202 Method 106 test condition D
Temperature Range	-65 °C to +165 °C
Environmental Compliance	RoHS

INSERTION LOSS

Figure 2 shows the Insertion Loss for the ADP-BNCF-T adapter. Insertion loss is the loss of signal power (gain) resulting from the insertion of a device in a transmission line.

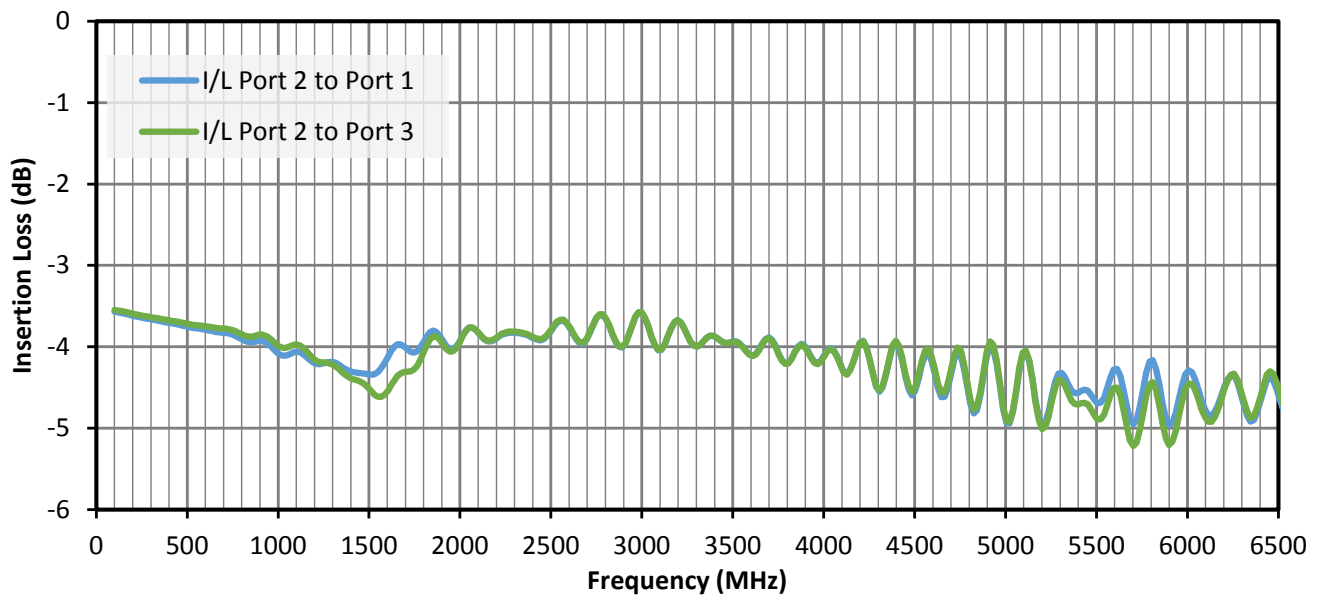


Figure 2. Insertion Loss for the ADP-BNCF-T Adapter