

### TNC Bulkhead Female Jack to SMA Male Plug

Model Number

**ADT-2815-TF-SMM-02**

**SPECIFICATIONS**

**Frequency:** DC - 18.0 GHz


**VSWR:** 1.05 @ DC-4.0 GHz

1.10 @ 4.0-8.0 GHz

1.15 @ 8.0-18.0 GHz

**Impedance:** 50 Ohms

**Finish:** Passivated Stainless Steel

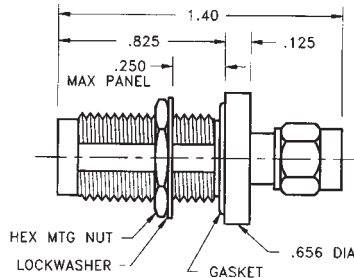

### TNC Bulkhead Female Jack to SMA Female Jack

Model Number

**ADT-2793-TF-SMF-02**

**SPECIFICATIONS**

**Frequency:** DC - 18.0 GHz


**VSWR:** 1.05 @ DC-4.0 GHz

1.10 @ 4.0-8.0 GHz

1.15 @ 8.0-18.0 GHz

**Impedance:** 50 Ohms

**Finish:** Passivated Stainless Steel



Note: A rear mounted bulkhead TNC to SMA female adapter is also available as ADT-2779-TF-SMF-02

### TNC Flange Mount Female Jack to SMA Male Plug

Model Number

**ADT-2689-TF-SMM-02**

**SPECIFICATIONS**

**Frequency:** DC - 18.0 GHz


**VSWR:** 1.05 @ DC-4.0 GHz

1.10 @ 4.0-8.0 GHz

1.15 @ 8.0-18.0 GHz

**Impedance:** 50 Ohms

**Finish:** Passivated Stainless Steel

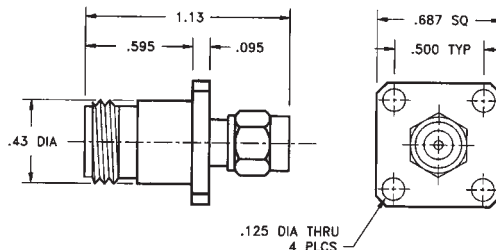

### TNC Flange Mount Female Jack to SMA Female Jack

Model Number

**ADT-2699-TF-SMF-02**


**SPECIFICATIONS**

**Frequency:** DC - 18.0 GHz

**VSWR:** 1.07 + .015f Ghz

**Impedance:** 50 Ohms

**Finish:** Passivated Stainless Steel

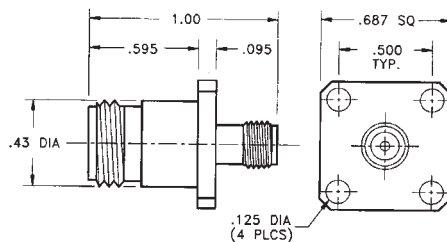

Note: Also available with four #3-56 tapped holes in flange as ADT-2699-FF-022-02