

BCR16FM-12LB

600V - 16A - Triac

Medium Power Use

R07DS1188EJ0201

Rev.2.01

Feb. 19, 2019


Features

- $I_T(\text{RMS})$: 16 A
- V_{DRM} : 600 V
- T_j : 150 °C
- $I_{\text{FGTI}}, I_{\text{RGTI}}, I_{\text{RGTH}}$: 30 mA(20mA) ^{Note5}
- Insulated Type
- Planar Passivation Type
- V_{iso} : 2000V

Outline



RENESAS Package code: PRSS0003AG-A
(Package name: TO-220FP)

Ordering code
#BB0



RENESAS Package code: PRSS0003AP-A
(Package name: TO-220FPA)

Ordering code
#BG0
#BH0



- T_1 Terminal
- T_2 Terminal
- Gate Terminal

Application

Motor control, Heater control, Power supply, Solid state relay, and other general purpose AC control applications.

Maximum Ratings

Parameter	Symbol	Voltage class		Unit
		12		
Repetitive peak off-state voltage ^{Note1}	V_{DRM}	600		V
Non-repetitive peak off-state voltage ^{Note1}	V_{DSM}	720		V

Parameter	Symbol	Ratings	Unit	Conditions
RMS on-state current	$I_T(\text{RMS})$	16	A	Commercial frequency, sine full wave 360° conduction, $T_c = 98^\circ\text{C}$ (#BB0, #BH0) ^{Note2} $T_c = 87^\circ\text{C}$ (#BG0) ^{Note2}
Surge on-state current	I_{TSM}	160	A	50 Hz sinewave 1 full cycle, peak value, non-repetitive
I^2t for fusion	I^2t	106.5	A ² s	Value corresponding to 1 cycle of half wave 50 Hz, surge on-state current
Peak gate power dissipation	P_{GM}	5	W	
Average gate power dissipation	$P_{\text{G(AV)}}$	0.5	W	
Peak gate voltage	V_{GM}	10	V	
Peak gate current	I_{GM}	2	A	
Junction Temperature	T_j	-40 to +150	°C	
Storage temperature	T_{stg}	-40 to +150	°C	
Isolation voltage ^{Note7}	V_{iso}	2000	V	$T_a=25^\circ\text{C}$, AC 1 minute, $T_1 \cdot T_2 \cdot G$ terminal to case

Notes: 1. Gate open.

2. Please refer to the Ordering Information.


Electrical Characteristics

Parameter		Symbol	Min.	Typ.	Max.	Unit	Test conditions
Repetitive peak off-state current		I_{DRM}	—	—	2.0	mA	$T_j = 150^\circ\text{C}$, V_{DRM} applied
On-state voltage		V_{TM}	—	—	1.5	V	$T_c = 25^\circ\text{C}$, $I_{TM} = 25 \text{ A}$, instantaneous measurement
Gate trigger voltage ^{Note3}	I	V_{FGTI}	—	—	1.5	V	$T_j = 25^\circ\text{C}$, $V_D = 6 \text{ V}$, $R_L = 6 \Omega$, $R_G = 330 \Omega$
	II	V_{RGTI}	—	—	1.5	V	
	III	$V_{RGTI\text{III}}$	—	—	1.5	V	
Gate trigger current ^{Note3}	I	I_{FGTI}	—	—	30 ^{Note6}	mA	$T_j = 25^\circ\text{C}$, $V_D = 6 \text{ V}$, $R_L = 6 \Omega$, $R_G = 330 \Omega$
	II	I_{RGTI}	—	—	30 ^{Note6}	mA	
	III	$I_{RGTI\text{III}}$	—	—	30 ^{Note6}	mA	
Gate non-trigger voltage		V_{GD}	0.2	—	—	V	$T_j = 125^\circ\text{C}$, $V_D = 1/2 V_{DRM}$
			0.1	—	—		$T_j = 150^\circ\text{C}$, $V_D = 1/2 V_{DRM}$
Thermal resistance		$R_{th(j-c)}$	—	—	2.9	$^\circ\text{C}/\text{W}$	Junction to case ^{Note4} (#BB0, #BH0) ^{Note2}
			—	—	3.5	$^\circ\text{C}/\text{W}$	Junction to case ^{Note4} (#BG0) ^{Note2}
Critical-rate of rise of off-state commutation voltage ^{Note5}		$(dv/dt)_c$	10	—	—	V/ μs	$T_j = 125^\circ\text{C}$
			1	—	—		$T_j = 150^\circ\text{C}$

Notes: 3. Measurement using the gate trigger characteristics measurement circuit.


- 4. The contact thermal resistance $R_{th(c-f)}$ in case of greasing is $0.5^\circ\text{C}/\text{W}$.
- 5. Test conditions of the critical-rate of rise of off-state commutation voltage is shown in the table below.
- 6. High sensitivity ($I_{GT} \leq 20 \text{ mA}$) is also available. (I_{GT} item:1)
- 7. Make sure that your finished product containing this device meets your safe isolation requirements.

For safety, it's advisable that heatsink is electrically floating.

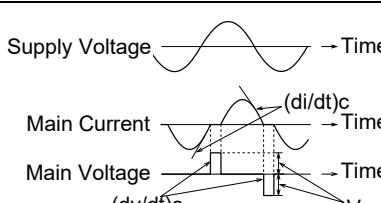
Test conditions	Commutating voltage and current waveforms (inductive load)
1. Junction temperature $T_j = 125^\circ\text{C}/150^\circ\text{C}$ 2. Rate of decay of on-state commuting current $(di/dt)_c = -8 \text{ A/ms}$ 3. Peak off-state voltage $V_D = 400 \text{ V}$	

Performance Curves


Maximum On-State Characteristics

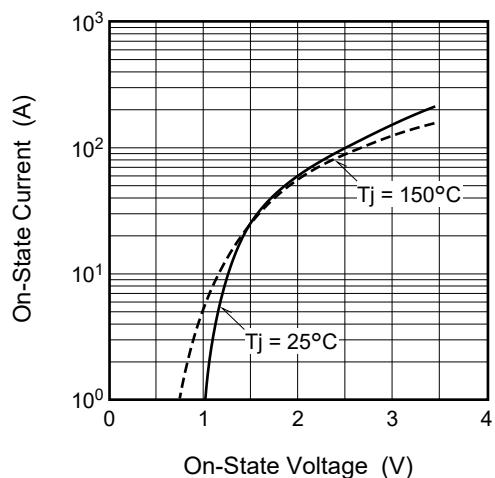


Rated Surge On-State Current

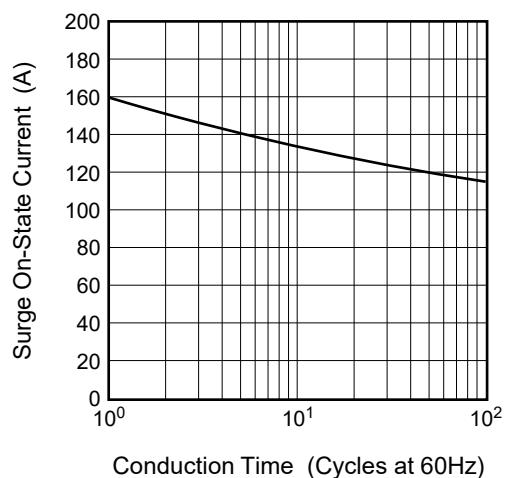


Gate Characteristics (I, II and III)

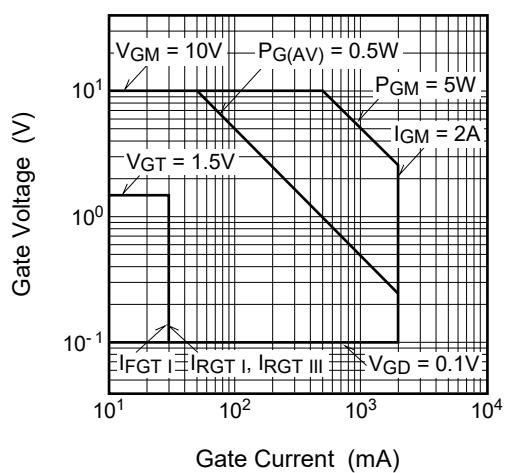


Gate Trigger Current vs. Junction Temperature






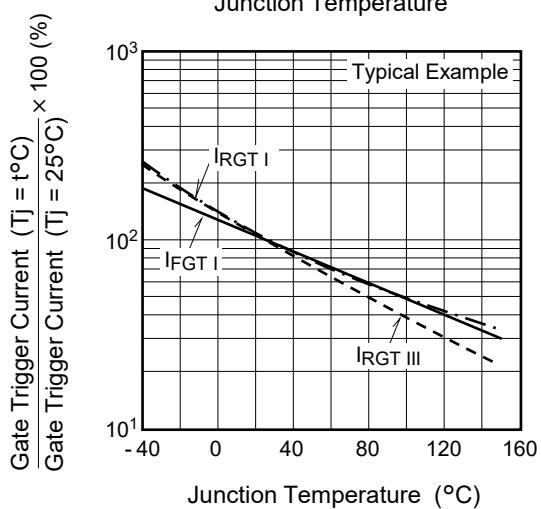








Gate Trigger Voltage vs. Junction Temperature




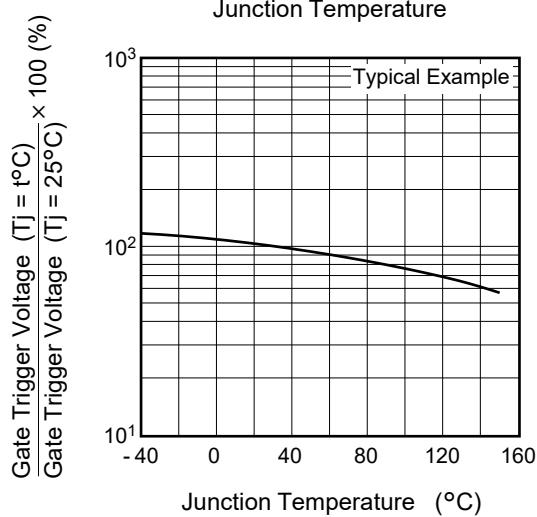


Gate Trigger Current vs. Gate Current Pulse Width

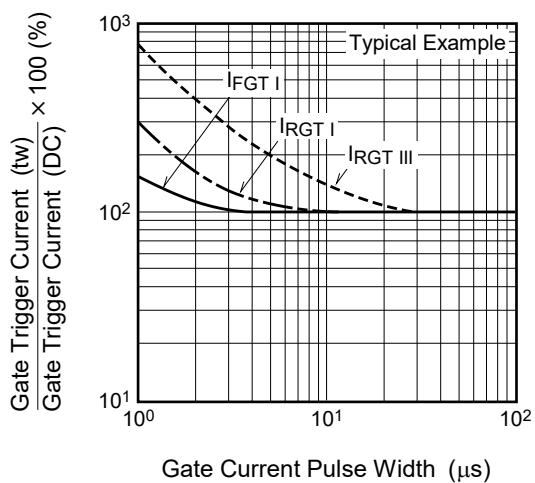

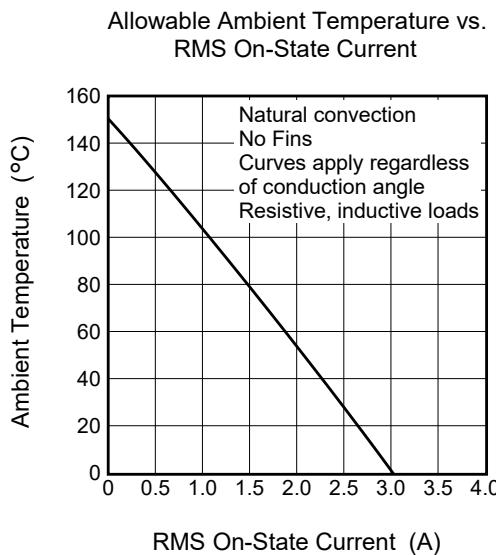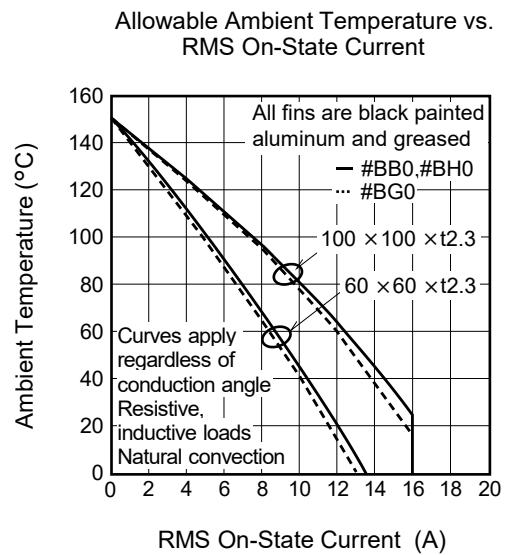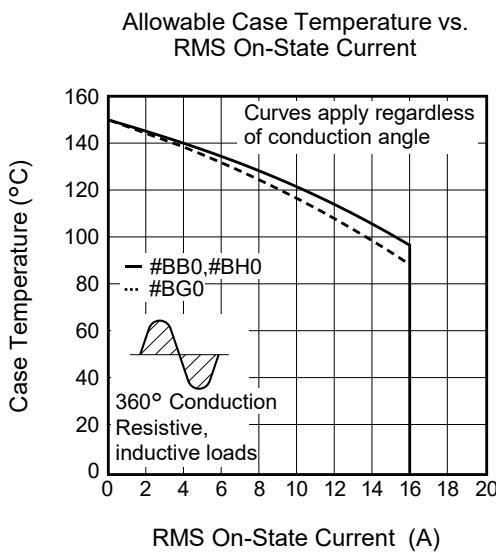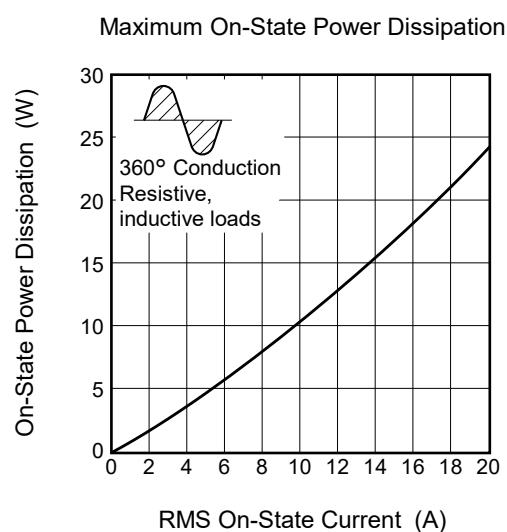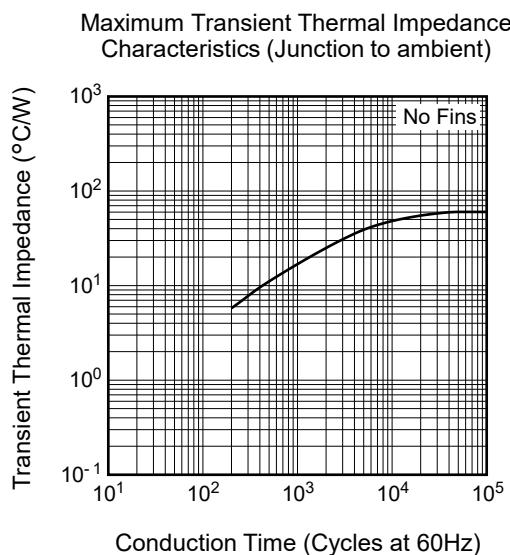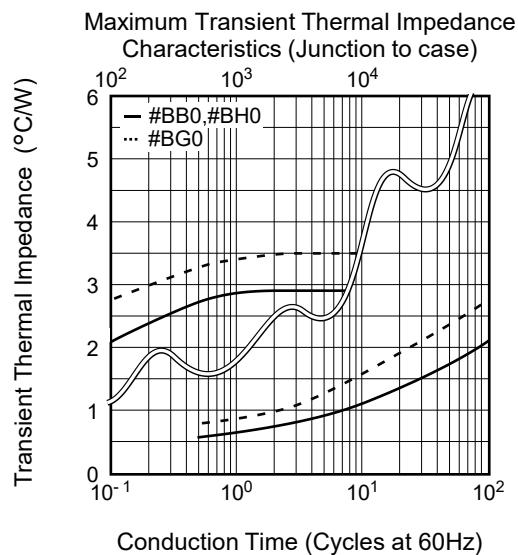

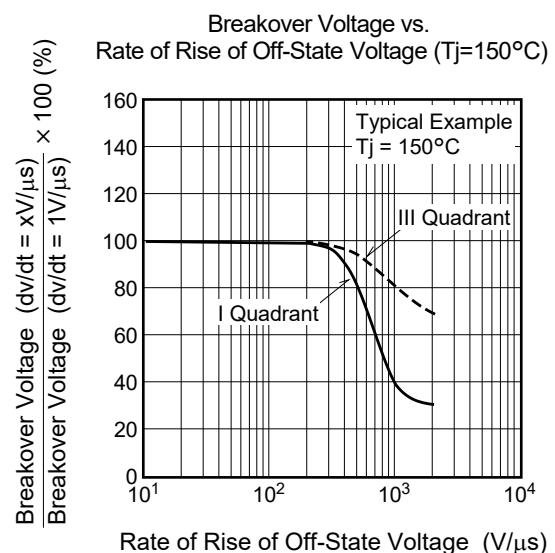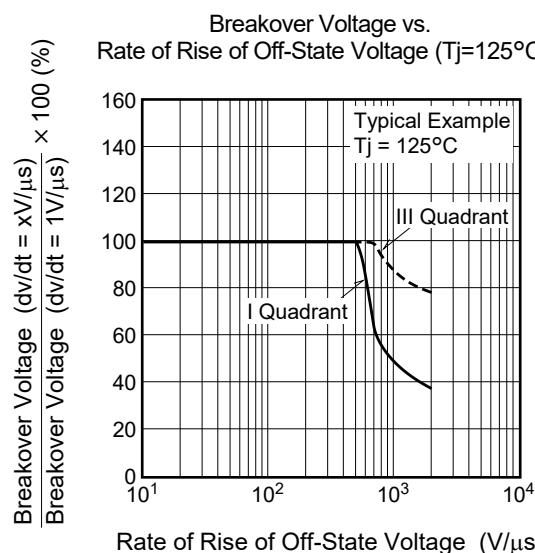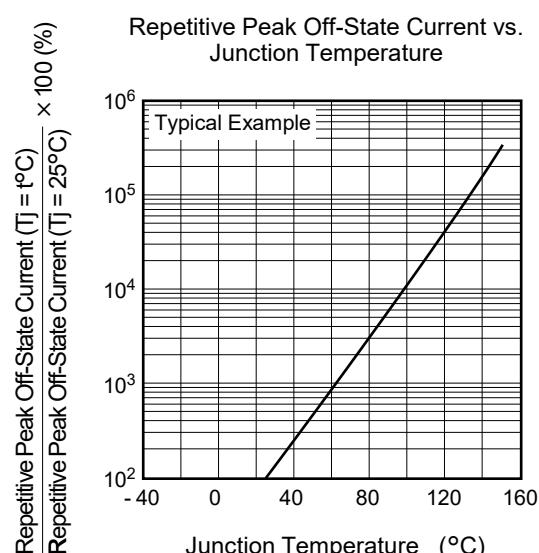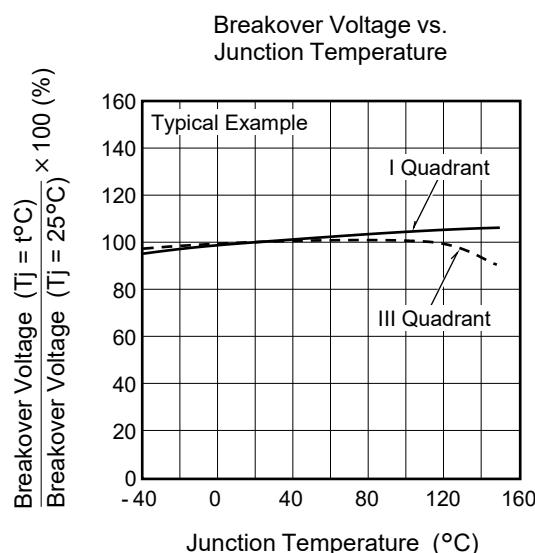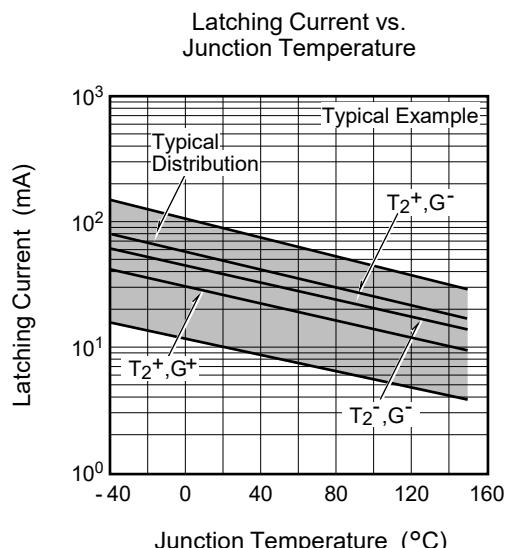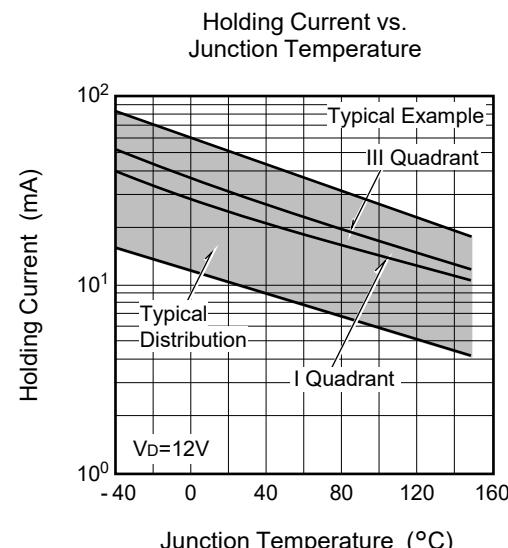

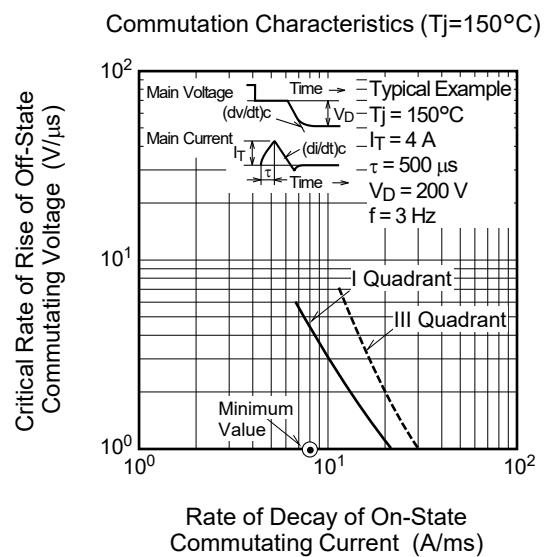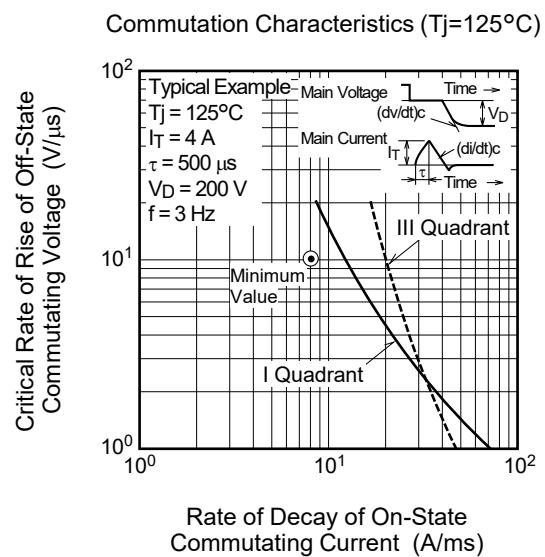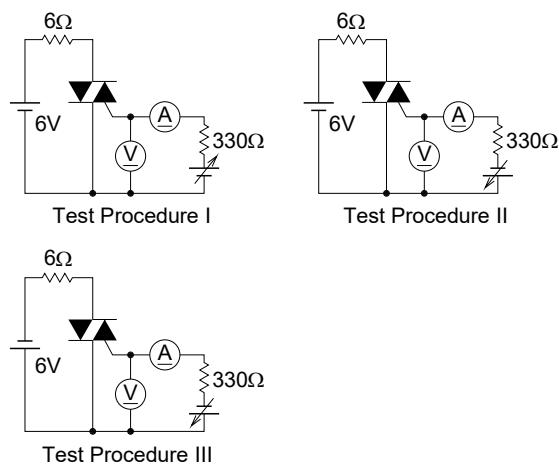
**Gate Trigger Characteristics Test Circuits****Recommended peripheral components for Triac**

Package Dimensions

Ordering code: #BG0, #BH0

JEITA Package Code	RENESAS Code	Previous Code	MASS (Typ) [g]
-	PRSS0003AP-A	TO-220FPA	1.65

Unit: mm

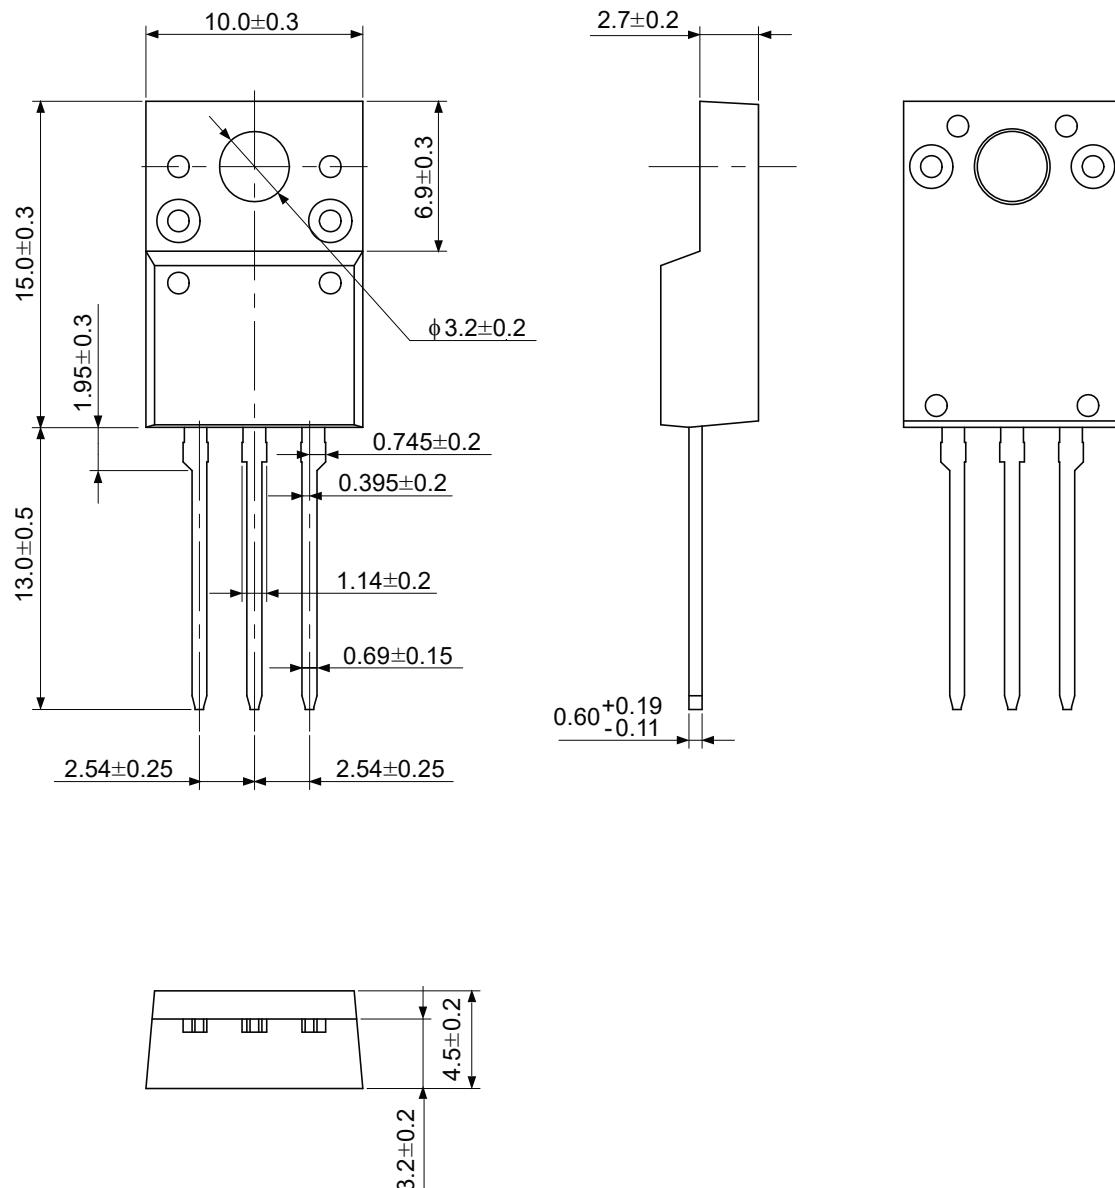

Package Dimensions

Ordering code: #BB0 <EOL announced>

Package Name	JEITA Package Code	RENESAS Code	Previous Code	MASS[Typ.]	Unit: mm
TO-220FP		PRSS003AG-A		1.9g	

Ordering Information

Orderable Part Number	Package	Quantity ^{Note8}	Remark	Status
BCR16FM-12LB#BG0	TO-220FPA	50 pcs./ tube	Straight type	Mass Production
BCR16FM-12LB-1#BG0	TO-220FPA	50 pcs./ tube	Straight type, IGT item:1	
BCR16FM-12LB□□#BG0	TO-220FPA	50 pcs./ tube	□□:Lead form type	
BCR16FM12LB1□□#BG0	TO-220FPA	50 pcs./ tube	□□:Lead form type, IGT item:1	
BCR16FM-12LB#BH0	TO-220FPA	50 pcs./ tube	Straight type	
BCR16FM-12LB-1#BH0	TO-220FPA	50 pcs./ tube	Straight type, IGT item:1	
BCR16FM-12LB□□#BH0	TO-220FPA	50 pcs./ tube	□□:Lead form type	
BCR16FM12LB1□□#BH0	TO-220FPA	50 pcs./ tube	□□:Lead form type, IGT item:1	
BCR16FM-12LB#BB0	TO-220FP	50 pcs./ tube	Straight type	EOL announced
BCR16FM-12LB-1#BB0	TO-220FP	50 pcs./ tube	Straight type, IGT item:1	
BCR16FM12LB1□□#BB0	TO-220FP	50 pcs./ tube	□□:Lead form type, IGT item:1	

Notes: 8. Please confirm the specification about the shipping in detail.