

# 10/100BASE-TX QUAD PORT TRANSFORMER MODULES

Ruggedized



- ⚙️ Compliant with IEEE 802.3u and ANSI X3.263 standards
- ⚙️ 350µH OCL with 8mA bias
- ⚙️ IC grade transfer-molded package withstands 235°C peak temperature profile
- ⚙️ Moisture Sensitivity Level: 3


## Electrical Specifications @ 25 °C – Operating Temperature – 40 °C to +85 °C

Part 1,2,3 Number	Insertion Loss (dB MAX)	Return Loss (dB MIN)				Crosstalk (dB MAX)				Differential to Common Mode Rejection (dB MIN)			
		0.1 - 100MHz	5MHz	30MHz	60MHz	80MHz	1MHz	30MHz	60MHz	80MHz	30MHz	60MHz	80MHz
100B-4011	-1.2	-16	-16	-12	-12	-50	-43	-37	-33	-42	-37	-33	-25

Notes: 1. Add suffix X for extended temp version (ie. **100B-4011X**); 2. Add suffix NL for RoHS compliant version (ie. **100B-4011NL**); 3. Add suffix T for tape and reel (ie. 100B-4011T).

## Mechanical

### 100B-4011X

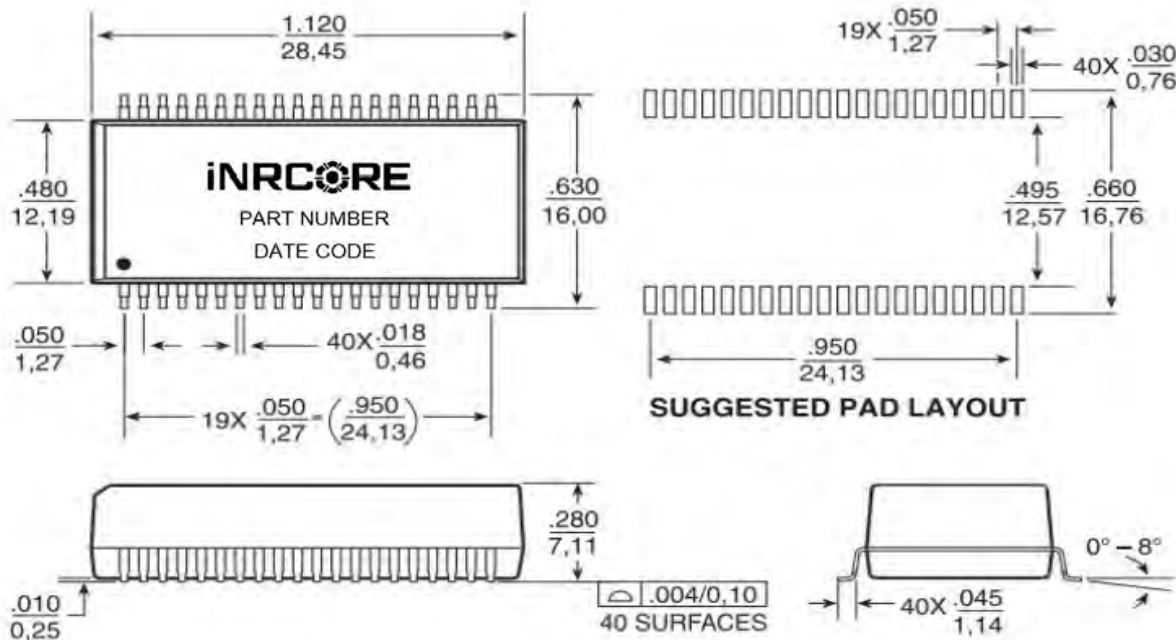

Weight ..... 4.0 grams TYP  
Tape and Reel ..... 250/reel  
Tray ..... 15/tray

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified, all tolerances are  $\pm \frac{.010}{0,25}$




# 10/100BASE-TX QUAD PORT TRANSFORMER MODULES


Ruggedized



## Electrical Schematic

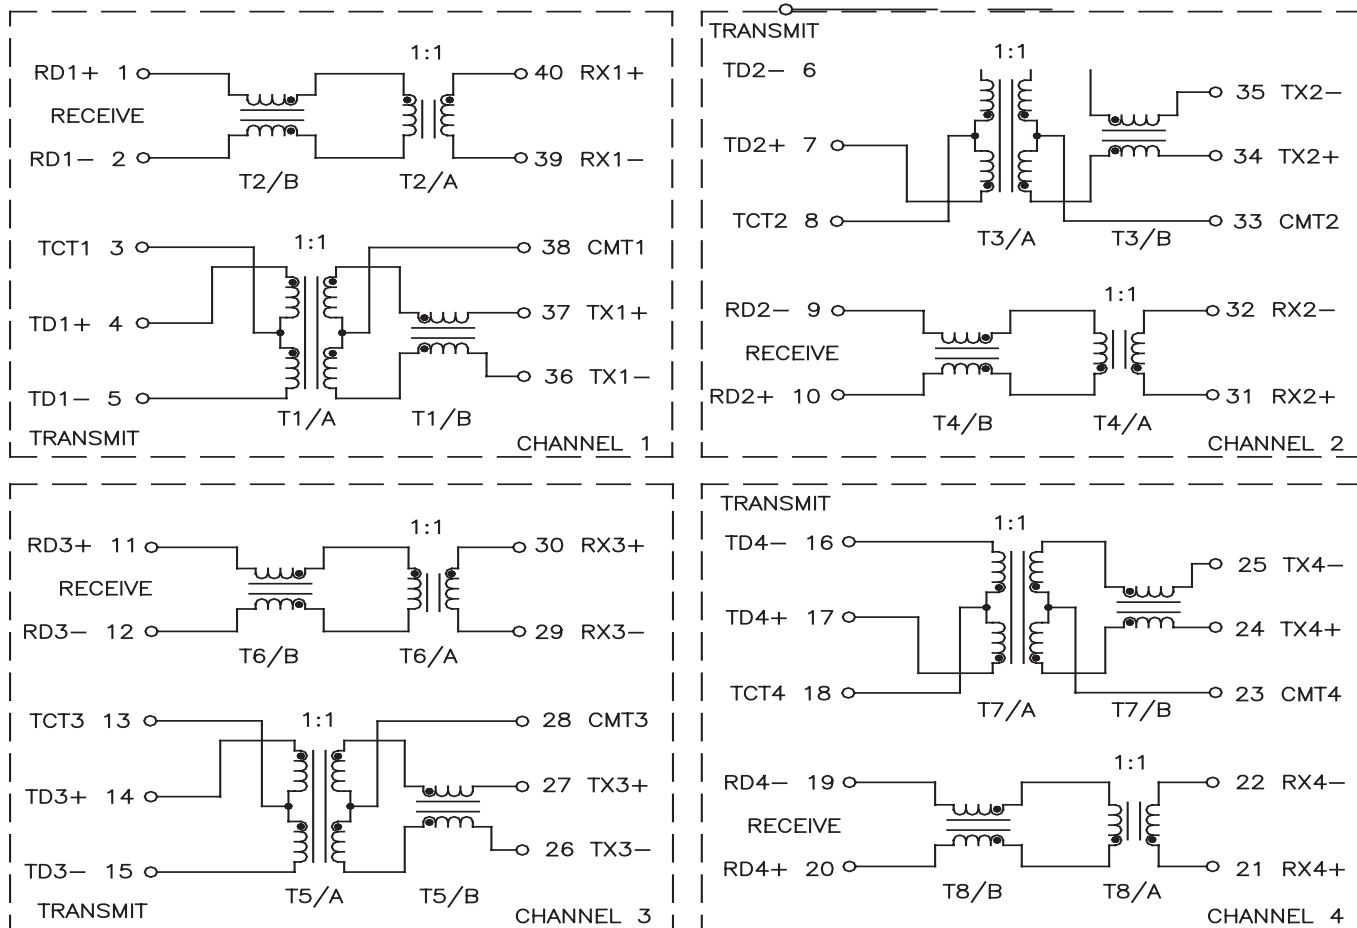

### LEGEND



ALL CHANNELS ARE IN PHASE BETWEEN INPUT AND OUTPUT

