

50/60 Hz Current Sense Transformer



This Coilcraft current sense transformer is intended for use in measuring 50/60 Hz line currents from 0.5 to 20 Amperes rms. Typical application shown below yields an output of 0.1 Volt per Ampere. The output voltage may be changed by adjusting the value of the terminating resistance (R_T). These parts also can be used to measure 400 Hz line currents.

To request free evaluation samples, contact Coilcraft or visit **www.coilcraft.com**.

Weight 19 g

Terminations Tin-silver over tin over nickel over copper

Packaging 30 per tray

Isolation (hipot) 2500 Vrms, one minute, between windings

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at $<30^{\circ}$ C / 85% relative humidity)


Failures in Time (FIT) / Mean Time Between Failures (MTBF) 38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

PCB washing Tested to MIL-STD-202 Method 215 plus an additional aqueous wash. See Doc787_PCB_Washing.pdf


Part	Turns (N)	Inductance ¹	DCR max (Ohms)		Frequency range ²	Sensed current	R _T for 1.0 V _{out}
number	pri : sèc	min (mH)	1,2 - 3,4	8 – 5	(Hz)	range I _{in}	from 10 A I _{in} 3
CS2106L	1:500	75	0.007	26	50 – 400	0.5 A – 20 A	50 Ohms


- 1. Inductance is for the secondary, tested at 1 kHz, 0.1 Vrms.
- 2. Square wave response deteriorates above and below this frequency.
- 3. Use the following equation to determine the approximate change in output voltage/ input ampere when varying the terminating resistor: Vout / Iin = $0.1 \times (R_T / 50)$.
- 4. Ambient temperature range -40°C to +85°C.
- 5. Electrical specifications at 25°C.

Typical Circuit



Typical Response (with $R_T = 50$ Ohms)



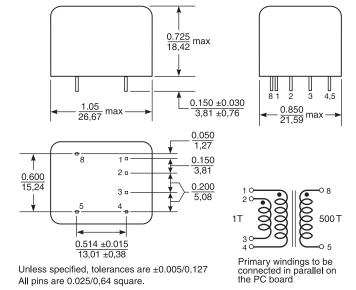



US +1-847-639-6400 sales@coilcraft.com
UK +44-1236-730595 sales@coilcraft-europe.com
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw
China +86-21-6218 8074 sales@coilcraft.com.cn
Singapore + 65-6484 8412 sales@coilcraft.com.sg

Document 150 Revised 12/29/09

Dimensions are in

inches

© Coilcraft Inc. 2018
This product may not be used in medical or high
risk applications without prior Coilcraft approval
Specification subject to change without notice.
Please check web site for latest information