

## Plug-In Two Way Power Divider 5-500 MHz

Rev. V4


### Features

- Low Cost
- Convenient Plug-In Mounting
- Impedance: 50 Ohms Nominal
- Maximum Power Rating or Input Power: 1 Watt Max.
- Internal Load Dissipation: 0.125 Watts Max.
- MIL-STD-202 Screening Available

### Description

A Power Divider is ideally a lossless reciprocal device which can also perform vector summation of two or more signals and thus is sometimes called a power combiner or summer.

### RH-1

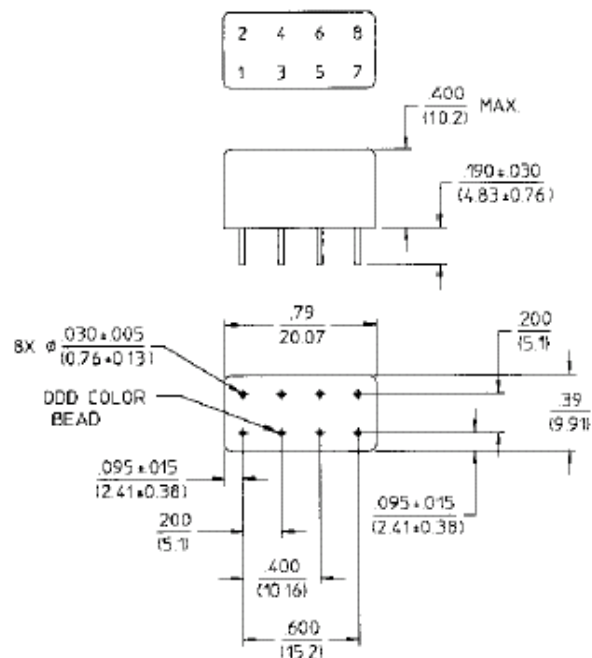

Dimensions in  $\phi$  are in mm  
Unless Otherwise Noted: XXX =  $\pm 0.010$  (XX =  $\pm 0.25$ )  
WEIGHT (APPROX): 0.23 OUNCES 6.5 GRAMS

### Pin Configuration

Pin No.	Function	Pin No.	Function
1	$\Sigma$	5	Output
2	GND	6	Output
3	GND	7	GND
4	GND	8	GND

### Ordering Information

Part Number	Package
DS-318 PIN	RH-1

## Plug -In Two Way Power Divider 5-500 MHz

Rev. V4


### Electrical Specifications<sup>1</sup>: $T_A = -55^{\circ}\text{C}$ to $+85^{\circ}\text{C}$

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Insertion Loss	Less Coupling	10 - 200 MHz	dB	—	—	0.5
		5 - 500 MHz	dB	—	—	1.0
Isolation	—	5 - 500 MHz	dB	18	—	—
Amplitude Balance	—	5 - 500 MHz	dB	—	—	0.2
Phase Balance	—	5 - 500 MHz	°	—	—	2
VSWR	All Ports	5 - 500 MHz	Ratio	—	—	1.5:1


1. All specifications apply with 50 ohm source and load impedance.  
This product contains elements protected by United States Patent Number 3,428,920.

## Typical Performance Curves

*Insertion Loss*

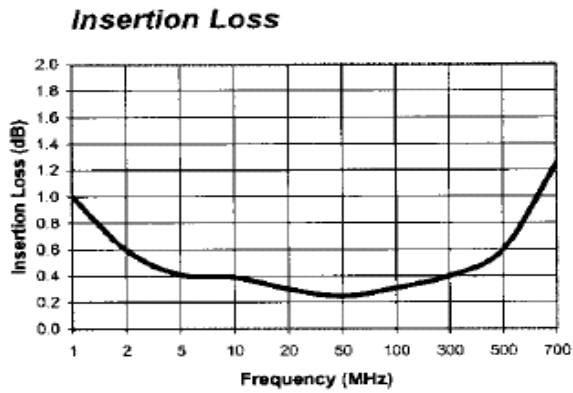

*Isolation*

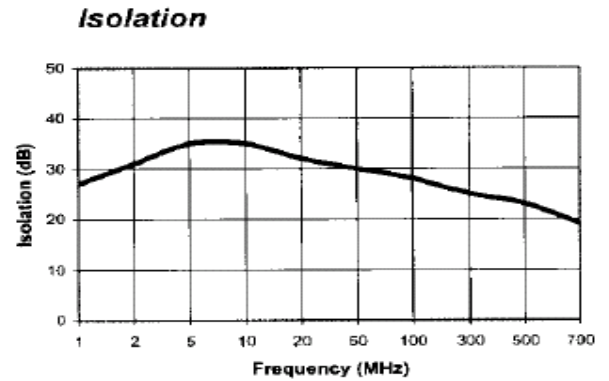

*VSWR*

