


FEATURES

- All-Silicon Timing Circuit
- Three Independent Buffered Delays
- Stable and Precise Over Temperature and Voltage
- Leading and Trailing Edge Precision Preserves the Input Symmetry
- Vapor Phasing, IR, and Wave Solderable
- Available in Tape and Reel
- Commercial and Industrial Temperature Ranges Available
- 5V Operation (Refer to DS1135L for 3V Operation)
- Recommended Replacement for DS1013 and DS1035

DS1135 3-in-1 High-Speed Silicon Delay Line

PIN ASSIGNMENT



DS1135Z 8-Pin SO (150 mils)

PIN DESCRIPTION

IN1-IN3	- Input Signals
OUT1-OUT3	- Output Signals
V _{CC}	- +5V Supply
GND	- Ground

DESCRIPTION

The DS1135 series is a low-power, +5V high-speed version of the popular DS1013 and DS1035.

The DS1135 series of delay lines have three independent logic buffered delays in a single package. The device is our fastest 3-in-1 delay line. It is available in a standard 8-pin 150-mil SO.

The device features precise leading and trailing edge accuracy. It has the inherent reliability of an allsilicon delay line solution. Each output is capable of driving up to 10 LS loads.

Standard delay values are indicated in Table 1.



ONE OF THREE

PART NUMBER DELAY TABLE (t_{PLH}, t_{PHL}) Table 1

PART NUMBER	DELAY PER OUTPUT (ns)	INITIAL TOLERANCE (Note 1)	TEMP AND (Note	TOLERANCE OVER TEMP AND VOLTAGE (Note 2)		
DS1135Z-6+	6/6/6	±1.0ns	<u>0°C to +70°C</u> ±1.0ns	-40°C to +85°C ±1.5ns		
DS1135Z-8+	8/8/8	± 1.0 ms	± 1.0 ns	± 1.5 ms ± 1.5 ms		
DS1135Z-10+	10/10/10	±1.0ns	±1.0ns	±1.5ns		
DS1135Z-12+	12/12/12	±1.0ns	±1.0ns	±1.5ns		
DS1135Z-15+	15/15/15	±1.0ns	±1.5ns	±2ns		
DS1135Z-20+	20/20/20	±1.0ns	±1.5ns	±2ns		
DS1135Z-25+	25/25/25	±1.5ns	±1.5ns	±2ns		
DS1135Z-30+	30/30/30	±1.5ns	±1.5ns	±2ns		


NOTES:

- 1. Nominal conditions are $+25^{\circ}$ C and V_{CC} =+5.0V.
- 2. Voltage range of 4.75V to 5.25V.
- 3. Delay accuracies are for both leading and trailing edges.

TEST SETUP DESCRIPTION

Figure 2 illustrates the hardware configuration used for measuring the timing parameters of the DS1135. The input waveform is produced by a precision pulse generator under software control. Time delays are measured by a time interval counter (20ps resolution) connected to the output. The DS1135 output taps are selected and connected to the interval counter by a VHF switch control unit. All measurements are fully automated with each instrument controlled by the computer over an IEEE 488 bus.

DS1135 TEST CIRCUIT Figure 2

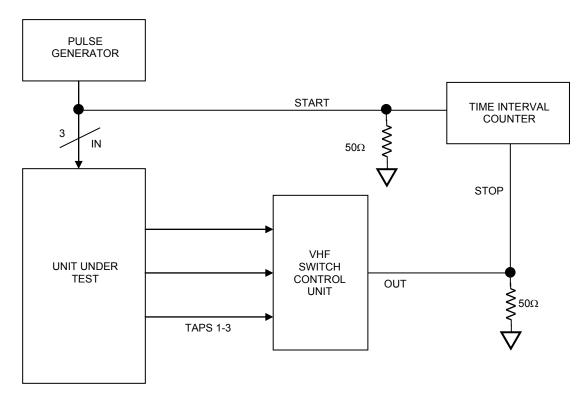

ABSOLUTE MAXIMUM RATINGS

Voltage Range on Any Pin Relative to Ground Short Circuit Output Current Operating Temperature Storage Temperature Lead Temperature (soldering, 10 seconds) Soldering Temperature (reflow)

This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

-1.0V to +6.0V

-40°C to +85°C

-55°C to +125°C

+300°C

+260°C

50mA for 1 second

DC ELECTRICAL CHARACTERISTICS

(V_{CC} = +5V \pm 5%, T_A = -40°C to +85°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	ТҮР	MAX	UNITS	NOTES
Supply Voltage	V _{CC}		4.75	5.00	5.25	V	1
Active Current	I _{CC}	$V_{CC} = 5.25V$, period = 1µs			35	mA	
High Level Input Voltage	V _{IH}		2.2		V _{CC} +0.5	V	1
Low Level Input Voltage	V _{IL}		-0.5		0.8	V	1
Input Leakage	IL	$0V \leq V_I \leq V_{CC}$	-1.0		+1.0	μΑ	
High Level Output Current	I _{CC}	$V_{CC} = 4.75V,$ $V_{OH} = 4V$			-1.0	mA	1
Low Level Output Current	I _{CC}	$V_{CC} = 4.75V,$ $V_{OL} = 0.5V$	12			mA	1

AC ELECTRICAL CHARACTERISTICS

(V_{CC} = +5V ±5%, T_A = -40°C to +85°C, unless otherwise noted.)

PARAMETER	SYMBOL	MIN	ТҮР	MAX	UNITS	NOTES
Period	t _{PERIOD}	$2(t_{WI})$			ns	2
Input Pulse Width	$t_{\rm WI}$	100% of Tap Delay			ns	2
Input-to-Output Delay	t_{PLH}, t_{PHL}	See T	able 1	ns		
Output Rise or Fall Time	t _{OF} , t _{OR}		2.0	2.5	ns	
Power-up Time	t _{PU}			100	ms	3

CAPACITANCE

 $(T_A = +25^{\circ}C, unless otherwise noted.)$

PARAMETER	SYMBOL	MIN	ТҮР	MAX	UNITS	NOTES
Input Capacitance	C _{IN}			10	pF	


TEST CONDITIONS

Ambient Temperature: $25^{\circ}C \pm 3^{\circ}C$ Supply Voltage (V_{CC}): $5.0V \pm 0.1V$ Input Pulse: High: $3.0V \pm 0.1V$ Low: $0.0V \pm 0.1V$ Source Impedance: 50Ω Max. Rise and Fall Time: 3.0ns Max. - Measured between 0.6V and 2.4V. Pulse Width: 500ns Pulse Period: 1μ s Output Load Capacitance: 15pF Output: Each output is loaded with the equivalent of one 74F04 input gate. Data is measured at the 1.5V level on the rising and falling edges.

Note: The above conditions are for test only and do not restrict the devices under other data sheet conditions.

NOTES:

- 1. All voltages are referenced to ground.
- 2. Pulse width and duty cycle specifications may be exceeded; however, accuracy will be application sensitive with respect to decoupling, layout, etc.
- 3. Power-up time is the time from the application of power to the time stable delays are being produced at the output.

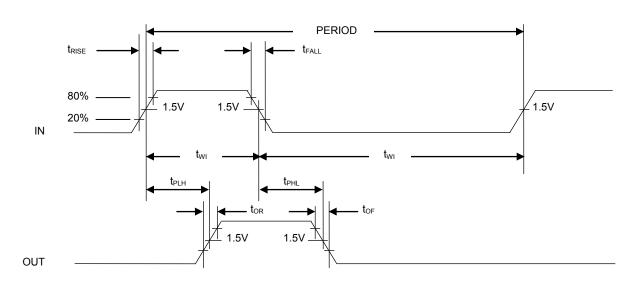

TIMING DIAGRAM

TERMINOLOGY

Period: The time elapsed between the leading edge of the first pulse and the leading edge of the following pulse.

 t_{WI} (Pulse Width): The elapsed time on the pulse between the 1.5-volt point on the leading edge and the 1.5-volt point on the trailing edge or the 1.5-volt point on the trailing edge and the 1.5-volt point on the leading edge.


 t_{RISE} (Input Rise Time): The elapsed time between the 20% and the 80% point on the leading edge of the input pulse.

 t_{FALL} (Input Fall Time): The elapsed time between the 80% and the 20% point on the trailing edge on the input pulse.

 t_{PLH} (Time Delay, Rising): The elapsed time between the 1.5-volt point on the leading edge of the input pulse and the 1.5-volt point on the leading edge of the output pulse.

 t_{PHL} (Time Delay, Falling): The elapsed time between the 1.5-volt point on the falling edge of the input pulse and the 1.5-volt point on the falling edge of the output pulse.

ORDERING INFORMATION

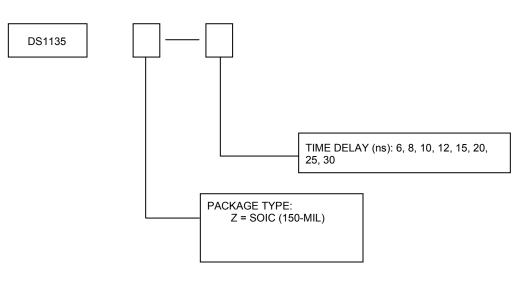

PACKAGE INFORMATION

For the latest package outline information and land patterns (footprints), go to <u>www.maximintegrated.com/packages</u>. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	GE TYPE PACKAGE CODE OUTLINE NO.		LAND PATTERN NO.	
8 SO	S8+2	<u>21-0041</u>	<u>90-0096</u>	