



The Future of Analog IC Technology®

EV2145-D-00A

5.5V, 6A, 1.2MHz, High-Efficiency, 40µA I_Q Constant On-Time Synchronous, Step-Down Switcher Evaluation Board

DESCRIPTION

The MP2145 is a monolithic, step-down, switch-mode converter with internal power MOSFETs. It can achieve up to 6A continuous output current from a 2.8V-to-5.5V input voltage with excellent load and line regulation. The output voltage can be regulated to as low as 0.6V.

Constant-on-time control provides a fast transient response and eases loop stabilization. Fault condition protections include cycle-by-cycle current limiting and thermal shutdown.

The MP2145 is available in a small QFN2×3mm package and requires only a minimal number of readily-available, standard, external components.

The MP2145 is ideal for a wide range of applications, including storage (SSD, HDD), high-performance DSPs, FPGAs, and distributed power systems.

ELECTRICAL SPECIFICATION

| Parameter | Symbol | Value | Units |
|------------------------------|------------------|---------|-------|
| Input Voltage ⁽¹⁾ | V _{IN} | 2.8–5.5 | V |
| Output Voltage | V _{OUT} | 1.2 | V |
| Output Current | I _{OUT} | 6 | A |

Notes:

1) If V_{IN} < 3.6V, need more input capacitors.

FEATURES

- Up to 6A Output Current
- Wide 2.8V-to-5.5V Operating Input Range
- 20mΩ and 12mΩ Internal Power MOSFETs
- 40µA Quiescent Current
- 1.2MHz Fixed Switching Frequency
- 1% Feedback Accuracy
- External Mode Control
- External VCON Control
- Adjustable Output from 0.6V
- 1.5ms Internal SS Time with Pre-Bias Startup
- Cycle-by-Cycle Over Current Protection
- Short Circuit Protection with Hiccup Mode
- Stable with Low-ESR Output Ceramic Capacitors
- Thermal Shutdown
- Available in a 2mm×3mm QFN Package
- Output Discharge Function


APPLICATIONS

- Storage (SSD, HDD)
- Portable Instruments
- Battery-Powered Devices


All MPS parts are lead-free and adhere to the RoHS directive. For MPS green status, please visit MPS website under Products, Quality Assurance page.

"MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.


EV2145-D-00A EVALUATION BOARD



| Board Number | MPS IC Number |
|--------------|---------------|
| EV2145-D-00A | MP2145GD |

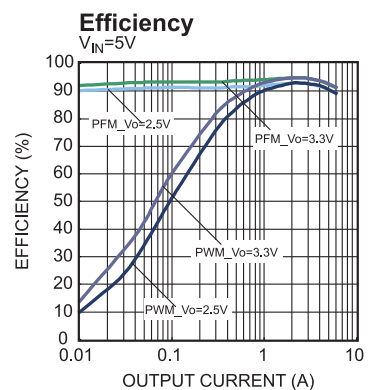

EVALUATION BOARD SCHEMATIC

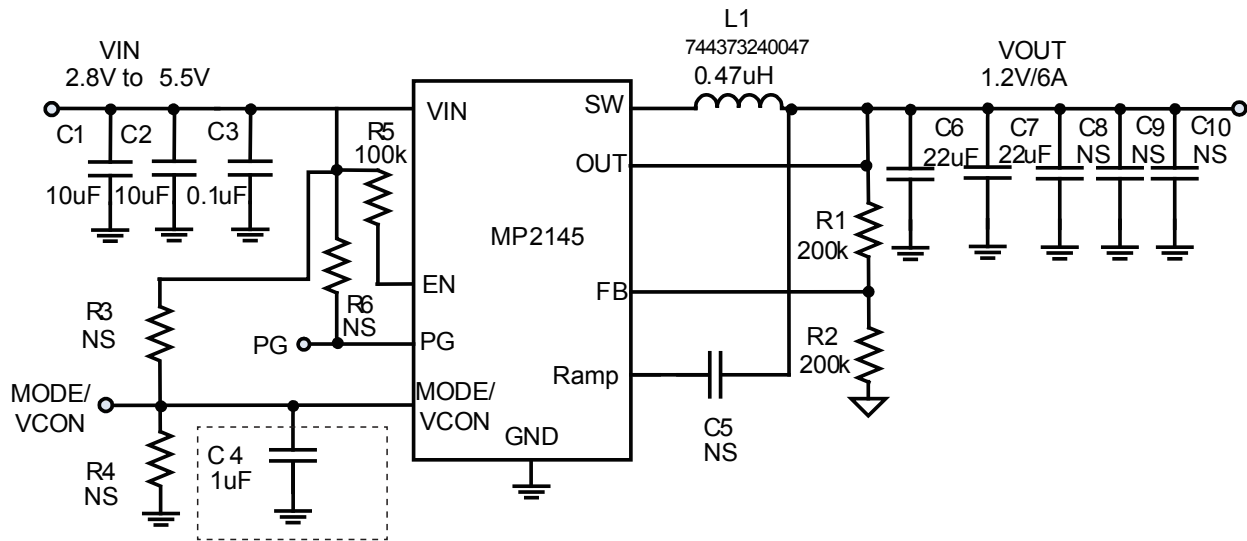

Note: C4 is optional for "VCON" application.


EV2145-D-00A BILL OF MATERIALS

| Qty | RefDes | Value | Description | Package | Manufacturer | Manufacturer P/N |
|-----|-------------------------|--------------|--------------------------------|---------------|--------------|--------------------|
| 2 | C1, C2 | 10 μ F | Ceramic Cap,10V,X5R | 0805 | muRata | GRM21BR61A106KE19L |
| 1 | C3 | 0.1 μ F | Ceramic Cap,16V,X7R | 0603 | muRata | GRM188R71C104KA01D |
| 1 | C4 | 1 μ F | Ceramic Cap,6.3V,X7R | 0603 | muRata | GRM188R60J105KA01D |
| 2 | C6,C7 | 22 μ F | Ceramic Cap,10V,X5R | 0805 | muRata | GRM21BR61A226ME51L |
| 1 | L1 | 0.47 μ H | Inductor, 14.5A, 14m Ω | 4x4mm | Würth | 744 373 240 047 |
| 1 | R1 | 200K | Film Res,1% | 0603 | ROYAL | RL0603FR-07200KL |
| 1 | R2 | 200K | Film Res,1% | 0603 | ROYAL | RL0603FR-07200KL |
| 1 | R5 | 100K | Film Res,5% | 0603 | ROYAL | RC0603JR-07100KL |
| 1 | U1 | MP2145 | Synchronous step-down switcher | QFN12 (2x3mm) | MPS | MP2145GD |
| 0 | C5,C8, C9,C10, R3,R4,R6 | NS | | | | |

EVB TEST RESULTS

Performance waveforms are tested on the evaluation board.









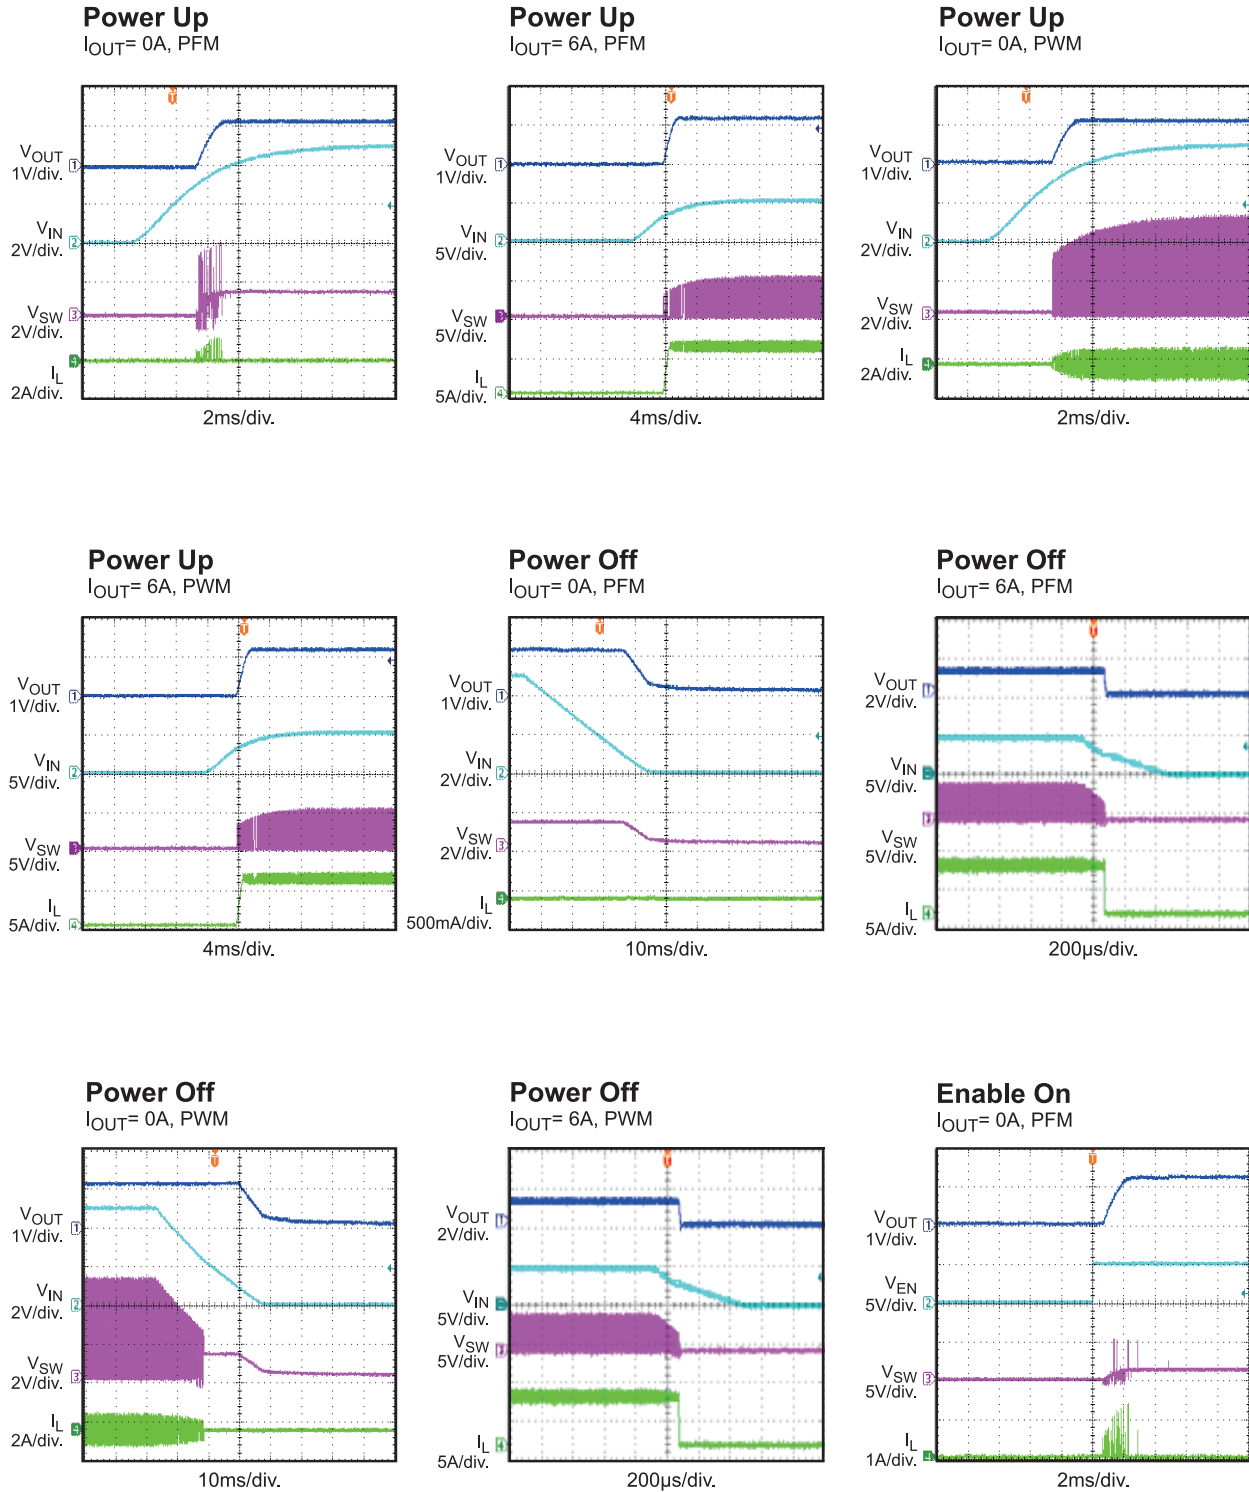
$V_{IN} = 5V$, $V_{OUT} = 1.2V$, $L = 0.47\mu H$, $C_{OUT} = 22\mu F \times 2$, $T_A = 25^\circ C$, unless otherwise noted.



EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board.

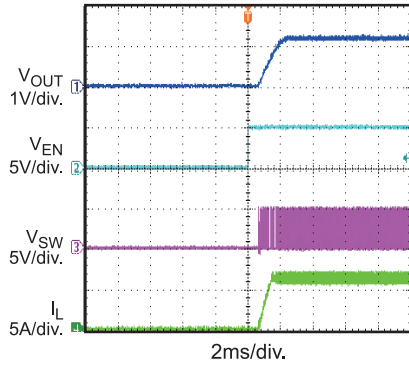
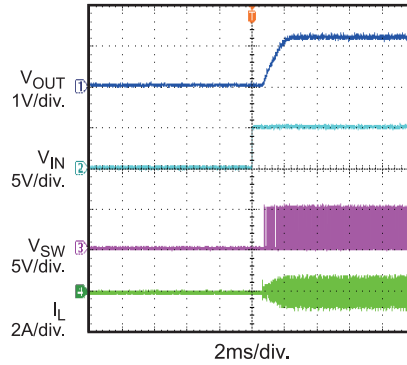
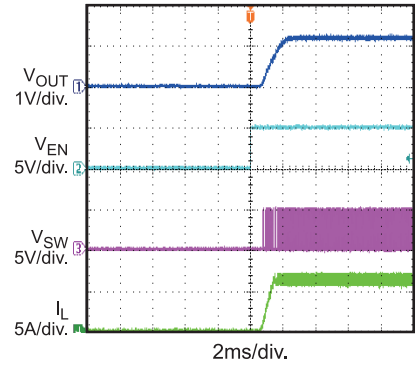
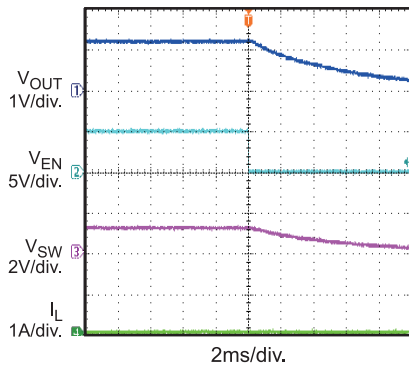
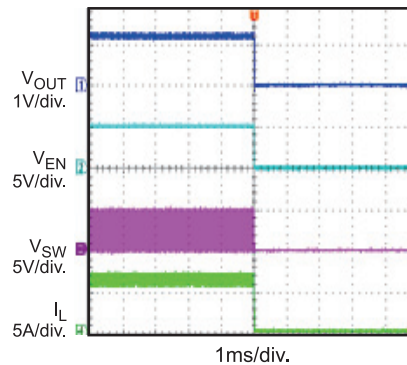
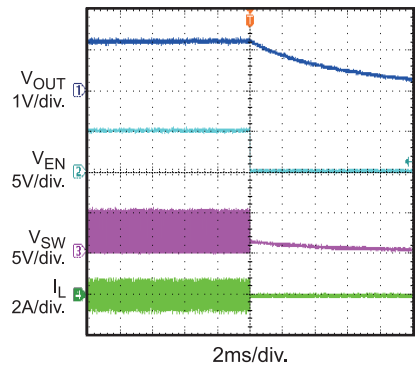
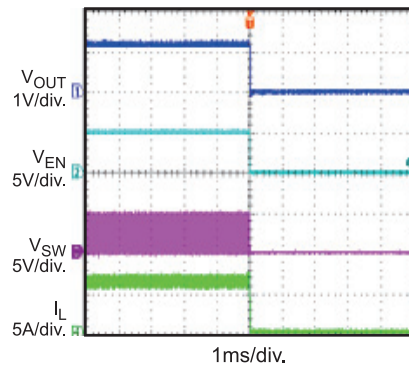
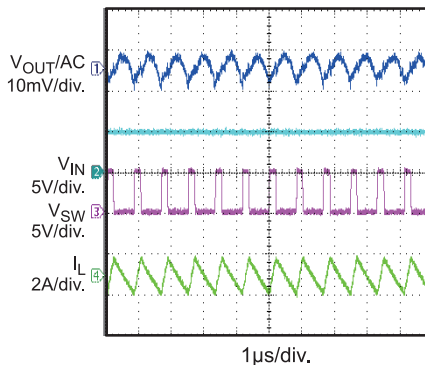
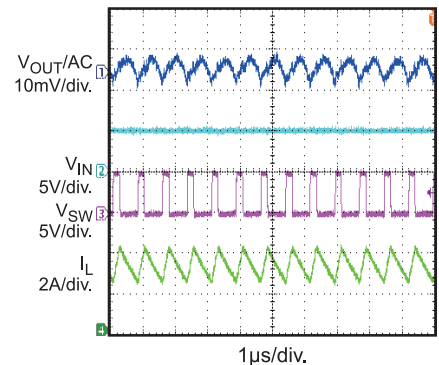
 $V_{IN} = 5V$, $V_{OUT} = 1.2V$, $L = 0.47\mu H$, $C_{OUT} = 22\mu F \times 2$, $T_A = 25^\circ C$, unless otherwise noted.

Enable On
 $I_{OUT} = 6A$, PFM

Enable On
 $I_{OUT} = 0A$, PWM

Enable On
 $I_{OUT} = 6A$, PWM

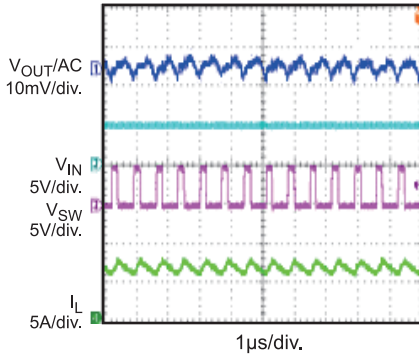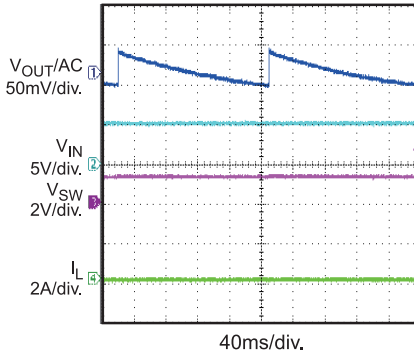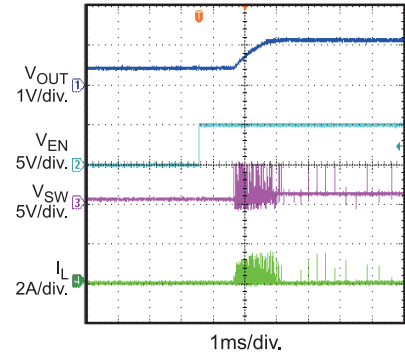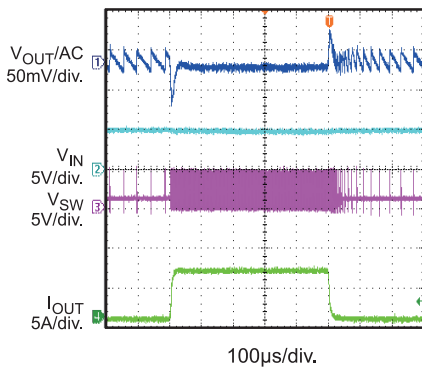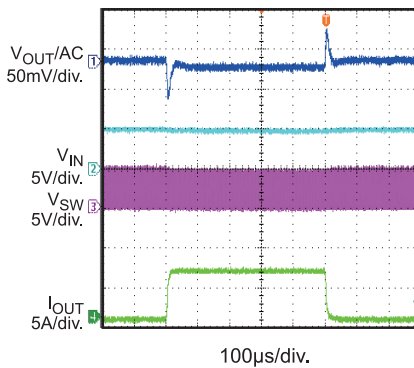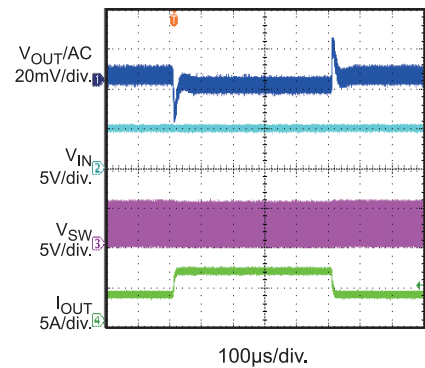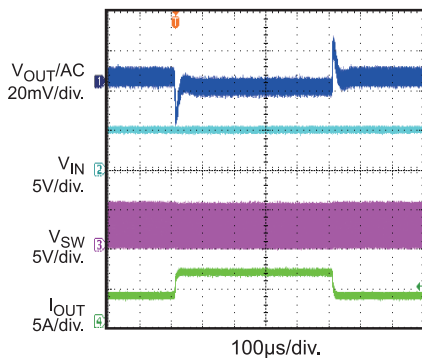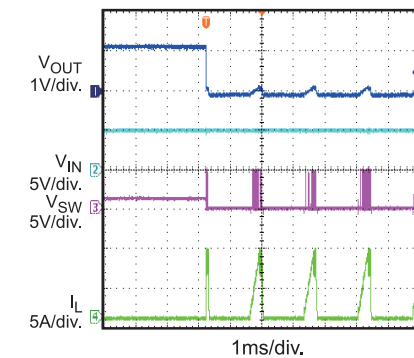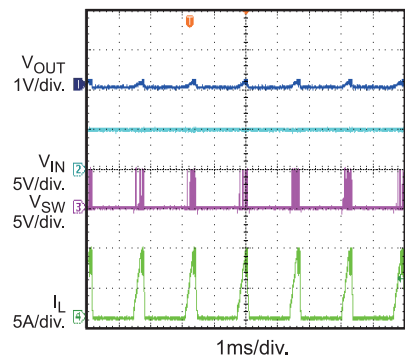Enable Shutdown
 $I_{OUT} = 0A$, PFM

Enable Shutdown
 $I_{OUT} = 6A$, PFM

Enable Shutdown
 $I_{OUT} = 0A$, PWM

Enable Shutdown
 $I_{OUT} = 6A$, PWM

Steady State
 No Load, PWM

Steady State
 Half Load 3A, PWM


EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board.

 $V_{IN} = 5V$, $V_{OUT} = 1.2V$, $L = 0.47\mu H$, $C_{OUT} = 22\mu F \times 2$, $T_A = 25^\circ C$, unless otherwise noted.

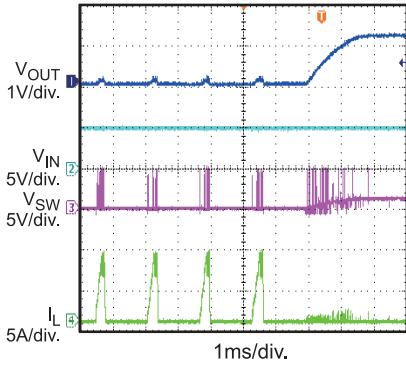
Steady State
Full Load 6A, PWM

Steady State
No Load, PFM

 V_{OUT} Prebias Start Up
 $V_{PRE}=0.5V$, $I_{OUT}=0A$, PFM

Load Transient Response
 $I_{OUT}=0A-6A$, PFM

Load Transient Response
 $I_{OUT}=0A-6A$, PWM

Load Transient Response
 $I_{OUT}=3A-6A$, PFM

Load Transient Response
 $I_{OUT}=3A-6A$, PWM

Hiccup With Output Short
No Load, PFM, Entry

Hiccup With Output Short
No Load, PFM, Steady


EVB TEST RESULTS *(continued)*

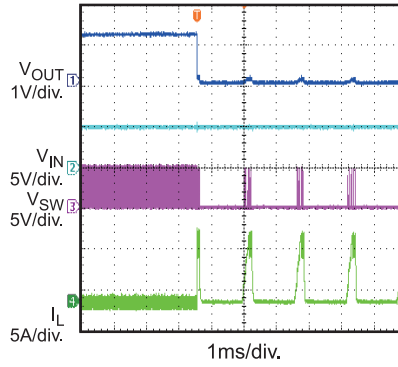
Performance waveforms are tested on the evaluation board.

$V_{IN} = 5V$, $V_{OUT} = 1.2V$, $L = 0.47\mu H$, $C_{OUT} = 22\mu F \times 2$, $T_A = 25^\circ C$, unless otherwise noted.


Hiccup With Output Short
No Load, PFM, Recovery




Hiccup With Output Short
No Load, PWM, Entry



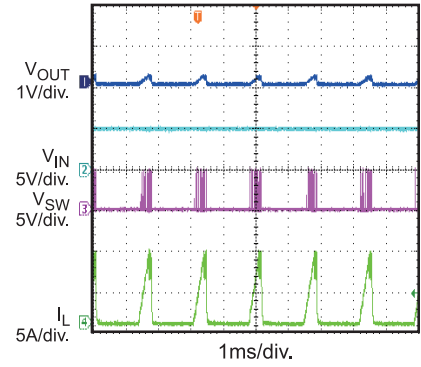Hiccup With Output Short
No Load, PWM, Steady



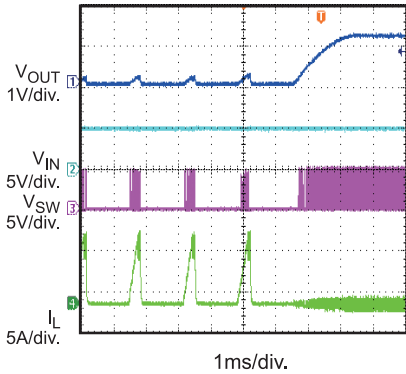Hiccup With Output Short
No Load, PWM, Recovery



PRINTED CIRCUIT BOARD LAYOUT

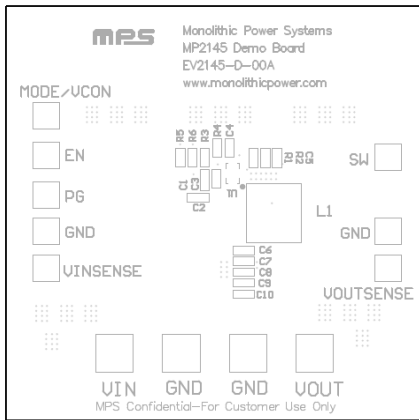


Figure 1—Top Silk Layer

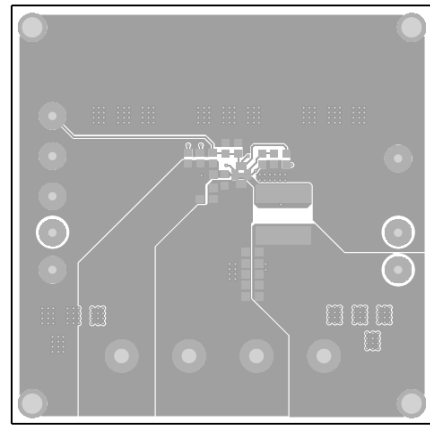


Figure 2—Top Layer

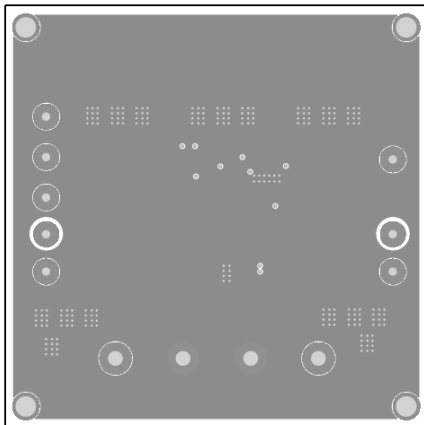


Figure 3—Inner 1 Layer

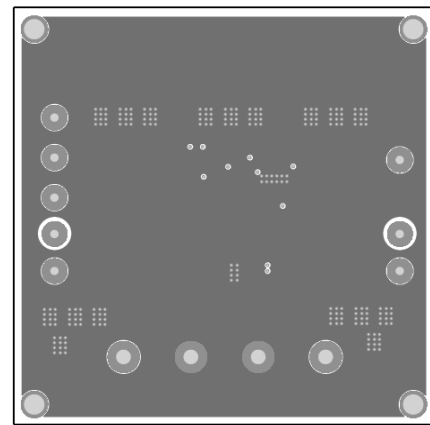


Figure 4—Inner 2 Layer

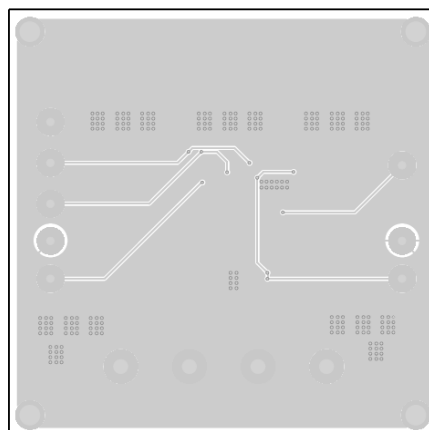


Figure 5—Bottom Layer