

DESCRIPTION

The EV8712-L-00A is used for demonstrating the performance of MPS's MP8712. MP8712 is a highly integrated and high frequency synchronous step-down switch-mode converter. It offers a fully integrated solution to achieve a 12A continuous and 15A peak output current with excellent load and line regulation over a wide input supply range.

COT control operation provides fast transient response and eases loop stabilization. An open drain power good pin indicates that the output voltage is in the nominal range. Full protection features include over voltage, over-current protection and thermal shut down.

The MP8712 is available in QFN-14(3mmx4mm) package.

ELECTRICAL SPECIFICATION

| Parameter | Symbol | Value | Units |
|---------------------------|------------------|-------|-------|
| Input Voltage | V _{IN} | 3– 18 | V |
| Output Voltage | V _{OUT} | 1 | V |
| Continuous Output Current | I _{OUT} | 12 | A |
| Peak Output Current | I _{OUT} | 15 | A |

FEATURES

- Wide 3V-to-18V Operating Input Range
- 12A Continuous/15A Peak Output Current
- 1% Internal Reference Accuracy
- Output Adjustable from 0.6V
- 15mΩ/4.5mΩ High Side/Low Side R_{DS(ON)} for Internal Power MOSFETs
- 500kHz Switching Frequency
- External Soft Start
- Open Drain Power Good Indication
- Output Over Voltage Protection
- Hiccup OCP Protection
- Thermal Shutdown
- QFN-14(3mmx4mm) Package


APPLICATIONS

- Solid State Driver (SSD)
- Flat-Panel Television and Monitors
- Set-Top Boxes
- Distributed Power Systems

All MPS parts are lead-free, halogen free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance.

"MPS" and "The Future of Analog IC Technology" are Registered Trademarks of Monolithic Power Systems, Inc.


EV8712-L-00A EVALUATION BOARD

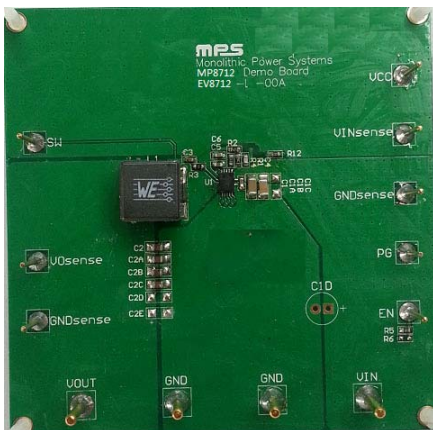


(4 layer PCB, 8.5cmx8.5cm)

| Board Number | MPS IC Number |
|--------------|---------------|
| EV8712-L-00A | MP8712GL |

Efficiency vs. Output Current
V_{OUT}=1V, L=1.5μH, DCR=2.1mΩ

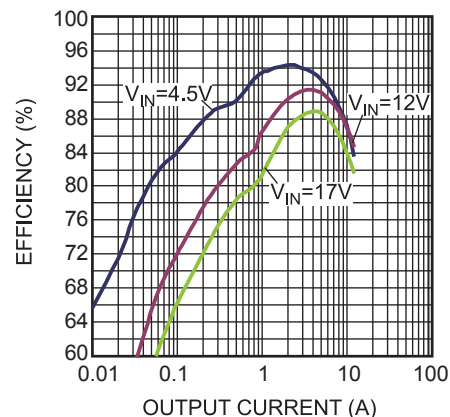

EVALUATION BOARD SCHEMATIC

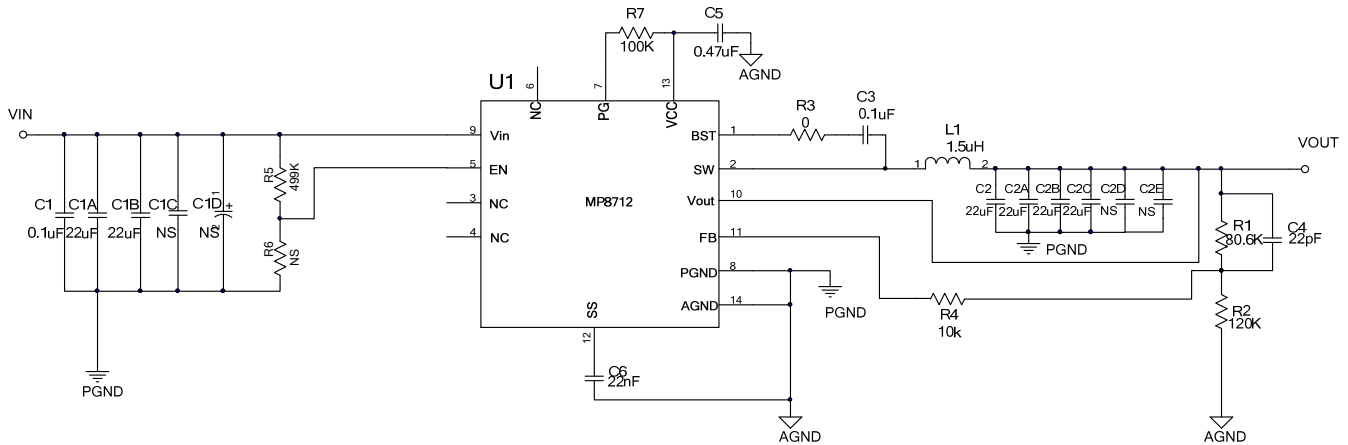

EV8712-L-00A BILL OF MATERIALS


| Qty | Ref | Value | Description | Package | Manufacturer | Manufacturer P/N |
|-----|--------------------|--------|------------------------|-------------|--------------|--------------------|
| 1 | R1 | 80.6k | Film Res,1% | 0603 | ROYAL | RC0603FR-0780K6L |
| 1 | R2 | 120k | Film Res,1% | 0603 | ROYAL | RL0603FR-07120KL |
| 1 | R3 | 0 Ω | Film Res,1% | 0603 | ROYAL | RC0603FR-070RL |
| 1 | R4 | 10k | Film Res,1% | 0603 | ROYAL | RL0603FR-0710KL |
| 1 | R5 | 499k | Film Res,1% | 0603 | ROYAL | RL0603FR-07499KL |
| 0 | R6 | NS | | | | |
| 1 | R7 | 100k | Film Res,1% | 0603 | ROYAL | RL0603FR-07100KL |
| 2 | C1, C3 | 0.1μF | Ceramic Cap, 25V, X7R | 0603 | muRata | GRM188R71E104KA01D |
| 2 | C1A, C1B, | 22μF | Ceramic Cap, 25V, X5R | 1206 | muRata | GRM31CR61E226KE15L |
| 4 | C2, C2A, C2B, C2C | 22μF | Ceramic Cap , 25V, X5R | 0805 | muRata | GRM21BR61E226ME44L |
| 0 | C1C, C1D, C2D, C2E | NS | | | | |
| 1 | C4 | 22pF | Ceramic Cap, 50V, X7R | 0603 | muRata | GRM1885C1H220JA01D |
| 1 | C5 | 0.47μF | Ceramic Cap, 16V, X7R | 0603 | muRata | GRM188R71C474KA88D |
| 1 | C6 | 22nF | Ceramic Cap, 16V, X7R | 0603 | muRata | GRM188R71C223KA01D |
| 1 | L1 | 1.5μH | Inductor, DCR=2.1mΩ | SMD | Würth | 7443320150 |
| 1 | U1 | MP8712 | Step-Down Converter | QFN14 (3*4) | MPS | MP8712GL |

EVB TEST RESULTS


Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$, $V_{OUT} = 1V$, $L = 1.5\mu H$, $F_S = 500kHz$, $T_A = 25^\circ C$, unless otherwise noted.


Enabled Supply Current vs. Input Voltage

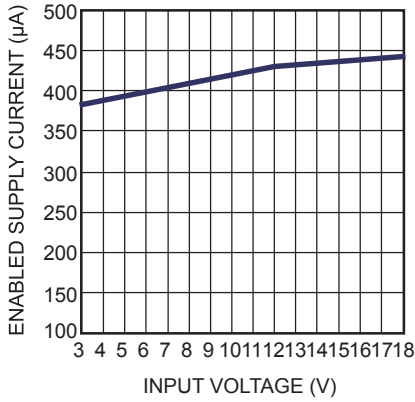


Disabled Supply Current vs. Input Voltage

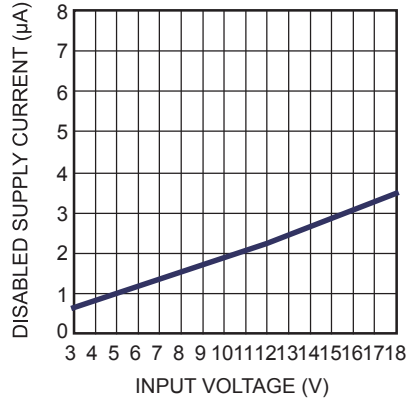


V_{IN} UVLO Rising vs. Temperature

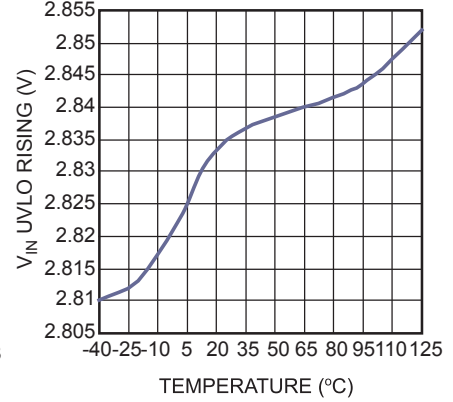


EN Rising Threshold vs. Temperature

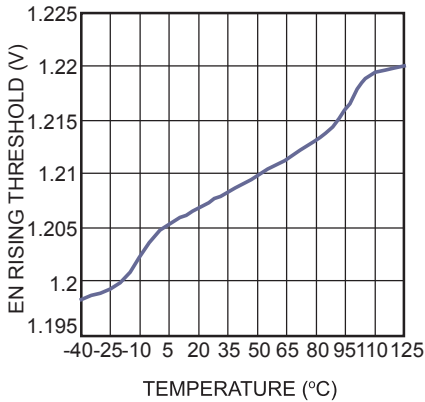


Reference Voltage vs. Temperature

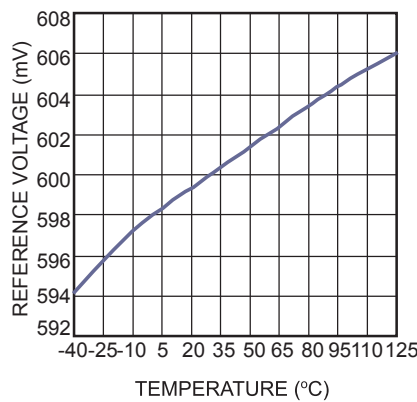


Line Regulation vs. Input Voltage

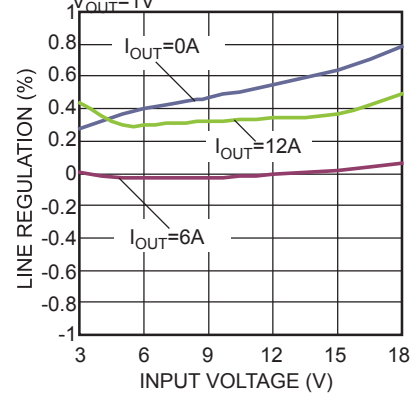


Efficiency vs. Output Current
 $V_{OUT} = 1V$, $L = 1.5\mu H$, $DCR = 2.1m\Omega$

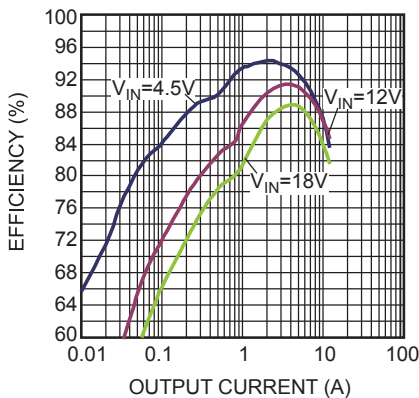

Efficiency vs. Output Current
 $V_{OUT} = 1.2V$, $L = 1.5\mu H$, $DCR = 2.1m\Omega$

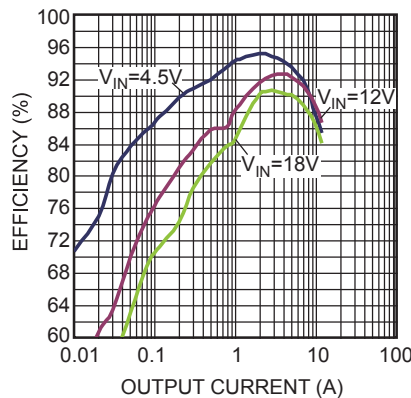

Efficiency vs. Output Current
 $V_{OUT} = 1.5V$, $L = 1.5\mu H$, $DCR = 2.1m\Omega$

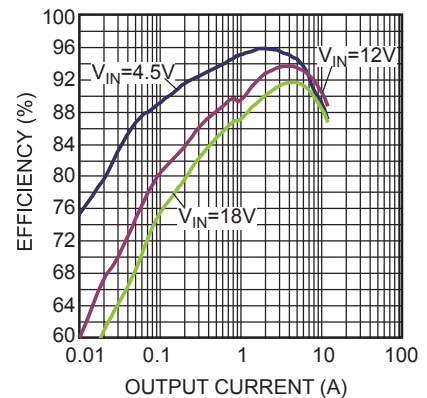


EV8 TEST RESULTS *(continued)*


Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$, $V_{OUT} = 1V$, $L = 1.5\mu H$, $F_S = 500kHz$, $T_A = 25^\circ C$, unless otherwise noted.


Efficiency vs. Output Current
 $V_{OUT}=1.8V$, $L=1.5\mu H$, $DCR=2.1m\Omega$

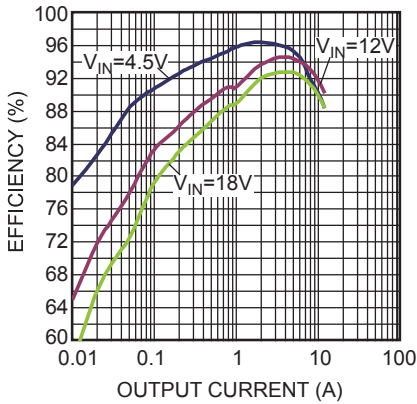


Efficiency vs. Output Current
 $V_{OUT}=2.5V$, $L=2.2\mu H$, $DCR=3m\Omega$

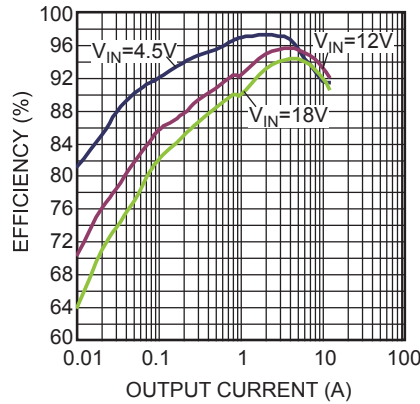


Efficiency vs. Output Current
 $V_{OUT}=3.3V$, $L=2.2\mu H$, $DCR=3m\Omega$

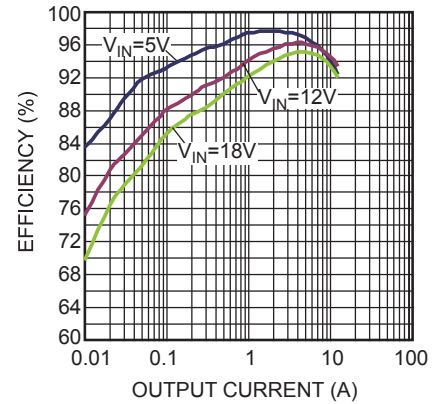


Efficiency vs. Output Current
 $V_{OUT}=5V$, $L=3.3\mu H$, $DCR=4.4m\Omega$

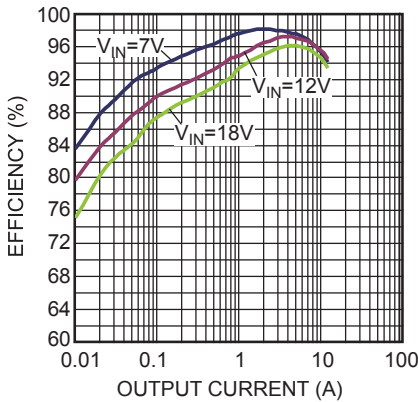


Load Regulation vs. Output Current
 $V_{OUT}=1V$

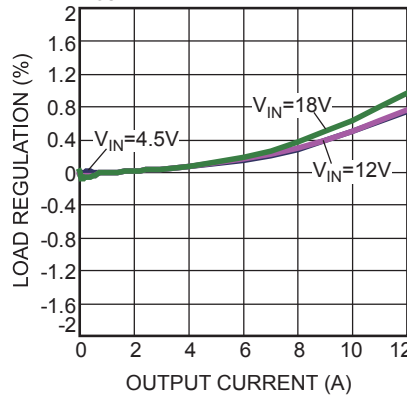


Load Regulation vs. Output Current
 $V_{OUT}=1.2V$

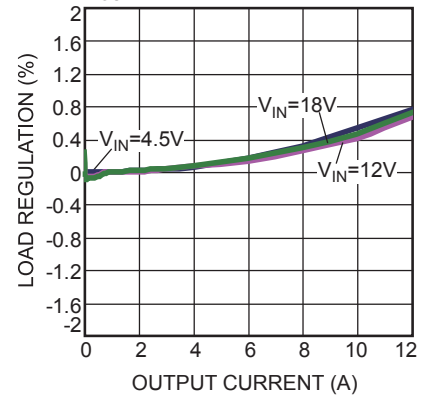


Load Regulation vs. Output Current
 $V_{OUT}=1.5V$

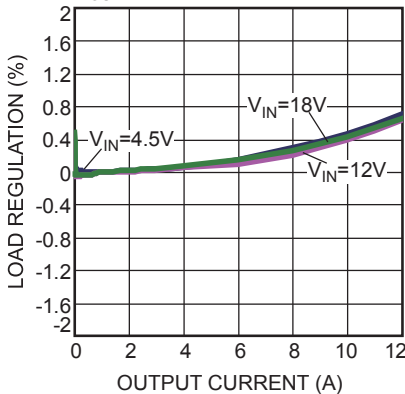

Load Regulation vs. Output Current
 $V_{OUT}=1.8V$



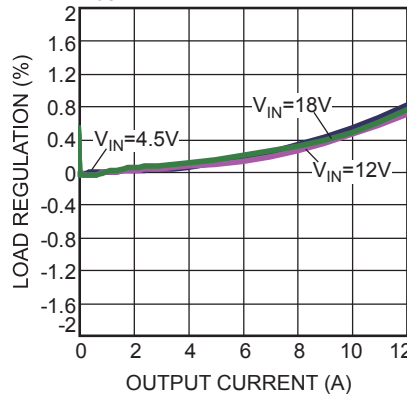


Load Regulation vs. Output Current
 $V_{OUT}=2.5V$

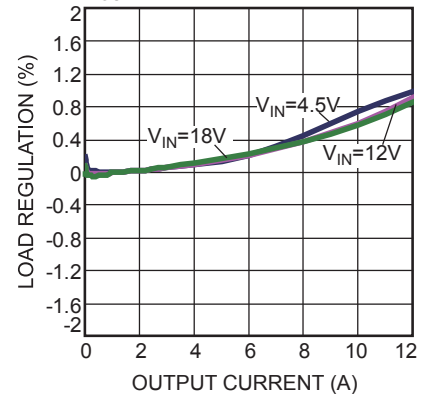

EVB TEST RESULTS (continued)










Performance waveforms are tested on the evaluation board.

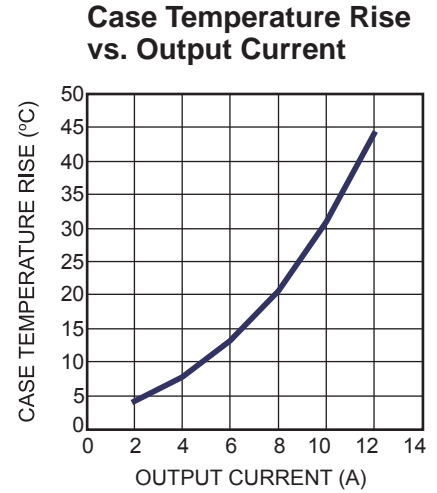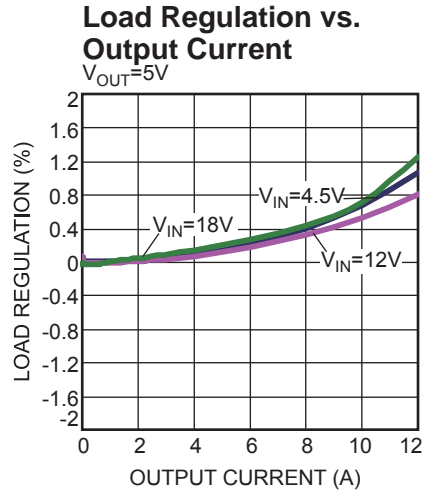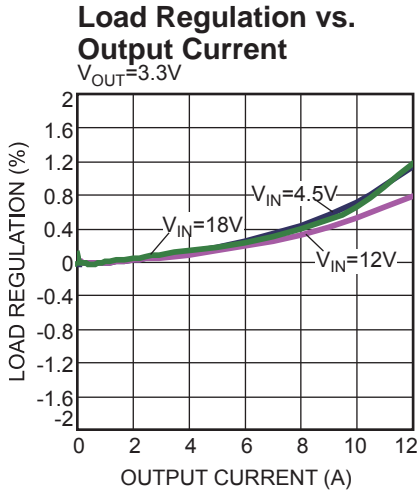 $V_{IN} = 12V$, $V_{OUT} = 1V$, $L = 1.5\mu H$, $F_S = 500kHz$, $T_A = 25^\circ C$, unless otherwise noted.


EVB TEST RESULTS (continued)

Performance waveforms are tested on the evaluation board.

 $V_{IN} = 12V$, $V_{OUT} = 1V$, $L = 1.5\mu H$, $F_S = 500kHz$, $T_A = 25^\circ C$, unless otherwise noted.

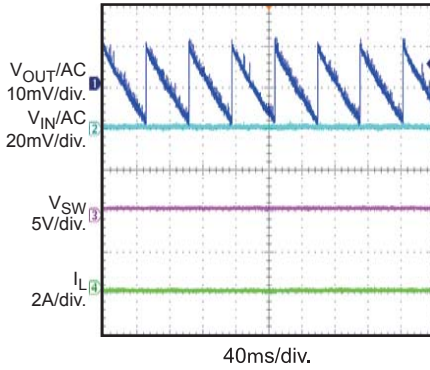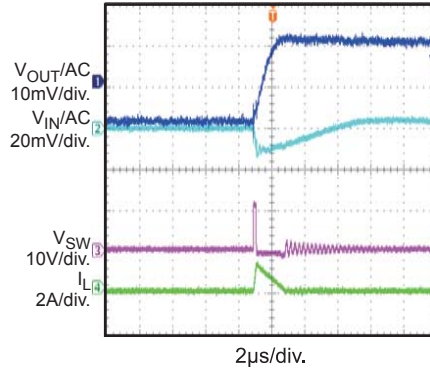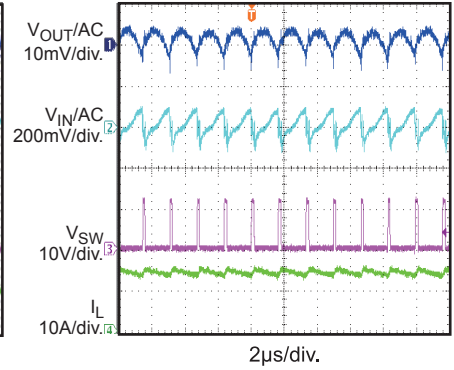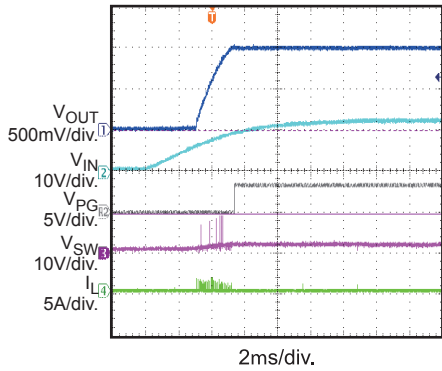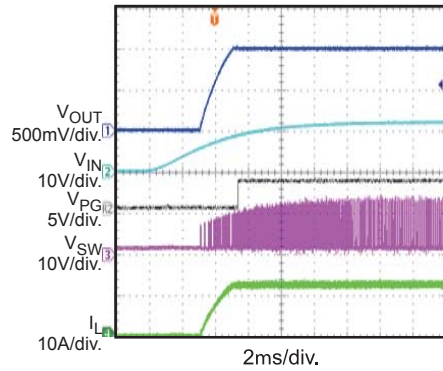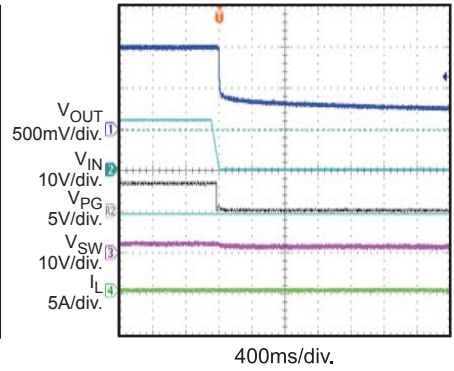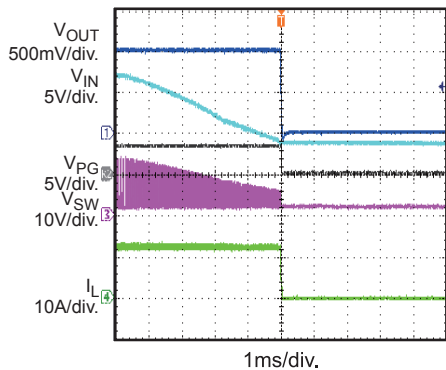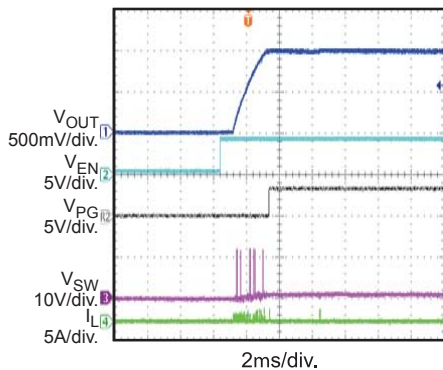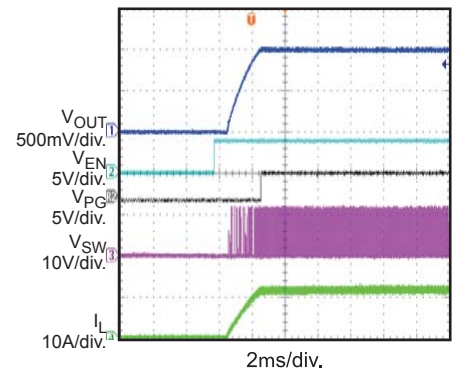Input/Output Ripple
 $I_{OUT} = 0A$

Input/Output Ripple
 $I_{OUT} = 0A$

Input/Output Ripple
 $I_{OUT} = 12A$

Start-Up through Input Voltage
 $I_{OUT} = 0A$

Start-Up through Input Voltage
 $I_{OUT} = 12A$

Shutdown through Input Voltage
 $I_{OUT} = 0A$

Shutdown through Input Voltage
 $I_{OUT} = 12A$

Start-Up through EN
 $I_{OUT} = 0A$

Start-Up through EN
 $I_{OUT} = 12A$


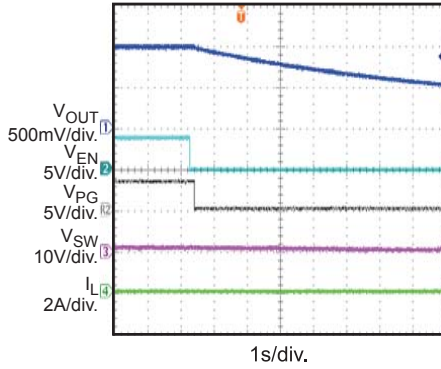
EV8 TEST RESULTS *(continued)*

Performance waveforms are tested on the evaluation board.

$V_{IN} = 12V$, $V_{OUT} = 1V$, $L = 1.5\mu H$, $F_S = 500kHz$, $T_A = 25^\circ C$, unless otherwise noted.


Shutdown through EN

$I_{OUT} = 0A$




Shutdown through EN

$I_{OUT} = 12A$

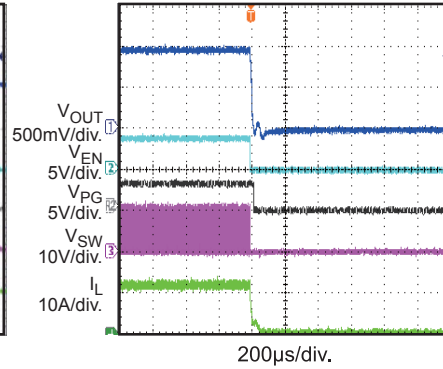


Load Transient

$I_{OUT} = 6A-12A$

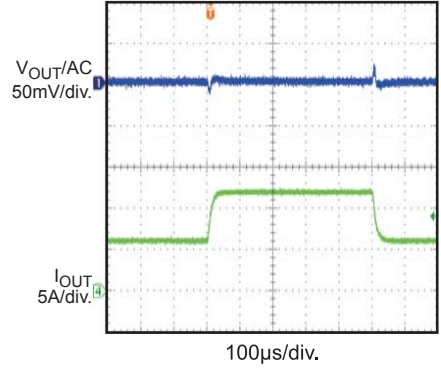


Short-Circuit Protection Entry

$I_{OUT} = 0A$

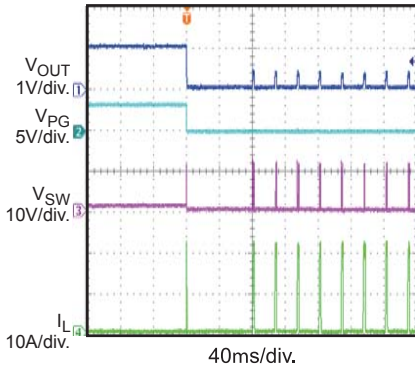


Short-Circuit Protection Recovery

$I_{OUT} = 0A$

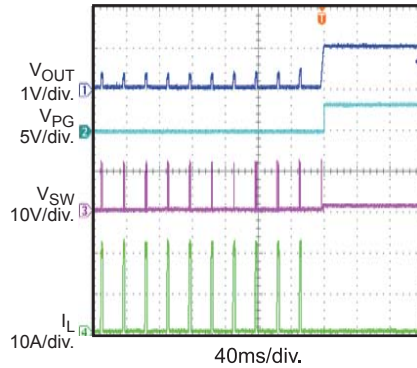

Short-Circuit Protection Steady State

Short Output to GND

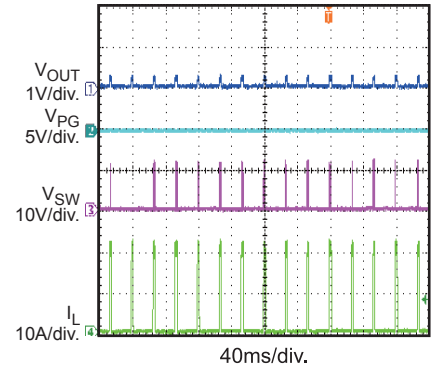

PRINTED CIRCUIT BOARD LAYER

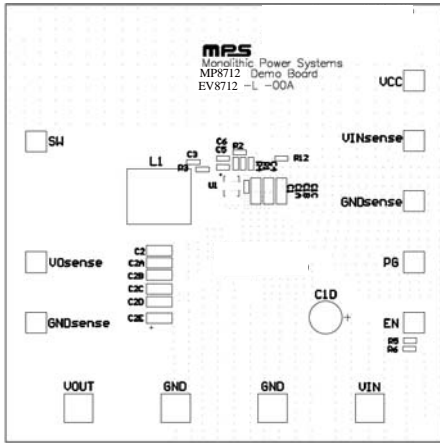


Figure 1: Top Silk Layer

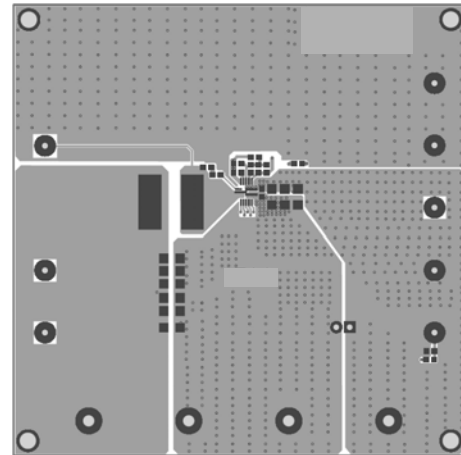


Figure 2: Top Layer

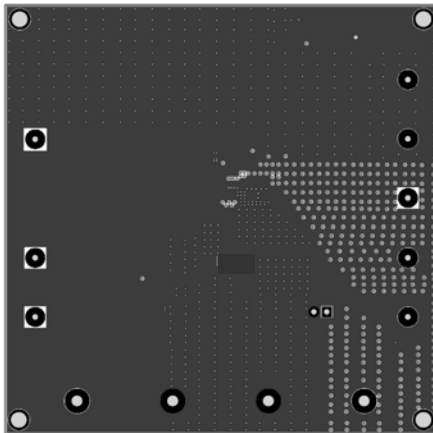


Figure 3: Inner 1 Layer

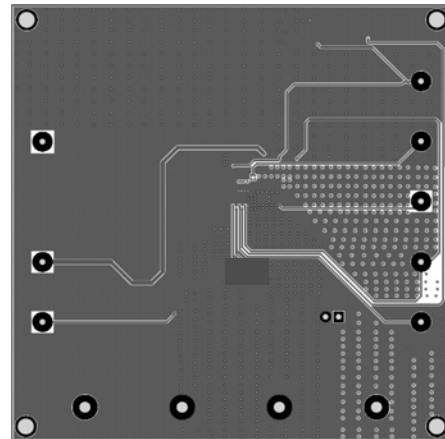


Figure 4: Inner 2 Layer

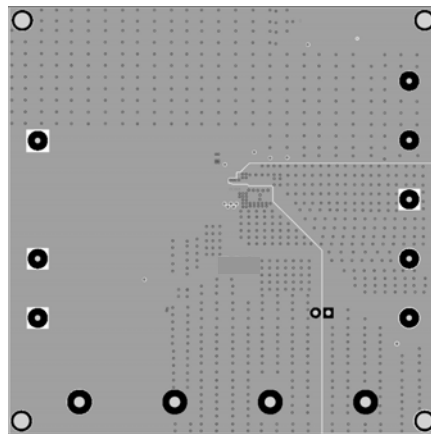


Figure 5: Bottom Layer