


# HATCH LED DRIVERS

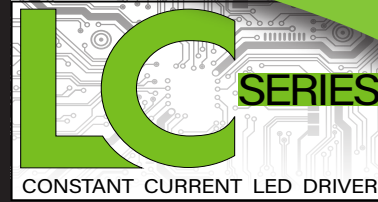

## GENERAL INFORMATION

LED Driver Type	Constant Current (Class 2)
Maximum Wattage	12 Watts
Input Voltage	120 VAC $\pm$ 10% Dedicated or 120-277 VAC Universal
Input Frequency	50/60Hz
Total Harmonic Distortion	<20%

## CASE STYLE B: POLYCARBONATE



## ELECTRICAL SPECIFICATIONS

Watts	Rated Current	Output Voltage	Dimming Type	Input Voltage	Input Power	Input Current	Power Factor	Efficiency	Hatch Part Number
<b>0-10V Dimming</b>									
12W	350mA	17-34 VDC	0-10V Dimming	120-277 VAC	15W	0.13/0.07A	>0.90	79%	LC12-0350Z-UNV-B
	500mA	12-24 VDC	0-10V Dimming	120-277 VAC	15W	0.13/0.07A	>0.90	80%	LC12-0500Z-UNV-B
	700mA	10-17 VDC	0-10V Dimming	120-277 VAC	15W	0.13/0.07A	>0.90	80%	LC12-0700Z-UNV-B
	*260mA	23-46 VDC	Phase Dimming	120 VAC	14W	0.14A	>0.90	78%	*LC12-0260P-120-B
	350mA	17-34 VDC	Phase Dimming	120 VAC	15W	0.14A	>0.90	80%	LC12-0350P-120-B
	500mA	12-24 VDC	Phase Dimming	120 VAC	15W	0.14A	>0.90	79%	LC12-0500P-120-B
	700mA	8-17 VDC	Phase Dimming	120 VAC	15W	0.14A	>0.90	78%	LC12-0700P-120-B

## PRODUCT FEATURES

- Short circuit and overload protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P - O/P 2.8kVDC, 2mA
- Operating Temperature range: -40°C to 90°C (measured at Tcase)
- MTBF (phase dim): 570,000 hours @ 40°C ambient (-70°C case temp)
- MTBF (0-10 dim): 343,000 hours @ 40°C ambient (-70°C case temp)
- Surge voltage rating: L-N 2kV
- Output Current tolerance +/- 5% @ 25°C
- Inrush Current: <20A Max @ 120VAC, cold start 25°C

## APPROVALS


\*Class 2 US Only

- UL 8750 recognized component
- EN61000-3-2
- EMC: Meets FCC47 CFR Part 15 (Class B) consumer limits



TYPE  
HL

## MECHANICAL SPECIFICATIONS: CASE STYLE C

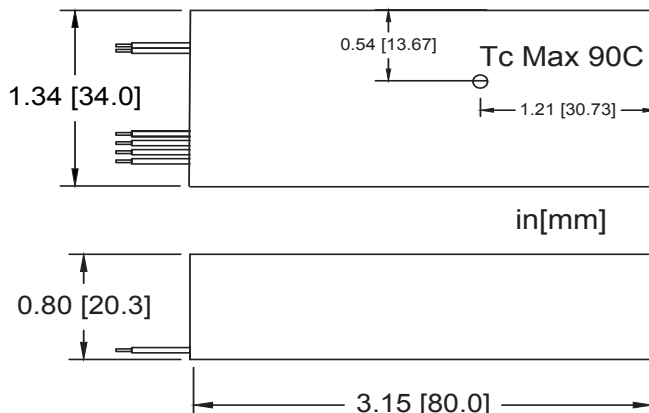

## DIMENSIONS [IN/MM]

Length:	3.14 [79.8]
Width:	1.33 [33.8]
Height:	0.80 [20.3]

## WIRING INFORMATION

Input:	12", Black (L), White (N) #18AWG
Output:	12", Red (+), Blue (-) #18AWG

## PACKAGING INFORMATION

Weight:	4.0 oz
Quantity:	160pc/carton


## WARRANTY

- 5 year limited warranty

Specifications subject to change without notice.

### PERFORMANCE CURVES

Efficiency vs. Output Power

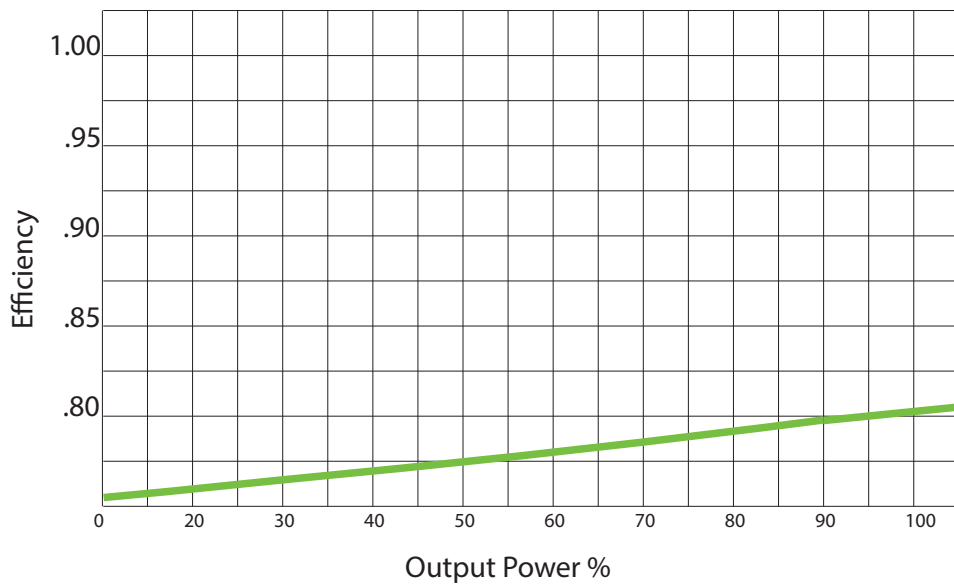

Power Factor vs. Output Power

