


LME series – digital low differential pressure sensors

The LME differential low pressure sensors are based on thermal flow measurement of gas through a micro-flow channel integrated within the sensor chip. The innovative LME technology features superior sensitivity especially for ultra low pressures. The extremely low gas flow through the sensor ensures high immunity to dust contamination, humidity and long tubing compared to other flow-based pressure sensors.



Features

- Ultra-low pressure ranges from 25 to 2500 Pa (0.1 to 10 inH₂O)
- Pressure sensor based on thermal micro-flow measurement
- High flow impedance
 - very low flow-through leakage
 - high immunity to dust and humidity
 - no loss in sensitivity using long tubing
- Outstanding long-term stability and precision with patented real-time offset compensation and linearization techniques
- Offset long term stability better than 0.1 Pa/year
- Total accuracy better than 0.5% FS typical
- On-chip temperature sensor
- Linearized digital SPI and analog outputs
- Small footprint, low profile, only 9 mm in height, and robust package
- Pressure ports for direct manifold assemblies
- Highly versatile to fit to application-specific mounting adapters and manifolds
- Minimized internal volume and manifold mount option allow for fast gas purge time
- No position sensitivity

Certificates

- Quality Management System according to EN ISO 13485 and EN ISO 9001
- RoHS and REACH compliant

Media compatibility

Air and other non-corrosive gases

Applications

Medical

- Ventilators
- Spirometers
- CPAP
- Sleep diagnostic equipment
- Nebulizers
- Oxygen conservers/concentrators
- Insufflators/endoscopy

Industrial

- HVAC
 - VAV
 - Filter monitoring
 - Burner control
- Fuel cells
- Gas leak detection
- Gas metering
- Fume hood
- Instrumentation
- Security systems

LME series – digital low differential pressure sensors

Maximum ratings

| Parameter | Min. | Max. | Unit |
|---|------|------|----------|
| Supply voltage V_s | 4.75 | 5.25 | V_{DC} |
| Output current | | 1 | mA |
| Soldering recommendations | | | |
| Reflow soldering ^{(1) (2)} | | | |
| Average preheating temperature gradient | | 1.5 | K/s |
| Time above 217 °C | | 74 | s |
| Time above 240 °C | | 30 | |
| Peak temperature | | 245 | °C |
| Cooling temperature gradient | | -1.4 | K/s |
| Wave soldering, pot temperature | | 260 | °C |
| Hand soldering, tip temperature | | 370 | °C |
| Temperature ranges | | | |
| Compensated | 0 | +70 | °C |
| Operating | -20 | +80 | °C |
| Storage | -40 | +80 | °C |
| Humidity limits (non-condensing) | | | |
| | | 97 | %RH |
| Vibration ⁽³⁾ | | | |
| | | 20 | g |
| Mechanical shock ⁽⁴⁾ | | | |
| | | 500 | g |

Pressure sensor characteristics

| Part no. | Operating pressure | Proof pressure ⁽⁵⁾ | Burst pressure ⁽⁵⁾ |
|-------------|--|-------------------------------|-------------------------------|
| LMES025U... | 0...25 Pa / 0...0.25 mbar (0.1 inH ₂ O) | | |
| LMES050U... | 0...50 Pa / 0...0.5 mbar (0.2 inH ₂ O) | | |
| LMES100U... | 0...100 Pa / 0...1 mbar (0.4 inH ₂ O) | | |
| LMES250U... | 0...250 Pa / 0...2.5 mbar (1 inH ₂ O) | | |
| LMES500U... | 0...500 Pa / 0...5 mbar (2 inH ₂ O) | | |
| LMEM012U... | 0...1250 Pa / 0...12.5 mbar (5 inH ₂ O) | | |
| LMEM025U... | 0...2500 Pa / 0...25 mbar (10 inH ₂ O) | | |
| LMES025B... | 0...±25 Pa / 0...±0.25 mbar (0.1 inH ₂ O) | 2 bar (30 psi) | 5 bar (75 psi) |
| LMES050B... | 0...±50 Pa / 0...±0.5 mbar (0.2 inH ₂ O) | | |
| LMES100B... | 0...±100 Pa / 0...±1 mbar (0.4 inH ₂ O) | | |
| LMES250B... | 0...±250 Pa / 0...±2.5 mbar (1 inH ₂ O) | | |
| LMES500B... | 0...±500 Pa / 0...±5 mbar (2 inH ₂ O) | | |
| LMEM012B... | 0...±1250 Pa / 0...±12.5 mbar (5 inH ₂ O) | | |
| LMEM025B... | 0...±2500 Pa / 0...±25 mbar (10 inH ₂ O) | | |

Gas correction factors ⁽⁶⁾

| Gas type | Correction factor |
|-----------------------------------|-------------------|
| Dry air | 1.0 |
| Oxygen (O ₂) | 1.07 |
| Nitrogen (N ₂) | 0.97 |
| Argon (Ar) | 0.98 |
| Carbon dioxide (CO ₂) | 0.56 |

Specification notes

- (1) Recommendations only. Actually reflow settings depend on many factors, for example, number of oven heating and cooling zones, type of solder paste/flux used, board and component size, as well as component density. It is the responsibility of the customer to fine tune their processes for optimal results.
- (2) Handling instruction: Products are packaged in vacuum sealed moisture barrier bag with a floor life of 168hours (<30C, 60% R.H.). If floor life or environmental conditions have been exceeded prior to reflow assembly, baking is recommended. Recommended bake-out procedure is 72 hours @ 60C.
- (3) Sweep 20 to 2000 Hz, 8 min, 4 cycles per axis, MIL-STD-883, Method 2007.
- (4) 5 shocks, 3 axes, MIL-STD-883E, Method 2002.4.
- (5) The max. common mode pressure is 5 bar.
- (6) For example with a LMES500... sensor measuring CO₂ gas, at full-scale output the actual pressure will be:

$$\Delta P_{\text{eff}} = \Delta P_{\text{Sensor}} \times \text{gas correction factor} = 500 \text{ Pa} \times 0.56 = 280 \text{ Pa}$$

$$\Delta P_{\text{eff}} = \text{True differential pressure}$$

$$\Delta P_{\text{Sensor}} = \text{Differential pressure as indicated by output signal}$$

LME series – digital low differential pressure sensors

Performance characteristics ⁽⁷⁾

(V_S=5.0 V_{DC}, T_A=20 °C, P_{Abs}=1 bara, calibrated in air, output signal is non-ratiometric to V_S)

25 Pa and 50 Pa devices

| Parameter | Min. | Typ. | Max. | Unit |
|--|------|-------|-----------------|--------------|
| Noise level (RMS) | | ±0.01 | | Pa |
| Offset warm-up shift | | | less than noise | |
| Offset long term stability ⁽⁸⁾ | | ±0.05 | ±0.1 | Pa/year |
| Offset repeatability | | ±0.01 | | Pa |
| Span repeatability ^(11, 12) | | ±0.25 | | % of reading |
| Current consumption (no load) ⁽⁹⁾ | | 7 | 8 | mA |
| Response time (t ₆₃) | | 5 | | ms |
| Power-on time | | | 25 | ms |

Digital output

| Parameter | Min. | Typ. | Max. | Unit | |
|---|-------------------|-----------|-------|--------------|--------------|
| Scale factor (digital output) ⁽¹⁰⁾ | 0...25/0...±25 Pa | 1200 | | counts/Pa | |
| | 0...50/0...±50 Pa | 600 | | counts/Pa | |
| Zero pressure offset accuracy ⁽¹¹⁾ | | ±0.1 | ±0.2 | %FSS | |
| Span accuracy ^(11, 12) | | ±0.4 | ±0.75 | % of reading | |
| Thermal effects | Offset | 5...55 °C | | ±0.2 | %FSS |
| | | 0...70 °C | | ±0.4 | %FSS |
| | Span | 5...55 °C | ±1 | ±1.75 | % of reading |
| | | 0...70 °C | ±2 | ±2.75 | % of reading |

Analog output (unidirectional devices)

| Parameter | Min. | Typ. | Max. | Unit | |
|--------------------------------------|--------|-----------|-------|--------------|--------------|
| Zero pressure offset ⁽¹¹⁾ | 0.49 | 0.50 | 0.51 | V | |
| Full scale output | | 4.50 | | V | |
| Span accuracy ^(11, 12) | | ±0.4 | ±0.75 | % of reading | |
| Thermal effects | Offset | 5...55 °C | | ±15 | mV |
| | | 0...70 °C | | ±30 | mV |
| | Span | 5...55 °C | ±1.25 | ±2 | % of reading |
| | | 0...70 °C | ±2 | ±2.75 | % of reading |

Analog output (bidirectional devices)

| Parameter | Min. | Typ. | Max. | Unit | |
|--------------------------------------|----------------------------|-----------|-------|--------------|--------------|
| Zero pressure offset ⁽¹¹⁾ | 2.49 | 2.50 | 2.51 | V | |
| Output | at max. specified pressure | 4.50 | | V | |
| | at min. specified pressure | 0.50 | | V | |
| Span accuracy ^(11, 12) | | ±0.4 | ±0.75 | % of reading | |
| Thermal effects | Offset | 5...55 °C | | ±15 | mV |
| | | 0...70 °C | | ±30 | mV |
| | Span | 5...55 °C | ±1.25 | ±2 | % of reading |
| | | 0...70 °C | ±2 | ±2.75 | % of reading |

Specification notes (cont.)

(7) The sensor is calibrated with a common mode pressure of 1 bar absolute. Due to the mass flow based measuring principle, variations in absolute common mode pressure need to be compensated according to the following formula:

$$\Delta P_{\text{eff}} = \Delta P_{\text{Sensor}} \times 1 \text{ bara} / P_{\text{abs}}$$

ΔP_{eff} = True differential pressure

ΔP_{Sensor} = Differential pressure as indicated by output voltage

P_{abs} = Current absolute common mode pressure

(8) Figure based on accelerated lifetime test of 10000 hours at 85 °C biased burn-in.

(9) Please contact First Sensor for low power options.

(10) The digital output signal is a signed, two complement integer. Negative pressures will result in a negative output

(11) Zero pressure offset accuracy and span accuracy are uncorrelated uncertainties. They can be added according to the principles of error propagation.

(12) Span accuracy below 10% of full scale is limited by the intrinsic noise of the sensor.

LME series – digital low differential pressure sensors

Performance characteristics (cont.) ⁽⁷⁾

($V_S=5.0 V_{DC}$, $T_A=20\text{ °C}$, $P_{Abs}=1\text{ bara}$, calibrated in air, output signal is non-ratiometric to V_S)

100 Pa, 250 Pa and 500 Pa devices

| Parameter | Min. | Typ. | Max. | Unit |
|--|------|-------|-----------------|--------------|
| Noise level (RMS) | | ±0.01 | | %FSS |
| Offset warm-up shift | | | less than noise | |
| Offset long term stability ⁽⁸⁾ | | ±0.05 | ±0.1 | %FSS/year |
| Offset repeatability ⁽¹³⁾ | | ±0.02 | | Pa |
| Span repeatability ^(11, 12) | | ±0.25 | | % of reading |
| Current consumption (no load) ⁽⁹⁾ | | 7 | 8 | mA |
| Response time (t_{63}) | | 5 | | ms |
| Power-on time | | | 25 | ms |

Digital output

| Parameter | Min. | Typ. | Max. | Unit | |
|---|---------------------|-----------|-------|--------------|--------------|
| Scale factor (digital output) ⁽¹⁰⁾ | 0...100/0...±100 Pa | 300 | | counts/Pa | |
| | 0...250/0...±250 Pa | 120 | | counts/Pa | |
| | 0...500/0...±500 Pa | 60 | | counts/Pa | |
| Zero pressure offset accuracy ⁽¹¹⁾ | | ±0.05 | ±0.1 | %FSS | |
| Span accuracy ^(11, 12) | | ±0.4 | ±0.75 | % of reading | |
| Thermal effects | Offset | 5...55 °C | | ±0.1 | %FSS |
| | | 0...70 °C | | ±0.2 | %FSS |
| | Span | 5...55 °C | ±1 | ±1.75 | % of reading |
| | | 0...70 °C | ±2 | ±2.75 | % of reading |

Analog output (unidirectional devices)

| Parameter | Min. | Typ. | Max. | Unit | |
|--------------------------------------|--------|-----------|-------|--------------|--------------|
| Zero pressure offset ⁽¹¹⁾ | 0.49 | 0.50 | 0.51 | V | |
| Full scale output | | 4.50 | | V | |
| Span accuracy ^(11, 12) | | ±0.4 | ±0.75 | % of reading | |
| Thermal effects | Offset | 5...55 °C | | ±10 | mV |
| | | 0...70 °C | | ±12 | mV |
| | Span | 5...55 °C | ±1 | ±1.75 | % of reading |
| | | 0...70 °C | ±2 | ±2.75 | % of reading |

Analog output (bidirectional devices)

| Parameter | Min. | Typ. | Max. | Unit | |
|--------------------------------------|----------------------------|-----------|-------|--------------|--------------|
| Zero pressure offset ⁽¹¹⁾ | 2.49 | 2.50 | 2.51 | V | |
| Output | at max. specified pressure | 4.50 | | V | |
| | at min. specified pressure | 0.50 | | V | |
| Span accuracy ^(11, 12) | | ±0.4 | ±0.75 | % of reading | |
| Thermal effects | Offset | 5...55 °C | | ±10 | mV |
| | | 0...70 °C | | ±12 | mV |
| | Span | 5...55 °C | ±1 | ±1.75 | % of reading |
| | | 0...70 °C | ±2 | ±2.75 | % of reading |

Specification notes (cont.)

(7) The sensor is calibrated with a common mode pressure of 1 bar absolute. Due to the mass flow based measuring principle, variations in absolute common mode pressure need to be compensated according to the following formula:

$$\Delta P_{\text{eff}} = \Delta P_{\text{Sensor}} \times 1 \text{ bara} / P_{\text{abs}}$$

ΔP_{eff} = True differential pressure

ΔP_{Sensor} = Differential pressure as indicated by output voltage

P_{abs} = Current absolute common mode pressure

(8) Figure based on accelerated lifetime test of 10000 hours at 85 °C biased burn-in.

(9) Please contact First Sensor for low power options.

(10) The digital output signal is a signed, two complement integer. Negative pressures will result in a negative output

(11) Zero pressure offset accuracy and span accuracy are uncorrelated uncertainties. They can be added according to the principles of error propagation.

(12) Span accuracy below 10% of full scale is limited by the intrinsic noise of the sensor.

(13) Typical value for 250 Pa sensors.

LME series – digital low differential pressure sensors

Performance characteristics (cont.) ^(7, 14)

(V_S=5.0 V_{DC}, T_A=20 °C, P_{Abs}=1 bara, calibrated in air, output signal is non-ratiometric to V_S)

1250 Pa and 2500 Pa devices

| Parameter | Min. | Typ. | Max. | Unit |
|--|------|-------|-----------------|--------------|
| Noise level (RMS) | | ±0.5 | | Pa |
| Offset warm-up shift | | | less than noise | |
| Offset long term stability ⁽⁸⁾ | | ±1.25 | ±2.5 | Pa/year |
| Offset repeatability | | ±0.5 | | Pa |
| Span repeatability ^(11, 12) | | ±0.25 | | % of reading |
| Current consumption (no load) ⁽⁹⁾ | | 7 | 8 | mA |
| Response time (t ₆₃) | | 5 | | ms |
| Power-on time | | | 25 | ms |

Digital output

| Parameter | Min. | Typ. | Max. | Unit | |
|---|-----------------------|-----------|------|--------------|--------------|
| Scale factor (digital output) ⁽¹⁰⁾ | 0...1250/0...±1250 Pa | 24 | | counts/Pa | |
| | 0...2500/0...±2500 Pa | 12 | | counts/Pa | |
| Zero pressure offset accuracy ⁽¹¹⁾ | | ±0.1 | ±0.2 | %FSS | |
| Span accuracy ^(11, 12) | | ±0.75 | ±1.5 | % of reading | |
| Thermal effects | Offset | 5...55 °C | | ±0.1 | %FSS |
| | | 0...70 °C | | ±0.2 | %FSS |
| | Span | 5...55 °C | ±1 | ±1.75 | % of reading |
| | | 0...70 °C | ±2 | ±2.75 | % of reading |

Analog output (unidirectional devices)

| Parameter | Min. | Typ. | Max. | Unit | |
|--------------------------------------|--------|-----------|-------|--------------|--------------|
| Zero pressure offset ⁽¹¹⁾ | 0.49 | 0.50 | 0.51 | V | |
| Full scale output | | 4.50 | | V | |
| Span accuracy ^(11, 12) | | ±0.75 | ±1.5 | % of reading | |
| Thermal effects | Offset | 5...55 °C | | ±10 | mV |
| | | 0...70 °C | | ±12 | mV |
| | Span | 5...55 °C | ±1.25 | ±2 | % of reading |
| | | 0...70 °C | ±2 | ±2.75 | % of reading |

Analog output (bidirectional devices)

| Parameter | Min. | Typ. | Max. | Unit | |
|--------------------------------------|----------------------------|-----------|-------|--------------|--------------|
| Zero pressure offset ⁽¹¹⁾ | 2.49 | 2.50 | 2.51 | V | |
| Output | at max. specified pressure | 4.50 | | V | |
| | at min. specified pressure | 0.50 | | V | |
| Span accuracy ^(11, 12) | | ±0.75 | ±1.5 | % of reading | |
| Thermal effects | Offset | 5...55 °C | | ±10 | mV |
| | | 0...70 °C | | ±12 | mV |
| | Span | 5...55 °C | ±1.25 | ±2 | % of reading |
| | | 0...70 °C | ±2 | ±2.75 | % of reading |

Specification notes (cont.)

(7) The sensor is calibrated with a common mode pressure of 1 bar absolute. Due to the mass flow based measuring principle, variations in absolute common mode pressure need to be compensated according to the following formula:

$$\Delta P_{\text{eff}} = \Delta P_{\text{Sensor}} \times 1 \text{ bara} / P_{\text{abs}}$$

ΔP_{eff} = True differential pressure

ΔP_{Sensor} = Differential pressure as indicated by output voltage

P_{abs} = Current absolute common mode pressure

(8) Figure based on accelerated lifetime test of 10000 hours at 85 °C biased burn-in.

(9) Please contact First Sensor for low power options.

(10) The digital output signal is a signed, two complement integer. Negative pressures will result in a negative output

(11) Zero pressure offset accuracy and span accuracy are uncorrelated uncertainties. They can be added according to the principles of error propagation.

(12) Span accuracy below 10% of full scale is limited by the intrinsic noise of the sensor.

(14) For pressure ranges 1250 Pa and 2500 Pa, more accurate absolute pressure correction procedures than in (5) might be needed. See Application Note "Absolute pressure correction of LME/LMI pressure sensors".

LME series – digital low differential pressure sensors

Performance characteristics (cont.)

| Temperature sensor | | | | |
|-------------------------------|------|------|------|-----------|
| Parameter | Min. | Typ. | Max. | Unit |
| Scale factor (digital output) | | 95 | | counts/°C |
| Non-linearity | | ±0.5 | | %FS |
| Hysteresis | | ±0.1 | | % FS |

Total accuracy ⁽¹⁵⁾

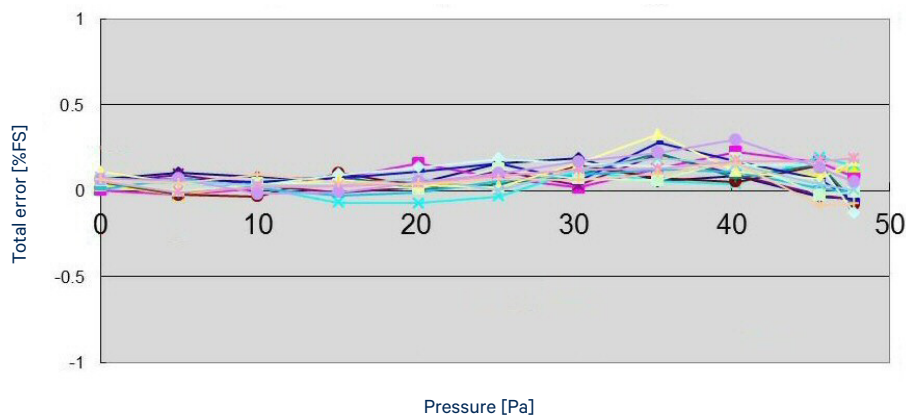


Fig. 1: Typical total accuracy plot of 16 LME 50 Pa sensors @ 25 °C (typical total accuracy better than 0.5 %FS)

Offset long term stability

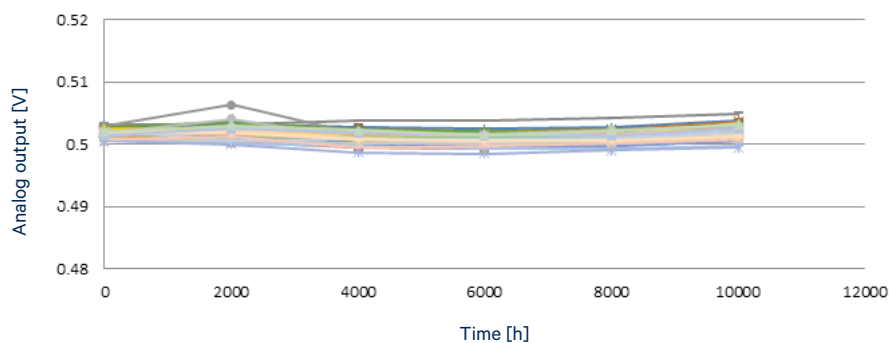


Fig. 2: Offset long term stability for LME 250 Pa sensors after 10,000 hours @ 85°C powered, equivalent to over 43.5 years @ 25 °C (better than ±2 mV / ±0.125 Pa)

Specification notes (cont.)

(15) Total accuracy is the combined error from offset and span calibration, non-linearity, repeatability and pressure hysteresis

LME series – digital low differential pressure sensors

SPI – Serial Peripheral Interface

Introduction

The LME serial interface is a high-speed synchronous data input and output communication port. The serial interface operates using a standard 4-wire SPI bus. The LME device runs in SPI mode 0, which requires the clock line SCLK to idle low (CPOL = 0), and for data to be sampled on the leading clock edge (CPHA = 0). Figure 5 illustrates this mode of operation.

Care should be taken to ensure that the sensor is properly connected to the master microcontroller. Refer to the manufacturer's datasheet for more information regarding physical connections.

Application circuit

The use of pull-up resistors is generally unnecessary for SPI as most master devices are configured for push-pull mode. There are, however, some cases where it may be helpful to use 33Ω series resistors at both ends of the SPI lines, as shown in Figure 3.

Signal quality may be further improved by the addition of a buffer as shown in Figure 4. These cases include multiple slave devices on the same bus segment, using a master device with limited driving capability and long SPI bus lines.

If these series resistors are used, they must be physically placed as close as possible to the pins of the master and slave devices.

Signal control

The serial interface is enabled by asserting /CS low. The serial input clock, SCLK, is gated internally to begin accepting the input data at MOSI, or sending the output data on MISO. When /CS rises, the data clocked into MOSI is loaded into an internal register.

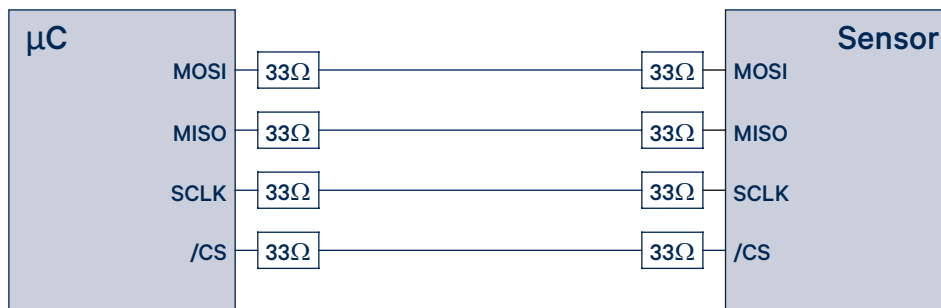


Fig. 3: Application circuit with resistors at both ends of the SPI lines

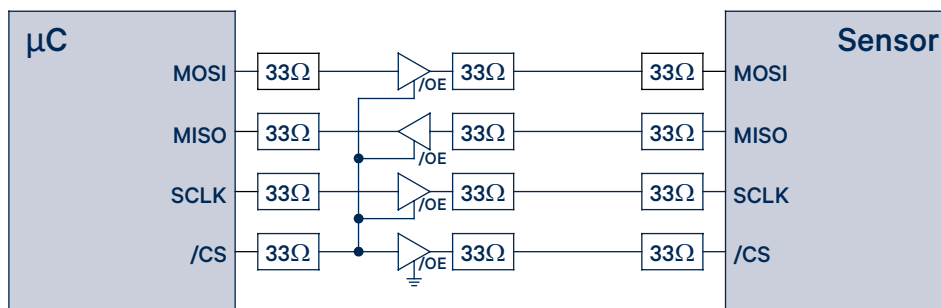


Fig. 4: Application circuit with additional buffer

LME series – digital low differential pressure sensors

SPI – Serial Peripheral Interface (cont.)

Data read – pressure

When powered on, the sensor begins to continuously measure pressure. To initiate data transfer from the sensor, the following three unique bytes must be written sequentially, MSB first, to the MOSI pin (see Figure 5):

| Step | Hexadecimal | Binary | Description |
|------|-------------|-----------|-----------------------------------|
| 1 | 0x2D | B00101101 | Poll current pressure measurement |
| 2 | 0x14 | B00010100 | Send result to data register |
| 3 | 0x98 | B10011000 | Read data register |

The entire 16 bit content of the LME register is then read out on the MISO pin, MSB first, by applying 16 successive clock pulses to SCLK with /CS asserted low. Note that the value of the LSB is held at zero for internal signal processing purposes. This is below the noise threshold of the sensor and thus its fixed value does not affect sensor performance and accuracy.

From the digital sensor output the actual pressure value can be calculated as follows:

$$\text{Pressure [Pa]} = \frac{\text{Digital output [counts]}}{\text{Scale factor} \left[\frac{\text{counts}}{\text{Pa}} \right]}$$

For example, for a ±250 Pa sensor (LMES250B...) with a scale factor of 120 a digital output of 30 000 counts (7530'h) calculates to a positive pressure of 250 Pa. Similarly, a digital output of -30 000 counts (8AD0'h) calculates to a negative pressure of -250 Pa.

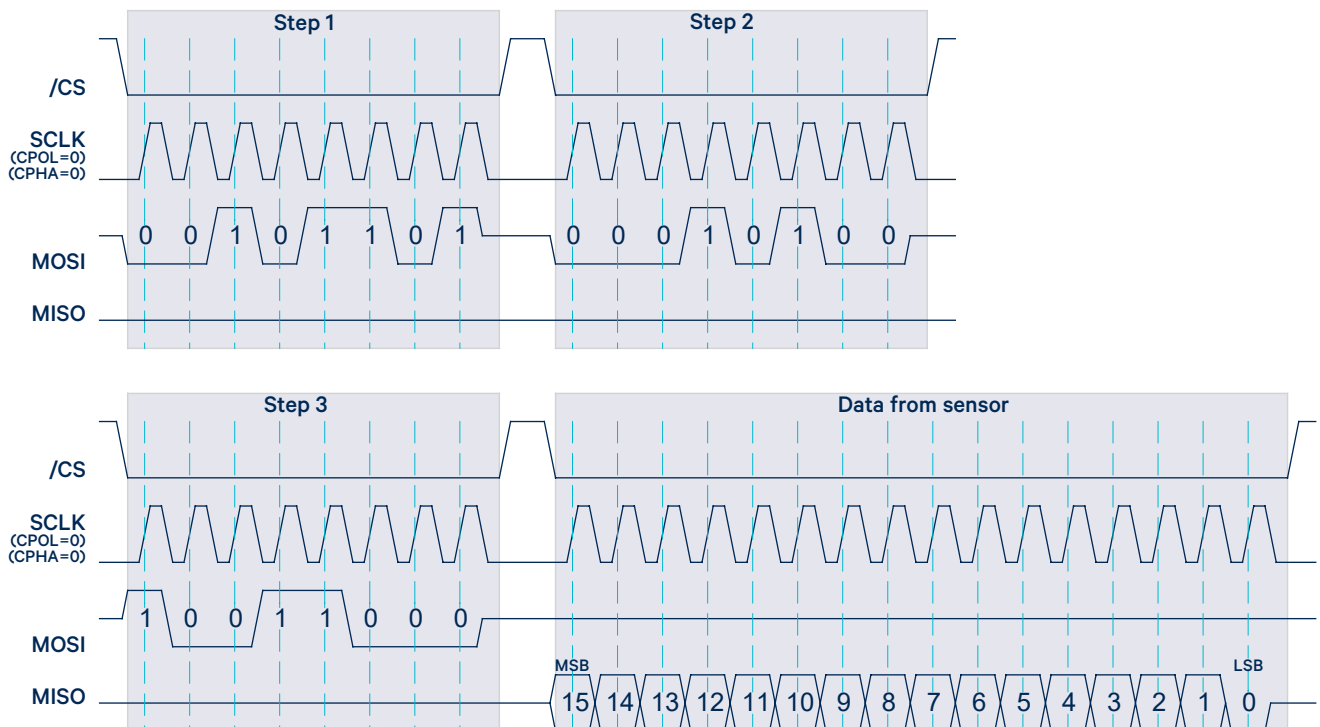


Fig. 5: SPI data transfer

LME series – digital low differential pressure sensors

SPI – Serial Peripheral Interface (cont.)

Data read – temperature

The on-chip temperature sensor changes 95 counts/°C over the operating range. The temperature data format is 15-bit plus sign in two's complement format. To read temperature, use the following sequence:

| Step | Hexadecimal | Binary | Description |
|------|-------------|-----------|--------------------------------------|
| 1 | 0x2A | B00101010 | Poll current temperature measurement |
| 2 | 0x14 | B00010100 | Send result to data register |
| 3 | 0x98 | B10011000 | Read data register |

From the digital sensor output, the actual temperature can be calculated as follows:

$$\text{Temperature [}^{\circ}\text{C]} = \frac{\text{TS} - \text{TS}_0 \text{ [counts]}}{\text{Scale factor}_{\text{TS}} \left[\frac{\text{counts}}{^{\circ}\text{C}} \right]} + T_0 \text{ [}^{\circ}\text{C]}$$

where

TS is the actual sensor readout;

TS₀ is the sensor readout at known temperature T₀⁽¹⁶⁾;

Scale factor_{TS} = 95 counts/°C

Specification notes (cont.)

(16) To be defined by user. The results show deviation (in °C) from the offset calibrated temperature.

LME series – digital low differential pressure sensors

SPI – Serial Peripheral Interface (cont.)

Interface specification

| Parameter | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|---|-----------------|--|------------------|------|------------------|---------------|
| | | | Min. | Max. | | |
| External clock frequency | f_{ECLK} | $V_{CKSEL}=0$ | | 0.2 | | MHz |
| External master clock input low time | $f_{ECLKIN LO}$ | $t_{ECLK}=1/f_{ECLK}$ | 40 | | 60 | % t_{ECLK} |
| External master clock input high time | $f_{ECLKIN HI}$ | $t_{ECLK}=1/f_{ECLK}$ | 40 | | 60 | % t_{ECLK} |
| SCLK setup to falling edge /CS | t_{SC} | | 30 | | | ns |
| /CS falling edge to SCLK rising edge setup time | t_{CSS} | | 30 | | | ns |
| /CS idle time | t_{CSI} | $f_{CLK}=4 \text{ MHz}$ | 1.5 | | | μs |
| SCLK falling edge to data valid delay | t_{DO} | $C_{LOAD}=15 \text{ pF}$ | | | 80 | ns |
| Data valid to SCLK rising edge setup time | t_{DS} | | 30 | | | ns |
| Data valid to SCLK rising edge hold time | t_{DH} | | 30 | | | ns |
| SCLK high pulse width | t_{CH} | | 100 | | | ns |
| SCLK low pulse width | t_{CL} | | 100 | | | ns |
| /CS rising edge to SCLK rising edge hold time | t_{CSH} | | 30 | | | ns |
| /CS falling edge to output enable | t_{DV} | $C_{LOAD}=15 \text{ pF}$ | | | 25 | ns |
| /CS rising edge to output disable | t_{TR} | $C_{LOAD}=15 \text{ pF}$ | | | 25 | ns |
| Maximum output load capacitance | C_{LOAD} | $R_{LOAD}=\infty$, phase margin $>55^\circ$ | | 200 | | pF |
| Input voltage, logic HIGH | V_{IH} | | $0.8 \times V_S$ | | $V_S+0.3$ | V |
| Input voltage, logic LOW | V_{IL} | | | | $0.2 \times V_S$ | V |
| Output voltage, logic HIGH | V_{OH} | $R_{LOAD}=\infty$ | $V_S-0.1$ | | | V |
| Output voltage, logic LOW | V_{OL} | $R_{LOAD}=2 \text{ k}\Omega$ | $V_S-0.15$ | | | V |
| | | $R_{LOAD}=\infty$ | | | 0.5 | V |
| | | $R_{LOAD}=2 \text{ k}\Omega$ | | | 0.2 | V |


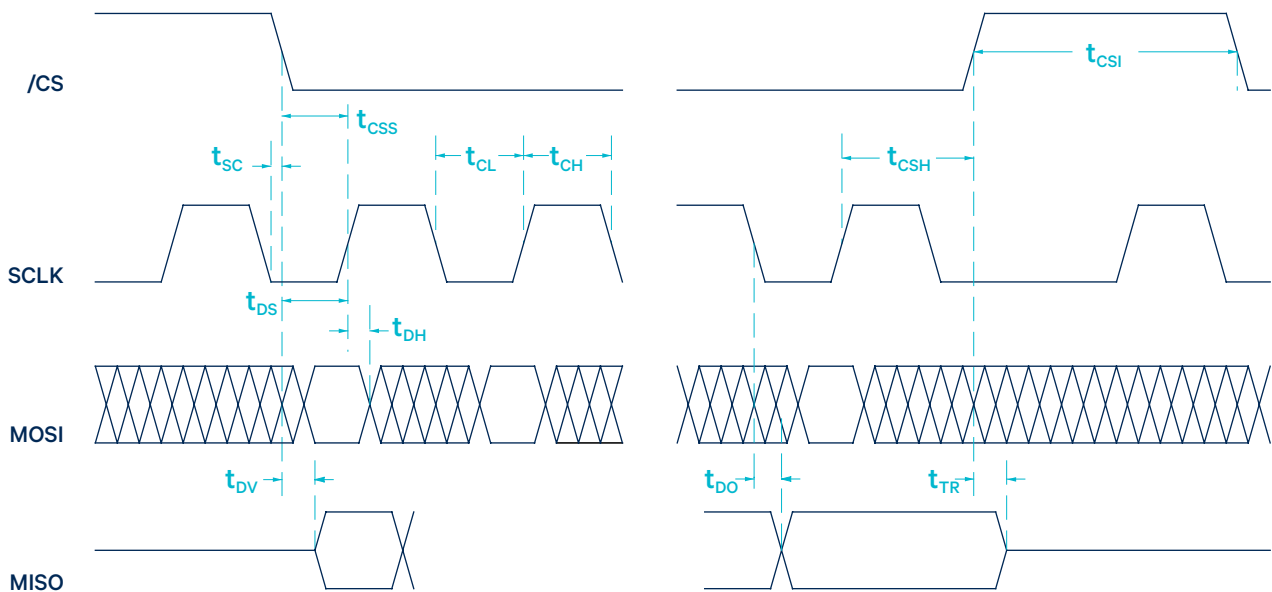



Fig. 6: SPI timing diagram

LME series – digital low differential pressure sensors


Dimensional drawing

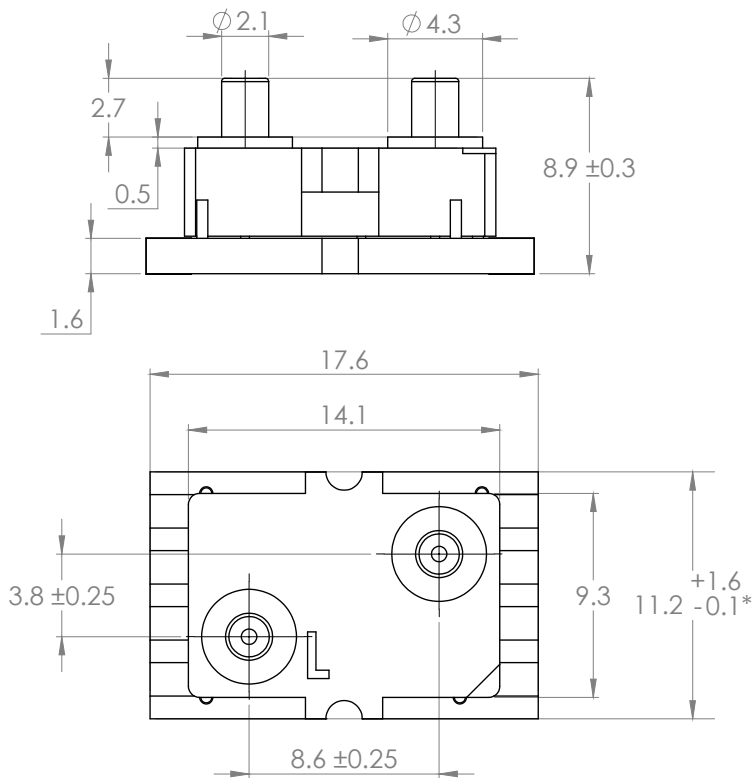

dimensions in mm
 dimensions without tolerance are for reference only
 *large PCB tolerance due to thin burs left after V-cut

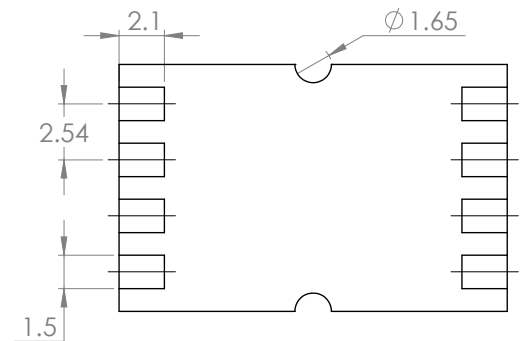


Suggested PCB land pattern

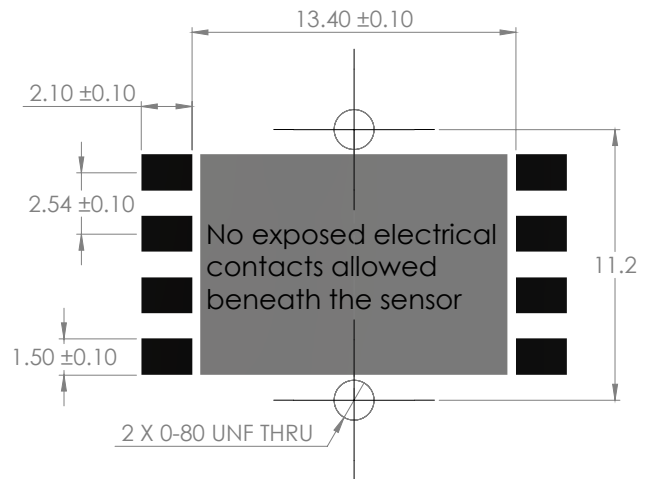

Electrical connection


There are two use cases that will change the manner in which the LME series device is connected in-circuit:

| Pin | Function | Case 1: Digital signal output | Case 2: Analog signal output |
|-----|----------|-------------------------------|---|
| 1 | V_s | +5V | +5V |
| 2 | GND | GND | GND |
| 3 | Vout | NC | High impedance analog input (e.g. op-amp, ADC) |
| 4 | Reserved | NC | NC |
| 5 | SCLK | Master device SCLK | GND |
| 6 | MOSI | Master device MOSI | GND |
| 7 | MISO | Master device MISO | GND |
| 8 | /CS | Master device (/CS) | V_s |

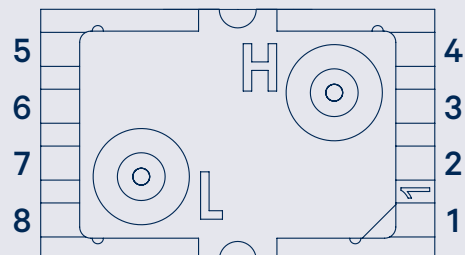


LME series – digital low differential pressure sensors

Recommended manifold dimensions for two side-by-side mounted sensors

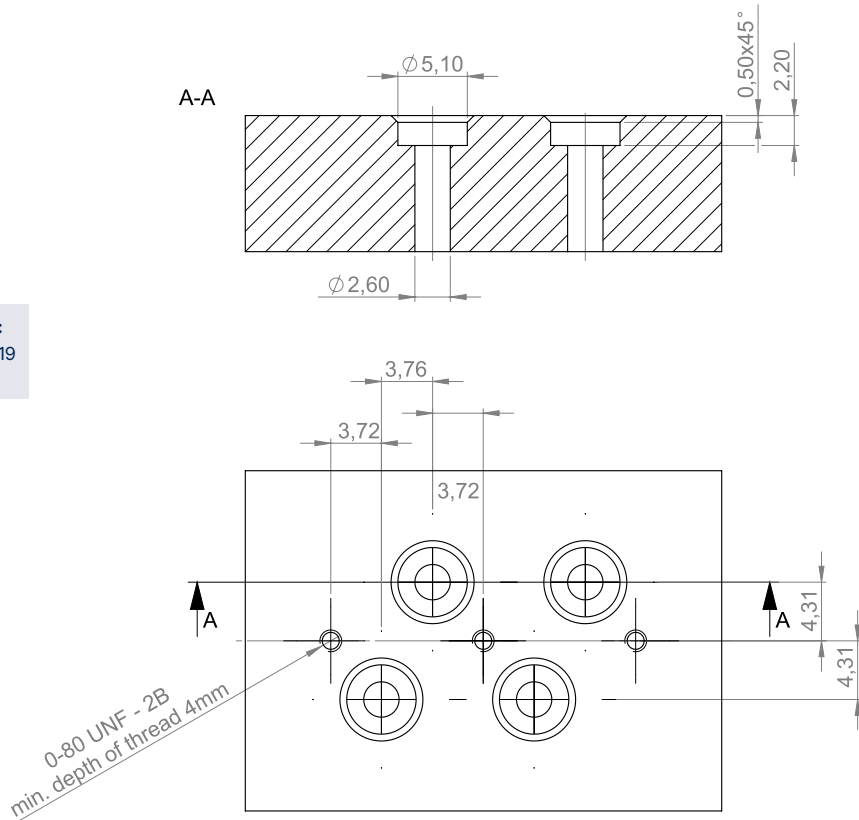

Recommended manifold schematic for multiple side-by-side mounted sensors

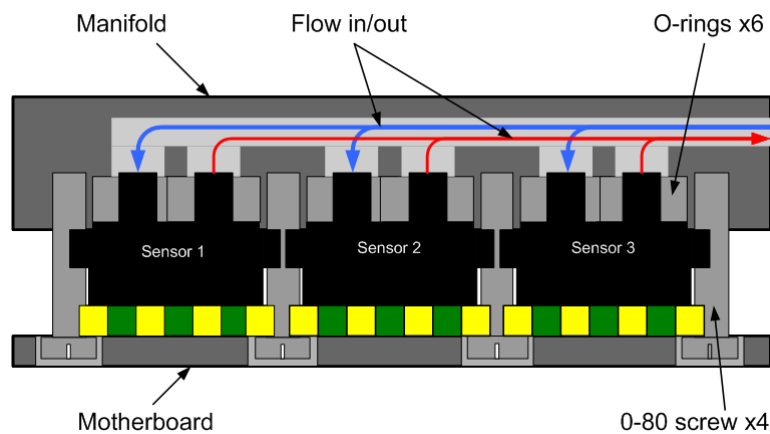


LME series – digital low differential pressure sensors





Custom adapter

The LME series pressure sensors can optionally be equipped with a custom adapter for your application-specific mounting requirements. It is designed for applications where wider port spacing and diameter are needed. Please contact First Sensor for more information.

3D views of a custom adapter for the LME pressure sensor

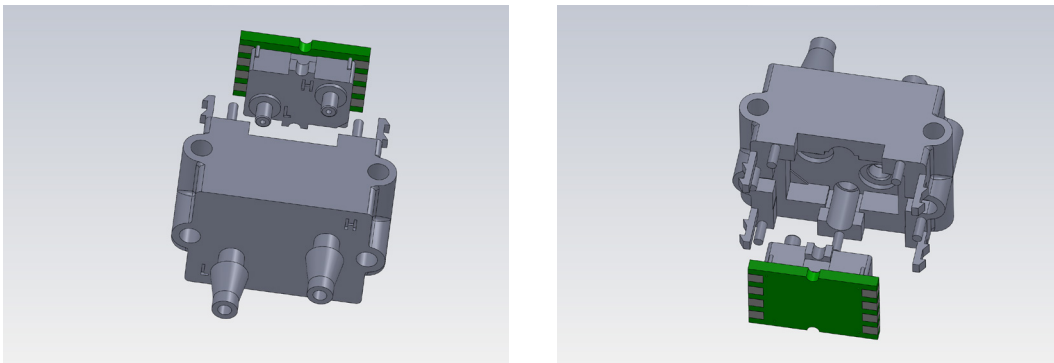


Dimensional drawing ZA009102 plug-in adapter

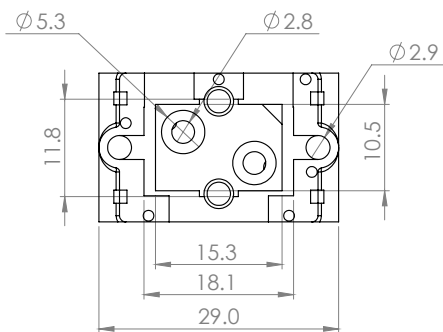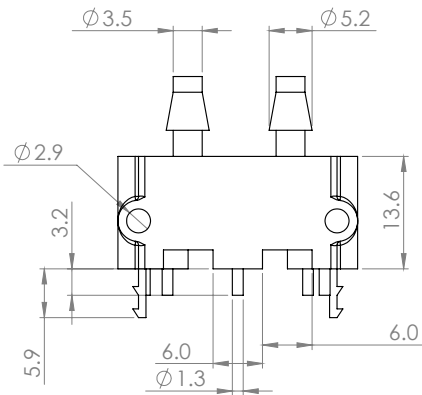

DETAIL A

Example of PCB layout for plug-in adapter

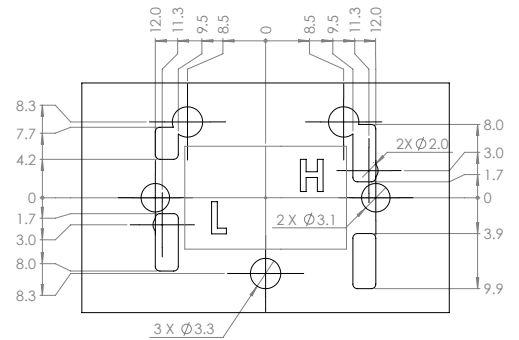

Hole pattern is provided with reference dimensions only. Please ensure that the final design allows for positioning errors of the PCB assembly process.

dimensions in mm