

M1559CWT

L1: GPS, GLONASS, GALILEO, BEIDOU

Part #: 100-00118-01

Description

The M1559CWT is an active multi-frequency, high accuracy, GNSS antenna for the L1 GPS, Galileo, Beidou and GLONASS band. The antenna's excellent radiation pattern, exceptional out-of-band rejection, minimal group delay variation, and low noise figure ensures optimal performance of GNSS systems. It features a 5 m cable with an integrated SMA, SMB, or MCX connector (customer choice). The M1559CWT is ideal for applications requiring minimal integration effort or for retrofitting existing products and is rated IP67. The antenna is manufactured using automotive grade housing.

Passive Antenna Performance

| Parameter | Specification |
|-----------------|--------------------------------------|
| Frequency | 1559-1610 MHz (L1, E1, B1, B1-2, G1) |
| Peak Efficiency | 40% |
| Polarization | RHCP |
| Realized Gain | 3.3 dB |
| Axial Ratio | Max 2.7 dB at the Zenith |
| VSWR | Max 2.3:1 |
| Beamwidth | 100° |

Phase Center Variation

| Maximum Phase Center Variation (mm) | |
|-------------------------------------|-----------|
| In azimuth plane | Max 10 mm |
| As low as 40 degree elevation | Max 10 mm |
| Between samples | Max 5 mm |
| Over frequency band | Max 10 mm |

RF Specifications

| Parameter | Specification |
|--------------------------|--------------------------------------|
| Conducted Gain | 28 dB \pm 3 dB |
| Noise Figure | 2 dB max |
| Voltage | 3.0 - 5.0 V |
| Current | 35 mA (max) |
| Out of Band Rejection | 40 dB (typical) |
| Group Delay Variation | Less than 5 ns over GNSS bands |
| EMI Immunity Out of Band | 30 V/m |
| ESD Circuit Protection | 15 kV human body model air discharge |




Features

- Low profile design
- Concurrent GNSS reception on L1: GPS, GLONASS, Galileo, Beidou
- Rugged IP67 rating
- Small form factor
- GIS, RTK and other high accuracy GNSS applications
- Low power consumption
- Minimal phase center variation over azimuth and elevation
- Negligible group delay variation
- Automotive grade housing

L1 Band Radiation Patterns


Maxtena's M1559CWT uses patented optimized microstrip technology which results in minimal dependence on frequency and features wide beamwidth, low axial ratio and radiation pattern symmetry across all desired frequencies in the L1 band.

RHCP Realized Gain [dBic] - Elevation Cuts

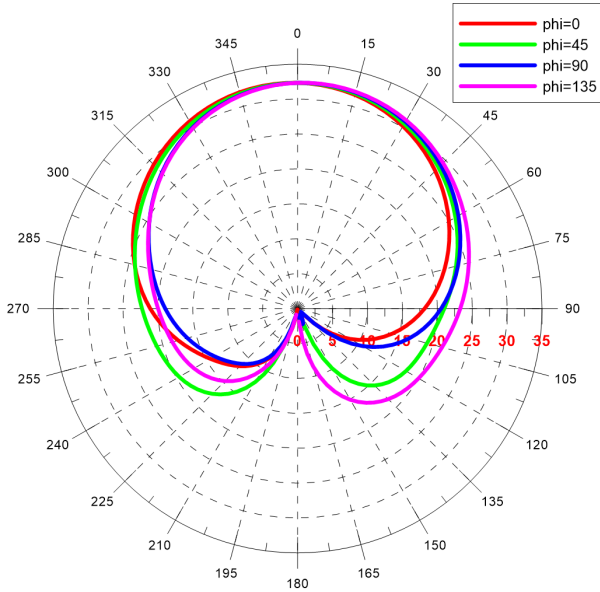


A 100 degree beamwidth ensures excellent hemispherical coverage.

RHCP Realized Gain [dBic] - Azimuth Cuts

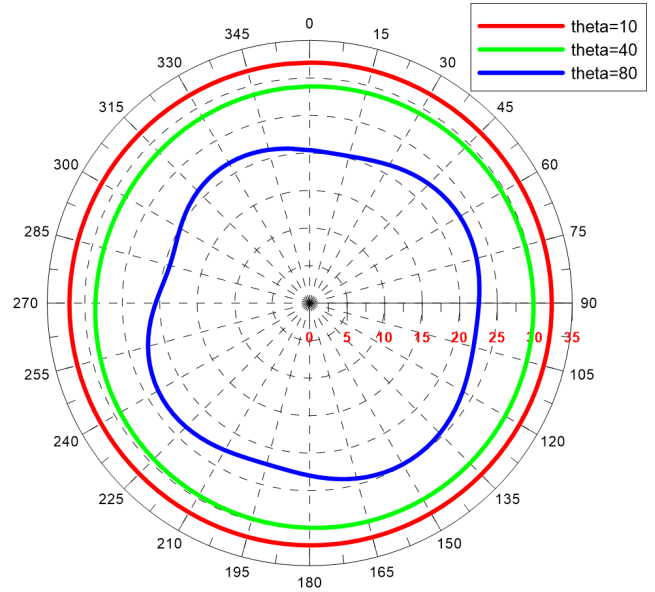


Symmetric coverage even in low elevation enhances accuracy.

Axial Ratio [dB] - Zenith

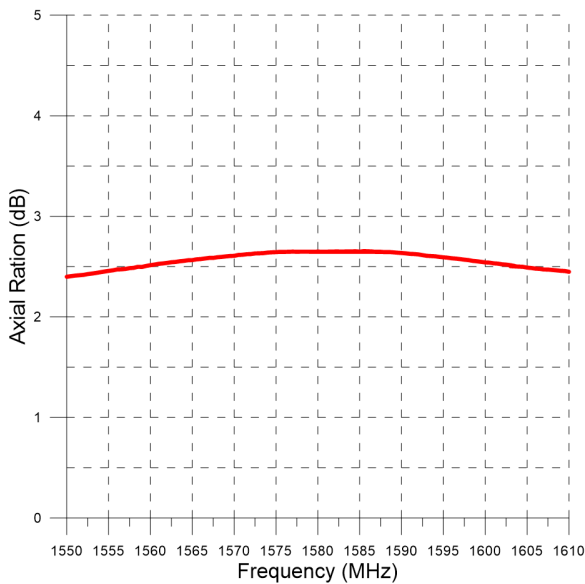


Axial Ratio [dB] - Azimuth Cuts

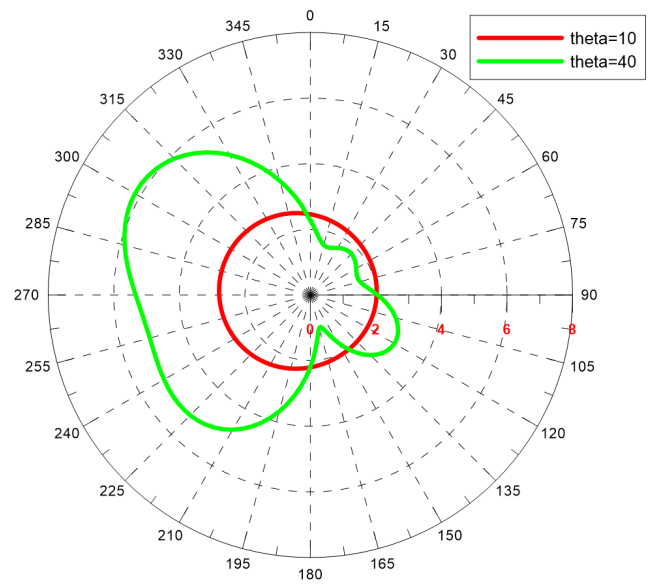


Phase Center Variation

Maxtena's M1559CWT has minimal phase center variation over azimuth and elevation in the L1 band.

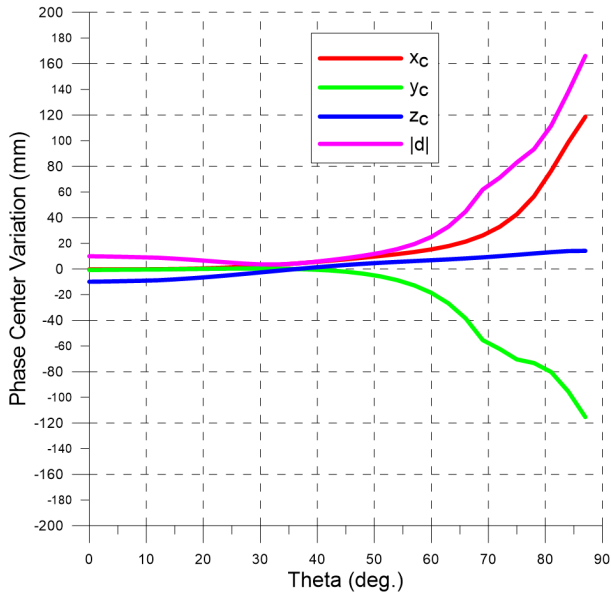

Phase Center Variation vs. Elevation in L1 band.

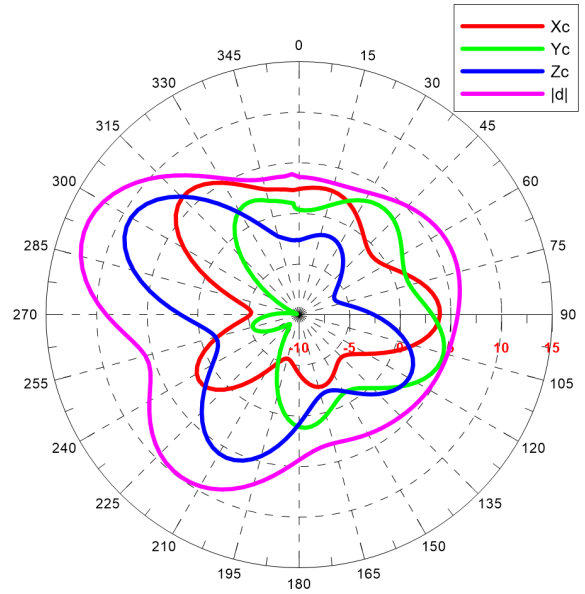


Phase Center Variation vs. Azimuth at Theta=30° in L1 band.

Excellent Group Delay Variation


Using GPS carrier phase to increase accuracy in GNSS applications has been proven reliable and has made mm-level accuracy possible. However, in resolving carrier phase ambiguity, it is necessary to make sure carrier phase is received and measured accurately and the effect of antenna and receiver on carrier phase is minimized. Maxtena's M1559CWT has a flat response over its specified GNSS band and has minimal group delay variation over frequency.

Filtering and LNA Performance

Maxtena's M1559CWT antenna has a flat response over the L1 band, with less than 1 dB variation over it. The superior out-of-band rejection ensures minimal interference.

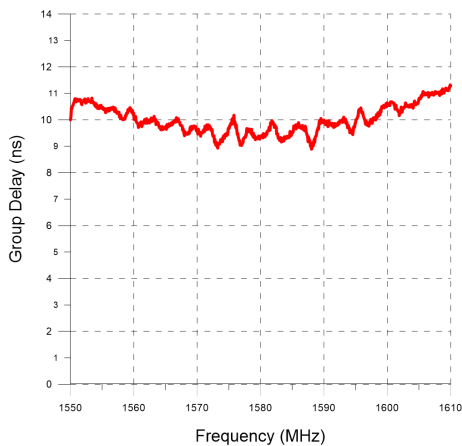

< 2 ns group delay variation over L1-band.

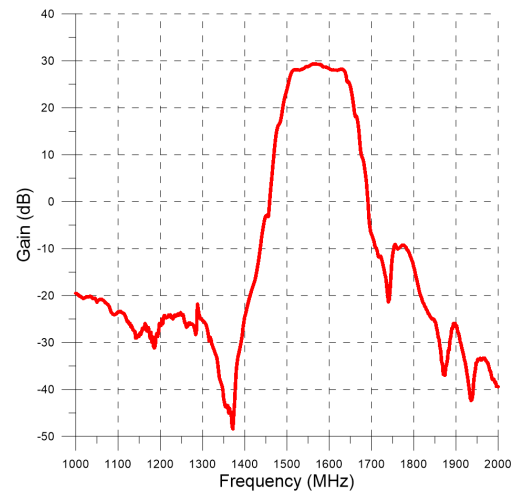

Outstanding out-of-band rejection and less than 1dB fluctuation of in-band frequency response over L1-band.