M6EH / SM6EH

Double-Balanced Mixer



Rev. V2

Features

- LO 5 to 750 MHz •
- RF 5 to 500 MHz
- IF DC to 500 MHz •
- LO Drive +20 dBm (nominal) •
- High Intercept Point +28.5 dBm (typ) •
- High Isolation 45 dB (typ) •

Description

The M6EH/SM6EH is a double balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband ferrite baluns to attain excellent performance. This mixer can also be used as a phase detector and/or bi-phase modulator since the IF port is DC coupled to the diodes. Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.


Ordering Information

Part Number	Package
M6EH	Relay Header
SM6EH	Surface Mount

Electrical Specifications: $Z_0 = 50\Omega$ Lo = +20 dBm (Downconverter application only)

Parameter	Test Conditions	Unito	Typical	Guaranteed	
Parameter lest Conditions		Units		+25°C	-54º to +85ºC
SSB Conversion Loss (max)	fR = 10 to 100 MHz , fL = 10 to 100 MHz, fI = 10 to 100 MHz fR = 100 to 250 MHz , fL = 100 to 250 MHz, fI = 10 to 250 MHz fR = 5 to 500 MHz, fL = 5 to 750 MHz, fI = 0.5 to 500 MHz	dB	5.5 6.0 6.5	7.0 7.5 8.5	7.3 7.8 8.8
SSB Noise Figure (max)	Within 1 db of conversion loss	dB			
Isolation, L to R (min)	fL = 5 to 200 MHz fL = 200 to 500 MHz fL = 500 to 750 MHz	dB	60 45 35	40 30 20	39 29 19
Isolation, L to I (min)	fL = 5 to 200 MHz fL = 200 to 500 MHz fL = 500 to 750 MHz	dB	55 40 30	40 25 18	39 24 17
1 dB Conversion Comp.	fL = +20 dBm	dBm	+13		
Input IP3	fR1 = 250 MHz 0 dBm, fR2 = 260 MHz 0 dBm, fL = 300 MHz +20 dBm	dBm	+28.5		

1

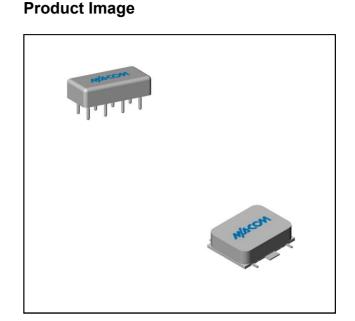

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

M6EH / SM6EH

Double-Balanced Mixer

4.0

4.5

5.0

5.5 6.0 6.5

7.0

4.0

4.5

5.0

5.5 6.0

6.5 7.0

10

CONVERSION LOSS - dB

3 5 10


CONVERSION LOSS - dB

LOW SIDE LO

20

Typical Performance Curves

Conversion Loss vs. LO Drive Level



IF = 1.0 MHz

HIGH SIDE

50

LOW SIDE LO

HIGH SIDE LO

50 100 FREQUENCY - MHz

FREQUENCY - MHz

LO

200


1F = 40 MHz

200


500


500

100



Isolation







M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

20

МАСОМ

Rev. V2

M6EH / SM6EH




Double-Balanced Mixer

Rev. V2


Absolute Maximum Ratings

Parameter	Absolute Maximum
Operating Temperature	-54°C to +100°C
Storage Temperature	-65°C to +100°C
Peak Input Power	+26 dBm max @ +25°C
Peak Input Current	50 mA DC


L-Port VSWR



R-Port VSWR




I-Port VSWR




3

Outline Drawing: Relay Header

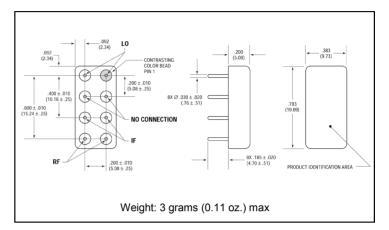

Outline Drawing: Surface Mount *

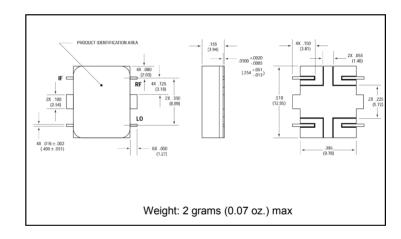

* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.