

1:1 Transmission Line Transformer with Tertiary Winding 50 - 1200 MHz

Rev. V5

Features


- 1:1 Impedance Ratio
- Surface Mount Package
- Excellent Amplitude & Phase Balance
- Suitable for all CATV, Broadband and FTTx Applications
- Available on Tape & Reel
- RoHS Compliant & Lead Free
- 260°C Reflow Compatible

Description

The MABA-010321-CT1A42 is a 1:1 transmission line transformer in a surface mount package.

Ideally suited for all CATV Broadband and FTTx applications.

Functional Schematic

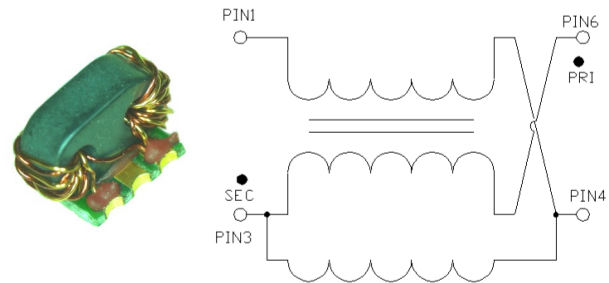

Pin Configuration

Pin #	Function
1	Output 2
2,5	Not Used (ground)
3	Output 1
4	Ground
6	Input

Electrical Specifications: Freq. = 50 - 1200 MHz, $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega$, $P_{IN} = 0 \text{ dBm}$

Parameter	Frequency (MHz)	Units	Min.	Typ.	Max.
Impedance Ratio	—	dB	—	1:1	—
Insertion Loss 1: (Pin 6-3 (Through))	50 - 150	dB	—	0.2	0.4
	150 - 500			0.5	0.6
	500 - 870			0.8	0.95
	870 - 1200			1.3	1.65
Insertion Loss 1: (Pin 6-1 (Coupled))	50 - 350	dB	—	0.5	0.6
	350-1200			0.7	1.1
Amplitude Balance	50 - 500	dB	—	0.2	± 0.35
	500-1000			0.4	± 0.65
	1000-1200			0.6	± 0.95
Phase Balance	50 - 500	°	—	0.9	± 2.0
	500-1000			3.1	± 6.0
	1000-1200			6.7	± 10.0
Input Return Loss (Pin 6)	50 - 150	dB	20	22	—
	150 - 700		13	16	
	700 - 1200		8	11	

Ordering Information

Part number	Description
MABA-010321-CT1A42	2000 piece reel

Recommended Maximum Ratings


Parameter	Value
Input Power	250 mW
DC Current	500 mA
Operating Temperature	-40°C to +85°C

1:1 Transmission Line Transformer with Tertiary Winding 50 - 1200 MHz


Rev. V5

Typical Performance Curves: $T_A = 25^\circ\text{C}$, $Z_0 = 75 \Omega$, $P_{IN} = 0 \text{ dBm}$


Insertion Loss 1: (Pin 6 to 3)

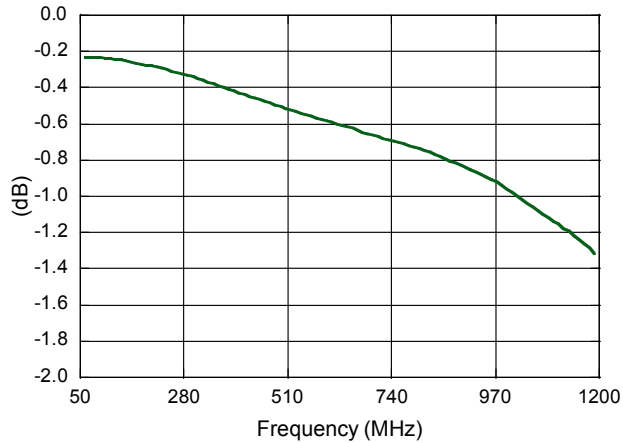


Insertion Loss 2: (Pin 6 to 1)

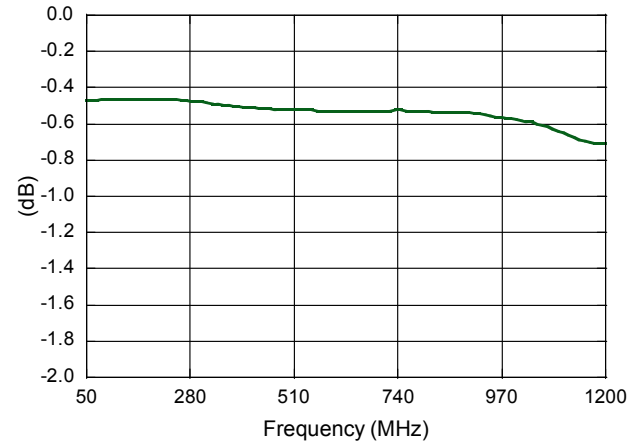


Amplitude Balance

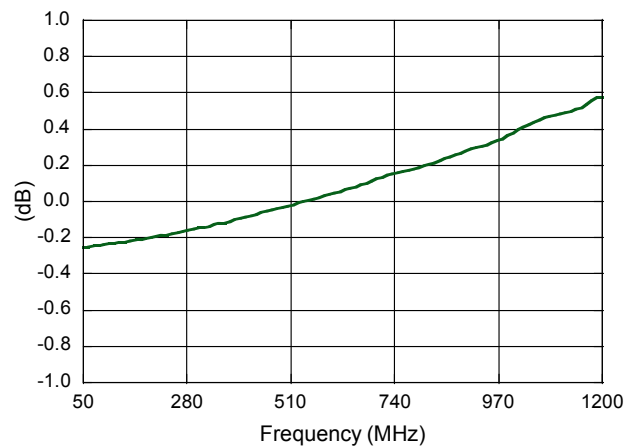


Phase Balance

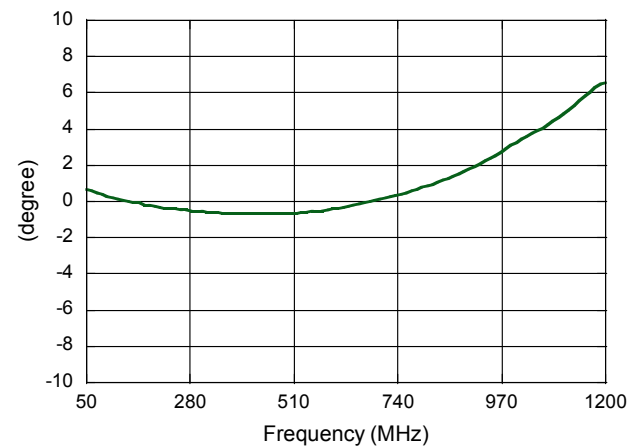

Return Loss: Input (Pin 6)

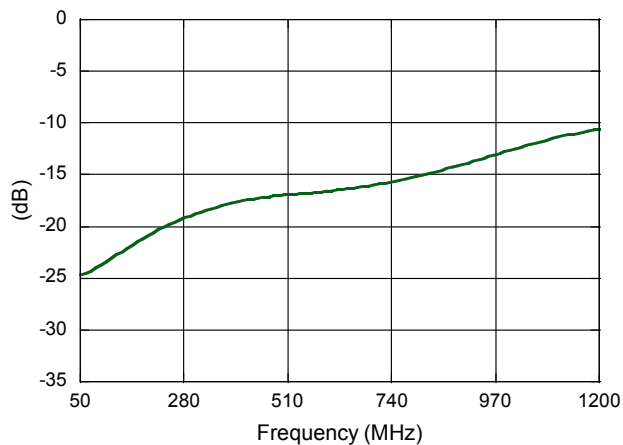

Application Circuit

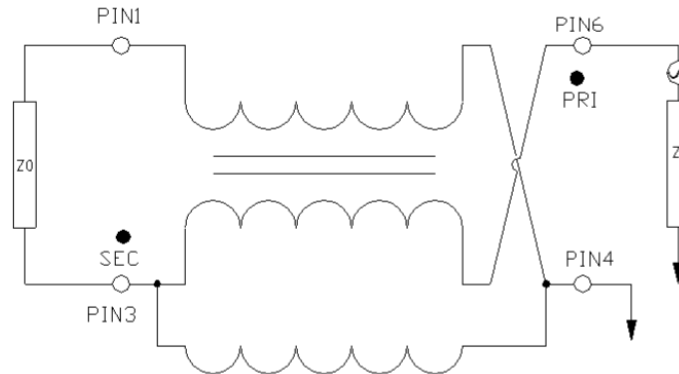

DC Bias Application Circuit

