# MZ5010 / MZ5010C

### **Triple-Balanced Mixer**

Rev. V3

#### Features

- LO 2 TO 26 GHz
- RF 2 TO 26 GHz
- IF 1 TO 15 GHz
- LO DRIVE +10 dBm (nominal)
- MINIATURE PACKAGE
- VERY WIDE BANDWIDTH
- AVAILABLE WITH FIELD REPLACEABLE CONNECTORS

#### Description

The MZ5010 is a triple balanced mixer, designed for use in military, commercial and test equipment applications. The design utilizes Schottky ring quad diodes and broadband soft dielectric baluns to attain excellent performance. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in manual, semi-automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202 or MIL-DTL-28837, consult factory.


#### **Ordering Information**

Part Number	Package
MZ5010	Versapac
MZ5010C	SMA Connectorized

#### Electrical Specifications: $Z_0 = 50\Omega$ Lo = +10 dBm (Downconverter application only)

Paramotor	Parameter Test Conditions		Typical	Guaranteed	
i arameter				+25°C	-54° to +85°C
SSB Conversion Loss (max) & SSB Noise Figure (max)	fR = 3 to 18 GHz, fL = 3.5 to 18 GHz, fI = 4 to 12 GHz fR = 2.5 to 26 GHz, fL = 2.5 to 24 GHz, fI=4 to12 GHz fR = 2 to 26 GHz, fL = 2 to 26 GHz, fI =1 to 15 GHz	dB dB dB	7.5 8.5 10.5	9.5 10.5 13.0	10.0 11.0 13.5
Isolation, L to R (min)	fL = 2 to 4 GHz fL = 4 to 26 GHz	dB dB	30 35	15 18	13 16
Isolation, L to I (min)	fL = 2 to 4 GHz fL = 4 to 26 GHz	dB dB	20 35	12 17	10 15
1 dB Conversion Comp.	fL = +10 dBm	dBm	+5		
Input IP3	fR1 = 18 GHz at −10 dBm, fR2 = 18.01 GHz at −10 dBm, fL = 14 GHz at +10 dBm fR1 = 5 GHz at −5 dBm, fR2 = 5.01 GHz at −5 dBm, fL = 7 GHz at +10 dBm	dBm dBm	+16 +16		

1

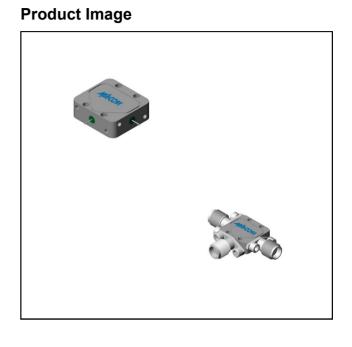




M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.

## MZ5010 / MZ5010C

### **Triple-Balanced Mixer**

#### **Typical Performance Curves**

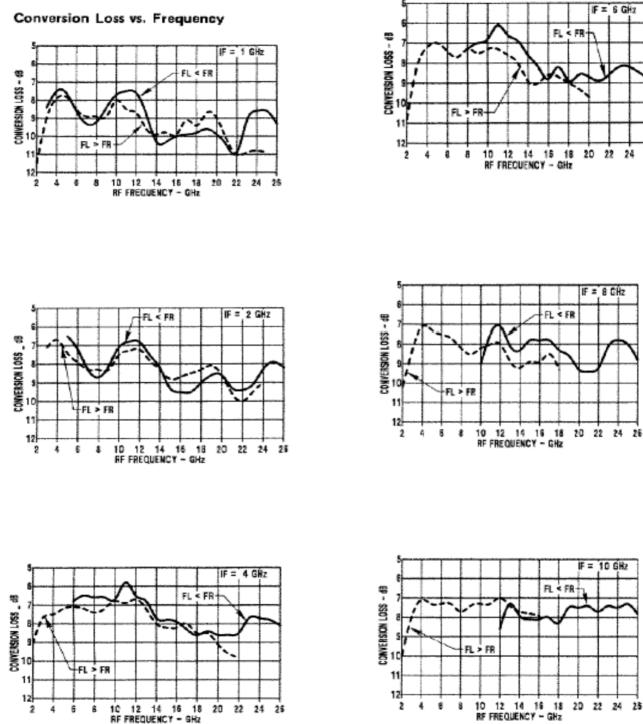

### Conversion Loss vs. Frequency

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.





Rev. V3

26

26

# MZ5010 / MZ5010C



### **Triple-Balanced Mixer**

Rev. V3

#### **Absolute Maximum Ratings**

Parameter	Absolute Maximum	
Operating Temperature	-54°C to +100°C	
Storage Temperature	-65°C to +100°C	
Peak Input Power	+26 dBm max @ +25°C +22 dBm max @ +100°C	
Peak Input Current	mA DC	

#### Conversion Loss vs. Frequency


FL

в

è FR


FL

20 22 24 26

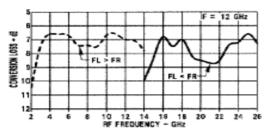


15 GHz



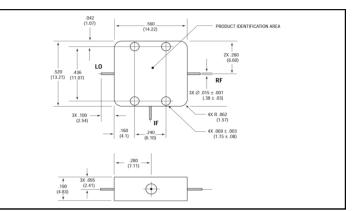

Weight: 4 grams (0.14 oz.) max

#### Outline Drawing: SMA Connectorized \*

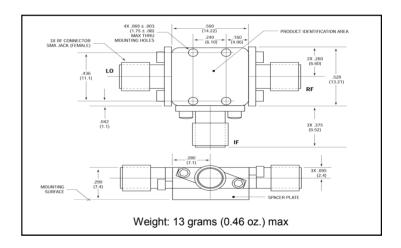


\* Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.

#### Isolation

CONVERSION LOSS - 48

12

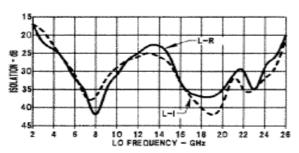

10 12 14 16 18 RF FREQUENCY - GHz

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.