
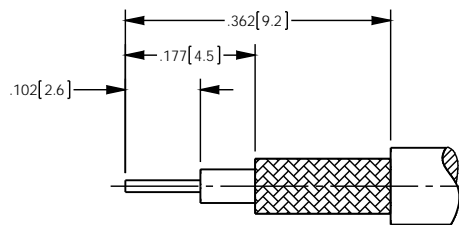




NOTES: UNLESS OTHERWISE SPECIFIED

- FOR USE WITH RG-178, 196, OR EQUIVALENT.
- MATERIAL SPECIFICATIONS:  
INSULATORS: PTFE, COLOR - NATURAL  
CONTACT AND RETAINING RING: BERYLLIUM COPPER  
FERRULE: COPPER  
ALL OTHER METAL PARTS: BRASS
- FINISH SPECIFICATIONS:  
CONTACT: .000003 MIN THICK GOLD OVER .000050 MIN THICK NICKEL  
ALL OTHER METAL: THIN GOLD OVER .000050 MIN THICK COPPER
- ELECTRICAL SPECIFICATIONS:  
IMPEDANCE: 50 OHMS
- INSULATOR, COVER, AND FERRULE SHIPPED LOOSE.
- CRIMP FERRULE (.128 HEX) AND SOLDER TO CONTACT.

REV	DESCRIPTION	BY DATE	APPD
A	ER052856	JL 12/12/14	SK



RECOMMENDED CABLE STRIPPING DIM'S

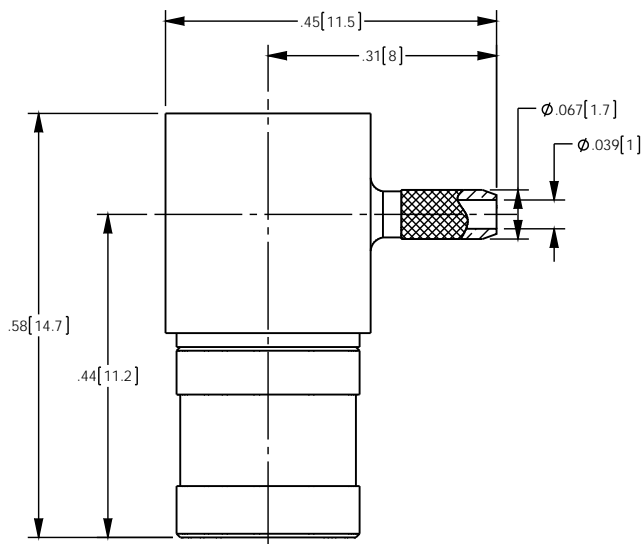

CATALOG P/N: 1013A204F

<small>PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMAL: .XX [XX] ± .01 [0.3]       XXX [XXX] ± .005 [0.13]       XXXX [XXXX] ± .000X ANGLES: ± 2°      SCALE: 5:1</small>		 Winchester Electronics Corporation 199 Park Road Ext Suite 104 Middlebury, Connecticut 06762	
<b>CUSTOMER SALES DRAWING</b>		<small>THIRD ANGLE</small> 	<b>SMB R/A CRIMP PLUG FOR RG-178 CABLE</b>
<small>DRAWN</small> JL	<small>DATE</small> 12/12/2014	<small>APPROVED</small> SK	<small>DATE</small> 12/19/2014
<small>APPROVED</small> MS	<small>DATE</small> 12/12/14	<small>APPROVED</small> XXX	<small>DATE</small> XX/XX/XX
<b>A</b>		SD1013A204F	<small>SHT OF REV</small> <b>1 1 A</b>