

## TRIPLE 2-CHANNEL MULTIPLEXER

## ■ GENERAL DESCRIPTION


The NJU4053B is a triple 2-channel multiplexer with three independent control inputs and an inhibit input.

The three control input signals select 1 of a pair of channels to be turned on and connect them to the three outputs.


The operating voltage is as wide as 3 to 18V and the quiescent current is as low as 5 $\mu$ A max.(at V<sub>DD</sub>=5V).

It is equivalent to RCA CD4053B and Motorola MC14053B.


## ■ PACKAGE OUTLINE



NJU4053BD



NJU4053BM




NJU4053BV


## ■ FEATURES

- High ON/OFF Output Voltage Ratio --- 65dB Typ. (R<sub>L</sub>=10k $\Omega$ )
- Low Quiescent Current --- 5 $\mu$ A Typ. at V<sub>DD</sub>=5V
- Low Crosstalk between channels --- 80dB Typ.
- Wide Operating Voltage --- 3 ~ 18V
- Linearity in the transfer characteristics.  $\Delta R_{ON} < 60\Omega$  (V<sub>IN</sub>=V<sub>DD</sub> $\sim$ V<sub>EE</sub>, V<sub>DD</sub>=15V)
- Package Outline --- DIP/DMP/SSOP 16
- C-MOS Technology


## ■ EQUIVALENT CIRCUIT

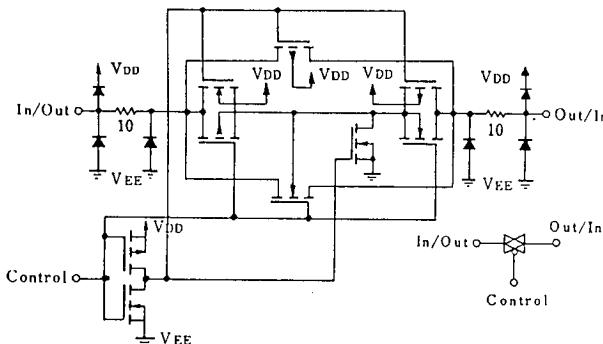

## ■ BLOCK DIAGRAM

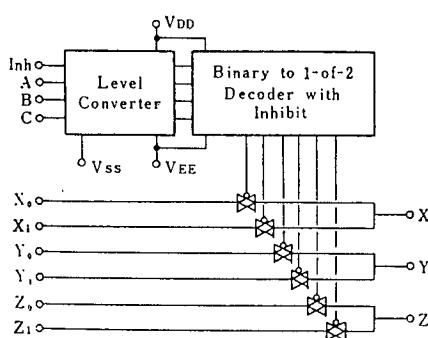

## ■ PIN CONFIGURATION

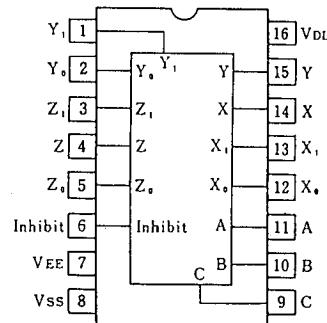

## ■ TRUTH TABLE

INH	C	B	A	On Switch
0	0	0	0	Z <sub>0</sub> Y <sub>0</sub> X <sub>0</sub>
0	0	0	1	Z <sub>0</sub> Y <sub>0</sub> X <sub>1</sub>
0	0	1	0	Z <sub>0</sub> Y <sub>1</sub> X <sub>0</sub>
0	0	1	1	Z <sub>0</sub> Y <sub>1</sub> X <sub>1</sub>
0	1	0	0	Z <sub>1</sub> Y <sub>0</sub> X <sub>0</sub>
0	1	0	1	Z <sub>1</sub> Y <sub>0</sub> X <sub>1</sub>
0	1	1	0	Z <sub>1</sub> Y <sub>1</sub> X <sub>0</sub>
0	1	1	1	Z <sub>1</sub> Y <sub>1</sub> X <sub>1</sub>
1	x	x	x	None

x: Don't Care

## ■ ABSOLUTE MAXIMUM RATINGS

( Ta=25°C )

PARAMETER	S Y M B O L	R A T I N G S	UNIT
Supply Voltage	$V_{DD} - V_{EE}$	- 0.5 ~ + 20	V
Input Voltage(Control Signal)	$V_{IN}$	$V_{SS}-0.5 \sim V_{DD}+0.5$	V
Input Voltage(Analog Signal)	$V_{SIG}$	$V_{EE}-0.5 \sim V_{DD}+0.5$	V
Input Current	$I_{IN}$	$\pm 10$	mA
Output Current	$I_{OUT}$	$\pm 10$	mA
Power Dissipation	$P_D$	500 (DIP) 200 (DMP) 300 (SSOP)	mW
Operating Temperature Range	$T_{opr}$	- 40 ~ + 85	°C
Storage Temperature Range	$T_{stg}$	- 65 ~ + 150	°C

6

## ■ ELECTRICAL CHARACTERISTICS

## • DC Characteristics

(  $V_{SS}=0V$  )

PARAMETER	SYMBOL	CONDITIONS	$V_{DD}$ (V)	$T_a=-40^\circ C$		$T_a=25^\circ C$			$T_a=85^\circ C$		UNIT
				MIN	MAX	MIN	TYP	MAX	MIN	MAX	
Quiescent Current	$I_{DD}$	No signal Per Package	5 10 15 20	5 10 20 100	5 10 20 100	5 10 20 100	5 10 20 100	5 10 20 100	150 300 600 3000	300 600 3000	μA
On-State Resistance	$R_{ON}$	$0 \leq V_{IS} \leq V_{DD}$ $V_{EE}=V_{SS}=0V$	5 10 15	500 210 140	220 100 60	600 250 160	220 100 60	600 250 160	800 300 200	300 200	Ω
On-State Resistance Deviation	$\Delta R_{ON}$	Between 2 channels $V_{EE}=V_{SS}=0V$	5 10 15			15 10 5	15 10 5				Ω
Off-Channel Leakage Current		Each channel $V_{EE}=V_{SS}=0V$	18	$\pm 1000$		$\pm 10$	$\pm 100$		$\pm 1000$		nA
Input Capacitance	$C_{IN}$	$V_{IN}=0V$ Control Inhibit Switch				5.0 10	7.5				pF
Low Level Input Voltage	$V_{IL}$	$R_L=10k\Omega$ $SW=V_{DD}$ $V_{EE}=V_{SS}$	$V_o=1.0V$ $V_o=1.0V$ $V_o=1.5V$	5 10 15	1.5 3.0 4.0		1.5 3.0 4.0		1.5 3.0 4.0		V
High Level Input Voltage	$V_{IH}$		$V_o=4.0V$ $V_o=9.0V$ $V_o=13.5V$	5 10 15	3.5 7.0 11.0	3.5 7.0 11.0	3.5 7.0 11.0	3.5 7.0 11.0	3.5 7.0 11.0		V
Input Current	$\pm I_{IN}$	$V_{IN}=0$ or 18V	18	$\pm 0.1$			$\pm 0.1$		$\pm 1$	$\mu A$	

## ■ SWITCHING CHARACTERISTICS


( Ta=25°C, C<sub>L</sub>=50pF )

**6**


PARAMETER		SYMBOL	CONDITIONS	V <sub>DD</sub> (V)	MIN	TYP	MAX	UNIT	
Propagation Delay Time	SW Input to Output	t <sub>P<sub>L</sub>H</sub>	R <sub>L</sub> =10kΩ	5		15	45	ns	
		t <sub>P<sub>H</sub>L</sub>		10		8	30		
		t <sub>P<sub>H</sub>L</sub>		15		5	20		
	CONT Input to Output	t <sub>P<sub>H</sub>L</sub>		5		15	45	ns	
		t <sub>P<sub>H</sub>L</sub>		10		8	30		
		t <sub>P<sub>H</sub>L</sub>		15		5	20		
	t <sub>P<sub>Z</sub>H</sub>	t <sub>P<sub>Z</sub>H</sub>		5		450	1000	ns	
		t <sub>P<sub>Z</sub>H</sub>		10		200	500		
		t <sub>P<sub>Z</sub>H</sub>		15		150	400		
	t <sub>P<sub>Z</sub>L</sub>	t <sub>P<sub>Z</sub>L</sub>		5		450	1000	ns	
		t <sub>P<sub>Z</sub>L</sub>		10		200	500		
		t <sub>P<sub>Z</sub>L</sub>		15		150	400		
Output Enable Time		t <sub>P<sub>H</sub>Z</sub>	R <sub>L</sub> =10kΩ	5		600	1400	ns	
		t <sub>P<sub>L</sub>Z</sub>		10		250	700		
		t <sub>P<sub>L</sub>Z</sub>		15		200	500		
Output Disable Time			R <sub>L</sub> =10kΩ	5		600	1400	ns	
				10		250	700		
				15		200	500		
Sine-Wave Distortion			R <sub>L</sub> =10kΩ, f=1kHz, V <sub>IS</sub> =5V <sub>P-P</sub>	10		0.05		%	
Feedthrough (all-ch. off)			R <sub>L</sub> =1kΩ, 20log <sub>10</sub> V <sub>os</sub> /V <sub>IS</sub> =-50dB	10		4.5		MHz	
Crosstalk	SW A to B		R <sub>L</sub> =1kΩ, V <sub>IS</sub> =1/2(V <sub>DD</sub> -V <sub>SS</sub> ) <sub>P-P</sub>	10		3.0		MHz	
	Control-Out		R <sub>I</sub> =1kΩ, R <sub>L</sub> =10kΩ, tr=tf=20ns CONTROL/INHIBIT	10		30		mV	

## ■ MEASUREMENT CIRCUITS


## 1. Noise Margin

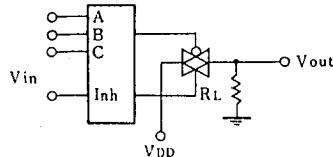


## 2. Propagation Delay

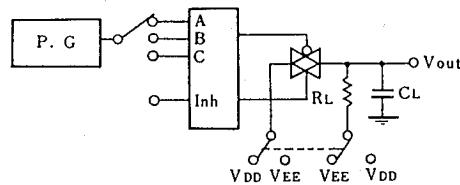

## 3. Feedthrough

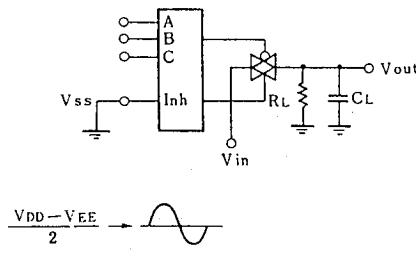

## 4. Crosstalk (Switch A and B)

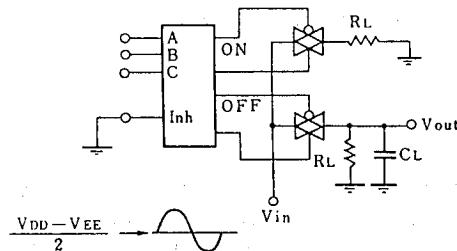

## 5. Crosstalk (Control and Out)

