



MODEL 4033 ACCELEROMETER

DC Response, Silicon MEMS
Triaxial Configuration
Low Cost, Great Value
 $\pm 2g$ & $\pm 6g$ Measurement Range
Rugged Aluminum Housing and Strain Relief

The Model 4033 is a low noise, triaxial DC accelerometer packaged in a rugged anodized Aluminum housing. The accelerometer is offered in $\pm 2g$ & $\pm 6g$ ranges with a nominal 0-200Hz bandwidth. The capacitive silicon MEMS sensing element offers high resolution and long term stability for critical measurement applications. The model 4033 has a usable operating temperature range of -40°C to $+85^{\circ}\text{C}$.

FEATURES

- ◆ 5-30Vdc Excitation Voltage
- ◆ Environmentally Sealed
- ◆ Low Pass Filtered Output
- ◆ Capacitive Silicon MEMS Element
- ◆ Integral #24 AWG Cable
- ◆ Self-Test Enabled

APPLICATIONS

- ◆ Low Frequency Vibration Monitoring
- ◆ Tilt & Inclination Measurement
- ◆ Motion Measurements
- ◆ Structural Monitoring
- ◆ Biomechanics Testing
- ◆ Robotics Measurements

PERFORMANCE SPECIFICATIONS

All values are typical at +24°C, 80Hz and 10Vdc excitation unless otherwise stated. TE Connectivity reserves the right to update and change these specifications without notice.

PARAMETERS

DYNAMIC		NOTES
Range (g)	±2 ±6	
Sensitivity (mV/g)	1000 333	±10%
Frequency Response (Hz)	0-200 0-200	±5%
Non-Linearity (%FSO)	±1 ±1	
Transverse Sensitivity (%)	<3 <3	
Shock Limit (g)	2000 2000	
Residual Noise (µV RMS)	600 240	Passband
Residual Noise (µg/√Hz RMS)	42 51	
Self Test Output Change (mV)	X = +210 ±90 X = +70 ±30 Y = -210 ±90 Y = -70 ±30 Z = -340 ±190 Z = -110 ±65	Ground ST Lead

ELECTRICAL

Zero Acceleration Output (V)	2.5 ±0.10
Excitation Voltage (Vdc)	5 to 30
Excitation Current (mA)	4
Full Scale Output Voltage (Vdc)	±2
Ground Isolation	Isolated from Mounting Surface

ENVIRONMENTAL

Thermal Zero Shift (%FSO)	±4	From -40° to +85°C
Thermal Sensitivity Shift (%)	±5	From -40° to +85°C
Operating Temperature (°C)	-40° to +85°C	
Humidity	Epoxy Sealed, IP65	


PHYSICAL

Housing Material	Anodized Aluminum
Weight (grams)	80 (cable not included)
Mounting	4x #4-40 or M3 Screws
Mounting Torque	6 lb-in (2.0 N-m)

Calibration supplied: CS-SENS-0100 NIST Traceable Amplitude Calibration at 80Hz

Optional accessories: 121 3-Channel Precision Low Noise DC Amplifier

DIMENSIONS

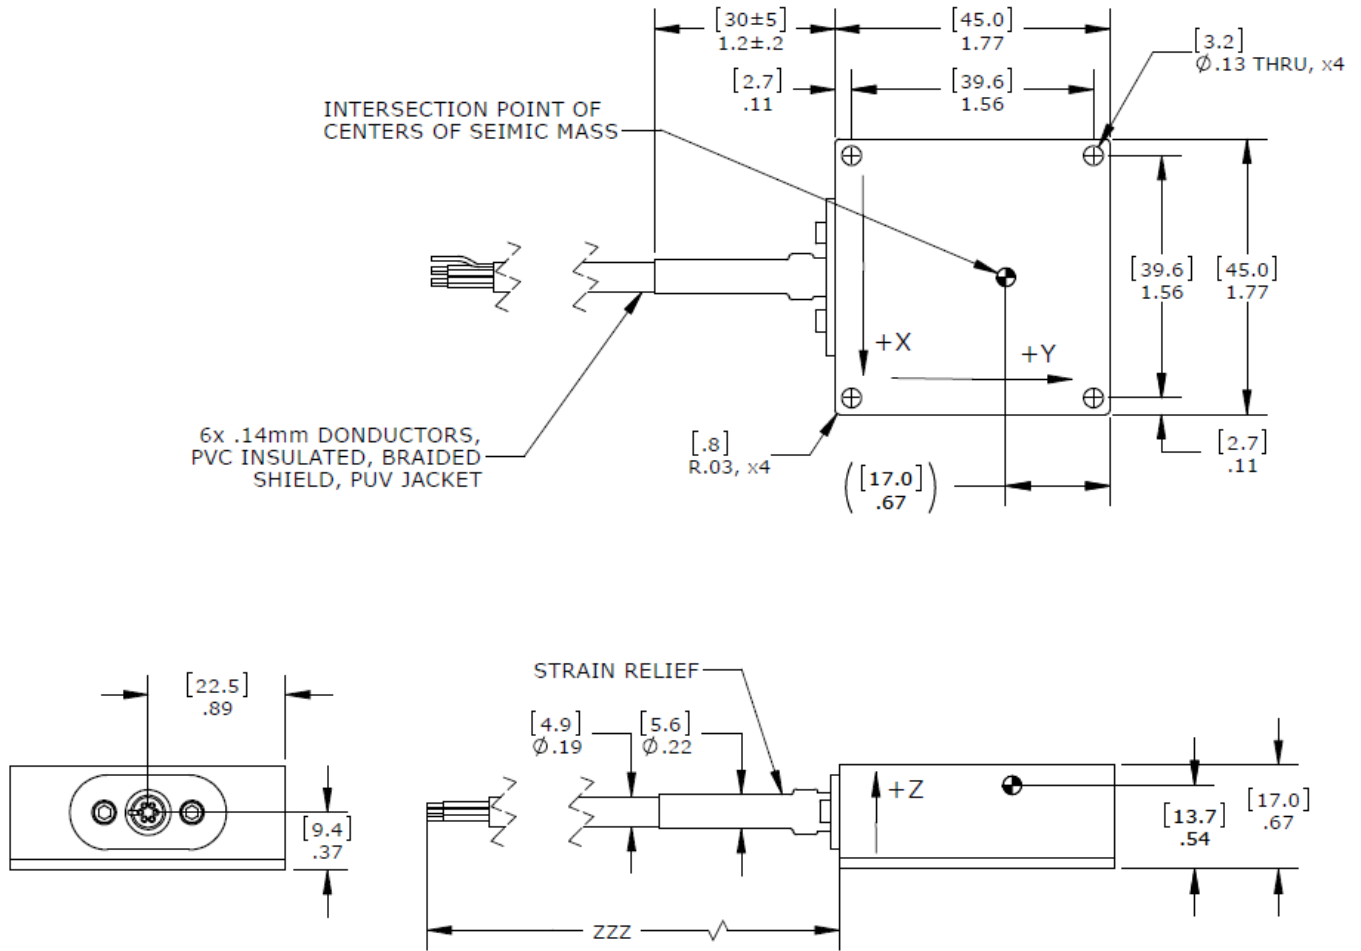

SCHEMATIC

