# 1045481-1 - ACTIVE

#### AMP | AMP OSMM, AMP SSMA

TE Internal #: 1045481-1 AMP SSMA, RF Connectors, SSMA RF Interface, Plug, RF Connector Mated Outer Diameter (Approximate) .285 in [7.24 mm], 50  $\Omega$ 

View on TE.com >

**TE** 

Connectors > RF Coax Connectors > RF Connectors



RF Interface: SSMA RF Connector Style: Plug RF Connector Mated Outer Diameter (Approximate): 7.24 mm [.285 in] Impedance: 50 Ω Compatible With RF Cable Type: RG 174, RG 316

### Features

### **Product Type Features**

Connector Product Type	Connector Assembly
RF Interface	SSMA
RF Connector Style	Plug

Compatible With RF Cable Type	RG 174, RG 316
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Connector Seal Type	Interfacial Seal
Configuration Features	
Number of Positions	1
Number of Coaxial Contacts	1
Electrical Characteristics	
Impedance	50 Ω
Body Features	
Cable Connector Orientation	Straight
Body Material	Stainless Steel
Body Material Finish	Plated
Body Plating Material	Gold
Contact Features	

**C** For support call+1 800 522 6752

### 1045481-1

AMP SSMA, RF Connectors, SSMA RF Interface, Plug, RF Connector Mated Outer Diameter (Approximate) .285 in [7.24 mm], 50  $\Omega$ 



RF Connector Center Contact Underplating Material	Copper, Nickel
Ferrule Plating Material	Gold
Ferrule Material	Copper Alloy
RF Connector Center Contact Plating Material	Gold
RF Connector Center Contact Material	Beryllium Copper
Termination Features	
Termination Method to Wire & Cable	Solder
Mechanical Attachment	
RF Connector Coupling Mechanism	Threaded
Connector Mounting Type	Cable Mount (Free-Hanging)
RF Contact Captivation Method	None
Dimensions	
Product Length	31.75 mm[1.25 in]
RF Connector Mated Outer Diameter (Approximate)	7.24 mm[.285 in]
Usage Conditions	
Operating Temperature Range	-65 – 165 °C[-85 – 329 °F]
Operation/Application	
Operating Frequency	38 GHz
Packaging Features	
Packaging Quantity	1
Packaging Method	Package
Other	
Coupling Nut Plating Material	Gold
Gasket Material	Silicone Rubber
Coupling Nut Base Material	Stainless Steel
Additional Features	Shrink Tubing
Dielectric Material	PTFE
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions

### 1045481-1

AMP SSMA, RF Connectors, SSMA RF Interface, Plug, RF Connector Mated Outer Diameter (Approximate) .285 in [7.24 mm], 50  $\Omega$ 



China RoHS 2 Directive MIIT Order No 32, 2016Restricted Materials Above ThresholdEU REACH Regulation (EC) No. 1907/2006Current ECHA Candidate List: JUL 2021<br/>(219)<br/>Candidate List Declared Against: JAN 2019<br/>(197)<br/>SVHC > Threshold:<br/>Not Yet ReviewedHalogen ContentNot Yet Reviewed for halogen contentSolder Process CapabilityNot applicable for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

# **Compatible Parts**



# Also in the Series | AMP OSMM

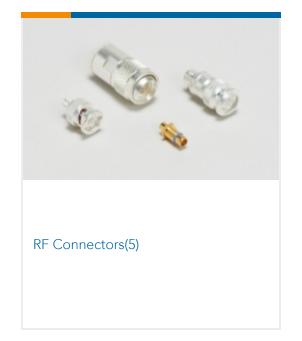


### 1045481-1

AMP SSMA, RF Connectors, SSMA RF Interface, Plug, RF Connector Mated Outer Diameter (Approximate) .285 in [7.24 mm], 50  $\Omega$ 




Also in the Series AMP SSMA

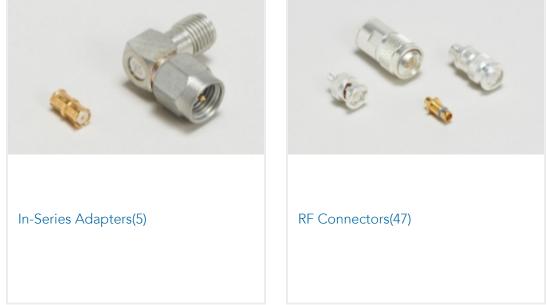

# Customers Also Bought



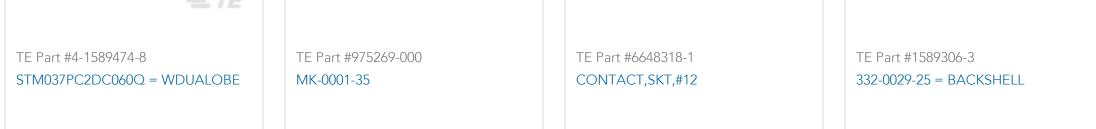

### Documents

### **CAD** Files

Customer View Model

ENG\_CVM\_CVM\_1045481-1\_C.2d\_dxf.zip

English

#### 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_1045481-1\_C.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1045481-1\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Datasheets & Catalog Pages

**C** For support call+1 800 522 6752