


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	A	REV PER ECO-12-020950		11DEC12	PY	DW	

DESIGNED FOR USE WITH .141 S.R.(RG 402/U)	
CABLE ENTRY DIAMETER MINIMUM	
HOUSING	.143
CONTACT	.037

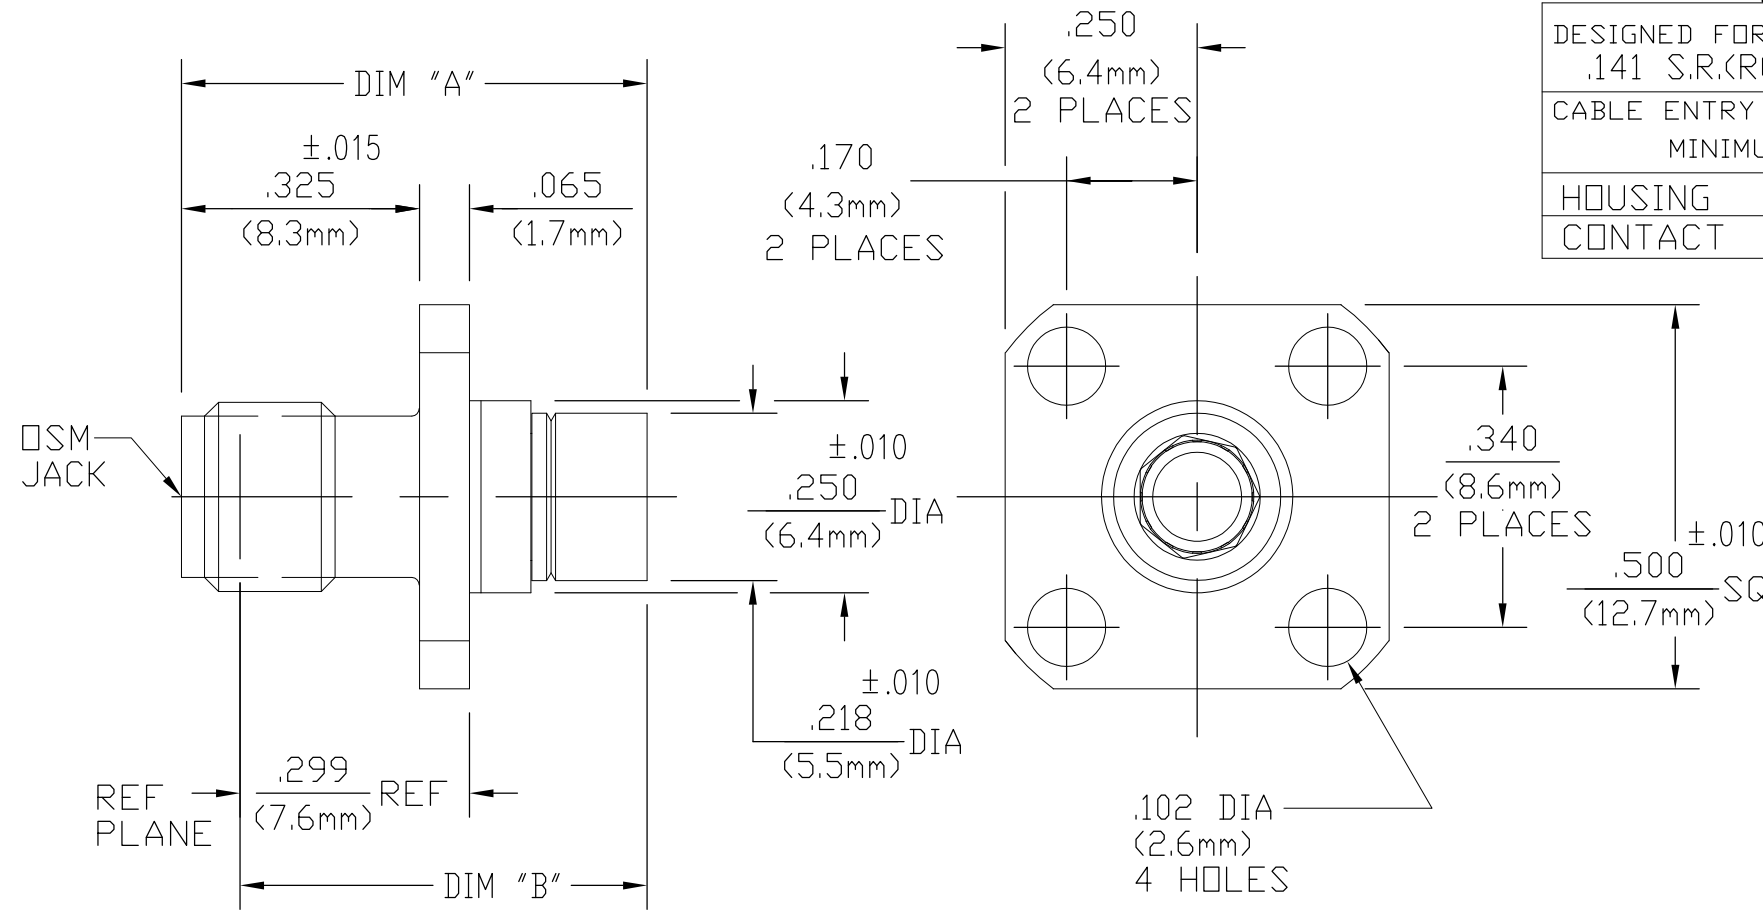

- NOTES:
1. PICTORIAL VIEW IS AFTER CRIMPING
 2. MIN STRAIGHT CABLE LENGTH: .292
 3. IT IS SUGGESTED TO BEND CABLE PRIOR TO CRIMPING
 4. CRIMP BUSHING MAY BE PACKAGED UNASSEMBLED. ORIENT GROOVE AS SHOWN.

BEFORE CRIMPING	.721 REF (18.3 mm)	.645 REF (16.4 mm)
AFTER CRIMPING	.606±.010 (15.4 mm)	.530 REF (13.5 mm)
DIM "A"		DIM "B"

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions <u>MIL-STD-348 Fig 310.2</u>	TEMPERATURE RATING <u>-65° TO +165°C</u>
Frequency Range (GHz) <u>DC to 18</u>	Recommended Mating Torque <u>7-10 In-lbs</u>	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) @ Sea Level <u>500</u>	Center Contact Captivation Axial (Lbs) <u>6</u>	Shock MIL-STD-202, Method 213, Condition I
VSWR <u>1.05+0.1f(GHz)</u>	Radial (In/Dz) <u>NONE</u>	Thermal Shock MIL-STD-202, Method 102, Condition C
Insertion Loss (dB MAX) <u>.03x √f(GHz)</u>	Cable Retention Axial Force (Lbs) <u>60</u>	EXCEPT HIGH TEMP +115°C
RF Leakage (dB MIN) <u>-90 @ 2-3 GHz</u>	Torque (In/Dz) <u>55</u>	Moisture Resistance MIL-STD-202, Method 106
Corona, 70,000 Ft (VRMS MIN) <u>375</u>	Weight (Grams) <u>2.1</u>	Corrosion - MIL-STD-202, Method 101, Condition B
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>1500</u>	Mating Characteristics Insertion (Max Lbs) <u>3</u>	
Contact Resistance (Milliohms MAX) Center Contact <u>3.0</u>	Withdrawal (Min Oz) <u>1</u>	
Outer Contact <u>2.0</u>	Connector Engagement and Disengagement (In/Lbs Max) <u>2</u>	
Cable to Housing <u>0.5</u>		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>1000</u>		
I.R.(Megohms MIN) <u>5000</u>		

COMPONENT	MATERIAL	FINISH
HOUSING	STAINLESS STEEL PER A582, TYPE 303	PASSIVATE PER
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457,	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN P. YEAGER 10DEC2012	STE TE Connectivity
	0 PLC ± -	CHK D. WILSON 11DEC12	
	1 PLC ± -	APVD D. WILSON 11DEC12	
MATERIAL SEE TABLE	2 PLC ± -	NAME SMA FLANGE MOUNT CABLE JACK COMPRESSION CRIMP ATTACHMENT M39012-82B3004	
	3 PLC ± .005	SIZE A3	
	4 PLC ± -	CAGE CODE 00779	
	ANGLES ± ±1d	DRAWING NO C-1051096	
	FINISH SEE TABLE	RESTRICTED TO -	
		WEIGHT -	
CUSTOMER DRAWING		SCALE 1:1	SHEET 1 OF 1
		REV A	