

Important notice

Dear Customer,

On 7 February 2017 the former NXP Standard Product business became a new company with the tradename **Nexperia**. Nexperia is an industry leading supplier of Discrete, Logic and PowerMOS semiconductors with its focus on the automotive, industrial, computing, consumer and wearable application markets

In data sheets and application notes which still contain NXP or Philips Semiconductors references, use the references to Nexperia, as shown below.

Instead of http://www.nxp.com, http://www.nxp.com, http://www.nexperia.com/, http://www.nexperia.com/, use http://www.nexperia.com/

Instead of sales.addresses@www.nxp.com or sales.addresses@www.semiconductors.philips.com, use salesaddresses@nexperia.com (email)

Replace the copyright notice at the bottom of each page or elsewhere in the document, depending on the version, as shown below:

- © NXP N.V. (year). All rights reserved or © Koninklijke Philips Electronics N.V. (year). All rights reserved

Should be replaced with:

- © Nexperia B.V. (year). All rights reserved.

If you have any questions related to the data sheet, please contact our nearest sales office via e-mail or telephone (details via **salesaddresses@nexperia.com**). Thank you for your cooperation and understanding,

Kind regards,

Team Nexperia

PDTA124X series

PNP resistor-equipped transistors; R1 = 22 k Ω , R2 = 47 k Ω

Rev. 08 — 3 September 2009

Product data sheet

1. Product profile

1.1 General description

PNP Resistor-Equipped Transistors (RET) family.

Table 1. Product overview

Type number	Package	NPN complement		
	NXP	JEITA	JEDEC	
PDTA124XE	SOT416	SC-75	-	PDTC124XE
PDTA124XEF	SOT490	SC-89	-	PDTC124XEF
PDTA124XK	SOT346	SC-59A	TO-236	PDTC124XK
PDTA124XM	SOT883	SC-101	-	PDTC124XM
PDTA124XS[1]	SOT54	SC-43A	TO-92	PDTC124XS
PDTA124XT	SOT23	-	TO-236AB	PDTC124XT
PDTA124XU	SOT323	SC-70	-	PDTC124XU

^[1] Also available in SOT54A and SOT54 variant packages (see Section 2)

1.2 Features

- Built-in bias resistors
- Simplifies circuit design
- 100 mA output current capability
- Reduces component count
- Reduces pick and place costs

1.3 Applications

- Digital applications
- Controlling IC inputs

- Cost-saving alternative for BC857 series in digital applications
- Switching loads

1.4 Quick reference data

Table 2. Quick reference data

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V_{CEO}	collector-emitter voltage	open base	-	-	-50	V
Io	output current (DC)		-	-	-100	mA
R1	bias resistor 1 (input)		15.4	22	28.6	kΩ
R2/R1	bias resistor ratio		1.7	2.1	2.6	




2. Pinning information


Table 3. Pinning

Pin	Description	Simplified outline	Symbol
SOT54			
1	input (base)		
2	output (collector)		R1 2
3	GND (emitter)	1 1 2 2 3 3 001aab347	1 R2 R2 006aaa148

ഭവ	ч	F5	л	۸
30	4	J	7	


1	input (base)
2	output (collector)
3	GND (emitter)






SOT54 variant


1	input (base)
2	output (collector)
3	GND (emitter)






SOT23; SOT323; SOT346; SOT416; SOT490

1	input (base)
2	GND (emitter)
3	output (collector)






SOT883

1	input (base)
2	GND (emitter)
3	output (collector)





PDTA124X_SER_8

© NXP B.V. 2009. All rights reserved.

3. Ordering information

Table 4. Ordering information

Type number	Package					
	Name	Description	Version			
PDTA124XE	SC-75	plastic surface mounted package; 3 leads	SOT416			
PDTA124XEF	SC-89	plastic surface mounted package; 3 leads	SOT490			
PDTA124XK	SC-59A	plastic surface mounted package; 3 leads	SOT346			
PDTA124XM	SC-101	leadless ultra small plastic package; 3 solder lands; body $1.0\times0.6\times0.5~\text{mm}$	SOT883			
PDTA124XS[1]	SC-43A	plastic single-ended leaded (through hole) package; 3 leads	SOT54			
PDTA124XT	-	plastic surface mounted package; 3 leads	SOT23			
PDTA124XU	SC-70	plastic surface mounted package; 3 leads	SOT323			

^[1] Also available in SOT54A and SOT54 variant packages (see Section 2 and Section 9)

4. Marking

Table 5. Marking codes

Type number	Marking code ^[1]
PDTA124XE	31
PDTA124XEF	31
PDTA124XK	44
PDTA124XM	DK
PDTA124XS	TA124X
PDTA124XT	*47
PDTA124XU	*44

^[1] * = -: made in Hong Kong

^{* =} p: made in Hong Kong

^{* =} t: made in Malaysia

^{* =} W: made in China

5. Limiting values

Table 6. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
V_{CBO}	collector-base voltage	open emitter		-	-50	V
V_{CEO}	collector-emitter voltage	open base		-	-50	V
V_{EBO}	emitter-base voltage	open collector		-	-7	V
VI	input voltage					
	positive			-	+7	V
	negative			-	-40	V
Io	output current (DC)			-	-100	mA
I _{CM}	peak collector current			-	-100	mA
P _{tot}	total power dissipation	$T_{amb} \le 25 ^{\circ}C$				
	SOT416		<u>[1]</u>	-	150	mW
	SOT490		[1][2]	-	250	mW
	SOT346		<u>[1]</u>	-	250	mW
	SOT883		[2][3]	-	250	mW
	SOT54		<u>[1]</u>	-	500	mW
	SOT23		<u>[1]</u>	-	250	mW
	SOT323		<u>[1]</u>	-	200	mW
T _{stg}	storage temperature			-65	+150	°C
Tj	junction temperature			-	150	°C
T _{amb}	ambient temperature			-65	+150	°C

^[1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

^[2] Reflow soldering is the only recommended soldering method.

^[3] Device mounted on an FR4 PCB with $60~\mu m$ copper strip line, standard footprint.

6. Thermal characteristics

Table 7. Thermal characteristics

1001011	Thomas ondiadosonous					
Symbol	Parameter	Conditions	Min	Тур	Max	Unit
R _{th(j-a)}	thermal resistance from junction to ambient	in free air				
	SOT416		<u>[1]</u> _	-	833	K/W
	SOT490		[1][2]	-	500	K/W
	SOT346		<u>[1]</u> _	-	500	K/W
	SOT883		[2][3]	-	500	K/W
	SOT54		<u>[1]</u> _	-	250	K/W
	SOT23		<u>[1]</u> _	-	500	K/W
	SOT323		<u>[1]</u> -	-	625	K/W

^[1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

7. Characteristics


Table 8. Characteristics

T_{amb} = 25 °C unless otherwise specified

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
I _{CBO}	collector-base cut-off current	$V_{CB} = -50 \text{ V}; I_E = 0 \text{ A}$	-	-	-100	nA
I _{CEO}	collector-emitter cut-off current	$V_{CE} = -30 \text{ V}; I_{B} = 0 \text{ A}$	-	-	-1	μΑ
		$V_{CE} = -30 \text{ V; } I_{B} = 0 \text{ A;}$ $T_{j} = 150 ^{\circ}\text{C}$	-	-	-50	μΑ
I _{EBO}	emitter-base cut-off current	$V_{EB} = -5 \text{ V}; I_C = 0 \text{ A}$	-	-	-120	μΑ
h _{FE}	DC current gain	$V_{CE} = -5 \text{ V}; I_{C} = -5 \text{ mA}$	80	-	-	
V _{CEsat}	collector-emitter saturation voltage	$I_C = -10 \text{ mA};$ $I_B = -0.5 \text{ mA}$	-	-	-150	mV
$V_{I(off)}$	off-state input voltage	$V_{CE} = -5 \text{ V}; I_{C} = -100 \mu\text{A}$	-	-0.8	-0.5	V
$V_{I(on)}$	on-state input voltage	$V_{CE} = -0.3 \text{ V}; I_{C} = -2 \text{ mA}$	-2	-1.1	-	V
R1	bias resistor 1 (input)		15.4	22	28.6	kΩ
R2/R1	bias resistor ratio		1.7	2.1	2.6	
C _c	collector capacitance	$V_{CB} = -10 \text{ V}; I_E = i_e = 0 \text{ A};$ f = 1 MHz	-	-	3	pF

^[2] Reflow soldering is the only recommended soldering method.

^[3] Device mounted on an FR4 PCB with $60~\mu m$ copper strip line, standard footprint.

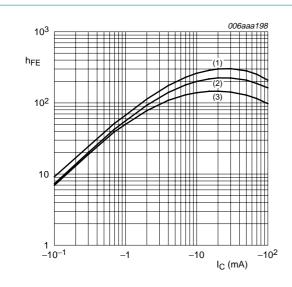


$$V_{CE} = -5 \text{ V}$$

(1)
$$T_{amb} = 100 \, ^{\circ}C$$

(2)
$$T_{amb} = 25 \,^{\circ}C$$

(3) $T_{amb} = -40 \, ^{\circ}C$

Fig 1. DC current gain as a function of collector current; typical values

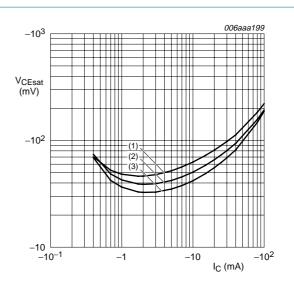


$$I_{\rm C}/I_{\rm B} = 20$$

(1)
$$T_{amb} = 100 \, ^{\circ}C$$

(2)
$$T_{amb} = 25 \, ^{\circ}C$$

(3)
$$T_{amb} = -40 \, ^{\circ}C$$

Fig 2. Collector-emitter saturation voltage as a function of collector current; typical values

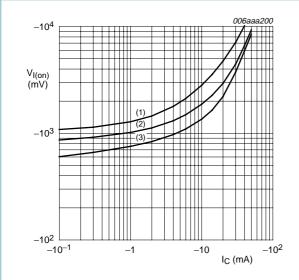


$$V_{CE} = -0.3 \text{ V}$$

(1)
$$T_{amb} = -40 \, ^{\circ}C$$

(2)
$$T_{amb} = 25 \, ^{\circ}C$$

(3) $T_{amb} = 100 \, ^{\circ}C$

Fig 3. On-state input voltage as a function of collector current; typical values

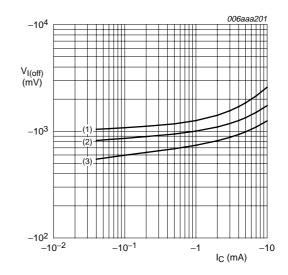

$$V_{CE} = -5 \text{ V}$$


(1)
$$T_{amb} = -40 \, ^{\circ}C$$


(2)
$$T_{amb} = 25 \, ^{\circ}C$$

(3) $T_{amb} = 100 \, ^{\circ}C$

Fig 4. Off-state input voltage as a function of collector current; typical values

8. Package outline

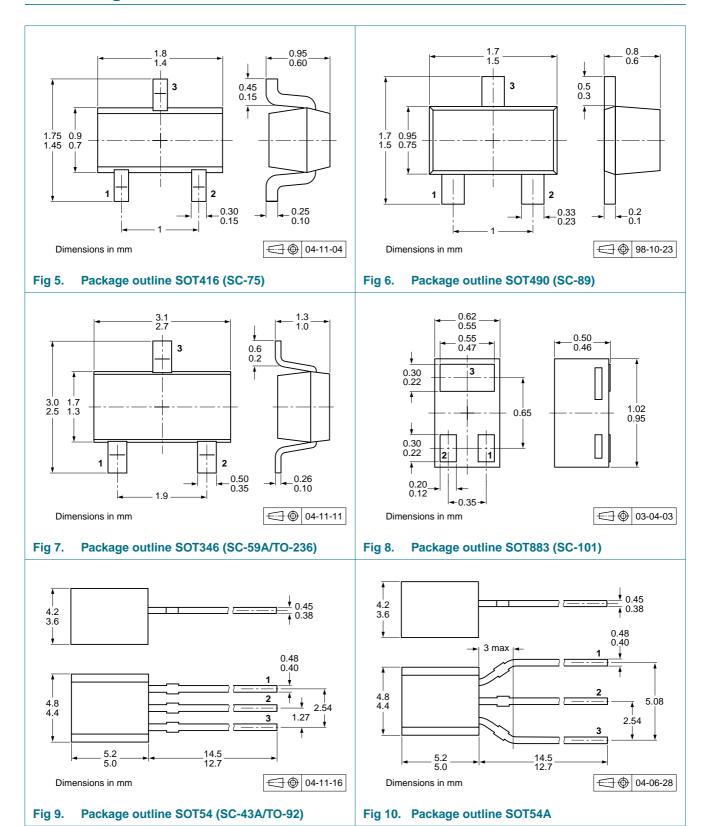

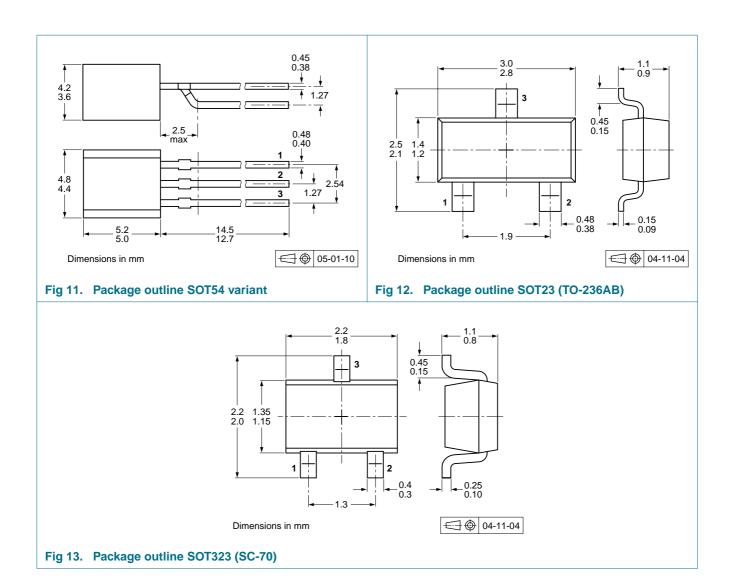

9. Packing information

Table 9. Packing methods

The indicated -xxx are the last three digits of the 12NC ordering code.[1]

Package	Description	Packing quantity			
		3000	4000	5000	10000
SOT416	4 mm pitch, 8 mm tape and reel	-115	-	-	-135
SOT490	4 mm pitch, 8 mm tape and reel	-	-115	-	-
SOT346	4 mm pitch, 8 mm tape and reel	-115	-	-	-135
SOT883	2 mm pitch, 8 mm tape and reel	-	-	-	-315
SOT54	bulk, straight leads	-	-	-412	-
SOT54A	tape and reel, wide pitch	-	-	-	-116
	tape ammopack, wide pitch	-	-	-	-126
SOT54 variant	bulk, delta pinning	-	-	-112	-
SOT23	4 mm pitch, 8 mm tape and reel	-215	-	-	-235
SOT323	4 mm pitch, 8 mm tape and reel	-115	-	-	-135
	SOT416 SOT490 SOT346 SOT883 SOT54 SOT54A SOT54 variant SOT23	SOT416 4 mm pitch, 8 mm tape and reel SOT490 4 mm pitch, 8 mm tape and reel SOT346 4 mm pitch, 8 mm tape and reel SOT883 2 mm pitch, 8 mm tape and reel SOT54 bulk, straight leads SOT54A tape and reel, wide pitch tape ammopack, wide pitch SOT54 variant bulk, delta pinning SOT23 4 mm pitch, 8 mm tape and reel	3000 SOT416 4 mm pitch, 8 mm tape and reel -115 SOT490 4 mm pitch, 8 mm tape and reel - SOT346 4 mm pitch, 8 mm tape and reel -115 SOT883 2 mm pitch, 8 mm tape and reel - SOT54 bulk, straight leads - SOT54A tape and reel, wide pitch - tape ammopack, wide pitch - SOT54 variant bulk, delta pinning - SOT23 4 mm pitch, 8 mm tape and reel -215	3000 4000 SOT416 4 mm pitch, 8 mm tape and reel -115 - SOT490 4 mm pitch, 8 mm tape and reel - -115 SOT346 4 mm pitch, 8 mm tape and reel -115 - SOT883 2 mm pitch, 8 mm tape and reel - - SOT54 bulk, straight leads - - SOT54A tape and reel, wide pitch - - tape ammopack, wide pitch - - SOT54 variant bulk, delta pinning - - SOT23 4 mm pitch, 8 mm tape and reel -215 -	3000 4000 5000 SOT416 4 mm pitch, 8 mm tape and reel -115 - - SOT490 4 mm pitch, 8 mm tape and reel - -115 - - SOT346 4 mm pitch, 8 mm tape and reel -115 - - SOT883 2 mm pitch, 8 mm tape and reel - - - SOT54 bulk, straight leads - - -412 SOT54A tape and reel, wide pitch - - - tape ammopack, wide pitch - - - SOT54 variant bulk, delta pinning - - -112 SOT23 4 mm pitch, 8 mm tape and reel -215 - -

^[1] For further information and the availability of packing methods, see <u>Section 12</u>.

10. Revision history

Table 10. Revision history

	-				
Document ID	Release date	Data sheet status	Change notice	Supersedes	
PDTA124X_SER_8	20090903	Product data sheet	-	PDTA124X_SER_7	
Modifications:	 This data sheet was changed to reflect the new company name NXP Semiconductors, including new legal definitions and disclaimers. No changes were made to the technical content 				
PDTA124X_SER_7	20050811	Product data sheet	-	PDTA124X_SERIES_6	
PDTA124X_SERIES_6	20040804	Product specification	-	PDTA124X_SERIES_5	
PDTA124X_SERIES_5	20040407	Product specification	-	PDTA124X_SERIES_4	
PDTA124X_SERIES_4	20030414	Product specification	-	PDTA124XE_3 PDTA124XEF_2	
PDTA124XE_3	19990521	Product specification	-	PDTA124XE_2	
PDTA124XE_2	19981125	Product specification	-	PDTA124XE_1	
PDTA124XE_1	19971215	Product specification	-	-	
PDTA124XEF_2	19990525	Preliminary specification	-	PDTA124XEF_1	
PDTA124XEF_1	19981116	Preliminary specification	-	-	

11. Legal information

11.1 Data sheet status

Document status[1][2]	Product status[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions"
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

11.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

11.3 Disclaimers

General — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental

damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

11.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

12. Contact information

For more information, please visit: http://www.nxp.com

For sales office addresses, please send an email to: salesaddresses@nxp.com