

Monitoring Relays 1-Phase True RMS AC/DC Over or Under Current Types DIB01, PIB01

CARLO GAVAZZI



DIB01



PIB01

- TRMS AC/DC over or under current monitoring relay
- Current measuring through internal shunt
- Selection of measuring range by DIP-switches
- Measuring ranges from 0.1 mA to 10 A AC/DC
- Adjustable current on relative scale
- Adjustable hysteresis on relative scale
- Adjustable delay function (0.1 to 30 s)
- Programmable latching or inhibit at set level
- Output: 8 A SPDT relay N.D. or N.E. selectable
- For mounting on DIN-rail in accordance with DIN/EN 50 022 (DIB01) or plug-in module (PIB01)
- 22.5 mm Euronorm housing (DIB01) or 36 mm plug-in module (PIB01)
- LED indication for relay, alarm and power supply ON
- Galvanically separated power supply

Product Description

DIB01 and PIB01 are precise TRMS AC/DC over or under current (selectable by DIP-switch) monitoring relays. Direct measuring or through current transformer. Owing to the built-in latch function, the ON-position of the relay output can be maintained. Inhibit function

can be used to avoid relay operation when not desired (maintenance, transitions). The LED's indicate the state of the alarm and the output relay. Through the built-in shunt it is possible to monitor loads up to 10 A AC/DC.

Ordering Key

DIB 01 C B23 5A

Housing _____
 Function _____
 Type _____
 Item number _____
 Output _____
 Power supply _____
 Measuring range _____

Type Selection

| Mounting | Output | Measuring range | Supply: 24 to 48 VAC/DC | Supply: 115/230 VAC |
|----------|--------|--------------------|-------------------------|---------------------|
| DIN-rail | SPDT | 0.1 to 5 mA AC/DC | DIB 01 C D48 5mA | DIB 01 C B23 5mA |
| | | 1 to 50 mA AC/DC | DIB 01 C D48 50mA | DIB 01 C B23 50mA |
| | | 10 to 500 mA AC/DC | DIB 01 C D48 500mA | DIB 01 C B23 500mA |
| | | 0.1 to 5 A AC/DC | DIB 01 C D48 5A | DIB 01 C B23 5A |
| | | 1 to 10 A AC/DC | DIB 01 C D48 10A | DIB 01 C B23 10A |
| Plug-in | SPDT | 0.1 to 5 mA AC/DC | PIB 01 C D48 5mA | PIB 01 C B23 5mA |
| | | 1 to 50 mA AC/DC | PIB 01 C D48 50mA | PIB 01 C B23 50mA |
| | | 10 to 500 mA AC/DC | PIB 01 C D48 500mA | PIB 01 C B23 500mA |
| | | 0.1 to 5 A AC/DC | PIB 01 C D48 5A | PIB 01 C B23 5A |
| | | 1 to 10 A AC/DC | PIB 01 C D48 10A | PIB 01 C B23 10A |

Input Specifications

| Input (current level) | Terminals Y1, Y2 Terminals 5, 7 | Internal resist. | Max. curr. | Measuring ranges (cont.) | Internal resist. | Max. curr. |
|--|------------------------------------|------------------|------------|-----------------------------|------------------|------------|
| DIB01 | | | | ..500MA: 10 to 100 mA AC/DC | 0.5 Ω | 700 mA |
| PIB01 | | | | 20 to 200 mA AC/DC | 0.5 Ω | 700 mA |
| Measuring ranges Direct Selectable by DIP-switch | Internal resist. | Max. curr. | | 50 to 500 mA AC/DC | 0.5 Ω | 700 mA |
| | | | | Max. current for 1 s | | 1.4 A |
| | | | | ..5MA: 0.1 to 1 mA AC/DC | 50 Ω | 50 mA |
| | | | | 0.2 to 2 mA AC/DC | 50 Ω | 50 mA |
| | | | | 0.5 to 5 mA AC/DC | 50 Ω | 50 mA |
| | | | | Max. current for 1 s | | 100 mA |
| | | | | ..50MA: 1 to 10 mA AC/DC | 5 Ω | 150 mA |
| | | | | 2 to 20 mA AC/DC | 5 Ω | 150 mA |
| | | | | 5 to 50 mA AC/DC | 5 Ω | 150 mA |
| | | | | Max. current for 1 s | | 500 mA |
| ..5A: | | | | 0.1 to 1 A AC/DC | 0.05 Ω | 6 A |
| | | | | 0.2 to 2 A AC/DC | 0.05 Ω | 6 A |
| | | | | 0.5 to 5 A AC/DC | 0.05 Ω | 6 A |
| | | | | Max. current for 1 s | | 15 A |
| ..10A: | | | | 1 to 10 A AC/DC | 3 mΩ | 11 A |
| | | | | Max. current for 1 s | | 50 A |

Input Specifications (cont.)

Measuring ranges (cont.)

| Standard CT (examples) | AAC _{rms} | Max. curr. |
|------------------------|--------------------|------------|
| TADK2 50 A/5 A | 5 to 50 A | 60 A |
| CTD1 150 A/5 A | 15 to 150 A | 180 A |
| CTD4 400 A/5 A | 40 to 400 A | 480 A |
| TAD12 1000 A/5 A | 100 to 1000 A | 1200 A |
| TACO200 6000 A/5 A | 600 to 6000 A | 7200 A |

Note:

The input voltage cannot raise over 300 VAC/DC with respect to ground (PIB01 only)

Contact input

| | |
|---------------|------------------|
| DIB01 | Terminals Z1, Y1 |
| PIB01 | Terminals 8, 9 |
| Disabled | > 10 kΩ |
| Enabled | < 500 Ω |
| Latch disable | > 500 ms |

Output Specifications

| | |
|--|--|
| Output | SPDT relay |
| Rated insulation voltage | 250 VAC |
| Contact ratings (AgSnO₂) | μ |
| Resistive loads | AC 1 8 A @ 250 VAC |
| | DC 12 5 A @ 24 VDC |
| Small inductive loads | AC 15 2.5 A @ 250 VAC |
| | DC 13 2.5 A @ 24 VDC |
| Mechanical life | ≥ 30 x 10 ⁶ operations |
| Electrical life | ≥ 10 ⁵ operations (at 8 A, 250 V, cos φ = 1) |
| Operating frequency | ≤ 7200 operations/h |
| Dielectric strength | |
| Dielectric voltage | ≥ 2 kVAC (rms) |
| Rated impulse withstand volt. | 4 kV (1.2/50 μs) |

Supply Specifications

Power supply

| | |
|--|--|
| Rated operational voltage through terminals: | |
| A1, A2 or A3, A2 (DIB01) | |
| 2, 10 or 11, 10 (PIB01) | |
| D48: | |
| B23: | |

| |
|---|
| Overvoltage cat. III (IEC 60664, IEC 60038) |
| 24 to 48 VAC/DC ± 15% |
| 45 to 65 Hz, insulated |
| 115/230 VAC ± 15% |
| 45 to 65 Hz, insulated |

Dielectric voltage

| | |
|------------------|--|
| Supply to input | |
| Supply to output | |
| Input to output | |

DC supply

| | |
|------|------|
| 2 kV | 4 kV |
| 4 kV | 4 kV |
| 4 kV | 4 kV |

Rated operational power

| | |
|----|-------|
| AC | 4 VA |
| DC | 0.8 W |

General Specifications

| | |
|-----------------------|--|
| Power ON delay | 1 s ± 0.5 s or 6 s ± 0.5 s |
| Reaction time | (input signal variation from -20% to +20% or from +20% to -20% of set value) |
| Alarm ON delay | < 100 ms |
| Alarm OFF delay | < 100 ms |
| Accuracy | (15 min warm-up time) |
| Temperature drift | ± 1000 ppm/°C |
| Delay ON alarm | ± 10% on set value ± 50 ms |
| Repeatability | ± 0.5% on full-scale |
| Indication for | |
| Power supply ON | LED, green |
| Alarm ON | LED, red (flashing 2 Hz during delay time) |
| Output relay ON | LED, yellow |
| Environment | (EN 60529) |
| Degree of protection | IP 20 |
| Pollution degree | 3 (DIB01), 2 (PIB01) |
| Operating temperature | -20 to 60°C, R.H. < 95% |
| Storage temperature | -30 to 80°C, R.H. < 95% |

| | | |
|-------------------------|----------------|--|
| Housing | | |
| Dimensions | DIB01 PIB01 | 22.5 x 80 x 99.5 mm 36 x 80 x 94 mm |
| Material | | PA66 or Noryl |
| Weight | | Approx. 150 g |
| Screw terminals | | |
| Tightening torque | | Max. 0.5 Nm acc. to IEC 60947 |
| Product standard | | EN 60255-6 |
| Approvals | | UL, CSA |
| CE Marking | | L.V. Directive 2006/95/EC EMC Directive 2004/108/EC |
| EMC | | |
| Immunity | | According to EN 60255-26 According to EN 61000-6-2 |
| Emissions | | According to EN 60255-26 According to EN 61000-6-3 |

Mode of Operation

DIB01 and PIB01 monitor both AC and DC over or under current through an internal shunt.

Example 1

(connection between terminals Z1, Y1 or 8, 9 - latching function enabled)

The relay operates and latches in operating position when the measured value

exceeds (or drops below) the set level for more than the set delay time. Provided that the current has dropped below (or has exceeded) the set point (see hysteresis setting), the relay releases when the interconnection between terminals Z1, Y1 or 8, 9 is interrupted or the power supply is interrupted as well.

The red LED flashes until the

delay time has expired or the measured value comes back to a non-alarm value (see hysteresis setting).

Example 2 (Standard CT)

(no connection between terminals Z1, Y1 or 8, 9 - latch function disabled)

The relay operates when the measured value exceeds (or drops below) the set level for

more than the set delay time. It releases when the current drops below (or exceeds) the set level (see hysteresis setting) or when power supply is interrupted.

Note

When the inhibit contact is opened, if the input signal is already in alarm position, the delay time needs to elapse before relay activation.

Function/Range/Level and Time Delay Setting

Adjust the input range setting the DIP switches 1 and 2 as shown below (except for models DIB01xxx10A and PIB01xxx10A). Select the desired function setting the DIP switches 3 to 6 (1 to 4 for DIB01xxx10A and PIB01xxx10A) as shown below.

To access the DIP switches open the grey plastic cover as shown below.

Selection of level and time delay:

Upper knob:


Setting of hysteresis on relative scale: 0 to 30% on set value.

Centre knob:

Current level setting on relative scale: 10 to 110% on full scale.


Lower knob:

Setting of delay on alarm time on absolute scale (0.1 to 30 s).

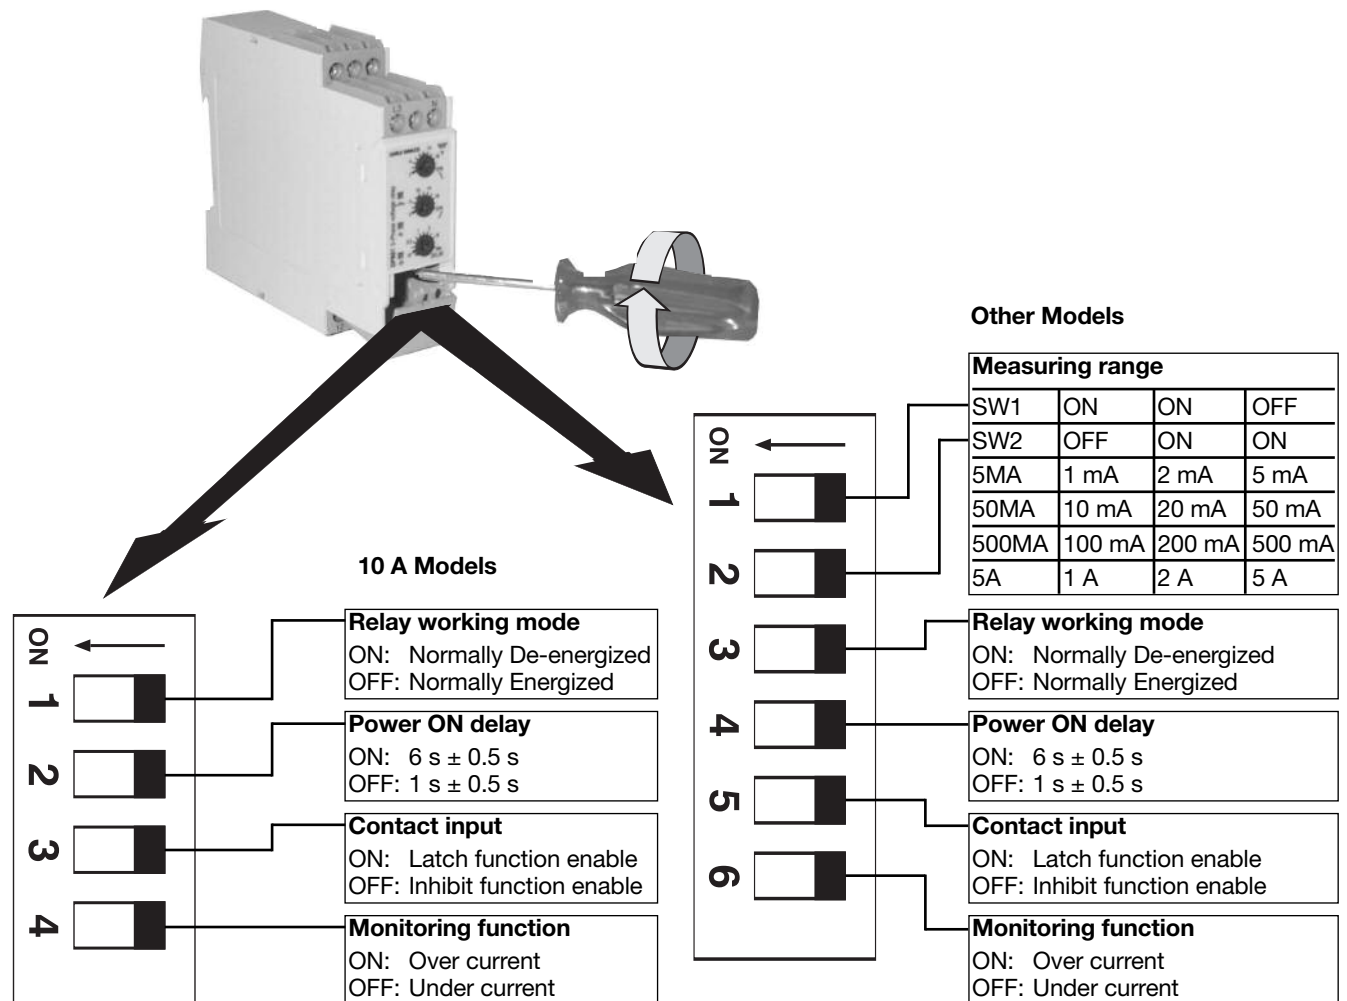


Operation Diagrams


Over current - N.D. relay

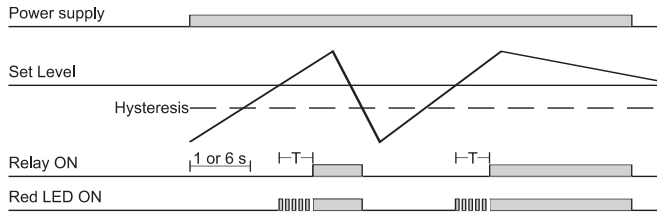


Under current - Latch function - N.D. relay

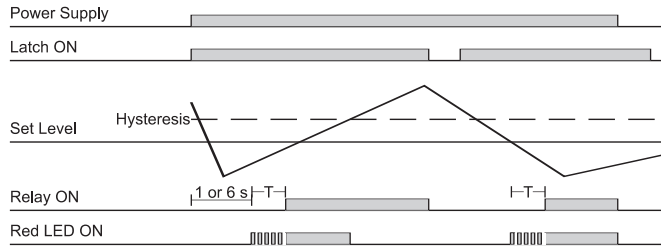

Under current - N.D. relay

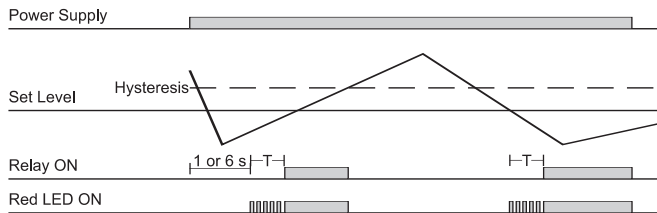


Over current - Inhibit function - N.D. relay

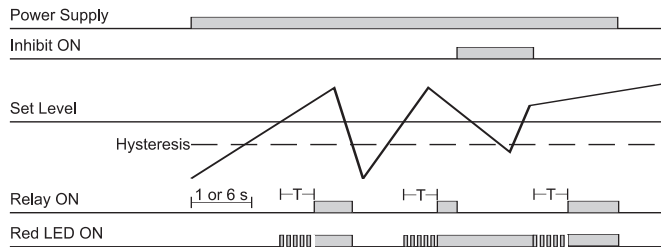


Wiring Diagrams

Example 1

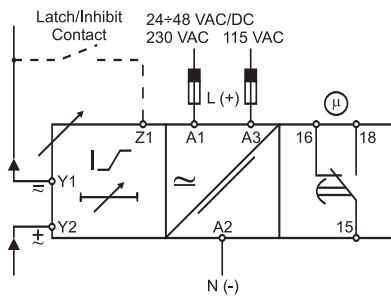


Example 2

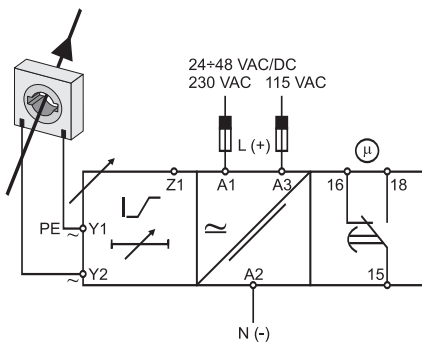


DIB01

Example 1

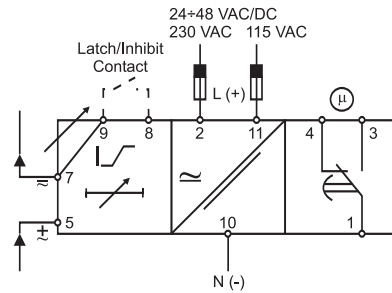

Example 2

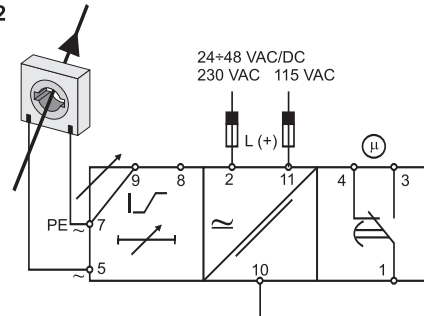

PIB01