

RAA2900034H12HPD

INTELLIGENT POWER DEVICE

1. Overview

1.1 Description

RAA290003 is designed for 2Wheeler Flasher driver with double frequency flashing in low load current condition.

1.2 Features

- High side driver
- Low on-state resistance
- Small package; TO252-3
- Short circuit protection
- Over temperature protection with current limitation control
- Built-in auto flashing operation with only one external capacitor
- Built-in double frequency flashing in low load condition
- Active clamp operation at inductive load switch off
- RoHS compliant

1.3 Application

- 2Wheeler Flasher bulb switching

R07DS1342EJ0102 Rev.1.02 Feb. 28, 2020




2. Ordering Information

| Part No. | Lead plating | Packing | Package |
|------------------|--------------|--------------------|----------------|
| RAA2900034H12HPD | Pure Sn | Tape 2500pcs /reel | TO252 (MP-3ZP) |




3. Specification

3.1 Block Diagram

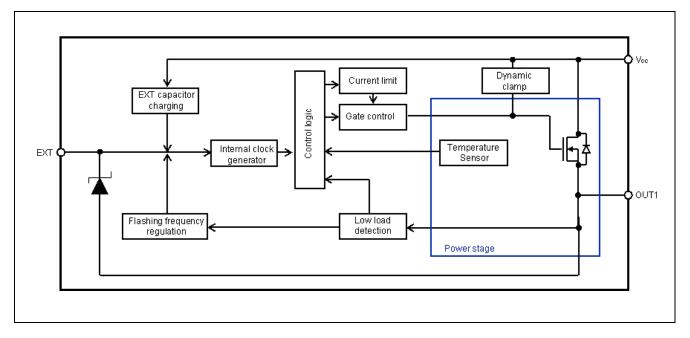

3.2 Current and Voltage definition

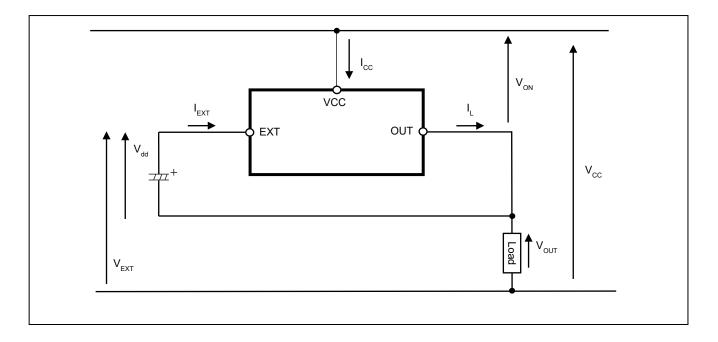



3.3 Pin Configuration

| Pin No. | | Terminal Name |
|------------|-----|---------------|
| 1 | EXT | |
| 2/4 | VCC | |
| 3 | OUT | |

Pin function

| Terminal Name | Pin function | Recommended connection |
|---------------|--|---|
| EXT | An external capacitor is connected between EXT pin and OUT pin. This capacitor stores power supply to the device during on-state and sets the flashing frequency. | Connected to OUT pin with 220uF capacitor |
| VCC | Positive power supply for logic supply as well as output power supply | |
| OUT | Protected high-side power output channel | |

4

Renesas 10-252

2 1 3



3.4 Absolute Maximum Ratings

| | | | | | Ta=25degreeC, unles | s other specified |
|---|------------------|--------------|---------|--|---|-------------------|
| Parameter | Symbol | Rating | Unit | Test Cor | dition | |
| Vcc Voltage | V _{CC} | 28 | V | | | |
| Vcc Voltage at reverse battery condition | -V _{CC} | -16 | V | RL=Nom | imal load, Refer 3.8.4, t<2m | in |
| Output Drain to Source Voltage | V _{DSS} | 42 | V | RL=Nomimal load, Refer 3.8.4, t = 200 ms | | |
| Load Current | ۱ _L | Self limited | Α | | | |
| OUT Reverse Current at reverse battery condition | -IL | -5 | A | t<2min | | |
| Total power dissipation for whole device (DC) | PD | 1.7 | W | | greeC, n 50mmx50mmx1.5mm epo n2 of 70 um copper area | xy PCB FR4 |
| Voltage between EXT and OUT | V _{dd} | 6.5 | V | | | |
| Channel Temperature | Tch | -40 to +150 | degreeC | | | |
| Storage Temperature | Tstg | -55 to +150 | degreeC | | | |
| ESD susceptibility | VESD | 2000 | V | НВМ | AEC-Q100-002 std. R=1.5kohm, C=100pF | All pin |
| | | 4000 | | | IEC61000-4-2 std. R=330ohm, C=150pF, 100nF at VCC and OUT | VCC, OUT |
| | | 200 | V | MM | AEC-Q100-003 std. R=0ohm, C=200pF | |

3.5 Recommended Operation Condition

| Parameter | Symbol | Min | Тур | Max | Unit | Test Condition |
|----------------------|-----------------|-----|-----|-----|---------|----------------|
| Ambient temperature | Та | -20 | | 85 | degreeC | |
| Power supply voltage | V _{CC} | 9 | | 16 | V | |

3.6 Thermal Characteristics

| Parameter | Symbol | Min | Тур | Max | Unit | Test Condition |
|-------------------------|-----------|-----|-----|-----|---------------|---|
| Thermal characteristics | Rth(ch-a) | | 38 | | degree C/W | According to JEDEC JESD51-2, -5, -7 on FR4 2s2p board |
| | Rth(ch-c) | | 5 | | degree C/W | |



3.7 Electrical Characteristics

Operation function

Tch=-40 to 150degreeC, Vcc=9 to 16V, 220uF between EXT and OUT, unless otherwise specified

| Parameter | Symbol | Min | Тур | Max | Unit | Test Condition | | |
|---|-----------------|------|------|------|------|---|--|---------|
| Operating Voltage | V _{CC} | 9 | | 28 | V | Von<0.4V, | | |
| | | | | | | RL=Nomimal load, R | efer 3.8.4 | |
| | | 7.0 | | 9.0 | V | Auto flashing operation | on | |
| | | | | | | RL=Nomimal load, Re | efer 3.8.4 | |
| On-state resistance | Ron | | 16 | | mohm | Tch=25℃ | RL=No | minal |
| | | | | 48 | | Tch=150℃ | load, 3.8.4 | Refer |
| Slew rate on | dV/dton | 0.04 | | 1.0 | V/µs | VCC=13.5V, RL=Non | ninal load, Refer | |
| Slew rate off | -dV/dtoff | 0.04 | | 1.0 | V/µs | 3.8.4, Refer 3.8.5 | | |
| Turn on delay time after power supply on 1) | td(on) | | | 100 | ms | VCC=13.5V, Tch=-20 RL=Nominal load, , R | | r 3.8.5 |
| Nominal operation frequency | fnom | 1.25 | 1.4 | 1.58 | Hz | Vcc=13.5V | Tch=25℃, RL=Nominal lo Refer 3.8.4 | |
| | | 0.66 | | | | Vcc=7.0 to 9V | Tch=-20 to 85 | • |
| | | 1.12 | 1.4 | 1.68 | | Vcc=9 to 16V | RL=Nominal lo Refer 3.8.4 | bad, |
| On duty rate | don | 35 | | 60 | % | Tch=-20 to 85°C, RL=Nominal load, Refer 3.8.4 | | |
| Internal clock high level between EXT and OUT | Vexth | | 6.10 | | V | VCC=13.5V | | |
| Internal clock low level between EXT and OUT | Vextl | | 4.95 | | V | VCC=13.5V | | |
| EXT clamp voltage | Vdd,clamp | | 7 | | V | IEXT=2mA, Von=0V | | |
| EXT reverse clamp voltage | Vdd,rev | | -0.7 | | V | IEXT=-2mA, Von=0V | | |
| Supply current via EXT pin | IEXT | | 708 | | μA | Von=0V, Vext=5.5V, | Tch=25℃ | |
| Double frequency flashing | ldff | 1.75 | 2.06 | 2.40 | А | VCC=9V, Tch=-20 to | 85 ℃ | |
| threshold | | 2.21 | 2.60 | 3.03 | | VCC=13.5V, Tch=-20 |) to 85℃ | |
| | | 2.45 | 2.88 | 3.36 | | VCC=16V, Tch=-20 te | o 85℃ | |

1) not subjected production test, guaranteed by design

Protection function

Tch=-40 to 150degreeC, Vcc=9 to 16V, unless other wise specified

| Parameter | Symbol | Min | Тур | Max | Unit | Test Condition |
|---------------------------------------|---------|-----|-----|-----|---------|----------------|
| Current limitation | IL(LIM) | | 42 | | А | VCC=13.5V |
| Absolute thermal shutdown temperature | aTth | 150 | | | degreeC | |



3.8 Feature Description

3.8.1 Normal operation

When a nominal load such as defined 3.8.4 is connected to OUT pin, device operate with auto flashing mode by charging EXT capacitor up to the Vexth quickly, and then discharging EXT capacitor down to Vextl slowly with constant current IEXT.

Auto flashing operation frequency is determined following formula. Duty cycle is approx. 50%.

fnom = $\frac{\text{IEXT}}{2 \times \text{CEXT} \times (\text{Vexth} - \text{Vextl})}$

3.8.2 Double flashing operation at low load current condition

If load current is lower than Idff during on-state, device detects low load condition, and start double flashing operation automatically.

3.8.3 Short circuit protection

The device shuts down automatically when Tch > aTth is detected.

Absolute thermal toggling

Current limitation control with IL(LIM) when auto restart from absolute Tch protection.


3.8.4 Nominal load

| Product | Nominal load |
|-----------|--------------|
| RAA290003 | 3.40hm |




3.8.5 Measurement condition

Switching waveform of OUT terminal

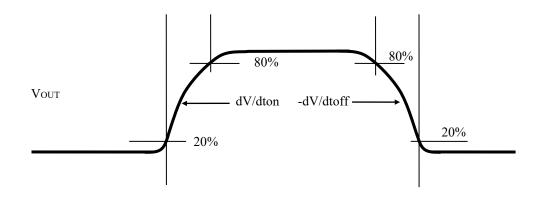


Turn on delay time after Power Supply on

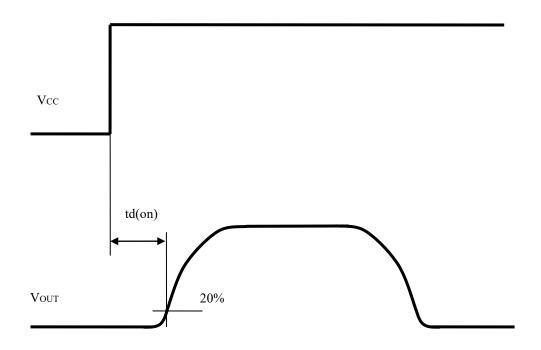




3.8.6 Timing chart


Nominal Operation

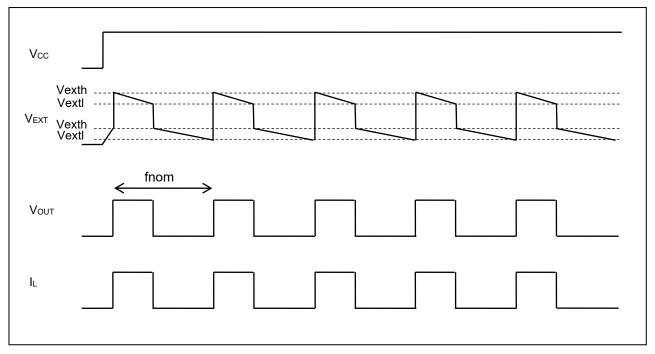

Double flashing operation at low load current condition

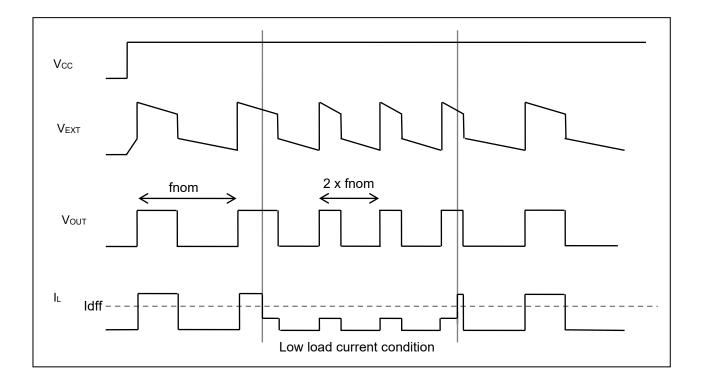


Short circuit protection

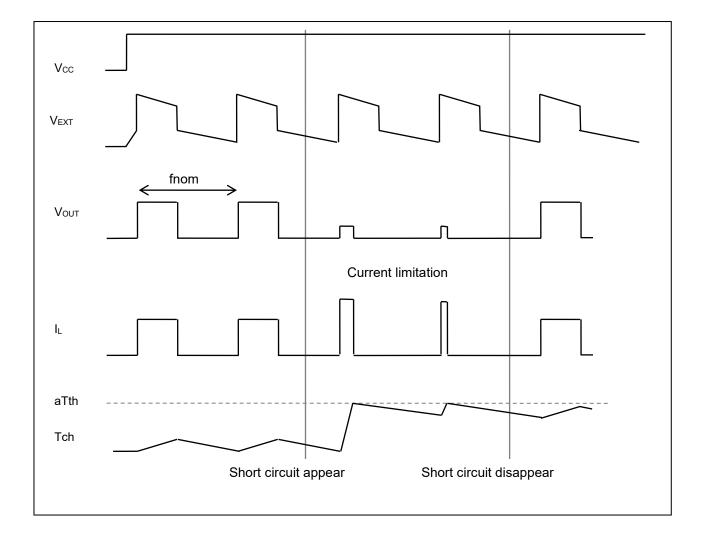




3.9 Package drawing

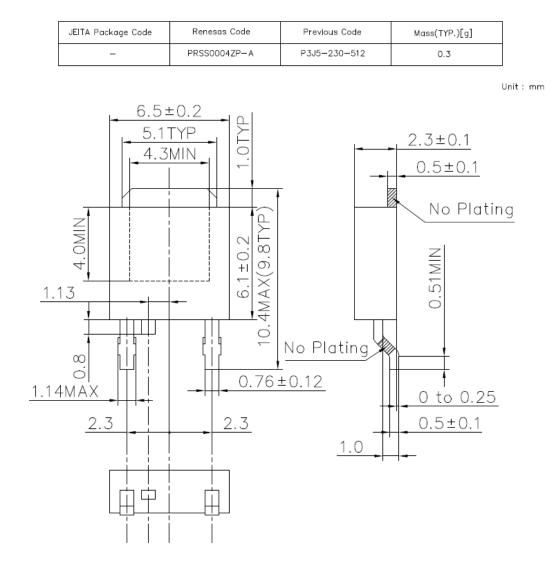





3.10 Taping information



3.11 Marking information

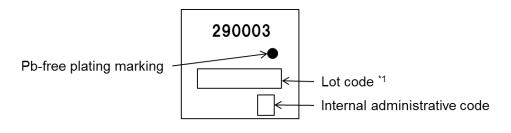


Note: *1. Composition of the lot code

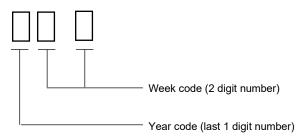





4. Typical characteristics

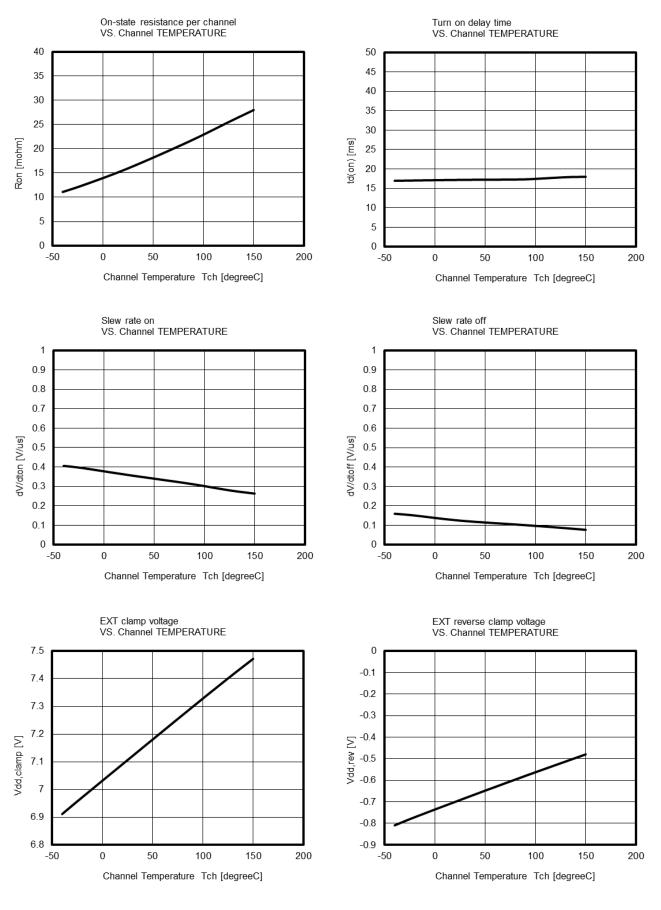




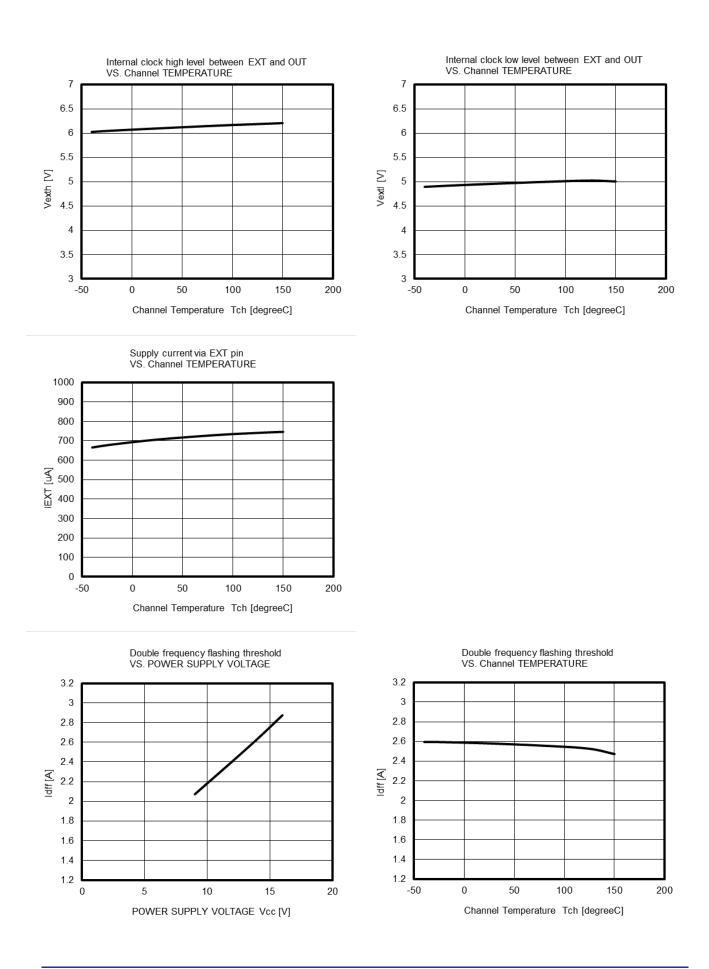




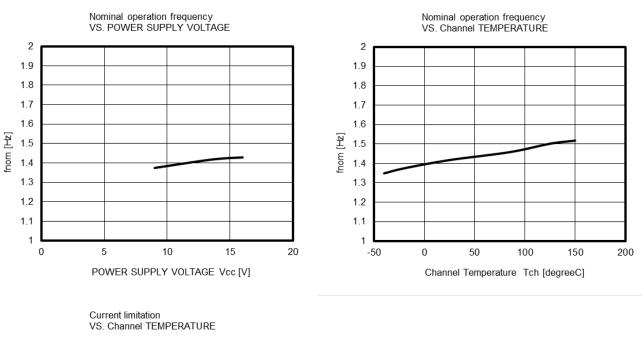

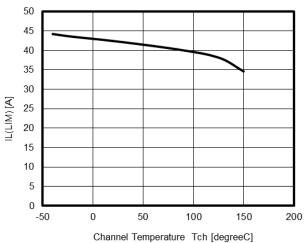




5. Thermal characteristics

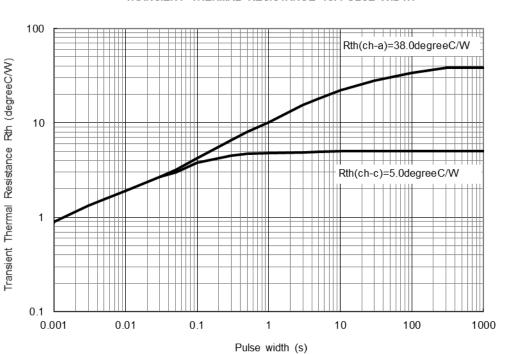


TRANSIENT THERMAL RESISTANCE vs. PULSE WIDTH



6. Application example in principle

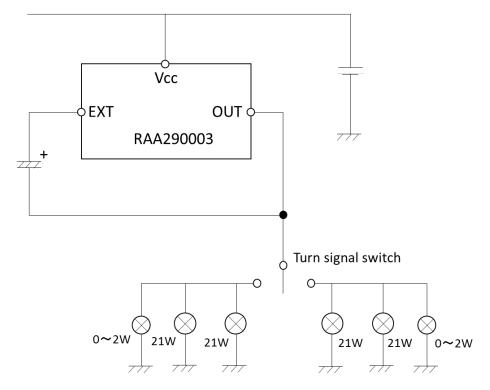

Recommended circuit for dump surge

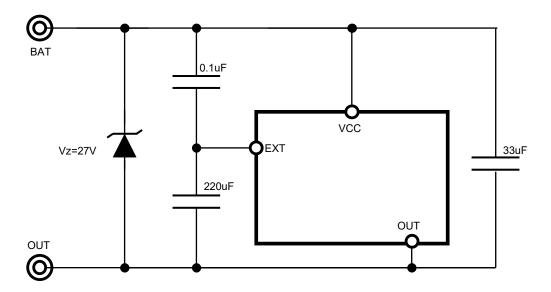

Revision History

RAA2900034H12HPD Datasheet

| | | | Description | | | | | |
|------|----------------|------|---|--|--|--|--|--|
| Rev. | Date | Page | Summary | | | | | |
| 1.00 | April 18, 2016 | 1-17 | 1st issue | | | | | |
| 1.01 | Sep. 20, 2017 | 1-17 | ldff (Double frequency flashing threshold) has been changed. | | | | | |
| 1.02 | Feb. 28, 2020 | 1 | Deleted description of "AEC-Q100 qualified" | | | | | |
| | | | Deleted description of "Note: The information contained in this document is | | | | | |
| | | | the one that was obtained when the document was issued, and may be | | | | | |
| | | | subject to change." | | | | | |

All documents should contain the following section break and paragraph as the last item. The footers of this document refer to the paragraph in order to reference the last page of the document.

All trademarks and registered trademarks are the property of their respective owners.