



SL-630 SERIES

SPECIFICATIONS

- ◆ **High/low liquid level monitor**
- ◆ **“Peel and stick” to the outside of a wide range of plastic containers**
- ◆ **Never comes in contact with liquid – no risk of contamination or volume displacement**
- ◆ **Proven ultrasonic technology**
- ◆ **Repeatability: ± 0.1 ” (2.54 mm)**

The Non-Invasive Sonic Eye™ SL-630 is a cost effective ultrasonic sensor for plastic containers. The sensor is designed to adhere to the outside of plastic containers with diameters from 2” (50.8mm) to 10” (254mm) with a wall thickness up to 0.25” (6.35mm) as a high/low level liquid level monitor. The sensor sticks to the outside of the container, never coming in contact with the liquid, so there is no contamination or volume displacement.

FEATURES

- ◆ No calibration required
- ◆ Non-invasive miniature sensor designed to stick to outside of container
- ◆ Integral electronics with disposable mounting
- ◆ Effective on plastic bottles with diameters ranging from 2” (50.8 mm) to 10” (254 mm)
- ◆ Independent of color, transparency, shape and size of bottom of container
- ◆ No displacement of liquid volume
- ◆ Eliminates fluid contamination problem

APPLICATIONS

- ◆ Chemical Analyzer
- ◆ Immuno Chemistry
- ◆ Chromatography
- ◆ Kidney Dialysis
- ◆ Clinical Chemistry
- ◆ Medical Laser System
- ◆ Hemodialysis
- ◆ Semiconductor
- ◆ Waste Management

PERFORMANCE SPECIFICATIONS

Parameter	Typical Value
Repeatability	± 0.1" (2.54 mm)
Response Time	200 milliseconds
Input Power	5 to 24 VDC
Leakage Current	Less than 50 µA
Output	TTL (high) – dry condition
Mounting	Reusable sensor/disposable mounting tape

Parameter	Typical Value
Protection	Transient, reverse polarity
Effective Plastic Bottle Diameter	2" (50.8 mm) to 10" (254 mm)
Wall Thickness	Up to 0.25" (6.35 mm)
Sensor Material	ULTEM® (plastic)
Temperature	-20 to 158 °F (30 to 70 °C)
Cable Length	12" (305 mm) (for longer lengths consult factory)

MECHANICAL DIMENSIONS IN INCHES

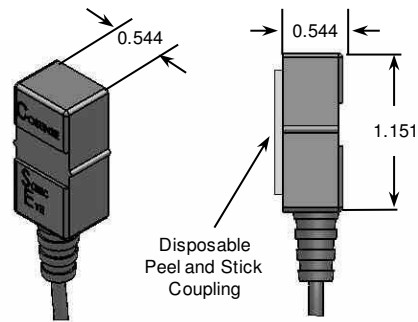


Figure 1: SL-630 series element with peel and stick disposable mounting tape.

NOTES: Clean area on container before installing. Remove backing from tape and adhere to container. Press sensor to container firmly